

CICS Transaction Server for z/OS
5.4

CICSplex SM Resource Tables Reference



Note

Before using this information and the product it supports, read the information in [“Notices” on page 1323](#).

This edition applies to the IBM CICS® Transaction Server for z/OS® Version 5 Release 4 (product number 5655-Y04) and to all subsequent releases and modifications until otherwise indicated in new editions.

© **Copyright International Business Machines Corporation 1974, 2023.**

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Contents

About this PDF.....	xxiii
Chapter 1. Developing system programs using CICSplex SM resource tables.....	1
CICS definition resource tables.....	1
CICS operations resource tables.....	2
CICS monitored resource tables.....	3
CICSplex SM definition resource tables.....	3
CICSplex SM configuration definition resource tables.....	4
CICSplex SM management resource tables.....	4
CICSplex SM notification resource tables.....	5
CICSplex SM metadata resource tables.....	5
Resource class key attributes.....	6
Special attribute and resource table considerations.....	6
EYU_ attributes.....	6
CHANGEAGENT, CHANGEAGREL, CHANGETIME, CHANGEUSRID, and CREATETIME attributes.....	6
LNKSxSCG Records (LNKSMSCG, LNKSRSRG, LNKSWSRG).....	7
LNKSxSCS Records (LNKSMSCS, LNKSRSRS, LNKSWSRS).....	7
CSYSDEF xxxACTION and xxxSEV attributes.....	7
Parameters for managing CICSplex SM Definitions.....	8
Creating CPSM definitions.....	8
Parameters for managing CICS Definitions.....	8
Parameters for managing CICS definitions with BAS.....	8
Managing CICS definitions in the CSD.....	9
Parameters for installing CICS definitions using BAS.....	11
Replacing a Resource description.....	15
Installing a RESGROUP when ASSIGNMENT is specified.....	16
Chapter 2. ACTION Resource Table.....	17
Chapter 3. AIMODEL Resource Table.....	19
Chapter 4. ARACTV Resource Table.....	21
Chapter 5. APPLCTN Resource Table.....	23
Chapter 6. APPLDEF Resource Table.....	27
Chapter 7. APSPEC Resource Table.....	31
Chapter 8. ASYNCREQ Resource Table.....	33
Chapter 9. ATMINGRP Resource Table.....	37
Chapter 10. ATOMDEF Resource Table.....	39
Chapter 11. ATOMSERV Resource Table.....	45
Chapter 12. ATTRAVA Resource Table.....	47

Chapter 13. ATTR Resource Table.....	49
Chapter 14. BATCHREP Resource Table.....	53
Chapter 15. BINCONRS Resource Table.....	57
Chapter 16. BINCONSC Resource Table.....	59
Chapter 17. BINSTERR Resource Table.....	61
Chapter 18. BRFACIL Resource Table.....	63
Chapter 19. BUNDDDEF Resource Table.....	65
Chapter 20. BUNDLE Resource Table.....	69
Chapter 21. BUNDPART Resource Table.....	73
Chapter 22. BUNINGRP Resource Table.....	75
Chapter 23. CFDTPOOL Resource Table.....	77
Chapter 24. CICSDSA Resource Table.....	79
Chapter 25. CICSPAGP Resource Table.....	83
Chapter 26. CICSPLEX Resource Table.....	87
Chapter 27. CICSRRGN Resource Table.....	89
Chapter 28. CICSSTOR Resource Table.....	101
Chapter 29. CLCACHE Resource Table.....	123
Chapter 30. CMASLIST Resource Table.....	125
Chapter 31. CMASPLEX Resource Table.....	129
Chapter 32. CMAS Resource Table.....	131
Chapter 33. CMDMPAPS Resource Table.....	137
Chapter 34. CMDMSAPS Resource Table.....	139
Chapter 35. CMDT Resource Table.....	141
Chapter 36. CMTCMDEF Resource Table.....	147
Chapter 37. CMTMLNK Resource Table.....	151
Chapter 38. CMTPLNK Resource Table.....	153

Chapter 39. CONINGRP Resource Table.....	155
Chapter 40. CONNDEF Resource Table.....	157
Chapter 41. CONNECT Resource Table.....	163
Chapter 42. CPLEXDEF Resource Table.....	169
Chapter 43. CPLXCMAS Resource Table.....	173
Chapter 44. CRESAIMD Resource Table.....	177
Chapter 45. CRESATOM Resource Table.....	179
Chapter 46. CRESBUND Resource Table.....	181
Chapter 47. CRESCONN Resource Table.....	183
Chapter 48. CRESDB2C Resource Table.....	185
Chapter 49. CRESDB2E Resource Table.....	187
Chapter 50. CRESDB2P Resource Table.....	189
Chapter 51. CRESDB2T Resource Table.....	191
Chapter 52. CRESDOCT Resource Table.....	193
Chapter 53. CRESDSNM Resource Table.....	195
Chapter 54. CRESENQM Resource Table.....	197
Chapter 55. CRESEPAD Resource Table.....	199
Chapter 56. CRESEPAS Resource Table.....	201
Chapter 57. CRESEVBD Resource Table.....	203
Chapter 58. CRESEVCS Resource Table.....	205
Chapter 59. CRESFECO Resource Table.....	207
Chapter 60. CRESFEND Resource Table.....	209
Chapter 61. CRESFEPO Resource Table.....	211
Chapter 62. CRESFETR Resource Table.....	213
Chapter 63. CRESFILE Resource Table.....	215
Chapter 64. CRESGLUE Resource Table.....	217

Chapter 65. CRESIPCN Resource Table.....	219
Chapter 66. CRESJRNL Resource Table.....	221
Chapter 67. CRESJRNM Resource Table.....	223
Chapter 68. CRESJVMS Resource Table.....	225
Chapter 69. CRESLIBR Resource Table.....	227
Chapter 70. CRESMODE Resource Table.....	229
Chapter 71. CRESMQMN Resource Table.....	231
Chapter 72. CRESPART Resource Table.....	233
Chapter 73. CRESPIPE Resource Table.....	235
Chapter 74. CRESPRGM Resource Table.....	237
Chapter 75. CRESPROF Resource Table.....	239
Chapter 76. CRESPTY Resource Table.....	241
Chapter 77. CRESRQMD Resource Table.....	243
Chapter 78. CRESSDMP Resource Table.....	245
Chapter 79. CRESTCPS Resource Table.....	247
Chapter 80. CRESTDMP Resource Table.....	249
Chapter 81. CRESTDQ Resource Table.....	251
Chapter 82. CRESTERM Resource Table.....	253
Chapter 83. CRESTRAN Resource Table.....	255
Chapter 84. CRESTRUE Resource Table.....	257
Chapter 85. CRESTSMD Resource Table.....	259
Chapter 86. CRESURIM Resource Table.....	261
Chapter 87. CRESWEBS Resource Table.....	263
Chapter 88. CRESXMLT Resource Table.....	265
Chapter 89. CSDGROUP Resource Table.....	267
Chapter 90. CSDINGRP Resource Table.....	269

Chapter 91. CSDINLST Resource Table.....	271
Chapter 92. CSDLIST Resource Table.....	273
Chapter 93. CSGLCGCG Resource Table.....	275
Chapter 94. CSGLCGCS Resource Table.....	277
Chapter 95. CSYSDEF Resource Table.....	281
Chapter 96. CSYSGRP Resource Table.....	287
Chapter 97. D2CINGRP Resource Table.....	289
Chapter 98. D2EINGRP Resource Table.....	291
Chapter 99. D2TINGRP Resource Table.....	293
Chapter 100. DB2CDEF Resource Table.....	295
Chapter 101. DB2CONN Resource Table.....	301
Chapter 102. DB2EDEF Resource Table.....	307
Chapter 103. DB2ENTRY Resource Table.....	311
Chapter 104. DB2PKGST Resource Table.....	315
Chapter 105. DB2SS Resource Table.....	317
Chapter 106. DB2TDEF Resource Table.....	319
Chapter 107. DB2THRD Resource Table.....	323
Chapter 108. DB2TRAN Resource Table.....	325
Chapter 109. DB2TRN Resource Table.....	327
Chapter 110. DBCTLSS Resource Table.....	329
Chapter 111. DOCDEF Resource Table.....	331
Chapter 112. DOCINGRP Resource Table.....	335
Chapter 113. DOCTEMP Resource Table.....	337
Chapter 114. DOMSPOOL Resource Table.....	341
Chapter 115. DSKJRNL Resource Table.....	343
Chapter 116. DSNAME Resource Table.....	345

Chapter 117. DSPGBL Resource Table.....	349
Chapter 118. DSPMODE Resource Table.....	351
Chapter 119. DSPPOOL Resource Table.....	353
Chapter 120. DTRINGRP Resource Table.....	355
Chapter 121. EACTNTFN Resource Table.....	357
Chapter 122. ECSYSCHG Resource Table.....	359
Chapter 123. EJCINGRP Resource Table.....	361
Chapter 124. EJCOBEAN Resource Table.....	363
Chapter 125. EJCODEF Resource Table.....	365
Chapter 126. EJCOSE Resource Table.....	371
Chapter 127. EJDINGRP Resource Table.....	375
Chapter 128. EJDJAR Resource Table.....	377
Chapter 129. EJDJBEAN Resource Table.....	379
Chapter 130. EJDJDEF Resource Table.....	381
Chapter 131. ELSIGNAL Resource Table.....	385
Chapter 132. EMASJOIN Resource Table.....	387
Chapter 133. EMASSICK Resource Table.....	389
Chapter 134. EMASSTOP Resource Table.....	393
Chapter 135. EMASSTRT Resource Table.....	395
Chapter 136. EMASWELL Resource Table.....	397
Chapter 137. EMCICS Resource Table.....	401
Chapter 138. EMCONN Resource Table.....	403
Chapter 139. EMDBX Resource Table.....	405
Chapter 140. EMFILE Resource Table.....	407
Chapter 141. EMGLBL Resource Table.....	409
Chapter 142. EMJRNL Resource Table.....	411

Chapter 143. EMPROG Resource Table.....	413
Chapter 144. EMSTATUS Resource Table.....	415
Chapter 145. EMTDQS Resource Table.....	419
Chapter 146. EMTERM Resource Table.....	421
Chapter 147. EMTRAN Resource Table.....	423
Chapter 148. ENQINGRP Resource Table.....	425
Chapter 149. ENQMDEF Resource Table.....	427
Chapter 150. ENQMODEL Resource Table.....	431
Chapter 151. ENQUEUE Resource Table.....	433
Chapter 152. EPADAPT Resource Table.....	435
Chapter 153. EPADSET Resource Table.....	437
Chapter 154. EPAINSET Resource Table.....	439
Chapter 155. EPLEXCHG Resource Table.....	441
Chapter 156. ERESSTAT Resource Table.....	443
Chapter 157. ERMCAIMD Resource Table.....	445
Chapter 158. ERMCATOM Resource Table.....	447
Chapter 159. ERMCBUND Resource Table.....	449
Chapter 160. ERMCCONN Resource Table.....	451
Chapter 161. ERMCDDB2C Resource Table.....	453
Chapter 162. ERMCDDB2E Resource Table.....	455
Chapter 163. ERMCDDB2P Resource Table.....	457
Chapter 164. ERMCDDB2T Resource Table.....	459
Chapter 165. ERMCDOCT Resource Table.....	461
Chapter 166. ERMCDSNM Resource Table.....	463
Chapter 167. ERMCEENQM Resource Table.....	465
Chapter 168. ERMCEVBD Resource Table.....	467

Chapter 169. ERMCEVCS Resource Table.....	469
Chapter 170. ERMCFECO Resource Table.....	471
Chapter 171. ERMCFEND Resource Table.....	473
Chapter 172. ERMCFEPO Resource Table.....	475
Chapter 173. ERMCFETR Resource Table.....	477
Chapter 174. ERMCFILE Resource Table.....	479
Chapter 175. ERMCGLUE Resource Table.....	481
Chapter 176. ERMCIPCN Resource Table.....	483
Chapter 177. ERM CJRNL Resource Table.....	485
Chapter 178. ERM CJRNM Resource Table.....	487
Chapter 179. ERM CJVMS Resource Table.....	489
Chapter 180. ERMCLIBR Resource Table.....	491
Chapter 181. ERMCMODE Resource Table.....	493
Chapter 182. ERM COSGB Resource Table.....	495
Chapter 183. ERM COSGS Resource Table.....	497
Chapter 184. ERMCPART Resource Table.....	499
Chapter 185. ERM CPIPE Resource Table.....	501
Chapter 186. ERM CPRGM Resource Table.....	503
Chapter 187. ERM CPROF Resource Table.....	505
Chapter 188. ERM CPRTY Resource Table.....	507
Chapter 189. ERM CRQMD Resource Table.....	509
Chapter 190. ERM CSDMP Resource Table.....	511
Chapter 191. ERM CTCPS Resource Table.....	513
Chapter 192. ERM CTDMP Resource Table.....	515
Chapter 193. ERM CTDQ Resource Table.....	517
Chapter 194. ERM CTERM Resource Table.....	519

Chapter 195. ERMCTRAN Resource Table.....	521
Chapter 196. ERMCTRUE Resource Table.....	523
Chapter 197. ERMCTSMD Resource Table.....	525
Chapter 198. ERMCURIM Resource Table.....	527
Chapter 199. ERMCWEBS Resource Table.....	529
Chapter 200. ERMCXMLT Resource Table.....	531
Chapter 201. ERMCONN Resource Table.....	533
Chapter 202. ERMFILE Resource Table.....	535
Chapter 203. ERMJRNL Resource Table.....	537
Chapter 204. ERMMPRGM Resource Table.....	539
Chapter 205. ERMSTDQ Resource Table.....	541
Chapter 206. ERMTERM Resource Table.....	543
Chapter 207. ERMTRAN Resource Table.....	545
Chapter 208. ESGRPCHG Resource Table.....	547
Chapter 209. EVALDEF Resource Table.....	549
Chapter 210. EVCSPEC Resource Table.....	553
Chapter 211. EVCSDATA Resource Table.....	555
Chapter 212. EVCSINFO Resource Table.....	557
Chapter 213. EVCSOPT Resource Table.....	559
Chapter 214. EVENTDTL Resource Table.....	561
Chapter 215. EVENT Resource Table.....	563
Chapter 216. EVNTBIND Resource Table.....	567
Chapter 217. EVNTGBL Resource Table.....	569
Chapter 218. EXCI Resource Table.....	573
Chapter 219. EXITGLUE Resource Table.....	575
Chapter 220. EXITTRUE Resource Table.....	577

Chapter 221. EXTGLORD Resource Table.....	579
Chapter 222. EXTRATDQ Resource Table.....	581
Chapter 223. FEEDBACK Resource Table.....	585
Chapter 224. FENODDEF Resource Table.....	589
Chapter 225. FEPICONN Resource Table.....	593
Chapter 226. FEPINODE Resource Table.....	595
Chapter 227. FEPIPOOL Resource Table.....	597
Chapter 228. FEPIPROP Resource Table.....	601
Chapter 229. FEPITRGT Resource Table.....	603
Chapter 230. FEPOODEF Resource Table.....	605
Chapter 231. FEPRODEF Resource Table.....	609
Chapter 232. FETRGTDEF Resource Table.....	613
Chapter 233. FILEDEF Resource Table.....	617
Chapter 234. FILINGRP Resource Table.....	625
Chapter 235. FNOINGRP Resource Table.....	627
Chapter 236. FPOINGRP Resource Table.....	629
Chapter 237. FPRINGRP Resource Table.....	631
Chapter 238. FSEGDEF Resource Table.....	633
Chapter 239. FSGINGRP Resource Table.....	649
Chapter 240. FTRINGRP Resource Table.....	651
Chapter 241. HOST Resource Table.....	653
Chapter 242. HTASK Resource Table.....	655
Chapter 243. INDTDQ Resource Table.....	673
Chapter 244. INTRATDQ Resource Table.....	675
Chapter 245. IPCINGRP Resource Table.....	679
Chapter 246. IPCONDEF Resource Table.....	681

Chapter 247. IPCONN Resource Table.....	687
Chapter 248. IPFACIL Resource Table.....	693
Chapter 249. JMSINGRP Resource Table.....	695
Chapter 250. JRMINGRP Resource Table.....	697
Chapter 251. JRNINGRP Resource Table.....	699
Chapter 252. JRNLDEF Resource Table.....	701
Chapter 253. JRNLMODL Resource Table.....	705
Chapter 254. JRNLNAME Resource Table.....	707
Chapter 255. JRNMDEF Resource Table.....	709
Chapter 256. JVM Resource Table.....	713
Chapter 257. JVMPPOOL Resource Table.....	715
Chapter 258. JVMPROF Resource Table.....	717
Chapter 259. JVMSERV Resource Table.....	719
Chapter 260. JVMSVDEF Resource Table.....	723
Chapter 261. LIBDEF Resource Table.....	727
Chapter 262. LIBDSN Resource Table.....	733
Chapter 263. LIBINGRP Resource Table.....	735
Chapter 264. LIBRARY Resource Table.....	737
Chapter 265. LNKSMSCG Resource Table.....	739
Chapter 266. LNKSMSCS Resource Table.....	741
Chapter 267. LNKSRSCG Resource Table.....	743
Chapter 268. LNKSRSCS Resource Table.....	745
Chapter 269. LNKSWSCG Resource Table.....	747
Chapter 270. LNKSWSCS Resource Table.....	749
Chapter 271. LOADACT Resource Table.....	751
Chapter 272. LOADER Resource Table.....	753

Chapter 273. LOCFILE Resource Table.....	757
Chapter 274. LOCTRAN Resource Table.....	763
Chapter 275. LSRDEF Resource Table.....	769
Chapter 276. LSRINGRP Resource Table.....	775
Chapter 277. LSRPBUF Resource Table.....	777
Chapter 278. LSRPOOL Resource Table.....	779
Chapter 279. MAPDEF Resource Table.....	781
Chapter 280. MAPINGRP Resource Table.....	785
Chapter 281. MAS Resource Table.....	787
Chapter 282. MASHIST Resource Table.....	793
Chapter 283. MASQRYER Resource Table.....	795
Chapter 284. MASSTAT Resource Table.....	797
Chapter 285. MCICSDSA Resource Table.....	799
Chapter 286. MCICSRGN Resource Table.....	803
Chapter 287. MCMDT Resource Table.....	807
Chapter 288. MCONNECT Resource Table.....	811
Chapter 289. MDB2THRD Resource Table.....	815
Chapter 290. METADESC Resource Table.....	817
Chapter 291. METANAME Resource Table.....	819
Chapter 292. METAPARM Resource Table.....	821
Chapter 293. MFEPICON Resource Table.....	823
Chapter 294. MGMTPART Resource Table.....	825
Chapter 295. MINDTDQ Resource Table.....	827
Chapter 296. MJOURNAL Resource Table.....	829
Chapter 297. MJRNLNAM Resource Table.....	831
Chapter 298. MLOCFILE Resource Table.....	833

Chapter 299. MLOCTRAN Resource Table.....	837
Chapter 300. MLSRPBUF Resource Table.....	845
Chapter 301. MLSRPOOL Resource Table.....	847
Chapter 302. MMODNAME Resource Table.....	851
Chapter 303. MNTRATDQ Resource Table.....	853
Chapter 304. MODENAME Resource Table.....	855
Chapter 305. MONDEF Resource Table.....	857
Chapter 306. MONGROUP Resource Table.....	861
Chapter 307. MONINGRP Resource Table.....	863
Chapter 308. MONINSPC Resource Table.....	865
Chapter 309. MONITOR Resource Table.....	867
Chapter 310. MONSPEC Resource Table.....	873
Chapter 311. MPROGRAM Resource Table.....	875
Chapter 312. MQCINGRP Resource Table.....	877
Chapter 313. MQCON Resource Table.....	879
Chapter 314. MQCONDEF Resource Table.....	883
Chapter 315. MQCONN Resource Table.....	887
Chapter 316. MQINI Resource Table.....	889
Chapter 317. MQMINGRP Resource Table.....	891
Chapter 318. MQMON Resource Table.....	893
Chapter 319. MQMONDEF Resource Table.....	897
Chapter 320. MREMFIL Resource Table.....	901
Chapter 321. MREMTDQ Resource Table.....	903
Chapter 322. MREMTRAN Resource Table.....	905
Chapter 323. MTDQGBL Resource Table.....	907
Chapter 324. MTERMNL Resource Table.....	909

Chapter 325. MTRANCLS Resource Table.....	911
Chapter 326. MTSQGBL Resource Table.....	913
Chapter 327. MVSESTG Resource Table.....	917
Chapter 328. MVSTCBGL Resource Table.....	919
Chapter 329. MVSTCB Resource Table.....	921
Chapter 330. MVSWLM Resource Table.....	923
Chapter 331. MXTRATDQ Resource Table.....	927
Chapter 332. OBJACT Resource Table.....	929
Chapter 333. OBJECT Resource Table.....	931
Chapter 334. OBJSTAT Resource Table.....	935
Chapter 335. OSGIBUND Resource Table.....	937
Chapter 336. OSGISERV Resource Table.....	939
Chapter 337. PARINGRP Resource Table.....	941
Chapter 338. PARMAVA Resource Table.....	943
Chapter 339. PARTDEF Resource Table.....	945
Chapter 340. PARTNER Resource Table.....	949
Chapter 341. PERIODEF Resource Table.....	951
Chapter 342. PGMINGRP Resource Table.....	953
Chapter 343. PIPEDEF Resource Table.....	955
Chapter 344. PIPELINE Resource Table.....	959
Chapter 345. PIPINGRP Resource Table.....	963
Chapter 346. PLATDEF Resource Table.....	965
Chapter 347. PLATFORM Resource Table.....	969
Chapter 348. POLMON Resource Table.....	975
Chapter 349. PRCINGRP Resource Table.....	977
Chapter 350. PRNINGRP Resource Table.....	979

Chapter 351. PROCDEF Resource Table.....	981
Chapter 352. PROCTYP Resource Table.....	985
Chapter 353. PROFDEF Resource Table.....	987
Chapter 354. PROFILE Resource Table.....	993
Chapter 355. PROGDEF Resource Table.....	995
Chapter 356. PROGRAM Resource Table.....	1001
Chapter 357. PROINGRP Resource Table.....	1007
Chapter 358. PRTNDEF Resource Table.....	1009
Chapter 359. RASGNDEF Resource Table.....	1013
Chapter 360. RASINDSC Resource Table.....	1017
Chapter 361. RASPROC Resource Table.....	1019
Chapter 362. RDSCPROC Resource Table.....	1021
Chapter 363. RECOVERY Resource Table.....	1023
Chapter 364. REMFILE Resource Table.....	1025
Chapter 365. REMTDQ Resource Table.....	1027
Chapter 366. REMTRAN Resource Table.....	1029
Chapter 367. REQID Resource Table.....	1033
Chapter 368. RESDESC Resource Table.....	1035
Chapter 369. RESGROUP Resource Table.....	1043
Chapter 370. RESINDSC Resource Table.....	1047
Chapter 371. RESINGRP Resource Table.....	1049
Chapter 372. RPLLIST Resource Table.....	1051
Chapter 373. RQMDEF Resource Table.....	1053
Chapter 374. RQMINGRP Resource Table.....	1057
Chapter 375. RQMODEL Resource Table.....	1059
Chapter 376. RTAACTV Resource Table.....	1061

Chapter 377. RTADEF Resource Table.....	1063
Chapter 378. RTAGROUP Resource Table.....	1067
Chapter 379. RTAINAPS Resource Table.....	1069
Chapter 380. RTAINGRP Resource Table.....	1071
Chapter 381. RTAINSPC Resource Table.....	1073
Chapter 382. RTASPEC Resource Table.....	1075
Chapter 383. RULE Resource Table.....	1079
Chapter 384. SESINGRP Resource Table.....	1083
Chapter 385. SESSDEF Resource Table.....	1085
Chapter 386. SMFJRNL Resource Table.....	1089
Chapter 387. STAINGRP Resource Table.....	1091
Chapter 388. STATDEF Resource Table.....	1093
Chapter 389. STREAMNM Resource Table.....	1097
Chapter 390. SYSDUMP Resource Table.....	1099
Chapter 391. SYSLINK Resource Table.....	1103
Chapter 392. SYSPARM Resource Table.....	1107
Chapter 393. SYSRES Resource Table.....	1109
Chapter 394. TAPEJRNL Resource Table.....	1111
Chapter 395. TASKASSC Resource Table.....	1113
Chapter 396. TASKESTG Resource Table.....	1117
Chapter 397. TASKFILE Resource Table.....	1119
Chapter 398. TASKRMI Resource Table.....	1121
Chapter 399. TASK Resource Table.....	1123
Chapter 400. TASKTSQ Resource Table.....	1141
Chapter 401. TCLINGRP Resource Table.....	1143
Chapter 402. TCPDEF Resource Table.....	1145

Chapter 403. TCPINGRP Resource Table.....	1151
Chapter 404. TCPIPGBL Resource Table.....	1153
Chapter 405. TCPIPS Resource Table.....	1157
Chapter 406. TDQDEF Resource Table.....	1163
Chapter 407. TDQGBL Resource Table.....	1169
Chapter 408. TDQINGRP Resource Table.....	1171
Chapter 409. TERMDEF Resource Table.....	1173
Chapter 410. TERMNL Resource Table.....	1179
Chapter 411. TRANCLAS Resource Table.....	1187
Chapter 412. TRANDEF Resource Table.....	1191
Chapter 413. TRANDUMP Resource Table.....	1197
Chapter 414. TRANGRP Resource Table.....	1201
Chapter 415. TRMINGRP Resource Table.....	1203
Chapter 416. TRNCLDEF Resource Table.....	1205
Chapter 417. TRNINGRP Resource Table.....	1209
Chapter 418. TSKSPOLS Resource Table.....	1211
Chapter 419. TSKSPOOL Resource Table.....	1215
Chapter 420. TSMDEF Resource Table.....	1217
Chapter 421. TSMINGRP Resource Table.....	1221
Chapter 422. TSMODEL Resource Table.....	1223
Chapter 423. TSPOOL Resource Table.....	1225
Chapter 424. TSQGBL Resource Table.....	1227
Chapter 425. TSQNAME Resource Table.....	1231
Chapter 426. TSQSHR Resource Table.....	1233
Chapter 427. TSQUEUE Resource Table.....	1235
Chapter 428. TYPINGRP Resource Table.....	1237

Chapter 429. TYPTMDEF Resource Table.....	1239
Chapter 430. UOWDSNF Resource Table.....	1247
Chapter 431. UOWENQ Resource Table.....	1249
Chapter 432. UOWLINK Resource Table.....	1251
Chapter 433. UOW Resource Table.....	1253
Chapter 434. URIINGRP Resource Table.....	1255
Chapter 435. URIMAP Resource Table.....	1257
Chapter 436. URIMPDEF Resource Table.....	1261
Chapter 437. URIMPGBL Resource Table.....	1267
Chapter 438. VOLUME Resource Table.....	1269
Chapter 439. WEBINGRP Resource Table.....	1271
Chapter 440. WEBSERV Resource Table.....	1273
Chapter 441. WEBSVDEF Resource Table.....	1277
Chapter 442. WLMAROUT Resource Table.....	1281
Chapter 443. WLMATAFF Resource Table.....	1283
Chapter 444. WLMATARG Resource Table.....	1285
Chapter 445. WLMATGRP Resource Table.....	1289
Chapter 446. WLMATRAN Resource Table.....	1293
Chapter 447. WLMAWAOR Resource Table.....	1295
Chapter 448. WLMAWDEF Resource Table.....	1299
Chapter 449. WLMAWORK Resource Table.....	1301
Chapter 450. WLMAWTOR Resource Table.....	1303
Chapter 451. WLMDEF Resource Table.....	1305
Chapter 452. WLMGROUP Resource Table.....	1307
Chapter 453. WLMINGRP Resource Table.....	1309
Chapter 454. WLMINSPC Resource Table.....	1311

Chapter 455. WLMSPEC Resource Table.....	1313
Chapter 456. WLPSESV Resource Table.....	1317
Chapter 457. WORKREQ Resource Table.....	1319
Chapter 458. XMLTRANS Resource Table.....	1321
Notices.....	1323
Index.....	1329

About this PDF

This PDF describes the format and content of CICSplex[®]SM resource tables. The resource tables can be accessed by the application programming interface (API) or the batched repository-update facility, or can be used in real-time analysis. A set of machine-readable copybooks is provided for each CICSplex SM resource table. The set consists of one copybook for each language supported by the API. Before CICS TS V5.4, these tables were split across two PDFs.

For details of the terms and notation used in this book, see [Conventions and terminology used in the CICS documentation](#) in IBM Knowledge Center.

Date of this PDF

This PDF was created on 2024-01-04 (Year-Month-Date).

Chapter 1. Developing system programs using CICSplex SM resource tables

CICSplex® SM resource tables describe the information available for resource classes created or managed by CICSplex SM.

A resource class is a template that describes the attributes of the actual objects that exist in a CICSplex. For example, a local transaction installed in a CICS system has the attributes described by the LOCTRAN resource class. Likewise, the MONDEF resource class describes the attributes of each CICSplex SM monitor definition created by a user.

Each resource class in CICSplex SM has a unique name. The resource class name is used as the name of the resource table that describes its attributes. In many, but not all, cases the resource class name is the same as the Web User Interface (WUI) view that provides information about the resource class. The view names are relative distinguishing names that have a meaning only within the WUI. A resource class name is a unique distinguishing name in CICSplex SM. All requests for resource data from the API, batched repository-update facility, or RTA evaluation definitions must use the resource class name that is defined in the resource table.

The terms *resource table* and *resource class* are used to refer to the resource class. The terms *attribute* and *field* are both used to refer to a resource class attribute definition.

CICS definition resource tables

The CICS definition resource tables describe resource definitions that CICSplex SM can assign to and possibly install in CICS systems.

Table 1.

Summary of resource tables

ATOMDEF	FEPRODEF	PROFDEF
BUNDDEF	FETRGDEF	PROGDEF
CONNDEF	FILEDEF	PRTNDEF
CSDGROUP	FSEGDEF	RQMDEF
CSDINGRP	IPCONDEF	SESSDEF
CSDINLST	JRNLDEF	TCPDEF
CSDLIST	JRNMDEF	TDQDEF
DB2CDEF	JVMSVDEF	TERMDEF
DB2EDEF	LIBDEF	TRANDEF
DB2TDEF	LIBDSN	TRNCLDEF
DOCDEF	LSRDEF	TSMDEF
EJCODEF	MAPDEF	TYPTMDEF
EJDJDEF	MQCONDEF	URIMPDEF
ENQMDEF	PARTDEF	WEBSVDEF
FENODDEF	PIPEDEF	
FEPOODEF	PROCDEF	

CICS operations resource tables

The CICS operations resource tables describe resources that exist in active CICS systems that are being managed by CICSplex SM.

Table 2.

Summary of resource tables

AIMODEL	EXTRATDQ	RECOVERY
ATOMSERV	FEPICONN	REMAFILE
BRFACIL	FEPINODE	REMTDQ
BUNDLE	FEPPOOL	REMTAN
BUNDPART	FEPPROP	REQID
CFDTPPOOL	FEPITRGT	RPLLIST
CICSDSA	HOST	RQMODEL
CICSPAGP	HTASK	SMFJRN
CICSRGN	INDTDQ	STREAMNM
CICSSTOR	INTRATDQ	SYSDUMP
CLCACHE	IPCONN	SYSPARM
CMDT	IPFACIL	TAPEJRN
CONNECT	JRNLMODL	TASK
DBCTLSS	JRNNAME	TASKESTG
DB2CONN	JVM	TASKFILE
DB2ENTRY	JVMPPOOL	TASKRMI
DB2PKGST	JVMPROP	TASKTSQ
DB2SS	JVMSERV	TASKASSC
DB2THRD	LIBRARY	TCPIPGBL
DB2TRAN	LOADACT	TCPIPS
DB2TRN	LOADER	TDQGBL
DOCTEMP	LOCFILE	TERMNL
DOMSPOOL	LOCTRAN	TRANCLAS
DSKJRN	LSRBUF	TRANDUMP
DSNAME	LSRPOOL	TSKSPOLS
DSPGBL	MASHIST	TSKSPPOOL
DSPMODE	MASSTAT	TSMODEL
DSPPOOL	MODENAME	TSPOOL
EJCOBEAN	MONITOR	TSQGBL
EJCOSE	MQCON	TSQNAME
EJDJAR	MQCONN	TSQSHR
EJDJBAN	MQINI	TSQUEUE
ENQMODEL	MVSESTG	UOW
ENQUEUE	MVSTCB	UOWDSNF
EPADAPT	MVSTCBGL	UOWENQ
EPADSET	MVSWLM	UOWLANK
EPAINSET	OSGIBUND	URIINGRP
EVCSDATA	OSGISERV	URIMPGBL
EVCSINFO	PARTNER	URIMAP
EVCSOPT	PIPELINE	VOLUME
EVCSPEC	PIPINGRP	WEBSERV
EVNTBIND	PROCTYP	WORKREQ
EVNTGBL	PROFILE	XMLTRANS
EXCI	PROGRAM	
EXITGLUE		
EXITTRUE		
EXTGLORD		

CICS monitored resource tables

The following table lists resources that exist in active CICSplex SMs and which are being monitored by CICSplex SM.

Table 3.

Summary of resource tables

MCICSDSA	MJRNLNAM	MREMFIL
MCICSRGN	MLOCFIL	MREMTDQ
MCMDT	MLOCTAN	MREMTAN
MCONNECT	MLSRPBU	MTDQGBL
MDB2THRD	MLSRPOOL	MTERMNL
MFEPICON	MMODNAME	MTRANCLS
MINDTDQ	MNTRATDQ	MTSQGBL
MJOURNAL	MPROGRAM	MXTRATDQ

CICSplex SM definition resource tables

The CICSplex SM definition resource tables are used by CICSplex SM management applications, such as Workload Manager and Business Application Services.

Table 4.

Summary of resource tables

ACTION	JRMINGRP	RESINDSC
APPLDEF	JRNINGRP	RESINGRP
APSPEC	LIBDEF	RQMINGRP
ATMINGRP	LIBINGRP	RTADEF
BUNINGRP	LNKSMSCG	RTAGROUP
CMDMPAPS	LNKSMSCS	RTAINAPS
CMDMSAPS	LNKSRSCG	RTAINGRP
CONINGRP	LNKSRSCS	RTAINSPC
CSGLCGCG	LNKSWSCG	RTASPEC
CSGLCGCS	LNKSWSCS	SESINGRP
CSYSDEF	LSRINGRP	STAINGRP
CSYSGRP	MAPINGRP	STATDEF
DOCDEF	MONDEF	SYSLINK
DOCINGRP	MONGROUP	TCLINGRP
DTRINGRP	MONINGRP	TCPINGRP
D2CINGRP	MONINSPC	TDQINGRP
D2EINGRP	MONSPEC	TERMDEF
D2TINGRP	MQCINGRP	TRANGRP
EJCINGRP	PARINGRP	TRMINGRP
EJCODEF	PERIODEF	TRNINGRP
EJDINGRP	PGMINGRP	TSMINGRP
ENQINGRP	PIPEDEF	TYPINGRP
EVALDEF	PLATDEF	URIMPDEF
FILINGRP	PRCINGRP	WEBINGRP
FNOINGRP	PRNINGRP	WEBSVDEF
FPOINGRP	PROGDEF	WLMDEF
FPRINGRP	PROINGRP	WLMGROUP
FSGINGRP	RASGNDEF	WLMINGRP
FTRINGRP	RASINDSC	WLMINSPC
IPCINGRP	RESDESC	WLMSPEC
JMSINGRP	RESGROUP	

CICSplex SM configuration definition resource tables

The following table lists definitions that are used by CICSplex SM for configuration purposes .

Table 5.

Summary of resource tables

CMTCMDEF
CMTPMDEF

CPLXCMAS
CPLEXDEF

CICSplex SM management resource tables

A list of runtime resources that are either built from CICSplex SM definitions or created by CICSplex SM management applications during processing.

Table 6.

Summary of resource tables

APACTV
APPLCTN
BATCHREP
CICSplex
CMAS
CMASLIST
CMASPLEX
CMTMMLNK
CMTPMLNK
CRESAIMD
CRESATOM
CRESBUND
CRESCONN
CRESDB2C
CRESDB2E
CRESDB2P
CRESDB2T
CRESDOCT
CRESDSNM
CRESENQM
CRESEPAD
CRESEPAS
CRESEVBD
CRESEVCS
CRESFECO

CRESFEND
CRESFEPO
CRESFETR
CRESFILE
CRESGLUE
CRESIPCN
CRESJRN
CRESJRN
CRESJVM
CRESLIBR
CRESMODE
CRESPART
CRESPIPE
CRESPRGM
CRESPROF
CRESPTY
CRESRQMD
CRESSDMP
CRESTCPS
CRESTDMP
CRESTDQ
CRESTERM
CRESTRAN
CRESTRUE
CRESTSMD

CRESURIM
CRESWEBS
CRESXMLT
EVENT
EVENTDTL
MAS
MGMTPART
PLATFORM
POLMON
RASPROC
RDSCPROC
RTAACTV
SYSRES
WLMATAFF
WLMATARG
WLMATGRP
WLMATRAN
WLMAWAOR
WLMAWDEF
WLMAWORK
WLMAWTOR

CICSplex SM notification resource tables

The CICSplex SM notification resource tables list messages that are generated asynchronously by CICSplex SM managed objects to report an interesting event.

Table 7.

Summary of resource tables

EACTNTFN	ERMCCONN	ERMCOSGS
ECSYSCHG	ERMCDDB2C	ERMCPART
EDEFCHG	ERMCDDB2E	ERMCPPIPE
EL SIGNAL	ERMCDDB2P	ERMCPRGM
EMASJOIN	ERMCDDB2T	ERMCPROF
EMASSICK	ERMCDDOCT	ERMCPRTY
EMASSTOP	ERMCDSDNM	ERMCRQMD
EMASSTRT	ERMCDENQM	ERMCDSDMP
EMASWELL	ERMCEPAD	ERMCTCPS
EMCICS	ERMCEPAS	ERMCTDMP
EMCONN	ERMCEVBD	ERMCTDQ
EMDBX	ERMCEVCS	ERMCTERM
EMFILE	ERMCEVSD	ERMCTRAN
EMGLBL	ERMCEVSI	ERMCTRUE
EMJRNL	ERMCEVSO	ERMCTSMD
EMPROG	ERMCFECO	ERMCURIM
EMSTATUS	ERMCFEND	ERM CW EBS
EMTDQS	ERMCFEPO	ERM CXMLT
EMTERM	ERMCFETR	ERMMCONN
EMTRAN	ERMCFILE	ERMMFILE
EPLEXCHG	ERMCG LUE	ERMMJRNL
ERESSTAT	ERMCI PCN	ERMMPRGM
ERMCAIMD	ERM CJRN L	ERMMTDQ
ERM CATOM	ERM CJRN M	ERMMTERM
ERM CBUND	ERM CJVMS	ERMMTRAN
	ERMCLIBR	ESGRPCHG
	ERMCMODE	
	ERM COSGB	

CICSplex SM metadata resource tables

The following table list objects that describe the structure of other CICSplex SM managed objects, including general characteristics, valid actions, and object attributes.

Table 8.

Summary of resource tables

ASYNCREQ	METADESC
ATTR	METANAME
ATTRAVA	METAPARM
BINCONRS	OBJECT
BINCONSC	OBJECT
BINSTERR	OBJSTAT
FEEDBACK	PARMAVA

Resource class key attributes

Each resource class can have many object instances in a CICSplex. Each object instance is a named entity and one or more attributes provide the instance key.

For example, the attribute TRANID in the LOCTRAN resource class identifies the attribute that is the name or key field. Resource class key fields are highlighted in the resource table descriptions. Some resource classes have multiple key fields.

For resource classes that describe CICSplex SM definitions, the key attributes are used to construct the physical keys used in the EYUDREP VSAM KSDS file. For these resource classes, one or two key fields are defined. One key field is identified as the **Primary** key. The other field, if used, is identified as the **Secondary** key. A suffix of -*n*, where *n* is the key level number, is added to the name in the table.

Key fields are used to:

- Uniquely identify resources for the CREATE, UPDATE, and REMOVE statements in the API and batched repository-update facility.

When you create, update, or remove a CICSplex SM definition, you must supply all the key values. Furthermore, the values for the key fields must be specific; generic values are not allowed.

- Identify the selection criteria for the LIST or DUMP statements in the batched repository-update facility.

When you list or dump CICSplex SM definitions, only the **Primary** key field can be referenced. For these statements, both specific and generic values are allowed for key fields.

- Identify object instances in an evaluation definition.

The instance pattern field in the EVALDEF create panel identifies a specific or generic pattern for the key field of a resource table. The INSTANCE attribute of the EVALDEF resource table is the field in which this information is stored.

The CICSplex SM resource table descriptions in the following sections identify the **Primary** key field for each CICSplex definition resource class. The CICSplex SM notification resource class does not have key fields. The content of the notification identifies the objects associated with the notification.

Special attribute and resource table considerations

Certain attributes in the CICSplex SM resource tables are for internal use only; you should not attempt to modify or manipulate them. Similarly, certain resource tables can be accessed only in certain ways.

EYU_ attributes

In CICS resource and CICS monitored tables, CICSplex SM uses the following attributes to uniquely identify which CICS system contains the resource:

- EYU_CICSNAME
- EYU_CICSREL

These attributes are included in every CICS resource and CICS monitored resource table record and can be used by the CICSplex SM API. However, you cannot refer to these attributes in any batched repository-update facility command.

CHANGEAGENT, CHANGEAGREL, CHANGETIME, CHANGEUSRID, and CREATETIME attributes

The resource table descriptions identify the CHANGETIME attribute for CICSplex SM and CICS definitions. The CHANGETIME attribute always contains the date and time of the last modification to the definition. CICS definition resource tables also include the CREATETIME attribute, which is the date and time when the definition was created.

CICS TS 4.1 introduced new attribute fields CHANGEAGENT, CHANGEAGREL, and CHANGEUSRID to the resource table resource definition record. These new attributes, combined with the existing CHANGETIME

and CREATETIME attributes, form the resource definition signature and are valid only for BAS resource definitions.

CHANGEAGENT displays how the resource was defined or last modified. CHANGEAGREL contains the level of CICS system that created or last modified the resource definition. CHANGEUSRID contains the user ID that created or last modified the resource definition.

The CHANGEAGENT, CHANGEAGREL, CHANGETIME, CHANGEUSRID and CREATETIME attributes are maintained internally by CICSplex SM. Do not attempt to change their values in any way.

LNKSxSCG Records (LNKSMSCG, LNKSRSCG, LNKSWSCG)

When a CICSplex SM specification-to-CICS group link record (LNKSxSCG) is created or removed, an additional operand, **keyword**, is required. This keyword indicates how the link being created or removed applies to the current members of the CICS system group.

The keywords for the CREATE and REMOVE commands are as follows:

CREATE

Specify one of the following parameters:

FORCE

All current members of the CICS system group should have implicit links established to the named specification. When a link already exists, it is replaced with the newly created link.

NULL

Current members of the CICS system group should have implicit links established to the named specification only if no link already exists.

NONE

No implicit links should be established.

REMOVE

Specify one of the following parameters:

KEEP

All implicit links are to be converted to explicit links.

NONE

No implicit links are to be converted to explicit links.

Note: You cannot update LNKSxSCG records using the API or batched repository-update facility; you must use either the CICS Explorer® or the Web User Interface.

LNKSxSCS Records (LNKSMSCS, LNKSRSCS, LNKSWSCS)

When a CICSplex SM specification-to-CICS link record (LNKSxSCS) is created or removed using the batched repository-update facility, two of the **keyword (value)** operand pairs cannot be used. The keyword(value) pairs that must be omitted from the CREATE and REMOVE commands are the LINK and GROUP pairs.

CSYSDEF xxxACTION and xxxSEV attributes

The CICSplex SM API allows the CSYSDEF xxxACTION and xxxSEV attributes to be used in more than one way.

The following values can be specified for the xxxACTION attributes:

1. The name of an action that is to be taken when this condition occurs.
2. An asterisk (*). This allows the action to be inherited. The rules for specifying inheritance are given in the CSYSDEF Resource Table topic in [CICSplex SM resource tables overview in Reference](#).
3. Leave the attribute blank. This causes a default value to be used. Default notification values are listed in the CICSplex System Manager Managing Resource Usage book..

The following values can be specified for the xxxSEV attributes:

1. The value that is to be used as the severity for this condition.
2. NO. This means that the condition is not to be monitored.
3. The EYUDA INHERIT value. This causes the value to be inherited.
4. The EYUDA N_A value. This causes the default security level for this condition to be used.

Parameters for managing CICSplex SM Definitions

You can use CICSplex SM to describe the set of CICS definitions to be installed in a CICS system.

Creating CPSM definitions

When you create a CICS system definition using the batched repository-update facility or the API, you can identify an existing CICS system to be used as a model. The CREATE command for the SYSRES object accepts the following parameter:

MODEL(csysdef)

(Optional) Specify the name of an existing CICS system whose system links definitions are to be used as a model.

Parameters for managing CICS Definitions

You can use CICSplex SM to manage your CICS resource definitions as CICS Definition objects.

Parameters for managing CICS definitions with BAS

You can use CICSplex SM to manage your CICS resource definitions as CICS definition objects with BAS.

Creating Resource descriptions

A resource description represents the largest set of resources that can be managed as a unit by CICSplex SM. It might consist of all the resources in several resource groups or resource assignments (much like a CSD group list) or the set of resources that make up a given application on various CICS systems. When you create a resource description using the batched repository-update facility or API, you can identify an existing resource description to be used as a model.

The **CREATE** command for the RESDESC object accepts the following parameter:

MODEL(resdesc)

(Optional) Specify the name of an existing resource description whose resource assignments are to be used by the new resource description.

Creating Resource groups

One aspect of managing CICS Definitions is combining them into logical sets of resources in a resource group (RESGROUP). When you create a resource group using the batched repository-update facility or API you can identify an existing resource group to be used as a model. The CREATE command for the RESGROUP object accepts the following parameters:

MODEL(resgroup)

(Optional) Specify the name of an existing resource group whose resource definitions are to be used by the new group.

MODE(option)

(Required, if you specified a MODEL value) Indicate which definitions are to be copied from the model resource group to the new group:

NO

Do not copy any definitions from the model group.

ASSOCIATIONS

Copy the associations between resource definitions and the model group (RESINGRP definitions) and create a new set of associations from the existing resources to the new group.

MEMBERS

Copy all the resource definitions in the model group and create a new set for use by the new group.

Adding CICS Definitions to a Resource group

When you create CICS Definitions using the batched repository-update facility or API, you can add them to an existing resource group by using the RESGROUP parameter. The CREATE command for each CICS Definition object (such as CONNDEF) supports the following parameter:

RESGROUP(resgroup)

(Optional) Specify the name of an existing resource group to which the CICS Definition should be added.

Selecting CICS Definitions

When you use the GET API command to create a result set of CICS Definition records, you can limit your request to definitions in a given resource group, or CICS system. The GET command for each CICS Definition object (such as CONNDEF) supports the following parameters:

RESGROUP(resgroup)

(Optional) Specify the name of an existing resource group from which CICS Definition records should be selected.

CICSSYS(value)

(Required for SYSRES definition, optional for all others) Specify the name of an existing CICS system whose system links definitions are to be used as a model.

When the CICSSYS parameter is used, the result set will contain records that have been modified to show what the record would look like when installed in the system specified by CICSSYS(value).

Managing CICS definitions in the CSD

You can use CICSplex SM to manage your CICS resource definitions in the CSD.

Add a resource to a group

Add a CSD resource to a CSD group either with the **CREATE** command or with the **CSDCOPY** action.

The **CREATE** command creates a new resource definition in the CSD. When the resource definition is created, it must be assigned to a group. The **CREATE** command contains the following parameter:

CSD

This parameter is optional.

Specifies whether the resource is a CSD resource. You must specify PARM=CSD if you are creating a CSD resource.

The **CSD** parameter is defined without a value. The CSD group into which the resource definition is defined is specified as an attribute of the resource definition: CSDGROUP=groupname

The **CSDCOPY** action copies an existing CICS resource definition, which is defined in the CSD, from one CSD group to another. The **CSDCOPY** action contains the following parameters:

AS_RESOURCE(value)

Specifies the name that the copy of the resource will take.

The **AS_RESOURCE** and **TO_CSDRESOURCE** parameters are mutually exclusive. Specify only one of these parameters on a **CSDCOPY** action.

DUPACTION {DUPERROR|DUPNOREPLACE|DUPREPLACE}

This parameter is optional.

Specifies the action that CICSplex SM takes if the **CSDCOPY** action would result in a duplicate definition in the target CSD group.

DUPERROR

If **DUPACTION=DUPERROR** is specified, an error is returned to the user if the **CSDCOPY** action would result in a duplicate resource in the target CSD group.

DUPREPLACE

If **DUPACTION=DUPREPLACE** is specified, duplicate resource definitions in the target CSD group are replaced by the resource definitions that are being copied into the CSD group.

DUPNOREPLACE

If **DUPACTION=DUPNOREPLACE** is specified, duplicate resource definitions in the target CSD group are not replaced.

TO_CSDGROUP(value)

Specifies the destination CSD group into which a copy of the resource will be added.

The **AS_RESOURCE** and **TO_CSDRESOURCE** parameters are mutually exclusive. Specify only one of these parameters on a **CSDCOPY** action.

Add a CSD group to a list

Add a CSD group to a CSD list with the **CSDADD** action.

The **CSDADD** action adds a group of CSD resources to a list of CSD groups. The **CSDADD** action contains the following parameters:

TO_CSDLIST(value)

Specifies the CSD list to which to add the CSD group.

ADD_CSDGROUP(value)

This parameter is optional.

Specifies which existing CSD group to position the supplied CSD group next to in the CSD list. The **ADD_LOCATION** parameter defines whether the supplied CSD group is added before or after the existing CSD group.

ADD_LOCATION {BEFORE|AFTER}

This parameter is optional. If this parameter is not specified, the supplied CSD group is appended to the end of the list.

Specifies whether to add the supplied CSD group BEFORE or AFTER the existing CSD group in the CSD list.

Remove a resource from a group

Delete a CSD resource definition from a CSD group with the **REMOVE** command.

The **REMOVE** command, when issued against a CICS resource definition in a CSD group, deletes the resource from the group and CSD.

CSD

This parameter is optional.

Specifies that the resource is to be removed from a group in the CSD.

Remove a group from a list

Remove a CSD group from a CSD list with the **REMOVE** command.

The **REMOVE** command, when issued against the CSDINLST resource, removes a CSD group from a CSD list.

Issuing a **REMOVE** command against the CSDINLST resource is equivalent to issuing a **CEDA REMOVE GROUP(group_name) LIST(list_name)** command.

Delete a group

Delete a CSD group from the CSD with the **REMOVE** command.

The **REMOVE** command, when issued against the CSDGROUP resource, deletes a CSD group, and all resource definitions in the group, from the CSD.

Issuing the **REMOVE** command against the CSDGROUP resource is equivalent to issuing a CEDA DELETE GROUP(*group_name*) ALL(*) command.

The **REMOVE** command contains the following parameter:

LISTREMOVE

This parameter is optional.

Specifies that the CSD group is to be removed from all CSD lists.

Parameters for installing CICS definitions using BAS

You can use CICSplex SM to install CICS definition objects in CICS systems that support the EXEC CICS CREATE command.

CICS resources that are represented by CICS definitions can be installed in the following ways:

- Individually, using the INSTALL action for a CICS Definition object (such as CONNDEF).
- As part of a resource group, using the INSTALL action for the RESGROUP object.
- As part of a resource description, using the INSTALL action for the RESDESC object.

The syntax of the INSTALL action, which is shown with each of the resource tables that support it, is essentially the same for each method of installation. Some or all of the following parameters can be used:

ASSIGNMENT

(Optional) When installing a resource group, specify the name of a resource assignment (RASGNDEF) to be used for the installation.

CRITERIA


(Optional) When installing a resource group, identify attributes that are to be used in selecting the resources to be installed. CICSplex SM processes only those resources that meet the specified filter criteria.

A filter expression can be made up of one or more attribute expressions in the form:

Filter Expression

►► **logic_expr** — . ►►

logic_expr

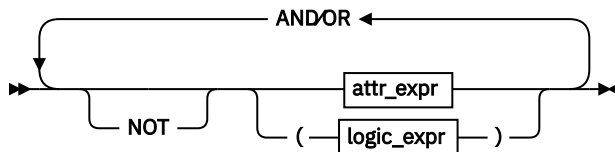

attr_expr

►► **attr** — oper — **value** ►►

where:

attr

Is the name of an attribute in the resource definition.

You can name the same attribute more than once in a filter expression.

Note: You cannot specify the EYU_CICSNAME or EYU_CICSREL attributes in a filter expression.

oper

Is one of the following comparison operators:

<	Less than
<=	Less than or equal to
=	Equal to
>=	Greater than or equal to
>	Greater than
≠	Not equal to

value

Is the value for which the attribute is being tested. The value must be a valid one for the CICSplex SM resource table attribute.

If the attribute accepts character data, this value can be a generic. Generic values can contain:

- An asterisk (*), to represent any number of characters, including zero. The asterisk must be the last or only character in the specified value. For example:

```
TRANID=PAY*
```

- A plus sign (+), to represent a single character. A + can appear in one or more positions in the specified value. For example:

```
TRANID=PAY++96
```

If the value contains imbedded blanks or special characters (such as periods, commas, or equal signs), the entire value string must be enclosed in single quotes. For example:

```
TERMID='Z AB'
```

To include a single quote or apostrophe in a value, you must repeat the character, like this:

```
DESCRIPTION='October's Payroll'
```

AND/OR

Combines attribute expressions into compound logic expressions using the logical operators AND and OR, like this:

```
attr_expr AND attr_expr.
```

Filter expressions are evaluated from left to right. You can use parentheses to vary the meaning of a filter expression. For example, this expression:

```
attr_expr AND (attr_expr OR attr_expr).
```

has a different meaning than this one:

```
(attr_expr AND attr_expr) OR attr_expr.
```

NOT

Negates one or more attribute expressions.

You can negate a single attribute expression, like this:

```
NOT attr_expr
```

You can also negate multiple attribute expressions or even a whole filter expression, like this:


```
NOT (attr_expr OR attr_expr).
```

Note that you must place parentheses around the attribute expressions (or the filter expression) to be negated.

FORCEINS

(Optional) Specify YES or NO to indicate whether you want to install the resource even if it already exists. YES is the default.

If you specify NO, the definition will be installed anywhere it does not currently exist. CICSplex SM checks to see if the resource is currently installed in the CICS system. If so, CICSplex SM does not install the new resource, to avoid inadvertently changing attributes of an active resource.

If you specify YES, CICSplex SM bypasses this duplicate resource checking and installs the new resource unconditionally.

MODE

(Optional. When installing a RESGROUP with the assignment parameter see [“Installing a RESGROUP when ASSIGNMENT is specified”](#) on page 16.) For some resource types, CICSplex SM requires additional information to determine which subset of resource attributes to use in completing the installation. The MODE value you should specify depends on the resource type being installed:

Program definitions (PROGDEF)

If REMOTE is specified in the Usage field, you can identify how the program is to be routed:

DYNAM

Programs are processed by the dynamic routing program (DTR).

STAT

Programs are sent to the remote CICS system identified in the Related Scope

Transaction definitions (TRANDEF)

If you specified a USAGE of REMOTE, you must identify the type of remote reference:

DYNAM

Transactions should be processed by the dynamic transaction routing (DTR) program.

STAT

Each transaction should be sent to the remote system identified in the transaction definition (TRANDEF).

The value you specify here overrides the Dynamic value in the TRANDEF.

Transient data queue definitions (TDQDEF)

You can identify the type of transient data queue to be installed:

INTRA

Intrapartition TDQ.

EXTRA

Extrapartition TDQ.

IND

Indirect TDQ.

If you do not specify the MODE parameter, CICSplex SM uses the Type value in the TDQDEF to install the transient data queue. If the Type value is REMOTE, CICSplex SM installs an indirect TDQ.

NOTIFY

(Optional) Specify the type of checking that should be performed before attempting to install a resource:

NO

No checking is performed.

INACTIVE

Check for CICS systems in the target scope that are not currently active.

RELEASE

Check for CICS systems in the target scope that do not support EXEC CICS CREATE commands.

FULL


Perform both INACTIVE and RELEASE checking.

OVERRIDE

(Optional. When installing a RESGROUP with the assignment parameter see [“Installing a RESGROUP when ASSIGNMENT is specified”](#) on page 16.) Identify attributes of the specified resource whose values are to be modified when it is installed in one or more of the specified scopes. (The OVERTYPE value determines which scope the override values are applied to.)

An override expression can be made up of one or more attribute expressions in the form:

Override Expression



where:

attr

Is the name of a modifiable attribute in the resource definition.

value

Is the value to which you want the attribute set. The following restrictions apply:

- The value must be a valid one for the attribute.
- If the value contains imbedded blanks or special characters (such as periods, commas, or equal signs), the entire value string must be enclosed in single quotes, like this:

```
DESCRIPTION='Payroll.OCT'
```

- To include a single quote or apostrophe in a value, you must repeat the character, like this:

```
DESCRIPTION='October' 's Payroll'
```

OVERTYPE

(Optional.) If you plan to specify an OVERRIDE expression for the installation, indicate which scope the override values should be applied to:

TARGET

Apply the override values to the TARGET scope only.

RELATED

Apply the override values to the RELATED scope only.

BOTH

Apply the override values to both the TARGET and RELATED scopes.

NONE

Do not apply any override values.

REFASSIGN

(Required when installing a CONNDEF) Identify the resource assignment (RASGNDEF) that applies to the related sessions definitions (SESSDEF). For each connection definition, CICSplex SM requires one or more sessions definitions to properly construct the actual CICS connection.

RELATED

(Required, if USAGE is REMOTE. Optional when installing a RESGROUP with the assignment parameter. See [“Installing a RESGROUP when ASSIGNMENT is specified”](#) on page 16.) Specify the name of an existing CICS system or CICS system group into which a resource identified as REMOTE is to be installed as LOCAL.

RESTYPE

(Required when installing a RESGROUP) Specify the type of resource being installed, as one of the following CICS Definition objects:

- ATOMDEF
- BUNDDEF
- CONNDEF
- DB2CDEF
- DB2EDEF
- DB2TDEF
- DOCDEF
- ENQMDEF
- FENODDEF
- FEPOODEF
- FEPRODEF
- FETRGDEF
- FILEDEF
- FSEGDEF
- IPCONDEF
- JRNLDEF
- JRNMDEF
- LIBDEF
- LSRDEF
- MAPDEF
- MQCONDEF
- PARTDEF
- PROCDEF
- PROFDEF
- PROGDEF
- PRTNDEF
- RQMDEF
- TCPDEF
- TDQDEF
- TERMDEF
- TRANDEF
- TRNCLDEF
- TSMDEF
- TSQDEF
- TYPTMDEF

Note that sessions definitions (SESSDEF) cannot be directly installed. They are installed along with their associated connection definitions (CONNDEF)

STATECHK

(Optional) Specify YES or NO to indicate whether the existence and operational state of the resource is checked before an EXEC CICS CREATE command is issued. If you specify YES and one or more resources are not in the required state, the **EXEC CICS CREATE COMMAND** is not issued for any of the selected resources. FORCEINS and STATECHK parameters must both be set to YES for the check to be carried out.

TARGET

(Required except when installing a RESGROUP with the assignment parameter. See [“Installing a RESGROUP when ASSIGNMENT is specified”](#) on page 16.) Specify the name of an existing CICS system or CICS system group into which the resource is to be installed.

USAGE

(Required except when installing a RESGROUP with the assignment parameter. See [“Installing a RESGROUP when ASSIGNMENT is specified”](#) on page 16.) Specify how the resource will be used:

LOCAL

The resource is contained within the target CICS system. LOCAL is valid for all supported resource types.

REMOTE

The resource definition refers to a resource installed in a different CICS system. If you specify REMOTE, you must also specify a RELATED value to identify the CICS system that contains a local instance of the resource. REMOTE is valid only for the following resource types:

- FILEDEF
- PROGDEF
- TDQDEF
- TRANDEF

Replacing a Resource description

You can use CICSplex SM to replace a resource description, using the REPLACE action for the RESDESC object. CICSplex SM attempts to replace all of the resources associated with an installed resource description with the resources associated with a new description. That is, CICSplex SM:

- Discards any resources that are associated with the old resource description, but not the new one.
- Reinstalls any resources that are associated with both the old resource description and the new one, regardless of whether the definitions have changed.
- Installs any additional resources that are associated with the new resource description.

For replacement to occur, the CICSplex SM named in the Target and Related scope fields of both resource descriptions must be active and must be running a release of CICS that supports the EXEC CICS CREATE command.

Some or all of the following parameters can be used:

CURRENT

(Required) Specify the specific or generic name of a currently installed resource description that is to be replaced.

FORCEINS

(Optional) See page [FORCEINS](#) for a description of the FORCEINS parameter.

NOTIFY

(Optional) See page [NOTIFY](#) for a description of the NOTIFY parameter.

STATECHK

(Optional) See page [STATECHK](#) for a description of the STATECHK parameter.

Installing a RESGROUP when ASSIGNMENT is specified

When the ASSIGNMENT parameter is used on the INSTALL action for the RESGROUP, the following parameters can be used to override temporarily the values in the RASGNDEF specified by the ASSIGNMENT parameter:

- TARGET
- RELATED
- USAGE
- MODE
- OVERRIDE

In this case the above parameters are optional. In all other cases including the case where a RESGROUP is installed and the ASSIGNMENT parameter is NOT specified, refer to the descriptions listed above for the correct usage.

Chapter 2. ACTION Resource Table

A CPSM Real Time Analysis Definition that describes the external notifications to be generated when an installed RTADEF or STATDEF enters the TRUE state.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSRTAAActionDefinition

Length

296

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt2812

Table 9. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
UPDATE		None	N/A
REMOVE		None	N/A

Table 10. ACTION FEEDBACK error codes		
Value	Code	Description
1	ACTION_INV_DATA	Attribute data invalid
2	ACTION_REC_NOT_FOUND	Requested resource not found
4	ACTION_REC_EXISTS	Resource already exists
5	ACTION_REC_CHANGED	Resource definition already changed
6	ACTION_INV_RESTYPE	Invalid resource type
7	ACTION_INV_VER	Invalid resource version
8	ACTION_NETVIEW_NOT_FOUND	Netview CMAS not found

Table 11. ACTION resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
ALERTMSGEND	CHAR	CPSM	30	No	DIFF	Message text when alert is cleared			19
ALERTMSGSTRT	CHAR	CPSM	30	No	DIFF	Message text when alert is raised			18
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			23
CHANGEAGENT Input/output valid values	DREPAPI								
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			26
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification			1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification userid			25
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created			24
DESC	CHAR	CPSM	58	No	DIFF	Description			14
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999	22
EVENTMSG	CHAR	CPSM	30	No	DIFF	Message to send when event occurs			15
EXTMSGEND	CHAR	CPSM	30	No	DIFF	External message sent when event is cleared			17
EXTMSGSTRT	CHAR	CPSM	30	No	DIFF	External message sent when event occurs			16
GENALERT	EYUDA	CPSM	4	Yes	LIKE	Generate SNA generic alert			10
GENALERT Input/output valid values	YES, NO								
GENEVENT	EYUDA	CPSM	4	Yes	LIKE	Generate event			8
GENEVENT Input/output valid values	YES, NO								
GENEXTMSG	EYUDA	CPSM	4	Yes	LIKE	Generate external message			9
GENEXTMSG Input/output valid values	YES, NO								
NAME-1	CHAR	CPSM	8	Yes	DIFF	Action			5
NETVIEW	CHAR	CPSM	8	No	DIFF	CMAS to which NetView attached			7
PRIORITY	BINARY	CPSM	1	No	AVG	Action priority	1	1-255	13
RESTARTMAS	EYUDA	CPSM	4	Yes	LIKE	MVS automatic restart	NO		11
RESTARTMAS Input/output valid values	YES, NO								
VIEW	CHAR	CPSM	8	No	DIFF	User data area			6

Chapter 3. AIMODEL Resource Table

A CICS Resource that describes an autoinstall terminal model.

The **Primary** key field for this resource class is MODEL.

The following action is supported:

DISCARD

Discard the autoinstall terminal model.

The DISCARD action requires no unique parameter data.

External resource name

CICSAutoInstallModel

Length

24

Usage

API or WUI or CICS Management Client Interface

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0054

Table 12. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM SET	DISCARD	None	N/A

Table 13. AIMODEL resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	1
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
MODEL-1	CHAR	INQ	8	DIFF	Model name	

Chapter 4. APACTV Resource Table

A CPSM Real Time Analysis Manager object that describes instances of RTADEFs installed under an active analysis specification.

The **Primary** key field for this resource class is APSPEC.

The **Secondary** key field for this resource class is CMAS.

The **Tertiary** key field for this resource class is DEFNAME.

The **Fourth** key field for this resource class is SCOPE.

The **Fifth** key field for this resource class is ACTIVETIME.

The following actions are supported:

DISCARD

Unconditionally remove the installed definition.

DEACTIVATE

Remove the installed definition honoring a PERIODEF.

These actions require no unique parameter data.

External resource name

CICSActiveAnalysisPoint

Length

80

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSPlex SM Manager

Copybook identifier

EYUt2528

Table 14. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET	DEACTIVATE	None	N/A
	REACTIVATE	None	N/A

Table 15. APACTV FEEDBACK error codes

Value	Code	Description
1	APACTV_INV_DATA	Attribute data invalid
21	APACTV_DEACT_NOT_ALLOWED	Deactivate not allowed
22	APACTV_NOT_FOUND	Not found
23	APACTV_SCOPE_NOT_FOUND	Scope not found
24	APACTV_SPEC_NOT_ACTIVE	Specification not active
25	APACTV_NOT_SPECIFIED	Not specified
26	APACTV_REACT_NOT_ALLOWED	Reactivate not allowed

Table 16. APACTV resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ACTION	CHAR	CPSM	8	DIFF	Associated action	7
ACTIVETIME-5	CHAR	CPSM	8	DIFF	Period definition	6
APSPEC-1	CHAR	CPSM	8	DIFF	Analysis point specification	1
CMAS-2	CHAR	CPSM	8	DIFF	CMAS	2
CMATYPE	EYUDA	CPSM	4	LIKE	CMAS type	3
CMATYPE Output valid values	PRIMARY, SECONDARY					
DEFNAME-3	CHAR	CPSM	8	DIFF	Analysis definition	4
RATE	BINARY	CPSM	4	AVG	Interval between analysis activations (seconds)	8
SCOPE-4	CHAR	CPSM	8	DIFF	Analysis scope	5
STATUS	EYUDA	CPSM	4	LIKE	Definition status	9
STATUS Output valid values	ACTIVE, PENDING					

Chapter 5. APPLCTN Resource Table

An instance of an application that is running in a platform.

The **Primary** key field for this resource class is APPLDEF.

The **Secondary** key field for this resource class is MAJORVERSION.

The **Tertiary** key field for this resource class is MINORVERSION.

The **Fourth** key field for this resource class is MICROVERSION.

The **Fifth** key field for this resource class is PLATDEF.

The following actions are supported:

AVAILABLE

Make the application available to callers through its application entry points.

ENABLE

Enable an application.

DISABLE

Disable an application.

DISCARD

Remove an application from the platform.

GET

Retrieve information about an application.

UNAVAILABLE

Make the application unavailable to callers through its application entry points.

External resource name

CICSApplication

Length

912

Usage

API or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt3522

Table 17. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 17. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
PERFORM SET	DISCARD	None	N/A
	ENABLE	None	N/A
	DISABLE	None	N/A
	AVAILABLE	None	N/A
	UNAVAILABLE	None	N/A

Table 18. APPLCTN FEEDBACK error codes		
Value	Code	Description
1	APPLCTN_REC_NOT_FOUND	Application not found
2	APPLCTN_DISABLED_SOME_BUNDLES	CICS bundles were not disabled in some regions
3	APPLCTN_DISCARDED_SOME_BUNDLES	CICS bundles were not discarded in some regions
4	APPLCTN_DISCARDED_NO_BUNDLES	CICS bundles were not discarded in any regions
5	APPLCTN_ENABLED_SOME_BUNDLES	CICS bundles were not enabled in some regions
6	APPLCTN_ENABLED_NO_BUNDLES	CICS bundles were not enabled in any regions
7	APPLCTN_DISABLED_NO_BUNDLES	CICS bundles were not disabled in any regions
8	APPLCTN_STATUS_CHANGING	The application status is changing due to another action or event.
9	APPLCTN_NOT_DISABLED	The application is not in a DISABLED state
10	APPLCTN_BUSY	Application is busy for another action
11	APPLCTN_AVAILABLE_NO_BUNDLES	CICS bundles were not made available in any regions
12	APPLCTN_AVAILABLE_SOME_BUNDLES	CICS bundles were not made available in some regions
13	APPLCTN_UNAVAIL_NO_BUNDLES	CICS bundles were not made unavailable in any regions
14	APPLCTN_UNAVAIL_SOME_BUNDLES	CICS bundles were not made unavailable in some regions
15	APPLCTN_NOT_UNAVAILABLE	The application is still available
16	APPLCTN_NOT_ENABLED	The application is not in an ENABLED state

Table 19. APPLCTN resource table attributes							
Name	Datatype	Source	Len	Sum	Description	Default	Attr ID
APPLDEF-1	CHAR	CPSM	8	DIFF	Application definition		4

Table 19. APPLCTN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Default	Attr ID
APPLDIR	CHAR	CPSM	255	DIFF	Name of the application directory on zFS		10
APPLICATION	CHAR	CPSM	64	DIFF	Application		5
AVAILSTATUS	EYUDA	CPSM	4	LIKE	Availability status		25
AVAILSTATUS Output valid values	AVAILABLE, UNAVAILABLE, SOMEAVAIL, NONE						
BINDDIR	CHAR	CPSM	255	DIFF	Name of the binding directory on zFS		22
CHANGEAGENT	CVDAS	CPSM	4	LIKE	Last modification agent		16
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	DIFF	Last modification agent release		19
CHANGETIME	DATETIME	CPSM	8	MAX	Last modification		15
CHANGEUSRID	CHAR	CPSM	8	DIFF	Last modification user ID		18
CREATETIME	DATETIME	CPSM	8	MAX	Time created		17
DESCCODEPAGE	BINARY	CPSM	4	MAX	Description code page	37	12
DESCRIPTION	CHAR	CPSM	255	DIFF	Description of this application		11
ENABLESTATUS	EYUDA	CPSM	4	LIKE	Enable status		14
ENABLESTATUS Output valid values	ENABLED, DISABLED, INCOMPLETE, ENABLING, DISABLING, EMPTY, SOMEDISABLED, INSTALLING, DISCARDING, FAILED						
MAJORVERSION-2	BINARY	CPSM	4	MAX	Major version		6
MICROVERSION-4	BINARY	CPSM	4	MAX	Micro version		8
MINORVERSION-3	BINARY	CPSM	4	MAX	Minor version		7
PLATDEF-5	CHAR	CPSM	8	DIFF	Platform definition		9

Chapter 6. APPLDEF Resource Table

This CICS resource object provides the structure and contents of an APPLCTN resource.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is MAJORVERSION.

The **Tertiary** key field for this resource class is MINORVERSION.

The **Fourth** key field for this resource class is MICROVERSION.

The **Fifth** key field for this resource class is PLATDEF.

The following actions are supported:

INSTALL

Deploy an APPLDEF resource into the CICSplex.

External resource name

CICSApplicationDefinition

Length

640

Usage

API or Batch Utility or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt3524

Table 20. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	INSTALL	None	N/A
SET			
CREATE		None	N/A
UPDATE		None	N/A
REMOVE		None	N/A

Table 21. APPLDEF FEEDBACK error codes

Value	Code	Description
1	APPLDEF_APPLCTN_INSTALLED	Application is already installed
2	APPLDEF_RESTYPE_INVALID	Invalid resource type
3	APPLDEF_REC_NOT_FOUND	Application definition not found
4	APPLDEF_DATA_INVALID	Attribute data invalid
5	APPLDEF_CONTEXT_INVALID	CICSplex not found
6	APPLDEF_RECORD_INVALID	Invalid record
7	APPLDEF_INV_ACTION	Invalid action
8	APPLDEF_APPLDEF_INVALID	Invalid application definition name
9	APPLDEF_INSTALLED_SOME_BUNDLES	CICS bundles were not installed in some regions
10	APPLDEF_INSTALLED_NO_BUNDLES	CICS bundles were not installed in any regions
11	APPLDEF_BUNDLE_FILE_NOT_AUTH	User ID not authorized to access zFS file
12	APPLDEF_NOT_FOUND_BUNDLE_FILE	Application or binding bundle file not found
13	APPLDEF_XML_IN_BUNDLE_INVALID	Invalid XML in Application or binding bundle
14	APPLDEF_PLATFORM_NOT_FOUND	Target platform not found
15	APPLDEF_INV_RESTYPE	Invalid resource type
16	APPLDEF_PLATDEF_INVALID	Invalid platform definition name
17	APPLDEF_MAJORVERSION_INVALID	Invalid major version
18	APPLDEF_MINORVERSION_INVALID	Invalid minor version
19	APPLDEF_MICROVERSION_INVALID	Invalid micro version
20	APPLDEF_VERSION_MISMATCH	APPLDEF and application versions differ
21	APPLDEF_REC_EXISTS	Application definition already exists
22	APPLDEF_RGNTYPE_NOT_FOUND	A region type in the binding could not be found
23	APPLDEF_REC_CHANGED	Resource definition already changed
24	APPLDEF_INSTALL_FAILED	APPLDEF install failed
25	APPLDEF_APPLCTN_BUSY	Application is busy for another action

Table 22. APPLDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Set	Description	Default	Value Range	Attr ID
APPLDIR	CHAR	CPSM	255	Yes	DIFF	No	Application directory on the zFS			9
BINDDIR	CHAR	CPSM	255	Yes	DIFF	Yes	Binding bundle directory on the zFS			14
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	No	Last modification agent			127

Table 22. APPLDEF resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Set	Description	Default	Value Range	Attr ID
CHANGEAGENT Input/output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	No	Last modification agent release			130
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	No	Last modification			1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	No	Last modification user ID			129
CREATETIME	DATETIME	CPSM	8	Yes	MAX	No	Time created			128
DESCCODEPAGE	BINARY	CPSM	4	No	MAX	No	Description code page	37	0-99999999	7
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Yes	Description			6
MAJORVERSION-2	BINARY	CPSM	4	Yes	MAX	No	Application Major Version			11
MICROVERSION-4	BINARY	CPSM	4	Yes	MAX	No	Application Micro Version			13
MINORVERSION-3	BINARY	CPSM	4	Yes	MAX	No	Application Minor Version			12
NAME-1	CHAR	CPSM	8	Yes	DIFF	No	Application definition			5
PLATDEF-5	CHAR	CPSM	8	Yes	DIFF	No	Platform definition			8

Chapter 7. APSPEC Resource Table

A CPSM Real Time Analysis Definition that describes an analysis specification.

The **Primary** key field for this resource class is NAME.

External resource name

CICSActiveAnalysisPointSpecification

Length

112

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt3515

Table 23. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
UPDATE		None	N/A
REMOVE		None	N/A
PERFORM	ADDPCMAS	CMASNAME(value)	Yes
SET	ADDSCMAS	CMASNAME(value)	Yes

Table 24. APSPEC FEEDBACK error codes		
Value	Code	Description
1	APSPEC_INV_DATA	Attribute data invalid
2	APSPEC_REC_NOT_FOUND	Requested resource not found
3	APSPEC_INV_REFERENCE	Does not exist
4	APSPEC_REC_EXISTS	Resource already exists
5	APSPEC_REC_CHANGED	Attempt to update changed definition
6	APSPEC_INV_RESTYPE	Invalid resource type

Table 24. APSPEC FEEDBACK error codes (continued)

Value	Code	Description
7	APSPEC_INV_VER	Invalid resource version
21	APSPEC_CMAS_NOT_UNIQU	Not unique
22	APSPEC_DUP_ASSOCIATIO	Duplicate association

Table 25. APSPEC resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			8
CHANGEAGENT Input/ output valid values	DREPAPI								
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification			1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created			9
DESC	CHAR	CPSM	58	No	DIFF	Description			6
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999	7
NAME-1	CHAR	CPSM	8	Yes	DIFF	RTA analysis point specification			5

Chapter 8. ASYNCREQ Resource Table

A CPSM Notification that describes the completion of an API command that was scheduled to run asynchronously with the NOWAIT option.

There is no key field for this resource class.

There are no object specific actions for this resource class.

External resource name

Length

192

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Metadata

Copybook identifier

EYUt2584

Table 26. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 27. ASYNCREQ resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ATTRDATAVAL	CHAR	CPSM	1	LIKE	Attribute data available	8
ATTRDATAVAL Input/output valid values	Y (YES) - Attribute Ids valid, N (NO) - No Attribute Id data					
ATTR_DTYP1	BINARY	CPSM	1	LIKE	Attribute datatype	21
ATTR_DTYP1 Input/output valid values	0 (COMP) - Component Identifier, 4 (BIN) - Binary Numeric, 8 (RATE) - Binary Derived Rate, 12 (PER) - Binary Derived Percent, 16 (SUM) - Binary Derived Sum, 20 (RATO) - Binary Derived Ratio, 24 (AVG) - Binary Derived Average, 28 (TSTP) - System/390 Timestamp, 32 (BIT) - Bit, 36 (TEXT) - Text Unknown Length, 40 (CHAR) - Character, 44 (EYUD) - EYUDA, 48 (CVDS) - CVDA Standard, 52 (CVDT) - CVDA Terminal, 56 (REST) - Resource Type, 60 (PACK) - Packed Decimal, 64 (DATE) - Date, 68 (ILBL) - Internal Label Field, 72 (HHMM) - Binary HHMM, 76 (SCLK) - Interval Store Clock, 80 (IUSC) - Interval Microseconds, 84 (IMSC) - Interval Milliseconds, 88 (16US) - Interval 16 Microseconds, 92 (ISEC) - Interval Seconds, 96 (IUSS) - Interval Store Clock Delta, 100 (DTGP) - Date Time Group, 104 (DECT) - Packed Decimal Timestamp, 108 (ADDR) - Address, 112 (CNUM) - Coded Numeric, 116 (HCHR) - Non Display Character, 120 (HEX) - Hexadecimal, 124 (TBLV) - Table version, 128 (RAT3) - Binary derived rate 3DP, 132 (PER3) - Binary derived percent 3DP, 136 (SUM3) - Binary derived sum 3DP, 140 (AVG3) - Binary derived average 3DP, 144 (DECS) - Packed Decimal Time - No Tenths, 152 (SC12) - Interval Store Clock Length 12					
ATTR_DTYP2	BINARY	CPSM	1	LIKE	Attribute datatype	26
ATTR_DTYP3	BINARY	CPSM	1	LIKE	Attribute datatype	31
ATTR_DTYP4	BINARY	CPSM	1	LIKE	Attribute datatype	36

Table 27. ASYNCREQ resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
ATTR_DTYP5	BINARY	CPSM	1	LIKE	Attribute datatype	41
ATTR_LEN1	BINARY	CPSM	2	LIKE	Attribute length	23
ATTR_LEN2	BINARY	CPSM	2	LIKE	Attribute length	28
ATTR_LEN3	BINARY	CPSM	2	LIKE	Attribute length	33
ATTR_LEN4	BINARY	CPSM	2	LIKE	Attribute length	38
ATTR_LEN5	BINARY	CPSM	2	LIKE	Attribute length	43
ATTR_NM1	CHAR	CPSM	12	LIKE	Attribute name	19
ATTR_NM2	CHAR	CPSM	12	LIKE	Attribute name	24
ATTR_NM3	CHAR	CPSM	12	LIKE	Attribute name	29
ATTR_NM4	CHAR	CPSM	12	LIKE	Attribute name	34
ATTR_NM5	CHAR	CPSM	12	LIKE	Attribute name	39
ATTR_OFF1	BINARY	CPSM	2	LIKE	Attribute offset	20
ATTR_OFF2	BINARY	CPSM	2	LIKE	Attribute offset	25
ATTR_OFF3	BINARY	CPSM	2	LIKE	Attribute offset	30
ATTR_OFF4	BINARY	CPSM	2	LIKE	Attribute offset	35
ATTR_OFF5	BINARY	CPSM	2	LIKE	Attribute offset	40
ATTR_RID1	BINARY	CPSM	1	LIKE	Attribute relative ID	22
ATTR_RID2	BINARY	CPSM	1	LIKE	Attribute relative ID	27
ATTR_RID3	BINARY	CPSM	1	LIKE	Attribute relative ID	32
ATTR_RID4	BINARY	CPSM	1	LIKE	Attribute relative ID	37
ATTR_RID5	BINARY	CPSM	1	LIKE	Attribute relative ID	42
CEIBDATAVAL	CHAR	CPSM	1	LIKE	EIB data available	9
CEIBDATAVAL Input/output valid values	Y (YES) - EIB data valid, N (NO) - No EIB data					
CEIBFN	HEX	CPSM	4	MIN	EIBFN value from CICS	16
CEIBRESP	BINARY	CPSM	4	LIKE	RESP response from CICS	14
CEIBRESP1	BINARY	CPSM	4	LIKE	RESP2 response from CICS	15
COMMAND	BINARY	CPSM	1	LIKE	Command code	7
COMMAND Input/output valid values	1 (NOOP) - NOOP, 2 (CANCEL) - Cancel, 3 (CONNECT) - Connect, 4 (COPY) - Copy, 5 (CREATE) - Create, 6 (DELETE) - Delete, 7 (DISCARD) - Discard, 8 (DISCONN) - Disconnect, 9 (FETCH) - Fetch, 10 (GET) - Get, 11 (LOCATE) - Locate, 12 (MARK) - Mark, 13 (ORDER) - Order by, 14 (PERFSET) - Perform Set, 15 (PERFOBJ) - Perform Object, 16 (QUALIFY) - Qualify, 17 (QUERY) - Query, 18 (RECEIVE) - Receive, 19 (REMOVE) - Remove, 20 (FILTER) - Specify Filter, 21 (UNMARK) - Unmark, 22 (ADDRESS) - Address, 23 (GETDEF) - Getdef, 24 (LISTEN) - Listen, 25 (REFRESH) - Refresh, 26 (SET) - Set, 27 (VIEW) - Specify View, 28 (TERM) - Terminate, 29 (TRANS) - Translate, 30 (GROUP) - Group by, 31 (UPDATE) - Update					
COUNT	BINARY	CPSM	4	LIKE	GET COUNT() value	47
CSDAPI	CHAR	CPSM	1	LIKE	CSD API	48
CSDAPI Input/output valid values	Y (YES) - CSD API related request, N (NO) - non-CSD API related request					
DIAGNOSTIC	BINARY	CPSM	32	LIKE	Internal diagnostic data	46
ERRCODEVAL	CHAR	CPSM	1	LIKE	Error code available	10
ERRCODEVAL Input/output valid values	Y (YES) - Error Code valid, N (NO) - No Error Code Data					
ERROR_CODE	BINARY	CPSM	4	LIKE	Error code	13
OBJECT	CHAR	CPSM	8	LIKE	Name of object	17
OBJECT_ACT	CHAR	CPSM	12	LIKE	Action performed	18
REASON	BINARY	CPSM	4	LIKE	Command reason	12
RESPONSE	BINARY	CPSM	4	LIKE	Command response	11

Table 27. ASYNCREQ resource table attributes (continued)						
Name	Datatype	Source	Len	Sum	Description	Attr ID
RESULTSET	BINARY	CPSM	4	LIKE	Result set token	5
RSLTRECID	BINARY	CPSM	4	LIKE	Result set record ID	45
RSRVED01	BINARY	CPSM	2	LIKE	Reserved area	44
USERTOKEN	CHAR	CPSM	4	LIKE	User token	6

Chapter 9. ATMINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of an Atom service, feed, collection, or category document definition (ATOMDEF) in a resource group (RESGROUP). An ATOMDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is ATOMGROUP.

The **Secondary** key field for this resource class is ATMNAME.

The **Tertiary** key field for this resource class is ATMVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6183

Table 28. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 29. ATMINGRP FEEDBACK error codes		
Value	Code	Description
1	ATMINGRP_INV_DATA	Attribute data invalid
2	ATMINGRP_REC_NOT_FOUND	Requested resource not found
4	ATMINGRP_REC_EXISTS	Resource already exists
6	ATMINGRP_INV_RESTYPE	Invalid resource type
7	ATMINGRP_INV_VER	Invalid resource version
11	ATMINGRP_NON_MP	Maintenance point CMAS not available

Table 29. ATMINGRP FEEDBACK error codes (continued)

Value	Code	Description
12	ATMINGRP_INV_CONTEXT	Context not found
21	ATMINGRP_INCONSISTENT_SET	Inconsistent set
22	ATMINGRP_DIFF_VERSION	Different version
23	ATMINGRP_INV_NAME	Invalid name
24	ATMINGRP_INV_MINNAME	Invalid minor name

Table 30. ATMINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
ATMGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
ATMNAME-2	CHAR	CPSM	8	Yes	DIFF	AtomService definition name	6
ATMVER-3	BINARY	CPSM	1	Yes	AVG	AtomService definition version	7
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9

Chapter 10. ATOMDEF Resource Table

A CICS Definition that describes an Atom service, feed, collection, or category document served by CICS.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

DISCARD

Discard an Atom service, feed, collection, or category document definition.

INSTALL

Install an Atom service, feed, collection, or category document definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionAtomService

Length

680

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3838

Table 31. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No

Table 31. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
PERFORM SET	INSTALL	FORCEINS(YES, NO)	No
		MODE(value)	No
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 32. ATOMDEF FEEDBACK error codes		
Value	Code	Description
1	ATOMDEF_INV_DATA	Attribute data invalid
2	ATOMDEF_REC_NOT_FOUND	Requested resource not found
4	ATOMDEF_REC_EXISTS	Resource already exists
5	ATOMDEF_REC_CHANGED	Resource definition already changed
6	ATOMDEF_INV_RESTYPE	Invalid resource type
7	ATOMDEF_INV_VER	Invalid resource version
11	ATOMDEF_NON_MP	Maintenance point CMAS not available
12	ATOMDEF_INV_CONTEXT	Context not found
13	ATOMDEF_INCONSISTENT_SET	Inconsistent set condition
14	ATOMDEF_INV_RESGROUP	Resource group not found
21	ATOMDEF_INV_ACTION	Invalid action
22	ATOMDEF_INV_RECADDR	Invalid record address
23	ATOMDEF_INV_RECLN	Invalid record length
24	ATOMDEF_DIFF_VERSION	Different version
25	ATOMDEF_EARLY_NAMELIST_END	Early name list end
26	ATOMDEF_INV_NAMELIST	Invalid name list
27	ATOMDEF_INV_NAME	Invalid name
28	ATOMDEF_INV_MINNAME	Invalid minor name

Table 32. ATOMDEF FEEDBACK error codes (continued)

Value	Code	Description
29	ATOMDEF_NOTIFY	Notify
30	ATOMDEF_PARTIAL_INSTALL	Partial install
31	ATOMDEF_NOTHING_INSTALLED	Nothing installed
32	ATOMDEF_NO_TARGETS	No targets
33	ATOMDEF_NO_RELATED	No related systems
34	ATOMDEF_INV_TSCOPE	Invalid target scope
35	ATOMDEF_INV_RSCOPE	Invalid related scope
36	ATOMDEF_INV_USAGE	Invalid usage
37	ATOMDEF_INV_MODE	Invalid mode
38	ATOMDEF_INV_STATECHK	Invalid state check
39	ATOMDEF_INV_FORCEINS	Invalid force install
40	ATOMDEF_INV_NOTIFY	Invalid notify
41	ATOMDEF_INV_OVERTYPE	Invalid over type
42	ATOMDEF_INV_OVRBLOCK	Invalid override block
43	ATOMDEF_INV_ORSTRING	Invalid override string
44	ATOMDEF_INV_STRNGTERM	Invalid string term
45	ATOMDEF_INV_EMBEDTERM	Invalid embedded terminator
46	ATOMDEF_INV_ATTRIBUTE	Invalid attribute
47	ATOMDEF_INV_LITERAL	Invalid literal
48	ATOMDEF_INV_ORSTGNA	Invalid override string
49	ATOMDEF_SCOPE_REQUIRED	Scope required
50	ATOMDEF_USAGE_CONFLICT	Usage conflict
51	ATOMDEF_NODEFS_SELECTED	No definitions selected
52	ATOMDEF_MORE_THAN_1_RELSYS	More than one related system
53	ATOMDEF_MISSING_RELSYSID	Missing related system identifier
54	ATOMDEF_SCOPE_CONFLICT	Scope conflict
56	ATOMDEF_BAD_BINDCONFLICT	Bindfile option conflicts with Atomtype option.
57	ATOMDEF_BAD_BINDSETCONFLICT	Bindfile should not be set with this Atomtype option.
58	ATOMDEF_BAD_RTYPECONFLICT	Resourcetype option conflicts with Atomtype option.
59	ATOMDEF_BAD_RTYPESETCONFLICT	Resourcetype should not be with this Atomtype option.
60	ATOMDEF_BAD_RNAMECONFLICT	Resourcenam option conflicts with Atomtype option.
61	ATOMDEF_BAD_RNAMESETCONFLICT	Resourcenam should not be set with this Atomtype option.

Table 32. ATOMDEF FEEDBACK error codes (continued)

Value	Code	Description
62	ATOMDEF_INVALID_CONFIGFILE	Configfile invalid.
63	ATOMDEF_INV_CSDGROUP	Invalid CSD group
64	ATOMDEF_REC_NOT_REMOVED	Record not removed
65	ATOMDEF_INV_RESOURCE	Invalid resource
66	ATOMDEF_INV_CICS_RESTYPE	Invalid CICS restype
67	ATOMDEF_PARTIAL_ACTION	Partial action
68	ATOMDEF_NOTHING_ACTIONED	Nothing actioned
69	ATOMDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
70	ATOMDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
71	ATOMDEF_BAD_RESNAMELEN	Resourcenam is too long for the Ressourcetype specified.
72	ATOMDEF_CSD_ERROR	CSD access error

Table 33. ATOMDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
ATOMTYPE	CVDAS	CPSM	4	Yes	MIN	Atomtype	FEED			14
ATOMTYPE Input/output valid values	FEED, SERVICE, COLLECTION, CATEGORY									
BINDFILE	CHAR	CPSM	255	No	DIFF	Bind file name				17
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	4
CHANGEAGENT Input/output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	7
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	6
CONFIGFILE	CHAR	CPSM	255	Yes	DIFF	Configuration file name				18
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				5
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	25
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		10
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		24
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				23
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				12
RESOURCENAME	CHAR	CPSM	16	No	DIFF	Resource name				16
RESOURCE TYPE	CVDAS	CPSM	4	Yes	LIKE	Resource type	NOTAPPLIC			15
RESOURCE TYPE Input/output valid values	FILE, PROGRAM, TSQUEUE, NOTAPPLIC									

Table 33. ATOMDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
STATUS	CVDAS	CPSM	4	Yes	LIKE	Enabled status	ENABLED			13
STATUS Input/output valid values	ENABLED, DISABLED									
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				20
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				21
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				22

Chapter 11. ATOMSERV Resource Table

A CICS Resource that provides information about Atom service, feed, collection, or category document definitions.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

DISABLE

Disable program access to the Atom service, feed, collection, or category document definition.

ENABLE

Enable program access to the Atom service, feed, collection, or category document definition.

External resource name

CICSAtomService

Length

696

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0180

Table 34. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	ENABLE	None	N/A
	DISABLE	None	N/A
	DISCARD	None	N/A

Table 35. ATOMSERV resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			

Table 35. ATOMSERV resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
ATMSRVDELENT	BINARY	STAT	4	AVG	No	Number of DELETE requests to the entry URL			25
ATMSRVGETENT	BINARY	STAT	4	AVG	No	Number of GET requests to the entry URL			23
ATMSRVGETFED	BINARY	STAT	4	AVG	No	Number of GET requests to the feed URL			22
ATMSRVPSTFED	BINARY	STAT	4	AVG	No	Number of POST requests to the feed URL			21
ATMSRVPUTENT	BINARY	STAT	4	AVG	No	Number of PUT requests to the entry URL			24
ATMSRVREFCT	BINARY	STAT	4	AVG	No	Atom Service reference count			19
ATMSRVREFDIS	BINARY	STAT	4	AVG	No	Atom Service reference disabled count			20
ATOMTYPE	CVDAS	CPSM	4	MIN	No	Atomtype			3
ATOMTYPE Input/output valid values	FEED, SERVICE, COLLECTION, CATEGORY								
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0		17
BINDFILE	CHAR	CPSM	255	DIFF	No	Bind file name			7
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent			10
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, CREATESPI, NOTAPPLIC								
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release			11
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time			12
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID			9
CONFIGFILE	CHAR	CPSM	255	DIFF	No	Configuration file name			8
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition			13
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time			14
ENABLESTATUS	CVDAS	CPSM	4	LIKE	Yes	Enabled status			2
ENABLESTATUS Input/output valid values	ENABLED, DISABLED								
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent		E640 E650 E660	5
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, GRPLIST, BUNDLE								
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time			16
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID			15
NAME-1	CHAR	INQ	8	DIFF	No	Name			1
RESOURCENAME	CHAR	CPSM	16	DIFF	No	Resource name			6
RESOURCECETYPE	CVDAS	CPSM	4	LIKE	No	Resource type			4
RESOURCECETYPE Input/output valid values	FILE, PROGRAM, TSQUEUE, NOTAPPLIC								
URIMAPNAME	CHAR	INQ	8	DIFF	No	URIMAP name		E640 E650 E660	28
XMLTRANSNAME	CHAR	INQ	32	DIFF	No	XMLTRANSFORM name		E640 E650 E660	29

Chapter 12. ATTRAVA Resource Table

A MetaData resource that describes one valid value for an attribute of a managed object.

The **Primary** key field for this resource class is OBJECT.

The **Secondary** key field for this resource class is TABLEVER.

The **Tertiary** key field for this resource class is NAME.

The **Fourth** key field for this resource class is AVAVALUE.

There are no object specific actions for this resource class.

External resource name

Length

40

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Metadata

Copybook identifier

EYUt2581

Table 36. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 37. ATTRAVA resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
AVAVALUE-4	CHAR	CPSM	16	DIFF	Attribute valid value	7
IOTYPE	CHAR	CPSM	1	DIFF	Valid I/O operation	9
IOTYPE Input/output valid values	B (B) - INPUT and Output, I (I) - INPUT operation, O (O) - OUTPUT operation					
LISTTYPE	BINARY	CPSM	1	AVG	Valid value type	8
LISTTYPE Input/output valid values	1 (AVA) - AVAVALUE is an AVA, 2 (VALUE) - AVAVALUE is a VALUE					
NAME-3	CHAR	CPSM	12	DIFF	Attribute name	6
OBJECT-1	CHAR	CPSM	8	DIFF	Object name	4
TABLEVER-2	BINARY	CPSM	2	AVG	Object table version	5

Chapter 13. ATTR Resource Table

A CPSM MetaData resource that describes an attribute of a managed object.

The **Primary** key field for this resource class is OBJECT.

The **Secondary** key field for this resource class is TABLEVER.

The **Tertiary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

Length

216

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Metadata

Copybook identifier

EYUt2580

Table 38. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 39. ATTR resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
AVAAVAIL	CHAR	CPSM	1	DIFF	AVA set available	17
AVAAVAIL Input/output valid values	Y (YES) - Value assertions, N (NO) - No values					
AVACOUNT	BINARY	CPSM	1	AVG	Number of AVAs present	23
CICSSETAVAIL	CHAR	CPSM	1	DIFF	CICS set validity available	48
CICSSETAVAIL Input/output valid values	Y (YES) - CICS Set Validity data present, N (NO) - No CICS Set Validity data					
CICSVALAVAIL	CHAR	CPSM	1	DIFF	CICS validity data available	18
CICSVALAVAIL Input/output valid values	Y (YES) - CICS Validity active, N (NO) - No CICS Validity data					
DATATYPE	CHAR	CPSM	8	DIFF	Data type	10
DEFAULT	CHAR	CPSM	16	DIFF	Default value	46
DESC	CHAR	CPSM	50	DIFF	Attribute description	45
FILTER	CHAR	CPSM	1	DIFF	Attribute eligible for filtering	50

Table 39. ATTR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
FILTER Input/output valid values	Y (YES) - Filter by field allowed, N (NO) - Filter by field not allowed					
HDRTEXT	CHAR	CPSM	30	DIFF	Attribute header text	44
HDRTXTAVAIL	CHAR	CPSM	1	DIFF	Header text available	19
HDRTXTAVAIL Input/output valid values	Y (YES) - Header data active, N (NO) - No header data					
HIGHVALUE	CHAR	CPSM	16	DIFF	Highest valid value	43
ID	BINARY	CPSM	2	LIKE	Attribute id	57
IDATATYPE	BINARY	CPSM	1	LIKE	Reserved	54
IDATATYPE Input/output valid values	0 (COMP) - Component Identifier, 4 (BIN) - Binary Numeric, 8 (RATE) - Binary Derived Rate, 12 (PER) - Binary Derived Percent, 16 (SUM) - Binary Derived Sum, 20 (RATO) - Binary Derived Ratio, 24 (AVG) - Binary Derived Average, 28 (TSTP) - System/370 Timestamp, 32 (BIT) - Bit, 36 (TEXT) - Text, 40 (CHAR) - Character, 44 (EYUD) - EYUDA, 48 (CVDS) - CVDA Standard, 52 (CVDT) - CVDA Terminal, 56 (REST) - Resource Type, 60 (PACK) - Packed Decimal, 64 (DATE) - Date, 68 (ILBL) - Internal Label Field, 72 (HHMM) - Binary HHMM, 76 (SCLK) - Interval Store Clock, 80 (IUSC) - Interval Microseconds, 84 (IMSC) - Interval Milliseconds, 88 (16US) - Interval 16 Microseconds, 92 (ISEC) - Interval Seconds, 96 (IUSS) - Interval Store Clock delta, 100 (DTGP) - Date Time Group, 104 (DECT) - Packed Decimal Timestamp, 108 (ADDR) - Address, 112 (CNUM) - Coded Numeric, 116 (HCHR) - Non Display Character, 120 (HEX) - Hexadecimal, 124 (TVER) - Table version, 128 (RAT3) - Binary derived rate 3DP, 132 (PER3) - Binary derived percent 3DP, 136 (SUM3) - Binary derived sum 3DP, 140 (AVG3) - Binary derived average 3DP, 144 (DECS) - Packed Decimal Time - No Tenths, 152 (SC12) - Interval Store Clock Length 12, 156 (BITS) - String of bit flags					
IGNVALUE	CHAR	CPSM	16	DIFF	Ignore value	41
INHERIT	CHAR	CPSM	1	DIFF	Attribute may participate in inheritance	53
INHERIT Input/output valid values	Y (YES) - Inherit supported, N (NO) - Inherit not supported					
KEY	CHAR	CPSM	1	DIFF	Key participation	22
LENGTH	BINARY	CPSM	2	AVG	Attribute length	8
LOWVALUE	CHAR	CPSM	16	DIFF	Lowest valid value	42
NAME-3	CHAR	CPSM	12	DIFF	Attribute name	6
OBJECT-1	CHAR	CPSM	8	DIFF	Object name	4
OFFSET	BINARY	CPSM	2	AVG	Attribute offset	9
PICKLIST	CHAR	CPSM	1	DIFF	Attribute eligible for picklist	58
PICKLIST Input/output valid values	Y (YES) - Picklist supported, N (NO) - Picklist not supported					
REQUIRED	CHAR	CPSM	1	DIFF	Attribute is required	16
REQUIRED Input/output valid values	Y (YES) - Required for Create, N (NO) - Optional on Create					
SETCICSES2	BIT	CPSM	1	LIKE	Not modifiable in CICS Transaction Server for z/OS byte 2	56
SETCICSES2 Input/output valid values	128 (E630) - CICS Transaction Server for z/OS, Version 2 Release 3, 64 (E640) - CICS Transaction Server for z/OS, Version 3 Release 1, 32 (E650) - CICS Transaction Server for z/OS, Version 3 Release 2, 16 (E660) - CICS Transaction Server for z/OS, Version 4 Release 1, 8 (E670) - CICS Transaction Server for z/OS, Version 4 Release 2, 4 (E680) - CICS Transaction Server for z/OS, Version 5 Release 1, 2 (E690) - CICS Transaction Server for z/OS, Version 5 Release 2, 1 (E700) - CICS Transaction Server for z/OS, Version 5 Release 3					
SETCICSES3	BIT	CPSM	1	LIKE	Not modifiable in CICS Transaction Server for z/OS byte 3	60
SETCICSES3 Input/output valid values	128 (E710) - CICS Transaction Server for z/OS, Version 5 Release 4					
SETCICSESA	BIT	CPSM	1	LIKE	Not modifiable in CICS/ESA	33
SETCICSESA Input/output valid values	128 (M212) - CICS/MVS 212, 64 (E330) - CICS/ESA 330, 32 (E410) - CICS/ESA 410, 16 (E510) - CICS for MVS/ESA 510, 8 (E520) - CICS for MVS/ESA 520, 4 (E530) - CICS for MVS/ESA 530, 2 (E610) - CICS for MVS/ESA 610, 1 (E620) - CICS for MVS/ESA 620					
SETCICSOS2	BIT	CPSM	1	LIKE	Not modifiable in CICS OS/2	35
SETCICSOS2 Input/output valid values	128 (O201) - CICS OS/2 201, 64 (O300) - CICS OS/2 300, 32 (O311) - CICS OS/2 310					
SETCICSVSE	BIT	CPSM	1	LIKE	Not modifiable in CICS/VSE	34
SETCICSVSE Input/output valid values	128 (V220) - CICS/VSE 220, 64 (V230) - CICS/VSE 230, 32 (V410) - CICS/VSE 410					
SETCICSWNT	BIT	CPSM	1	LIKE	Not modifiable in CICS for Windows	38

Table 39. ATTR resource table attributes (continued)						
Name	Datatype	Source	Len	Sum	Description	Attr ID
SETCICSWNT Input/output valid values	128 (N430) - CICS for Windows 430, 64 (N500) - CICS for Windows 500					
SETVALID	CHAR	CPSM	1	DIFF	Attribute may be set	15
SETVALID Input/output valid values	Y (YES) - Value may be modified, N (NO) - No modification					
SORT	CHAR	CPSM	1	DIFF	Attribute eligible for sorting	49
SORT Input/output valid values	Y (YES) - Sort by field allowed, N (NO) - Sort by field not allowed					
SOURCE	CHAR	CPSM	1	DIFF	Source of attribute	21
SUMMARIZE	CHAR	CPSM	1	DIFF	Attribute eligible for grouping	51
SUMMARIZE Input/output valid values	Y (YES) - Group by field allowed, N (NO) - Group by field not allowed					
SUMOPT	CHAR	CPSM	4	DIFF	Default summary option	11
TABLEVER-2	BINARY	CPSM	2	AVG	Object table version	5
UCHAR	CHAR	CPSM	1	DIFF	Uppercase character values	47
UCHAR Input/output valid values	Y (YES) - Uppercase characters, N (NO) - Do not uppercase characters					
VALCICSES2	BIT	CPSM	1	LIKE	Not valid in CICS Transaction Server for z/OS byte 2	55
VALCICSES2 Input/output valid values	128 (E630) - CICS Transaction Server for z/OS, Version 2 Release 3, 64 (E640) - CICS Transaction Server for z/OS, Version 3 Release 1, 32 (E650) - CICS Transaction Server for z/OS, Version 3 Release 2, 16 (E660) - CICS Transaction Server for z/OS, Version 4 Release 1, 8 (E670) - CICS Transaction Server for z/OS, Version 4 Release 2, 4 (E680) - CICS Transaction Server for z/OS, Version 5 Release 1, 2 (E690) - CICS Transaction Server for z/OS, Version 5 Release 2, 1 (E700) - CICS Transaction Server for z/OS, Version 5 Release 3					
VALCICSES3	BIT	CPSM	1	LIKE	Not valid in CICS Transaction Server for z/OS byte 3	59
VALCICSES3 Input/output valid values	128 (E710) - CICS Transaction Server for z/OS, Version 5 Release 4					
VALCICSESA	BIT	CPSM	1	LIKE	Not valid in CICS/ESA	25
VALCICSESA Input/output valid values	128 (M212) - CICS/MVS 212, 64 (E330) - CICS/ESA 330, 32 (E410) - CICS/ESA 410, 16 (E510) - CICS Transaction Server for OS/390, Release 1, 8 (E520) - CICS Transaction Server for OS/390, Release 2, 4 (E530) - CICS Transaction Server for OS/390, Release 3, 2 (E610) - CICS Transaction Server for z/OS, Version 2 Release 1, 1 (E620) - CICS Transaction Server for z/OS, Version 2 Release 2					
VALCICSOS2	BIT	CPSM	1	LIKE	Not valid in CICS OS/2	27
VALCICSOS2 Input/output valid values	128 (O201) - CICS OS/2 201, 64 (O300) - CICS OS/2 300, 32 (O311) - CICS OS/2 310					
VALCICSVSE	BIT	CPSM	1	LIKE	Not valid in CICS/VSE	26
VALCICSVSE Input/output valid values	128 (V220) - CICS/VSE 220, 64 (V230) - CICS/VSE 230, 32 (V410) - CICS/VSE 410					
VALCICSWNT	BIT	CPSM	1	LIKE	Not valid in CICS for Windows	30
VALCICSWNT Input/output valid values	128 (N430) - CICS for Windows 430, 64 (N500) - CICS for Windows 500					
VALCOUNT	BINARY	CPSM	1	AVG	Number of values present	24
VALSETAVAIL	CHAR	CPSM	1	DIFF	Value set available	20
VALSETAVAIL Input/output valid values	Y (YES) - Value set active, N (NO) - No value set					
VIEWMOD	CHAR	CPSM	1	DIFF	Attribute may appear in a view	52
VIEWMOD Input/output valid values	Y (YES) - SPECIFY VIEW allowed, N (NO) - SPECIFY VIEW not allowed					

Chapter 14. BATCHREP Resource Table

A CPSM Manager resource that provides information about a batched repository-update job.

The **Primary** key field for this resource class is INPUTDSN.

The **Secondary** key field for this resource class is INPUTMEMBER.

The following actions are supported:

CHECK

Check input parameters for a batched repository-update job.

The parameter data for the CHECK action is:

```
PARM('INPUTDSN(data set)
      [INPUTMEMBER(membername)] [PRINTCLASS(class)]
      PRINTNODE(node) OUTPUTUSER(userid).')
```

where:

data set = (Required) 1-to 44-character name of the sequential or Partitioned Data Set (PDS) that contains the input parameters to the batched repository-update job.

membername = When using a PDS, the name of the member that contains the input parameters to the batched repository-update job.

class = 1-character print class identifier. If omitted print class A is used.

node = (Required) 1-to 8-character print node identifier to be used by the system spooler for routing the job output.

userid = (Required) 1- to 8-character user identifier for the job output.

EXECUTE

Execute a batched repository-update job.

The parameter data for the EXECUTE action is:

```
PARM('INPUTDSN(data set)
      [INPUTMEMBER(membername)] [PRINTCLASS(class)]
      PRINTNODE(node) OUTPUTUSER(userid).')
```

where:

data set = (Required) 1-to 44-character name of the sequential or Partitioned Data Set (PDS) that contains the input parameters to the batched repository-update job.

membername = When using a PDS, the name of the member that contains the input parameters to the batched repository-update job.

class = 1-character print class identifier. If omitted print class A is used.

node = (Required) 1-to 8-character print node identifier to be used by the system spooler for routing the job output.

userid = (Required) 1- to 8-character user identifier for the job output.

External resource name

CICSBatchrepRequest

Length

80

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

Yes

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2554

Table 40. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		INPUTDSN(value)	No
		INPUTMEMBER(value)	No
PERFORM SET	CHECK	INPUTDSN(value)	Yes
		INPUTMEMBER(value)	No
		OUTPUTUSER(value)	Yes
		PRINTCLASS(value)	No
		PRINTNODE(value)	Yes
	EXECUTE	INPUTDSN(value)	Yes
		INPUTMEMBER(value)	No
		OUTPUTUSER(value)	Yes
		PRINTCLASS(value)	No
		PRINTNODE(value)	Yes

Table 41. BATCHREP FEEDBACK error codes

Value	Code	Description
1	BATCHREP_DUPLICATE_REQUEST	Duplicate request for this input data set and member
2	BATCHREP_STORAGE_FAILURE	Failure to obtain storage for job
3	BATCHREP_PRINT_FAILURE	Failure during print processing
4	BATCHREP_INPUT_SEC_VIOLATION	Security violation with input data set
5	BATCHREP_SPOOL_UNAVAILABLE	Spool found to be not available
6	BATCHREP_DATASET_NOT_FOUND	Input data set not found
7	BATCHREP_OUTPUT_SEC_VIOLATION	Security violation with output data set
8	BATCHREP_PRINTNODE_NOT_FOUND	Print node is required but not specified
9	BATCHREP_OUTPUTUSER_NOT_FOUND	Output user is required but not specified
10	BATCHREP_INV_INPUTMEMBER	Invalid input member

Table 41. BATCHREP FEEDBACK error codes (continued)

Value	Code	Description
11	BATCHREP_INV_INPUTDSN	Invalid input data set name
12	BATCHREP_INV_PRINTCLASS	Invalid output class
13	BATCHREP_INV_PRINTNODE	Invalid print node
14	BATCHREP_INV_OUTPUTUSER	Invalid destination user ID

Table 42. BATCHREP resource table attributes

Name	Datatype	Source	Len	Sum	Description	Default	Attr ID
INPUTDSN-1	CHAR	CPSM	44	DIFF	Input data set		7
INPUTMEMBER-2	CHAR	CPSM	8	DIFF	Input member		8
OUTPUTUSER	CHAR	CPSM	8	DIFF	Destination user ID		11
PRINTCLASS	CHAR	CPSM	1	DIFF	Output class	A	9
PRINTNODE	CHAR	CPSM	8	DIFF	Destination node		10
PROCESS	EYUDA	CPSM	4	LIKE	Processing state	STOPPED	12
PROCESS Output valid values	STARTED, STOPPED						
RUNTYPE	EYUDA	CPSM	4	LIKE	Batch run type	CHECK	6
RUNTYPE Input/output valid values	EXECUTE, CHECK						

Chapter 15. BINCONRS Resource Table

A CPSM Business Application Services Manager object that describes the reasons for inconsistent set errors encountered while installing CICS Definitions into CICS systems.

The **Primary** key field for this resource class is CICSNAME.

The **Secondary** key field for this resource class is CANDNAME.

The **Tertiary** key field for this resource class is CANDVER.

There are no object specific actions for this resource class.

External resource name

Length

144

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Metadata

Copybook identifier

EYUt2619

Table 43. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 44. BINCONRS resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
CANDASGOVR	EYUDA	CPSM	4	LIKE	Candidate assignment override	19
CANDASGOVR Output valid values	NO, YES					
CANDNAME-2	CHAR	CPSM	8	LIKE	Candidate resource name	10
CANDRASG	CHAR	CPSM	8	LIKE	Candidate resource assignment	14
CANDRDSC	CHAR	CPSM	8	LIKE	Candidate resource description	15
CANDRGRP	CHAR	CPSM	8	LIKE	Candidate resource group	13
CANDSGRP	CHAR	CPSM	8	LIKE	Candidate system group	17
CANDTYPE	EYUDA	CPSM	4	LIKE	Candidate system type	18
CANDTYPE Output valid values	TARGET, RELATED					
CANDUSAGE	EYUDA	CPSM	4	LIKE	Candidate resource assignment usage	16
CANDUSAGE Output valid values	LOCAL, REMOTE, ASIS					

Table 44. BINCONRS resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
CANDVER-3	BINARY	CPSM	1	LIKE	Candidate resource version	11
CICSNAME-1	CHAR	CPSM	8	LIKE	CICS system name	6
CMASNAME	CHAR	CPSM	8	LIKE	CMAS name	4
ERROP	BINARY	CPSM	1	LIKE	Error operation	8
ERROP Input/output valid values	1 (ADDSYS) - Add System to System Group, 2 (ADDTGRP) - Add Definition to Group, 3 (UPDINGRP) - Update Definition in Group, 4 (ADDRASI) - Add RASINDSC, 5 (ADDRESI) - Add RESINDSC, 6 (UPDRASG) - Update RASGNDEF, 7 (UPDRASI) - Update RASINDSC, 8 (UPDRESI) - Update RESDESC Install Scope, 9 (UPDRDSC) - Update RESDESC					
EXISTASGOVR	EYUDA	CPSM	4	LIKE	Existing resource assignment override	29
EXISTASGOVR Output valid values	NO, YES					
EXISTNAME	CHAR	CPSM	8	LIKE	Existing resource name	20
EXISTRASG	CHAR	CPSM	8	LIKE	Existing resource assignment	23
EXISTRDSC	CHAR	CPSM	8	LIKE	Existing resource description	24
EXISTRGRP	CHAR	CPSM	8	LIKE	Existing resource group	22
EXISTSGRP	CHAR	CPSM	8	LIKE	Existing system group	27
EXISTTYPE	EYUDA	CPSM	4	LIKE	Existing system type	28
EXISTTYPE Output valid values	TARGET, RELATED					
EXISTUSAGE	EYUDA	CPSM	4	LIKE	Existing resource assignment usage	26
EXISTUSAGE Output valid values	LOCAL, REMOTE, ASIS					
EXISTVER	BINARY	CPSM	1	LIKE	Existing resource version	21
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	5
RESTYPE	CHAR	CPSM	8	LIKE	Resource type	7

Chapter 16. BINCONSC Resource Table

A CPSM Business Application Services Manager object that describes the reasons for inconsistent scope errors encountered while installing CICS Definitions into aCICS system.

The **Primary** key field for this resource class is TARGSCOPE.

The **Secondary** key field for this resource class is RELSCOPE.

There are no object specific actions for this resource class.

External resource name

Length

80

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Metadata

Copybook identifier

EYUt2620

Table 45. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 46. BINCONSC resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
CICSNAME	CHAR	CPSM	8	LIKE	CICS system name	15
CMASNAME	CHAR	CPSM	8	LIKE	CMAS name	4
ERRCODE	BINARY	CPSM	1	LIKE	Error code	7
ERRCODE Input/output valid values	1 (SAMESCP) - Target/Related scopes are same, 2 (TRGINREL) - Target Scope is in Related, 3 (RELINTRG) - Related Scope is in Target, 4 (SYSNBOTH) - CICSNAME in Target and Related, 5 (MULTREL) - Multiple Systems in Related, 6 (RELNOSYS) - Related System has no SYSID					
ERROP	BINARY	CPSM	1	LIKE	Error operation	6
ERROP Input/output valid values	1 (ADDRASI) - Add RASINDSC, 2 (UPDRASG) - Update RASGNDEF, 3 (UPDRASI) - Update RASINDSc, 4 (UPDRDSC) - Update RESDESC, 5 (ADDSYS) - Add System to Group					
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	5
RELRASG	CHAR	CPSM	8	LIKE	Resource assignment for related scope	13
RELRDSC	CHAR	CPSM	8	LIKE	Resource description for related scope	14
RELSCOPE-2	CHAR	CPSM	8	LIKE	Related scope name	12
TARGRASG	CHAR	CPSM	8	LIKE	Resource assignment for target scope	10

Table 46. BINCONSC resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
TARGRDSC	CHAR	CPSM	8	LIKE	Resource description for target scope	11
TARGSCOPE-1	CHAR	CPSM	8	LIKE	Target scope name	9

Chapter 17. BINSTERR Resource Table

A CPSM Business Application Services Manager object that identifies errors encountered while installing CICS Definitions into CICS systems.

The **Primary** key field for this resource class is CICSNAME.

The **Secondary** key field for this resource class is RESNAME.

The **Tertiary** key field for this resource class is RESVER.

The **Fourth** key field for this resource class is RESTYPE.

There are no object specific actions for this resource class.

External resource name

Length

48

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Metadata

Copybook identifier

EYUt2616

Table 47. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 48. BINSTERR resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
CEIBFN	BINARY	CPSM	2	LIKE	EIBFN response from CICS	13
CICSNAME-1	CHAR	CPSM	8	LIKE	CICS system name	6
CMASNAME	CHAR	CPSM	8	LIKE	CMAS name	4
CRESP1	BINARY	CPSM	4	LIKE	RESP response from CICS	11
CRESP2	BINARY	CPSM	4	LIKE	RESP2 response from CICS	12
ERRCODE	BINARY	CPSM	1	LIKE	Error code	10
ERRCODE Input/output valid values	1 (SYSSTATE) - System Inact/Not Cre capable, 2 (INSTNAUT) - Install not authorized, 3 (DSCDNAUT) - Discard not authorized, 4 (INSTFAIL) - Install failure, 5 (DSCDFAIL) - Install discard failure, 6 (INSTCPFL) - Install Complete failure, 7 (INSTNCON) - Install Connection failure, 8 (INSTSTAT) - Install status failure, 9 (INSTNSUP) - Install not supported, 10 (FORCENO) - Resource Install negated, 11 (DSCRDERR) - Discard failure, 12 (METHFAIL) - MAS method failure, 13 (NOCREATE) - System not create capable, 14 (RSRCNSUP) - Resource not supported					
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	5

Table 48. BINSTERR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
RESNAME-2	CHAR	CPSM	8	LIKE	Resource name	7
RESTYPE-4	RESTYPE	CPSM	2	LIKE	Resource type	8
RESVER-3	BINARY	CPSM	1	LIKE	Resource version number	9

Chapter 18. BRFACIL Resource Table

A CICS Resource that describes a LINK3270 bridge facility.

The **Primary** key field for this resource class is NAME.

The following action is supported:

RELEASE

Mark an active bridge facility for deletion.

External resource name

CICSBridgeFacility

Length

88

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0111

Table 49. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM	RELEASE	None	N/A
SET			

Table 50. BRFACIL resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved	
KEEPTIME	INTSEC	INQ	4	MAX	No	Facility keep time	12
LINKSYSNET	CHAR	INQ	8	DIFF	No	Remote bridge target region network name	8
LINKSYSTEM	CHAR	INQ	4	DIFF	No	Remote bridge target region system ID	7
NAME-1	HEX	INQ	8	MIN	No	Bridge facility token	1

Table 50. BRFACIL resource table attributes (continued)							
Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
NAMESPACE	CVDAS	INQ	4	LIKE	No	Namespace type	11
NAMESPACE Output valid values	LOCAL, SHARED						
NETNAME	CHAR	INQ	8	DIFF	No	Network name	2
REMOTESYSNET	CHAR	INQ	8	DIFF	No	Remote bridge router network name	10
REMOTESYSTEM	CHAR	INQ	4	DIFF	No	Remote bridge router system ID	9
TASKID	BINARY	INQ	4	AVG	No	Task number	5
TERMINID	CHAR	INQ	4	DIFF	No	Terminal	3
TERMSTATUS	CVDAS	INQ	4	LIKE	Yes	Terminal status	13
TERMSTATUS Input/output valid values	RELEASED						
TERMSTATUS Output valid values	ACQUIRED, AVAILABLE						
TRANSID	CHAR	INQ	4	DIFF	No	Transaction	4
USERID	CHAR	INQ	8	DIFF	No	User ID	6

Chapter 19. BUNDEF Resource Table

A CICS definition that describes an application bundle.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

CREATE

Create a BUNDLE resource that represents the application bundle in CICS.

INSTALL

Install a BUNDLE resource so that the application bundle is available in CICS.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#)

External resource name

CICSDefinitionBundle

Length

656

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3839

Table 51. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No

Table 51. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
PERFORM SET	INSTALL	FORCEINS(YES, NO)	No
		MODE(value)	No
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 52. BUNDDEF FEEDBACK error codes

Value	Code	Description
1	BUNDDEF_INV_DATA	Attribute data invalid
2	BUNDDEF_REC_NOT_FOUND	Requested resource not found
4	BUNDDEF_REC_EXISTS	Resource already exists
5	BUNDDEF_REC_CHANGED	Resource definition already changed
6	BUNDDEF_INV_RESTYPE	Invalid resource type
7	BUNDDEF_INV_VER	Invalid resource version
11	BUNDDEF_NON_MP	Maintenance point CMAS not available
12	BUNDDEF_INV_CONTEXT	Context not found
13	BUNDDEF_INCONSISTENT_SET	Inconsistent set condition
14	BUNDDEF_INV_RESGROUP	Resource group not found
21	BUNDDEF_INV_ACTION	Invalid action
22	BUNDDEF_INV_RECADDR	Invalid record address
23	BUNDDEF_INV_RECLN	Invalid record length
24	BUNDDEF_DIFF_VERSION	Different version
25	BUNDDEF_EARLY_NAMELIST_END	Early name list end
26	BUNDDEF_INV_NAMELIST	Invalid name list
27	BUNDDEF_INV_NAME	Invalid name
28	BUNDDEF_INV_MINNAME	Invalid minor name

Table 52. BUNDDDEF FEEDBACK error codes (continued)

Value	Code	Description
29	BUNDDDEF_NOTIFY	Notify
30	BUNDDDEF_PARTIAL_INSTALL	Partial install
31	BUNDDDEF_NOTHING_INSTALLED	Nothing installed
32	BUNDDDEF_NO_TARGETS	No targets
33	BUNDDDEF_NO_RELATED	No related systems
34	BUNDDDEF_INV_TSCOPE	Invalid target scope
35	BUNDDDEF_INV_RSCOPE	Invalid related scope
36	BUNDDDEF_INV_USAGE	Invalid usage
37	BUNDDDEF_INV_MODE	Invalid mode
38	BUNDDDEF_INV_STATECHK	Invalid state check
39	BUNDDDEF_INV_FORCEINS	Invalid force install
40	BUNDDDEF_INV_NOTIFY	Invalid notify
41	BUNDDDEF_INV_OVERTYPE	Invalid over type
42	BUNDDDEF_INV_OVRBLOCK	Invalid override block
43	BUNDDDEF_INV_ORSTRING	Invalid override string
44	BUNDDDEF_INV_STRNGTERM	Invalid string term
45	BUNDDDEF_INV_EMBEDTERM	Invalid embedded terminator
46	BUNDDDEF_INV_ATTRIBUTE	Invalid attribute
47	BUNDDDEF_INV_LITERAL	Invalid literal
48	BUNDDDEF_INV_ORSTGNA	Invalid override string
49	BUNDDDEF_SCOPE_REQUIRED	Scope required
50	BUNDDDEF_USAGE_CONFLICT	Usage conflict
51	BUNDDDEF_NODEFS_SELECTED	No definitions selected
52	BUNDDDEF_MORE_THAN_1_RELSYS	More than one related system
53	BUNDDDEF_MISSING_RELSYSID	Missing related system identifier
54	BUNDDDEF_SCOPE_CONFLICT	Scope conflict
55	INVALID_BUNDLE_NAME	Invalid Bundle name.
56	BUNDDDEF_INV_CSDGROUP	Invalid CSD group
57	BUNDDDEF_REC_NOT_REMOVED	Record not removed
58	BUNDDDEF_INV_RESOURCE	Invalid resource
59	BUNDDDEF_INV_CICS_RESTYPE	Invalid CICS restype
60	BUNDDDEF_PARTIAL_ACTION	Partial action
61	BUNDDDEF_NOTHING_ACTIONED	Nothing actioned
62	BUNDDDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
63	BUNDDDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required

Table 52. BUNDDDEF FEEDBACK error codes (continued)

Value	Code	Description
64	BUNDDDEF_CSD_ERROR	CSD access error

Table 53. BUNDDDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
BASESCOPE	CHAR	CPSM	255	No	DIFF	BASESCOPE				20
BUNDLEDIR	CHAR	CPSM	255	Yes	DIFF	Name of the BUNDLE directory on zFS				19
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	4
CHANGEAGENT Input/output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	7
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	6
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				5
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	21
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		10
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		16
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				18
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				12
STATUS	CVDAS	CPSM	4	Yes	LIKE	Enabled Status	ENABLED			17
STATUS Input/output valid values	ENABLED, DISABLED									
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				13
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				14
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				15

Chapter 20. BUNDLE Resource Table

A CICS resource that provides information about an application bundle.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

AVAILABLE

Make the application available to callers through its application entry points.

DISABLE

Disable the BUNDLE resource so that the application that is deployed as a bundle is no longer available.

DISCARD

Discard the BUNDLE resource definition. The resource must be disabled.

ENABLE

Enable the BUNDLE resource so that the application is available in CICS.

UNAVAILABLE

Make the application unavailable to callers through its application entry points.

PHASEIN

Register new versions of any OSGi bundles referenced by the BUNDLE with the OSGi framework.

External resource name

CICSBundle

Length

704

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0182

Table 54. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	ENABLE	None	N/A
	DISABLE	None	N/A

Table 54. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
	DISCARD	None	N/A
	AVAILABLE	None	N/A
	UNAVAILABLE	None	N/A
	PHASEIN	None	N/A

Table 55. BUNDLE resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
AVAILSTATUS	CVDAS	INQ	4	LIKE	Yes	Availability status		E640 E650 E660 E670 E680	24
AVAILSTATUS Input/output valid values	AVAILABLE, UNAVAILABLE								
AVAILSTATUS Output valid values	SOMEAVAIL, NONE								
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0		13
BASESCOPE	CHAR	INQ	255	DIFF	No	BASESCOPE			14
BUNDLEDIR	CHAR	INQ	255	DIFF	No	Name of the BUNDLE directory on zFS			12
BUNDLEID	CHAR	INQ	64	DIFF	No	Bundle ID			19
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent			2
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, CREATESPI, NOTAPPLIC								
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release			3
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time			10
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID			4
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition			5
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time			9
ENABLEDCOUNT	BINARY	INQ	4	SUM	No	Enabled count			18
ENABLESTATUS	CVDAS	INQ	4	LIKE	Yes	Status			8
ENABLESTATUS Input/output valid values	ENABLED, DISABLED								
ENABLESTATUS Output valid values	ENABLING, DISABLING, DISCARDING								
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent			6
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, GRPLIST, CLOUD								
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time			11
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID			7
MAJORVERSION	BINARY	INQ	4	MAX	No	Major Version			20
MGMPART	HEX	INQ	8	MIN	No	Management part Id			23

Table 55. BUNDLE resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
MICROVERSION	BINARY	INQ	4	MAX	No	Micro Version			22
MINORVERSION	BINARY	INQ	4	MAX	No	Minor Version			21
NAME-1	CHAR	INQ	8	DIFF	No	Name			1
PARTCOUNT	BINARY	INQ	4	SUM	No	Part count			16
TARGETCOUNT	BINARY	INQ	4	SUM	No	Target count			17

Chapter 21. BUNDPART Resource Table

Inquire about the different parts of an application bundle, including the resources that are dynamically created and managed as part of the bundle.

The **Primary** key field for this resource class is BUNDLE.

The **Secondary** key field for this resource class is BUNDLEPART.

The **Tertiary** key field for this resource class is SEQNUMBER.

Although the BUNDPART resource identifies multiple key attributes, only the BUNDLE attribute can be specified in an EVALDEF INSTANCE attribute.

The following actions are supported:

INQUIRE

Inquire about contents of the BUNDLE resource, including the resources that were dynamically created by the BUNDLE resource definition. The BUNDLE resource must be installed.

External resource name

CICSBundlePart

Length

872

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0191

Table 56. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 57. BUNDPART resource table attributes							
Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release		
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved		

Table 57. BUNDPART resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
AVAILSTATUS	CVDAS	INQ	4	LIKE	Availability status	E640 E650 E660 E670 E680	10
AVAILSTATUS Output valid values	AVAILABLE, UNAVAILABLE, NONE						
BUNDLE-1	CHAR	INQ	8	DIFF	Bundle name		1
BUNDLEPART-2	CHAR	INQ	255	DIFF	Bundle resource name		2
ENABLESTATUS	CVDAS	INQ	4	LIKE	Resource status		4
ENABLESTATUS Output valid values	ENABLED, DISABLED, ENABLING, DISABLING, DISCARDING, UNUSABLE						
METADATAFILE	CHAR	INQ	255	DIFF	Relative zFS path to resource description file		6
OPERATION	CHAR	INQ	64	DIFF	Operation Name	E640 E650 E660 E670 E680	11
PARTCLASS	CVDAS	INQ	4	LIKE	Resource class		5
PARTCLASS Output valid values	DEFINITION, EXPORT, IMPORT, ENTRYPOINT, POLICYSCOPE						
PARTTYPE	CHAR	INQ	255	DIFF	Resource type URI		7
SEQNUMBER-3	BINARY	CPSM	4	MAX	Browse sequence number		9

Chapter 22. BUNINGRP Resource Table

A CPSM Business Application Services definition that describes the membership of a bundle definition (BUNDDDEF) in a resource group (RESGROUP). A BUNDDDEF resource object can be a member of multiple RESGROUPS.

The **Primary** key field for this resource class is BUNGROUP.

The **Secondary** key field for this resource class is BUNNAME.

The **Tertiary** key field for this resource class is BUNVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6184

Table 58. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 59. BUNINGRP FEEDBACK error codes		
Value	Code	Description
1	BUNINGRP_INV_DATA	Attribute data invalid
2	BUNINGRP_REC_NOT_FOUND	Requested resource not found
4	BUNINGRP_REC_EXISTS	Resource already exists
6	BUNINGRP_INV_RESTYPE	Invalid resource type
7	BUNINGRP_INV_VER	Invalid resource version
11	BUNINGRP_NON_MP	Maintenance point CMAS not available

Table 59. BUNINGRP FEEDBACK error codes (continued)

Value	Code	Description
12	BUNINGRP_INV_CONTEXT	Context not found
21	BUNINGRP_INCONSISTENT_SET	Inconsistent set
22	BUNINGRP_DIFF_VERSION	Different version
23	BUNINGRP_INV_NAME	Invalid name
24	BUNINGRP_INV_MINNAME	Invalid minor name

Table 60. BUNINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
BUNGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
BUNNAME-2	CHAR	CPSM	8	Yes	DIFF	Bundle definition name	6
BUNVER-3	BINARY	CPSM	1	Yes	AVG	Bundle definition version	7
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9

Chapter 23. CFDTPOOL Resource Table

A CICS Resource that describes a Coupling Facility Data Table pool in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSCFDTPool

Length

32

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0097

Table 61. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 62. CFDTPOOL resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	2
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
CONNSTATUS	CVDAS	INQ	4	LIKE	Connection status	
CONNSTATUS Output valid values		CONNECTED, NOTCONNECTED, UNAVAILABLE				
NAME-1	CHAR	CPSM	8	DIFF	Pool name	1

Chapter 24. CICSDSA Resource Table

A CICS Resource that describes a named dynamic storage area in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSDynamicStorageArea

Length

312

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0002

Table 63. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A

Table 64. CICSDSA FEEDBACK error codes		
Value	Code	Description
2	CICSDSA_REC_NOT_FOUND	Requested resource not found
3	CICSGCDSA_NOT_SETTABLE	MEMLIMIT for GCDSA, GUDSA or GSDSA is unmodifiable

Table 65. CICSDSA resource table attributes									
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Set Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			22
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
ACCESSTYPE	EYUDA	STAT	4	LIKE	No	Storage key			

Table 65. CICSDSA resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Set Invalid	Attr ID
ACCESSTYPE Output valid values	CICS, USER, READONLY, TRUSTED								
ASACTIVE	BINARY	STAT	8	AVG	No	Current address space storage that is addressable	E640		48
ASUBTOTL	BINARY	STAT	4	AVG	No	Number of Add Subpool requests			7
ATBCUSHLIMIT	BINARY	STAT	8	AVG	No	Cushion limit	E640		53
ATBCUSHRELS	BINARY	STAT	8	AVG	No	Number of GCDSA, GUDSA or GSDSA cushion releases	E640		52
CUMCMNSSUSRS	BINARY	STAT	4	AVG	No	Cumulative number of common subspace users			36
CUMUNQSSUSRS	BINARY	STAT	4	AVG	No	Cumulative number of unique subspace users			33
CURCMNSSUSRS	BINARY	STAT	4	AVG	No	Current number of common subspace users			35
CURRALLOC	BINARY	STAT	8	AVG	No	Current DSA allocation			38
CURUNQSSUSRS	BINARY	STAT	4	AVG	No	Current tasks allocated a unique subspace			32
CUSHION	BINARY	INQ	8	AVG	Yes	Cushion size		E410+	3
DSUBTOTL	BINARY	STAT	4	AVG	No	Number of Delete Subpool requests			8
EXTENTSADDED	BINARY	STAT	4	AVG	No	Number of extents added to DSA			41
EXTENTSCURR	BINARY	STAT	4	AVG	No	Number of extents allocated to DSA			40
EXTENTSDELTD	BINARY	STAT	4	AVG	No	Number of extents deleted from page pool			42
FREMTOTL	BINARY	STAT	4	AVG	No	Number of FREEMAIN requests			6
GDSAACTIVE	BINARY	STAT	8	AVG	No	The current GDSA active	E640		50
GETMTOTL	BINARY	STAT	4	AVG	No	Number of GETMAIN requests			5
GETSTOR SIZE	BINARY	STAT	8	AVG	No	The GETSTOR request size	E640		47
HWMALLOC	BINARY	STAT	8	MAX	No	Peak DSA allocation			39
HWMASACTIVE	BINARY	STAT	8	AVG	No	The HWM address space that can be addressed	E640		49
HWMCMNSSUSRS	BINARY	STAT	4	MAX	No	Peak number of common subspace users			37
HWMFREE	BINARY	CPSM	8	MAX	No	Peak amount of free storage available			30
HWMGDSAACTIV	BINARY	STAT	8	AVG	No	The peak GDSA active	E640		51
HWMUNQSSUSRS	BINARY	STAT	4	MAX	No	Peak number of unique subspace users			34
LIMIT	BINARY	STAT	8	AVG	Yes	Limit of storage for DSAs			24
LOCATION	EYUDA	STAT	4	LIKE	No	Dynamic storage area (DSA) location			21
LOCATION Output valid values	ABOVE, BELOW, ABOVEBAR								
LWMFREE	BINARY	CPSM	8	MIN	No	Smallest amount of free storage available			31
MEMLIMIT	CNUMERIC	STAT	8	AVG	No	Maximum amount of above the bar storage	E640		46
NAME-1	CHAR	STAT	8	DIFF	No	Dynamic storage area (DSA)			1

Table 65. CICSDSA resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Set Invalid	Attr ID
NSTGCURR	BINARY	STAT	4	SUM	No	Number of current suspended storage requests			11
NSTGTOTL	BINARY	STAT	4	AVG	No	Number of times NOSTORAGE returned			9
PCTFREE	PERCENT	CPSM	4	AVG	No	Percentage of available total storage			26
PGMONIU	BINARY	STAT	4	AVG	No	Storage occupied by not-in-use programs			4
POOLPCTFREE	PERCENT	CPSM	4	AVG	No	Percentage of available pool storage			25
REQSWAITMVS	BINARY	STAT	4	AVG	No	Number of requests for MVS storage causing wait			44
RNTPGPROTECT	CVDAS	STAT	4	LIKE	No	Reentrant program protection status			28
RNTPGPROTECT Output valid values	REENTPROT, NOREENTPROT								
SIZE	BINARY	INQ	8	AVG	No	Subpool size			2
STGCRELC	BINARY	STAT	4	AVG	No	Number of times cushion released			14
STGFSIZE	BINARY	STAT	8	AVG	No	Free storage size			18
STGHWM	BINARY	STAT	8	MAX	No	Peak size of DSA			23
STGLSIZE	BINARY	STAT	8	AVG	No	Largest free area size			19
STGNSUBP	BINARY	STAT	4	AVG	No	Number of current subpools			17
STGPROTECT	CVDAS	STAT	4	LIKE	No	Storage protection status			27
STGPROTECT Output valid values	ACTIVE, INACTIVE								
STGPWCNT	BINARY	STAT	4	AVG	No	Number of tasks purged while waiting			13
STGSHWM	BINARY	STAT	4	AVG	No	Peak number of suspended storage requests			12
STGSOSC	BINARY	STAT	4	SUM	No	Short on storage count			15
STGSOST	INTTSTP	STAT	8	MAX	No	Total time CICS was short on storage			16
STGSTOTL	BINARY	STAT	4	AVG	No	Number of times requests were suspended			10
STGVTOTL	BINARY	STAT	4	SUM	No	Number of storage violations			20
TIMEWAITMVS	INTTSTP	STAT	8	AVG	No	Total time waiting for MVS storage			43
TRNISOLATION	CVDAS	STAT	4	LIKE	No	Transaction isolation status			29
TRNISOLATION Output valid values	ACTIVE, INACTIVE								

Chapter 25. CICSPAGP Resource Table

A CICS Resource that describes CICS page (DSA) pools in an active system being managed by CICSplex SM.

The **Primary** key field for this resource class is SMSDSANAME.

There are no object specific actions for this resource class.

External resource name

CICSPagePool

Length

312

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0130

Table 66. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 67. CICSPAGP resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	62
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
AVGTIMESOS	INTTSTP	CPSM	8	AVG	Average time spent short-on-storage (SOS)	56
GMNOTSATIMM	BINARY	CPSM	8	AVG	Total of non-immediate GETMAIN requests	53
LPCTFREE	PERCENT3	CPSM	4	AVG	Lowest size of free storage as percentage of total	59
PCTCREL2GM	PERCENT3	CPSM	4	AVG	Percentage of cushion releases	51
PCTFREE	PERCENT3	CPSM	4	AVG	Size of free storage as percentage of total	57
PCTGMNOT2RQ	PERCENT3	CPSM	4	AVG	Percentage of GETMAIN requests failing	

Table 67. CICS PAGP resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
PCTGMPURGED	PERCENT3	CPSM	4	AVG	Percentage of GETMAIN requests purged	58
PCTLFA2DSA	PERCENT3	CPSM	4	AVG	Size of largest free area as percentage of DSA	66
PCTSTGDSA	PERCENT3	CPSM	4	AVG	Percentage of DSA storage above/below 16MB	49
PPCTFREE	PERCENT3	CPSM	4	AVG	Peak size of free storage as percentage of total	52
PPCTSTGDSA	PERCENT3	CPSM	4	AVG	Peak DSA storage as percentage of total peak	50
RATECREL	RATE3	CPSM	8	AVG	Rate of cushion releases	61
RATEEXTSA	RATE3	CPSM	8	AVG	Rate of extent increase	64
RATEEXTSR	RATE3	CPSM	8	AVG	Rate of releasing extents	65
RATEFM	RATE3	CPSM	8	AVG	Rate of FREEMAIN requests	55
RATEGM	RATE3	CPSM	8	AVG	Rate of GETMAIN requests	54
RATESTORVIOL	RATE3	CPSM	8	AVG	Rate of storage violations	63
SMSACCESS	EYUDA	STAT	4	LIKE	Type of access of DSA	24
SMSACCESS Output valid values	NOTAPPLIC, CICS, USER, READONLY, TRUSTED					
SMSASR	BINARY	STAT	4	AVG	Number of ADD_SUBPOOL requests	30
SMSCREL	BINARY	STAT	4	AVG	Number of cushion releases	36
SMSCRISS	BINARY	STAT	4	AVG	Number of requests returning no storage	32
SMSCSIZE	BINARY	STAT	4	AVG	Current cushion size	27
SMSCSSCUM	BINARY	STAT	4	AVG	Total number of common subspace users	15
SMSCSSCUR	BINARY	STAT	4	AVG	Current number of common subspace users	14
SMSCSSHWM	BINARY	STAT	4	AVG	Peak number of common subspace users	16
SMSCSUBP	BINARY	STAT	4	AVG	Current number of subpools	40
SMSDSABYTES	BINARY	STAT	8	AVG	Current size of DSA in bytes	71
SMSDSALIMIT	BINARY	STAT	4	AVG	Current DSA limit	17
SMSDSANAME-1	CHAR	STAT	8	DIFF	Name of DSA in which the page pool is located	5
SMSDSASZ	BINARY	STAT	4	AVG	Current size of DSA	25
SMSDSATOTAL	BINARY	STAT	4	AVG	Current DSA total	19
SMSDSR	BINARY	STAT	4	AVG	Number of DELETE_SUBPOOL requests	31
SMSEDSALIMIT	BINARY	STAT	4	AVG	Current EDSA limit	18
SMSEDSATOTAL	BINARY	STAT	4	AVG	Current EDSA total	20
SMSEXTS	BINARY	STAT	4	AVG	Current number of extents	46
SMSEXTSA	BINARY	STAT	4	AVG	Number of extents added	47
SMSEXTSR	BINARY	STAT	4	AVG	Number of extents released	48
SMSFMREQ	BINARY	STAT	4	AVG	Number of FREEMAIN requests	29
SMSFSTG	BINARY	STAT	4	AVG	Size of free storage including cushion	41
SMSGMREQ	BINARY	STAT	4	AVG	Number of GETMAIN requests	28
SMSHWMDASZ	BINARY	STAT	4	AVG	Peak DSA size	26
SMSHWMDSATOT	BINARY	STAT	4	AVG	Peak storage allocated to DSAs	21

Table 67. CICSPAGP resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
SMSHWMEDSATO	BINARY	STAT	4	AVG	Peak storage allocated to EDSAs	22
SMSHWMFSTG	BINARY	STAT	4	AVG	Peak size of free storage	42
SMSHWMSS	BINARY	STAT	4	AVG	Peak number of requests suspended	34
SMSLFA	BINARY	STAT	4	AVG	Largest free area in DSA	44
SMSLOCN	EYUDA	STAT	4	LIKE	Location above/below 16M or above the bar	23
SMSLOCN Output valid values	ABOVE, BELOW, ABOVEBAR					
SMSLWMFSTG	BINARY	STAT	4	AVG	Smallest size of free storage	43
SMSNPAGP	BINARY	STAT	2	AVG	Number of page pools	6
SMSPWWS	BINARY	STAT	4	AVG	Number of tasks purged waiting storage	35
SMSRENTPGM	EYUDA	STAT	4	LIKE	Reentrant program protection status	9
SMSRENTPGM Output valid values	REENTPROT, NOREENTPROT					
SMSSOS	BINARY	STAT	4	AVG	Number of times short-on-storage (SOS) occurred	37
SMSSTGPROT	EYUDA	STAT	4	LIKE	Storage protection status	8
SMSSTGPROT Output valid values	ACTIVE, INACTIVE					
SMSSV	BINARY	STAT	4	AVG	Number of storage violations	45
SMSTRANISO	EYUDA	STAT	4	LIKE	Transaction isolation status	10
SMSTRANISO Output valid values	ACTIVE, INACTIVE					
SMSTSOS	INTTSTP	STAT	8	AVG	Total time spent short-on-storage (SOS)	39
SMSUCSS	BINARY	STAT	4	AVG	Number of conditional requests suspended	33
SMSUSSCUM	BINARY	STAT	4	AVG	Total of unique subspace users	12
SMSUSSCUR	BINARY	STAT	4	AVG	Current number of unique subspace users	11
SMSUSSHWM	BINARY	STAT	4	AVG	Peak number of unique subspace users	13

Chapter 26. CICSplex Resource Table

A CPSM Communications Manager object that describes a CICSplex being managed by a CMAS. CICSplex instances can be accessed only when you are connected to the CMAS that is the CICSplex Maintenance Point.

The **Primary** key field for this resource class is PLEXNAME.

The **Secondary** key field for this resource class is CMASNAME.

There are no object specific actions for this resource class.

External resource name

CICSCICSplex

Length

56

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

Yes

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2449

Table 68. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 69. CICSplex resource table attributes							
Name	Datatype	Source	Len	Sum	Description	Default	Attr ID
ACCESSTYPE	EYUDA	CPSM	4	LIKE	Type of access from this CMAS to local CMAS		8
ACCESSTYPE Output valid values	N_A, LOCAL, ADJACENT, INDIRECT						
BOTRSUPD	BINARY	CPSM	1	DIFF	RS server bottom tier	1	16
CMASNAME-2	CHAR	CPSM	8	DIFF	CMAS		5
MPSTATUS	EYUDA	CPSM	4	LIKE	CMAS maintenance point status		9
MPSTATUS Output valid values	YES, NO						
PLEXNAME-1	CHAR	CPSM	8	DIFF	CICSplex		4
READRS	BINARY	CPSM	2	DIFF	RS server read interval	200	13
RSPOLID	CHAR	CPSM	8	DIFF	RS server pool name	DFHRSTAT	17
STATUS	EYUDA	CPSM	4	LIKE	CMAS status		7

Table 69. CICSplex resource table attributes (continued)							
Name	Datatype	Source	Len	Sum	Description	Default	Attr ID
STATUS Output valid values	N_A, INACTIVE, ACTIVE, LOSTCON, CREATING						
SYSID	CHAR	CPSM	4	DIFF	CMAS system ID		12
TOPRSUPD	BINARY	CPSM	1	DIFF	RS server top tier	5	15
TRANSITCMAS	CHAR	CPSM	8	DIFF	First transit CMAS		6
TRANSITCNT	BINARY	CPSM	2	AVG	The number of transit CMASs for indirect access		11
UPDATERS	BINARY	CPSM	1	DIFF	RS server update frequency	15	14

Chapter 27. CICSRegion Resource Table

This CICS resource describes an active CICS region being managed by CICSplex SM.

The CICSRegion resource class does not provide an explicit key attribute. The set of object instances returned is a function of the current scope in effect when the request is made.

The following actions are supported:

ARMRESTART

Request an MVS CANCEL of the CICS system with an ARM restart. Note that this action completes successfully even if the MVS CANCEL command fails. The user ID associated with the CMAS (not the API user) must have the appropriate security access to issue the MVS CANCEL command successfully.

DELETSHIPED

Control the removal of redundant shipped terminal definitions.

RESETTIME

Reset the internal CICS clock.

SECUREBUILD

Rebuild the ESM security profiles.

SHUTDOWN

Shut down the CICS system.

The parameter data for the SHUTDOWN action is as follows:

```
PARM(' [NORMAL | IMMEDIATE | TAKEOVER] [DUMP] [NORESTART] [RESTART]
      [PLT(plt)] [XLT(xlt)] [SDTRAN(tranid) | NOSDTRAN].')
```

where:

plt = 2-character DFHPLT suffix.
xlt = 2-character DFHXLT suffix.
tranid = 1-to 8-character shutdown transaction ID.

SNAP

Request a system dump.

The parameter data for the SNAP action is:

```
PARM(' DUMPCODE(code) [CALLER(caller)] [TITLE(title)].')
```

where:

code = (Required) 1- to 8-character dump code.
caller = Caller text.
title = Title text.

SSLREBUILD

Rebuild the z/OS SSL environment.

SWITCH

Switch auxiliary tracing from one data set to the other.

External resource name

CICSRegion

Length

1056

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0001

Table 70. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	SHUTDOWN	DUMP	No
		IMMEDIATE	No
		NORESTART	No
		NORMAL	No
		NOSDTRAN	No
		PLT(value)	No
		RESTART	No
		SDTRAN(value)	No
		TAKEOVER	No
		XLT(value)	No
	SNAP	CALLER(value)	No
		DUMPCODE(value)	Yes
		TITLE(value)	No
	SWITCH	None	N/A
	RESETTIME	None	N/A
	SECREBUILD	None	N/A
	DELETSHIPED	None	N/A
	STATISTICS	ALL	No
		ATOMSERVICE	No
		AUTOINSTALL	No
		BEAN	No
		BUNDLE	No
		CAPTURESPEC	No
		CONNECTION	No

Table 70. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		CORBASERVER	No
		DB2	No
		DISPATCHER	No
		DOCTEMP	No
		DTBACKOUT	No
		ENQUEUE	No
		EVENTBINDING	No
		EVENTPROCESS	No
		FEPI	No
		FILE	No
		IPCONN	No
		IRCBATCH	No
		JOURNAL	No
		JRNLNNAME	No
		JVMPPOOL	No
		JVMPROFILE	No
		JVMPROGRAM	No
		JVMSERVER	No
		LIBRARY	No
		LSRPOOL	No
		MONITOR	No
		MQCONN	No
		MQMON	No
		PIPELINE	No
		PROGAUTOINS	No
		PROGRAM	No
		PROGRAMDEF	No
		RECOVERY	No
		REQUESTMODEL	No
		RESETNOW	No
		STATISTICS	No
		STORAGE	No
		STREAMNAME	No
		SYSDUMP	No
		TABLEMGR	No
		TASKCONTROL	No

Table 70. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		TCPIP	No
		TCPIPSERVICE	No
		TEMPSTOR	No
		TERMINAL	No
		TRANCLASS	No
		TRANDATA	No
		TRANDUMP	No
		TRANSACTION	No
		URIMAP	No
		VTAM	No
		WEBSERVICE	No
		XMLTRANSFORM	No
	ARMRESTART	None	N/A
	SSLREBUILD	None	N/A

Table 71. CICS RGN FEEDBACK error codes

Value	Code	Description
12	CICSRGN_INV_CONTEXT	Context not found
21	CICSRGN_ACTNOT_SUPPORTED	Action not supported
22	CICSRGN_RESOURCE_REQUIRED	Resource required
23	CICSRGN_SYSTEM_NOT_ACTIVE	System not active
24	CICSRGN_ARM_NOT_AVAILOPSYS	ARM invalid for Operating System
25	CICSRGN_ARM_NOT_AVAILCICSREL	ARM invalid for CICS Release
26	CICSRGN_ARM_NOT_REGISTERED	Not registered for ARM
27	CICSRGN_ARM_NOT_ACTIVE	ARM restart unavailable - ARM not active on system
28	CICSRGN_ARM_POLICY_CHECK	Current ARM policy prohibits ARM restart of this MAS
29	CICSRGN_ALL_REQUIRED	Collect all statistics required
30	CICSRGN_INVALID_DUMP CODE	Invalid dumpcode
31	CICSRGN_ARM_NOT_IN_SMSS	ARMRESTART not available in an SMSS

Table 72. CICS RGN resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Set Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			

Table 72. CICS RGN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Set Invalid	Attr ID
ACTHPTCBS	BINARY	INQ	4	AVG	No	Number of currently allocated HP pool TCBs	E640+		163
ACTJVMTCBS	BINARY	INQ	4	AVG	No	Number of currently allocated JVM pool TCBs	E680+		165
ACTOPENTCBS	BINARY	INQ	4	AVG	No	Number of currently allocated Open pool TCBs			155
ACTSSLTCBS	BINARY	INQ	4	AVG	No	Number of currently allocated SSL pool TCBs			171
ACTTHRDTCBS	BINARY	STAT	4	AVG	No	Number of currently allocated JVM server thread TCBs	E640		182
ACTXPTCBS	BINARY	INQ	4	AVG	No	Number of currently allocated XPLink pool TCBs			169
AINSCREQ	BINARY	INQ	4	AVG	No	Number of current autoinstall requests			25
AINSMREQ	BINARY	INQ	4	AVG	Yes	Maximum number of autoinstall requests			26
AINSPROG	CHAR	INQ	8	DIFF	Yes	Autoinstall program name			24
AINSSTAT	CVDAS	INQ	4	LIKE	No	Autoinstall enabled status			27
AINSSTAT Output valid values	ENABLED, DISABLED								
AKP	CNUMERIC	INQ	4	MAX	Yes	Activity keypoint (AKP) frequency			4
AMAXTASKS	BINARY	INQ	4	AVG	Yes	Maximum number of active tasks	E410+		5
APPLID	CHAR	INQ	8	DIFF	No	VTAM application ID			2
AUXSTATUS	CVDAS	INQ	4	LIKE	Yes	Auxiliary trace status			39
AUXSTATUS Input/output valid values	AUXSTART, AUXSTOP, AUXPAUSE								
BMSVALABCNT	BINARY	STAT	4	LIKE	No	Number of BMS 3270 validation errors abended	E640 E650 E660 E670 E680 E690 E700		193
BMSVALIDATE	CHAR	STAT	4	LIKE	No	BMS 3270 validation	E640 E650 E660 E670 E680 E690 E700		190
BMSVALIGCNT	BINARY	STAT	4	LIKE	No	Number of BMS 3270 validation errors ignored	E640 E650 E660 E670 E680 E690 E700		191
BMSVALLGCNT	BINARY	STAT	4	LIKE	No	Number of BMS 3270 validation errors logged	E640 E650 E660 E670 E680 E690 E700		192
CICSSTATUS	CVDAS	INQ	4	LIKE	No	CICS status			7
CICSSTATUS Output valid values	STARTUP, ACTIVE, FIRSTQUIESCE, FINALQUIESCE, CONTROLSHUT, SHUTDOWN, CANCELLED, FIRSTINIT, SECONDINIT, THIRDDINIT, INITCOMPLETE								
CICSSYS	CHAR	INQ	1	DIFF	No	CICS operating system ID			17

Table 72. CICS RGN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Set Invalid	Attr ID
CMDPROTECT	CVDAS	INQ	4	LIKE	No	Command protection status			141
CMDPROTECT Output valid values	CMDPROT, NOCMDPROT								
COLDSTATUS	CVDAS	INQ	4	LIKE	No	Cold start status			161
COLDSTATUS Output valid values	COLD, INITIAL, NOTAPPLIC								
CONSOLES	CVDAS	INQ	4	LIKE	Yes	Autoinstall console status			157
CONSOLES Input/output valid values	PROGAUTO, FULLAUTO, NOAUTO								
CONVERSEST	CVDAS	INQ	4	LIKE	Yes	Separate conversational task performance records			98
CONVERSEST Input/output valid values	CONVERSE, NOCONVERSE								
CPUTIME	INTUSEC	CPSM	8	MAX	No	Total CPU time used			75
CTSLEVEL	CHAR	INQ	6	DIFF	No	CICS Transaction Server level			149
CURACTVUSRTR	BINARY	STAT	4	AVG	No	Current number of active user transactions			112
CURAUDDS	CHAR	INQ	1	DIFF	No	Current auxiliary trace dataset			87
CURQUEDUSRTR	BINARY	STAT	4	AVG	No	Current number of queued user transactions			113
CURQUETIME	INTTSTP	STAT	8	MAX	No	Time currently queued transactions waiting			119
CURRAMAX	BINARY	STAT	2	AVG	No	Current number of user tasks eligible for dispatch	E410+		51
CURRENTDDS	CHAR	INQ	1	DIFF	No	Current dump data set			85
CURRTASKS	BINARY	INQ	4	AVG	No	Current number of tasks			110
CUTCBCNT	BINARY	STAT	2	AVG	No	Number of MVS task control blocks (TCBs)	E410+		54
DDSOSTAT	CVDAS	INQ	4	LIKE	Yes	Dump data set open status			28
DDSOSTAT Input/output valid values	OPEN, CLOSED								
DDSOSTAT Input valid values	SWITCH								
DDSSSTAT	CVDAS	INQ	4	LIKE	Yes	Dump data set switch type			29
DDSSSTAT Input/output valid values	SWITCHNEXT, NOSWITCH								
DEBUGTOOL	CVDAS	INQ	4	LIKE	Yes	Debugging profiles status			167
DEBUGTOOL Input/output valid values	DEBUG, NODEBUG								
DFLTREMSYS	CHAR	INQ	4	DIFF	Yes	Default remote system	E330+		145
DFLTUSER	CHAR	INQ	8	DIFF	No	Default user ID			103
DSIDLE	DECTIME	INQ	4	MAX	Yes	Minimum terminal idle-time before deletion			147
DSINTERVAL	DECTIME	INQ	4	MAX	Yes	Idle terminal check interval			148
DSRTPROGRAM	CHAR	INQ	8	DIFF	Yes	Distributed routing program			156
DTRPROGRAM	CHAR	INQ	8	DIFF	Yes	Dynamic routing program name			12
ENDOFDAY	DECTIME	INQ	4	AVG	Yes	Statistics end-of-day time			35
EVENTCLASS	CVDAS	INQ	4	LIKE	Yes	SYSEVENT monitoring status	E620+		31
EVENTCLASS Input/output valid values	EVENT, NOEVENT								

Table 72. CICS RGN resource table attributes (continued)									
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Set Invalid	Attr ID
EXCEPTCLASS	CVDAS	INQ	4	LIKE	Yes	Exception class monitoring status			32
EXCEPTCLASS Input/output valid values	EXCEPT, NOEXCEPT								
EXITTIME	BINARY	INQ	4	AVG	Yes	Exit wait time			22
EXTSEC	CVDAS	INQ	4	LIKE	No	External security status			9
EXTSEC Output valid values	EXTSECURITY, CICSSECURITY, NOSECURITY								
FORCEQR	CVDAS	INQ	4	LIKE	Yes	Force quasi-reentrancy			153
FORCEQR Input/output valid values	FORCE, NOFORCE								
FREQUENCY	DECTIME	INQ	4	AVG	Yes	Performance record interval			99
GARBAGEINT	BINARY	INQ	4	AVG	Yes	Web domain garbage collection interval			159
GMMLNGTH	BINARY	INQ	2	AVG	No	Good morning message length			137
GMMTEXT	CHAR	INQ	246	DIFF	Yes	Good morning message			136
GMMTRANID	CHAR	INQ	4	DIFF	No	Good morning transaction ID			13
GRNAME	CHAR	INQ	8	DIFF	No	CICS registered generic name			138
GRSTATUS	CVDAS	INQ	4	LIKE	Yes	Generic resource registration status			139
GRSTATUS Input/output valid values	DEREGISTERED, NOTAPPLIC								
GRSTATUS Output valid values	REGISTERED, UNREGISTERED, UNAVAILABLE, REGERROR, DEREGERROR								
GTFSTATUS	CVDAS	INQ	4	LIKE	Yes	Generalized Tracing Facility (GTF) trace status			40
GTFSTATUS Input/output valid values	GTFSTART, GTFSTOP								
IDNTYCLASS	CVDAS	INQ	4	LIKE	Yes	Identity class status	E640 E650	E640 E650	181
IDNTYCLASS Input/output valid values	NOIDENTY, IDNTY								
INITIALDDS	CHAR	INQ	1	DIFF	Yes	Initial dump data set			86
INITSTATUS	CVDAS	INQ	4	LIKE	No	Initialization status			133
INITSTATUS Output valid values	FIRSTINIT, SECONDINIT, THIRDINIT, INITCOMPLETE								
INTERVAL	DECTIME	INQ	4	AVG	Yes	Statistics recording interval			36
INTSTATUS	CVDAS	INQ	4	LIKE	Yes	Internal trace status			41
INTSTATUS Input/output valid values	INTSTART, INTSTOP								
INTVTRANS	BINARY	STAT	4	AVG	No	Transactions run since last CICS statistics reset			135
IRCSTAT	CVDAS	INQ	4	LIKE	Yes	Interregion communication (IRC) status			30
IRCSTAT Input/output valid values	OPEN, CLOSED								
IRCSTAT Input valid values	IMMCLOSE								
IRCSTAT Output valid values	CLOSING, IMMCLOSING								
JOBID	CHAR	CPSM	8	DIFF	No	MVS job ID			184
JOBNAME	CHAR	INQ	8	DIFF	No	MVS job name			1
LASTRESET	BINARY	STAT	8	AVG	No	Last statistics reset time	E410+		55
LDGLBSOU	BINARY	STAT	4	AVG	No	LIBRARY search order updates	E640		177

Table 72. CICS/SGN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Set Invalid	Attr ID
LDGLSORT	BINARY	STAT	4	AVG	No	LIBRARY search order update time	E640		179
LDGLWSOU	BINARY	STAT	4	AVG	No	Load requests waited due to search order update	E640		178
LOADHWMC	BINARY	STAT	4	AVG	No	Number of times maximum suspended tasks reached			62
LOADHWMW	BINARY	STAT	4	AVG	No	Peak number of tasks waiting for load requests			61
LOADPNIU	BINARY	STAT	4	AVG	No	Number of programs on not-in-use queue			67
LOADREQS	BINARY	STAT	4	AVG	No	Number of load requests			56
LOADRNIU	BINARY	STAT	4	AVG	No	Number of reclaims from not-in-use queue			68
LOADTIME	INT16US	STAT	4	MAX	No	Total loading time			57
LOADTNIU	INTTSTP	STAT	8	MAX	No	Total time to remove not-in-use programs			66
LOADWAIT	INT16US	STAT	4	MAX	No	Total load waiting time			63
LOADWCNT	BINARY	STAT	4	AVG	No	Number of tasks waiting for load requests			60
LUCURR	BINARY	STAT	4	AVG	No	Number of LUs currently logged on			91
LUHWM	BINARY	STAT	4	AVG	No	Highest number of LUs logged on at any one time			92
MAXHPTCBS	BINARY	INQ	4	AVG	Yes	Maximum number of HP pool TCBs	E640+	E640+	162
MAXJVMTCBS	BINARY	INQ	4	AVG	Yes	Maximum number of JVM pool TCBs	E680+	E680+	164
MAXOPENTCBS	BINARY	INQ	4	AVG	Yes	Maximum number of Open pool TCBs		E680	154
MAXSSLTCBS	BINARY	INQ	4	AVG	Yes	Maximum number of SSL pool TCBs			170
MAXTASKS	BINARY	INQ	4	AVG	Yes	Maximum number of active and suspended tasks			6
MAXTHRTCBS	BINARY	STAT	4	AVG	No	Maximum number of JVM server thread TCBs.	E640		183
MAXTRCNT	BINARY	STAT	4	AVG	No	Number of times MAXTASK limit reached			111
MAXXPTCBS	BINARY	INQ	4	AVG	Yes	Maximum number of XPLink pool TCBs		E680	168
MEMLIMIT	CNUMERIC	INQ	8	LIKE	No	Maximum amount of above the bar storage	E640		173
MONRPTTIME	CVDAS	INQ	4	LIKE	No	Time zone for performance class records			102
MONRPTTIME Output valid values	GMT, LOCAL								
MONSTAT	CVDAS	INQ	4	LIKE	Yes	Monitor status			34
MONSTAT Input/output valid values	ON, OFF								
MROBATCH	BINARY	INQ	4	AVG	Yes	Number of MRO requests to be batched			14
MVSSYSID	CHAR	CPSM	4	DIFF	No	MVS system ID			3
MVSSYSNAME	CHAR	CPSM	8	DIFF	No	MVS system name			152
NEXTTIME	DECTIME	INQ	4	AVG	No	Next statistics recording time			37

Table 72. CICS RGN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Set Invalid	Attr ID
OPREL	BINARY	INQ	2	AVG	No	Operating system release			15
OPSYS	CHAR	INQ	1	DIFF	No	Operating system			16
OSLEVEL	CHAR	INQ	6	DIFF	No	OS/390 level			150
PAGEIN	BINARY	CPSM	4	AVG	No	Number of page-in requests			76
PAGEOUT	BINARY	CPSM	4	AVG	No	Number of page-out requests			77
PEAKAMAX	BINARY	STAT	2	AVG	No	Peak number of user tasks eligible for dispatch	E410+		52
PEAKTASKS	BINARY	STAT	2	AVG	No	Peak number of tasks in system			50
PEKACTVUSRTR	BINARY	STAT	4	AVG	No	Peak number of active user transaction			114
PEKQUEUDUSRTR	BINARY	STAT	4	AVG	No	Peak number of queued user transactions			115
PERFCLASS	CVDAS	INQ	4	LIKE	Yes	Performance class monitoring status			33
PERFCLASS Input/output valid values	PERF, NOPERF								
PLASTRESET	DECTIME	STAT	4	AVG	No	Last reset time			48
PRGMRCMP	BINARY	STAT	4	AVG	No	Number of programs removed by compression			65
PRGMUCNT	BINARY	STAT	4	AVG	No	Number of program uses			58
PRGMWAIT	BINARY	STAT	4	AVG	No	Number of waiting loader requests			59
PROGAUTOATTM	BINARY	STAT	4	AVG	No	Number of program autoinstall attempts			120
PROGAUTOCTLG	CVDAS	INQ	4	LIKE	Yes	Autoinstalled-program catalog type			105
PROGAUTOCTLG Input/output valid values	CTLGALL, CTLGMODIFY, CTLGNONE								
PROGAUTOEXIT	CHAR	INQ	8	DIFF	Yes	Autoinstall program exit name			104
PROGAUTOFAIL	BINARY	STAT	4	AVG	No	Number of failed program autoinstall attempts			122
PROGAUTOINST	CVDAS	INQ	4	LIKE	Yes	Status of autoinstall for programs			106
PROGAUTOINST Input/output valid values	AUTOACTIVE, AUTOINACTIVE								
PROGAUTOXREJ	BINARY	STAT	4	AVG	No	Number of times autoinstall prog request rejected			121
PRSSERRORCNT	BINARY	STAT	4	AVG	No	Number of persistent sessions already unbound			97
PRSSINQCNT	BINARY	STAT	4	AVG	No	Number of CICS persistent-session inquiries			93
PRSSNIBCNT	BINARY	STAT	4	AVG	No	Number of VTAM sessions that persisted			94
PRSSOPNCNT	BINARY	STAT	4	AVG	No	Number of persistent sessions successfully restored			95
PRSSUNBNCNT	BINARY	STAT	4	AVG	No	Number of persistent sessions that were terminated			96
PRTYAGING	BINARY	INQ	4	AVG	Yes	Priority aging value			18
PSDINTERVAL	DECTIME	INQ	4	AVG	Yes	Persistent session delay interval			109
PSTYPE	CVDAS	INQ	4	LIKE	No	Persistent session type	E640 E650		180

Table 72. CICS RGN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Set Invalid	Attr ID
PSTYPE Output valid values	SNPS, MNPS, NOPS								
RDEBRBLD	BINARY	STAT	4	AVG	No	Number of times LIBRARY reopened and load retried			64
REALSTG	BINARY	CPSM	4	AVG	No	Real storage in use			78
RECORDING	CVDAS	INQ	4	LIKE	Yes	Interval statistics recording status			38
RECORDING Input/output valid values	ON, OFF								
REENTPROTECT	CVDAS	INQ	4	LIKE	No	Reentrant program protection status			140
REENTPROTECT Output valid values	REENTPROT, NOREENTPROT								
REGIONUSERID	CHAR	INQ	8	DIFF	No	Region user ID	E640 E650 E660 E670 E680 E690 E700		189
RELEASE	CHAR	INQ	4	DIFF	No	CICS Release			19
RLSSTATUS	CVDAS	INQ	4	LIKE	No	Record level sharing (RLS) status			144
RLSSTATUS Output valid values	RLSACTIVE, RLSINACTIVE, NOTAPPLIC								
RRMSSTAT	CVDAS	INQ	4	LIKE	No	Resource recovery management service (RRMS) status			151
RRMSSTAT Output valid values	OPEN, CLOSED, NOTAPPLIC								
RUNAWAY	BINARY	INQ	4	AVG	Yes	Runaway time interval			20
SCANDELAY	BINARY	INQ	4	AVG	Yes	Terminal scan delay time			21
SDMPSUPP	BINARY	STAT	4	AVG	No	Number of system dumps suppressed			70
SDMPTOTL	BINARY	STAT	4	AVG	No	Number of system dumps taken			69
SDTRAN	CHAR	INQ	4	DIFF	No	Shutdown transaction			146
SHUTSTATUS	CVDAS	INQ	4	LIKE	No	Shutdown status			134
SHUTSTATUS Output valid values	CONTROLSHUT, SHUTDOWN, CANCELLED, NOTAPPLIC								
SINGLESTATUS	CVDAS	INQ	4	LIKE	Yes	Single task trace status			44
SINGLESTATUS Input/output valid values	SINGLEON, SINGLEOFF								
SIORREQ	BINARY	CPSM	8	AVG	No	Number of I/O requests			79
SOSABOVEBAR	CVDAS	INQ	4	LIKE	No	Short on storage status above the bar	E640		174
SOSABOVEBAR Output valid values	SOS, NOTSOS								
SOSABOVELINE	CVDAS	INQ	4	LIKE	No	Short on storage status above the line	E640		175
SOSABOVELINE Output valid values	SOS, NOTSOS								
SOSBELOWLINE	CVDAS	INQ	4	LIKE	No	Short on storage status below the line	E640		176
SOSBELOWLINE Output valid values	SOS, NOTSOS								

Table 72. CICS RGN resource table attributes (continued)									
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Set Invalid	Attr ID
SOSSTATUS	CVDAS	INQ	4	LIKE	No	Short on storage status below the bar			142
SOSSTATUS Output valid values	SOS, NOTSOS, SOSABOVE, SOSBELOW								
STARTUP	CVDAS	INQ	4	LIKE	No	Startup type			10
STARTUP Output valid values	COLDSTART, WARMSTART, EMERGENCY, LOGTERM								
STARTUPDATE	DECDATE	INQ	4	AVG	No	Date on which CICS started			108
STGPROT	CVDAS	INQ	4	LIKE	No	Storage protection status			11
STGPROT Output valid values	ACTIVE, INACTIVE								
STRTIME	DATETIME	CPSM	8	MAX	No	CICS start time			73
SUBSYSTEMID	CHAR	INQ	4	DIFF	No	Subsystem ID used on SYSEVENT class records	E650+		100
SUBTASKS	BINARY	INQ	4	AVG	No	Value set by the SUBTSKS system initialization parameter			166
SWITCHSTATUS	CVDAS	INQ	4	LIKE	Yes	Auxiliary trace data set switch type			42
SWITCHSTATUS Input/output valid values	NOSWITCH, SWITCHNEXT, SWITCHALL								
SYNCPPOINTST	CVDAS	INQ	4	LIKE	Yes	Performance record at syncpoint			101
SYNCPPOINTST Input/output valid values	SYNCPPOINT, NOSYNCPPOINT								
SYSDUMP	CVDAS	INQ	4	LIKE	Yes	System dump status			8
SYSDUMP Input/output valid values	SYSDUMP, NOSYSDUMP								
SYSID	CHAR	CPSM	4	DIFF	No	CICS system ID			74
SYSTEMSTATUS	CVDAS	INQ	4	LIKE	Yes	System trace status			45
SYSTEMSTATUS Input/output valid values	SYSTEMON, SYSTEMOFF								
TABLESIZE	BINARY	INQ	4	AVG	Yes	Internal trace table size			43
TCEXITSTATUS	CVDAS	INQ	4	LIKE	Yes	CICS VTAM exit trace status			46
TCEXITSTATUS Input/output valid values	TCEXITALL, TCEXITSYSTEM, TCEXITNONE								
TCEXITSTATUS Input valid values	TCEXITALLOFF								
TCEXITSTATUS Output valid values	NOTAPPLIC								
TCPIP	CVDAS	INQ	4	LIKE	Yes	TCP/IP status			158
TCPIP Input/output valid values	OPEN, CLOSED								
TCPIP Input valid values	IMMCLOSE								
TCPIP Output valid values	CLOSING, IMMCLOSING, OPENING								
TDMPSUPP	BINARY	STAT	4	AVG	No	Number of transaction dumps suppressed			72
TDMPTOTL	BINARY	STAT	4	AVG	No	Number of transaction dumps taken			71
TIMEOUTINT	BINARY	INQ	4	AVG	Yes	Web domain terminal timeout interval			160
TOTACTVUSRTR	BINARY	STAT	4	AVG	No	Total number of active user transactions			116
TOTDELYUSRTR	BINARY	STAT	4	AVG	No	Total number of queued user transactions			117

Table 72. CICS RGN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Set Invalid	Attr ID
TOTLTASKS	BINARY	STAT	8	AVG	No	Total number of tasks			143
TOTQUETIME	INTTSTP	STAT	8	MAX	No	Total time queued transactions waited			118
TRANISOLATE	CVDAS	INQ	4	LIKE	No	Transaction isolation status			107
TRANISOLATE Output valid values	ACTIVE, INACTIVE								
USERSTATUS	CVDAS	INQ	4	LIKE	Yes	User trace status			47
USERSTATUS Input/output valid values	USERON, USEROFF								
VTMACBDOPE	BINARY	STAT	2	AVG	No	Number of times VTAM ACB dynamically opened			84
VTMRPLMAX	DECIMAL	STAT	4	AVG	No	Number of times RPL maximum value was reached			81
VTMRPLPOST	DECIMAL	STAT	2	AVG	No	Maximum number of VTAM RPLs posted			82
VTMSOSCNT	BINARY	STAT	2	AVG	No	Number of times VTAM had short-on-storage status			83
VTMSTATUS	CVDAS	INQ	4	LIKE	Yes	CICS-VTAM connection status			80
VTMSTATUS Input/output valid values	OPEN, CLOSED								
VTMSTATUS Input valid values	IMMCLOSE, FORCECLOSE								
VTMSTATUS Output valid values	CLOSING, IMMCLOSING, FORCECLOSING, NOTAPPLIC								
XCFGROUP	CHAR	INQ	8	LIKE	No	XCF group ID	E640		172
XMGATMXT	EYUDA	STAT	4	LIKE	No	Currently at MXT	E640 E650 E660 E670 E680		188
XMGATMXT Input/output valid values	YES, NO								
XMGLAMXT	DATETIME	STAT	8	LIKE	No	Time the MAXTASKS limit last reached	E640 E650 E660 E670 E680		187
XMGLSMXT	DATETIME	STAT	8	LIKE	No	Time MAXTASKS last changed	E640 E650 E660 E670 E680		185
XMGLTAT	DATETIME	STAT	8	LIKE	No	Time last transaction attached	E640 E650 E660 E670 E680		186
XRFSTATUS	CVDAS	INQ	4	LIKE	No	Extended recovery facility (XRF) status			23
XRFSTATUS Output valid values	PRIMARY, TAKEOVER, NOTAPPLIC								

Chapter 28. CICSSTOR Resource Table

A CICS Resource that describes all the CICS dynamic storage areas (DSAs) in an active system being managed by CICSplex SM.

The CICSSTOR resource class does not provide an explicit key attribute. The set of object instances returned is a function of the scope in effect when the request is made.

There are no object specific actions for this resource class.

External resource name

CICSGlobalDynamicStorageArea

Length

2672

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0135

Table 73. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A

Table 74. CICSSTOR resource table attributes								
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release		
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved		
CAVGTIMESOS	INTTSTP	CPSM	8	AVG	No	Average time spent short-on-storage (SOS) in CDSA		222
CNONIMMGET	BINARY	CPSM	8	AVG	No	Number of CDSA non-immediate GETMAIN requests		216
CRATECREL	RATE3	CPSM	8	AVG	No	CDSA cushion release rate		221
CRATEEXTSA	RATE3	CPSM	8	AVG	No	CDSA extent increase rate		224
CRATEEXTSR	RATE3	CPSM	8	AVG	No	CDSA extent release rate		225
CRATEFM	RATE3	CPSM	8	AVG	No	CDSA FREEMAIN request rate		215

Table 74. CICSSTOR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
CRATEGM	RATE3	CPSM	8	AVG	No	CDSA GETMAIN request rate		214
CRATESTORV	RATE3	CPSM	8	AVG	No	CDSA storage violation rate		223
CAVGTIMESOS	INTTSTP	CPSM	8	AVG	No	Average time spent short-on-storage (SOS) in ECDSA		294
ECNONIMMGET	BINARY	CPSM	8	AVG	No	Number of ECDSA non-immediate GETMAIN requests		288
ECRATECREL	RATE3	CPSM	8	AVG	No	ECDSA cushion release rate		293
ECRATEEXTSA	RATE3	CPSM	8	AVG	No	ECDSA extent increase rate		296
ECRATEEXTSR	RATE3	CPSM	8	AVG	No	ECDSA extent release rate		297
ECRATEFM	RATE3	CPSM	8	AVG	No	ECDSA FREEMAIN request rate		287
ECRATEGM	RATE3	CPSM	8	AVG	No	ECDSA GETMAIN request rate		286
ECRATESTORV	RATE3	CPSM	8	AVG	No	ECDSA storage violation rate		295
ERAVGTIMESOS	INTTSTP	CPSM	8	AVG	No	Average time spent short-on-storage in ERDSA		348
ERNONIMMGET	BINARY	CPSM	8	AVG	No	Number of ERDSA non-immediate GETMAIN requests		342
ERRATECREL	RATE3	CPSM	8	AVG	No	ERDSA cushion release rate		347
ERRATEEXTSA	RATE3	CPSM	8	AVG	No	ERDSA extent increase rate		350
ERRATEEXTSR	RATE3	CPSM	8	AVG	No	ERDSA extent release rate		351
ERRATEFM	RATE3	CPSM	8	AVG	No	ERDSA FREEMAIN request rate		341
ERRATEGM	RATE3	CPSM	8	AVG	No	ERDSA GETMAIN request rate		340
ERRATESTORV	RATE3	CPSM	8	AVG	No	ERDSA storage violation rate		349
ESAVGTIMESOS	INTTSTP	CPSM	8	AVG	No	Average time spent short-on-storage in ESDSA		330
ESNONIMMGET	BINARY	CPSM	8	AVG	No	Number of ESDSA non-immediate GETMAIN requests		324
ESRATECREL	RATE3	CPSM	8	AVG	No	ESDSA cushion release rate		329
ESRATEEXTSA	RATE3	CPSM	8	AVG	No	ESDSA extent increase rate		332
ESRATEEXTSR	RATE3	CPSM	8	AVG	No	ESDSA extent release rate		333
ESRATEFM	RATE3	CPSM	8	AVG	No	ESDSA FREEMAIN request rate		323
ESRATEGM	RATE3	CPSM	8	AVG	No	ESDSA GETMAIN request rate		322
ESRATESTORV	RATE3	CPSM	8	AVG	No	ESDSA storage violation rate		331
ETAVGTIMESOS	INTTSTP	CPSM	8	AVG	No	Average time spent short-on-storage in ETDSA	E640 E650 E660	458
ETNONIMMGET	BINARY	CPSM	8	AVG	No	Number of ETDSA non-immediate GETMAIN requests	E640 E650 E660	452
ETRATECREL	RATE3	CPSM	8	AVG	No	ETDSA cushion release rate	E640 E650 E660	457
ETRATEEXTSA	RATE3	CPSM	8	AVG	No	ETDSA extent increase rate	E640 E650 E660	460
ETRATEEXTSR	RATE3	CPSM	8	AVG	No	ETDSA extent release rate	E640 E650 E660	461
ETRATEFM	RATE3	CPSM	8	AVG	No	ETDSA FREEMAIN request rate	E640 E650 E660	451

Table 74. CICSSTOR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
ETRATEGM	RATE3	CPSM	8	AVG	No	ETDSA GETMAIN request rate	E640 E650 E660	450
ETRATESTORV	RATE3	CPSM	8	AVG	No	ETDSA storage violation rate	E640 E650 E660	459
EUAVGTIMESOS	INTTSTP	CPSM	8	AVG	No	Average time spent short-on-storage (SOS) in EUDSA		312
EUNONIMMGET	BINARY	CPSM	8	AVG	No	Number of EUDSA non-immediate GETMAIN requests		306
EURATECREL	RATE3	CPSM	8	AVG	No	EUDSA cushion release rate		311
EURATEEXTSA	RATE3	CPSM	8	AVG	No	EUDSA extent increase rate		314
EURATEEXTSR	RATE3	CPSM	8	AVG	No	EUDSA extent release rate		315
EURATEFM	RATE3	CPSM	8	AVG	No	EUDSA FREEMAIN request rate		305
EURATEGM	RATE3	CPSM	8	AVG	No	EUDSA GETMAIN request rate		304
EURATESTORV	RATE3	CPSM	8	AVG	No	EUDSA storage violation rate		313
GCAVGTIMESOS	INTTSTP	CPSM	8	AVG	No	Average time spent short-on-storage (SOS) in GCDSA	E640	389
GCONONIMMGET	BINARY	CPSM	8	AVG	No	Number of GCDSA non-immediate GETMAIN requests	E640	386
GCRATEFM	RATE3	CPSM	8	AVG	No	GCDSA FREEMAIN request rate	E640	385
GCRATEGM	RATE3	CPSM	8	AVG	No	GCDSA GETMAIN request rate	E640	384
GCRATESTORV	RATE3	CPSM	8	AVG	No	GCDSA storage violation rate	E640	390
GSAVGTIMESOS	INTTSTP	CPSM	8	AVG	No	Average time spent short on storage (SOS) in GSDSA	E640 E650 E660 E670	519
GSONONIMMGET	BINARY	CPSM	8	AVG	No	Number of GSDSA non-immediate GETMAIN requests	E640 E650 E660 E670	516
GSRATEFM	RATE3	CPSM	8	AVG	No	GSDSA FREEMAIN request rate	E640 E650 E660 E670	515
GSRATEGM	RATE3	CPSM	8	AVG	No	GSDSA GETMAIN request rate	E640 E650 E660 E670	514
GSRATESTORV	RATE3	CPSM	8	AVG	No	GSDSA storage violation rate	E640 E650 E660 E670	520
GUAVGTIMESOS	INTTSTP	CPSM	8	AVG	No	Average time spent short on storage (SOS) in GUDSA	E640 E650 E660 E670	487
GUNONIMMGET	BINARY	CPSM	8	AVG	No	Number of GUDSA non-immediate GETMAIN requests	E640 E650 E660 E670	484
GURATEFM	RATE3	CPSM	8	AVG	No	GUDSA FREEMAIN request rate	E640 E650 E660 E670	483

Table 74. CICSSTOR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
GURATEGM	RATE3	CPSM	8	AVG	No	GUDSA GETMAIN request rate	E640 E650 E660 E670	482
GURATESTORV	RATE3	CPSM	8	AVG	No	GUDSA storage violation rate	E640 E650 E660 E670	488
LPCTCFREE	PERCENT3	CPSM	4	AVG	No	Lowest percentage of free storage in CDSA		212
LPCTECFREE	PERCENT3	CPSM	4	AVG	No	Lowest percentage of free storage in ECDSA		284
LPCTERFREE	PERCENT3	CPSM	4	AVG	No	Lowest percentage of free storage in ERDSA		338
LPCTESFREE	PERCENT3	CPSM	4	AVG	No	Lowest percentage of free storage in ESDSA		320
LPCTETFREE	PERCENT3	CPSM	4	AVG	No	Lowest percentage of free storage in ETDSA	E640 E650 E660	448
LPCTEUFREE	PERCENT3	CPSM	4	AVG	No	Lowest percentage of free storage in EUDSA		302
LPCTRFREE	PERCENT3	CPSM	4	AVG	No	Lowest percentage of free storage in RDSA		266
LPCTSFREE	PERCENT3	CPSM	4	AVG	No	Lowest percentage of free storage in SDSA		248
LPCTUFREE	PERCENT3	CPSM	4	AVG	No	Lowest percentage of free storage in UDSA		230
PCTCCSH	PERCENT3	CPSM	4	AVG	No	Percentage of cushion releases in CDSA		219
PCTCFREE	PERCENT3	CPSM	4	AVG	No	Percentage of free storage in CDSA		210
PCTCGMF	PERCENT3	CPSM	4	AVG	No	Percentage of GETMAIN failures in CDSA		217
PCTCGMP	PERCENT3	CPSM	4	AVG	No	Percentage of GETMAIN requests purged in CDSA		218
PCTECCSH	PERCENT3	CPSM	4	AVG	No	Percentage of cushion releases in ECDSA		291
PCTECFREE	PERCENT3	CPSM	4	AVG	No	Percentage of free storage in ECDSA		282
PCTECGMF	PERCENT3	CPSM	4	AVG	No	Percentage of GETMAIN failures in ECDSA		289
PCTECGMP	PERCENT3	CPSM	4	AVG	No	Percentage of GETMAIN requests purged in ECDSA		290
PCTERCSH	PERCENT3	CPSM	4	AVG	No	Percentage of cushion releases in ERDSA		345
PCTERFREE	PERCENT3	CPSM	4	AVG	No	Percentage of free storage in ERDSA		336
PCTERGMF	PERCENT3	CPSM	4	AVG	No	Percentage of GETMAIN failures in ERDSA		343
PCTERGMP	PERCENT3	CPSM	4	AVG	No	Percentage of GETMAIN requests purged in ERDSA		344
PCTESCSH	PERCENT3	CPSM	4	AVG	No	Percentage of cushion releases in ESDSA		327
PCTESFREE	PERCENT3	CPSM	4	AVG	No	Percentage of free storage in ESDSA		318

Table 74. CICSSTOR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
PCTESGMF	PERCENT3	CPSM	4	AVG	No	Percentage of GETMAIN failures in ESDSA		325
PCTESGMP	PERCENT3	CPSM	4	AVG	No	Percentage of GETMAIN requests purged in ESDSA		326
PCTETCSH	PERCENT3	CPSM	4	AVG	No	Percentage of cushion releases in ETDSA	E640 E650 E660	455
PCTETFREE	PERCENT3	CPSM	4	AVG	No	Percentage of free storage in ETDSA	E640 E650 E660	446
PCTETGMF	PERCENT3	CPSM	4	AVG	No	Percentage of GETMAIN failures in ETDSA	E640 E650 E660	453
PCTETGMP	PERCENT3	CPSM	4	AVG	No	Percentage of GETMAIN requests purged in ETDSA	E640 E650 E660	454
PCTEUCSH	PERCENT3	CPSM	4	AVG	No	Percentage of cushion releases in EUDSA		309
PCTEUFREE	PERCENT3	CPSM	4	AVG	No	Percentage of free storage in EUDSA		300
PCTEUGMF	PERCENT3	CPSM	4	AVG	No	Percentage of GETMAIN failures in EUDSA		307
PCTEUGMP	PERCENT3	CPSM	4	AVG	No	Percentage of GETMAIN requests purged in EUDSA		308
PCTGCGMF	PERCENT3	CPSM	4	AVG	No	Percentage of GETMAIN failures in GCDSA	E640	387
PCTGCGMP	PERCENT3	CPSM	4	AVG	No	Percentage of GETMAIN requests purged in GCDSA	E640	388
PCTGSGMF	PERCENT3	CPSM	4	AVG	No	Percentage of GETMAIN failures in GSDSA	E640 E650 E660 E670	517
PCTGSGMP	PERCENT3	CPSM	4	AVG	No	Percentage of GETMAIN requests purged in GSDSA	E640 E650 E660 E670	518
PCTGUGMF	PERCENT3	CPSM	4	AVG	No	Percentage of GETMAIN failures in GUDSA	E640 E650 E660 E670	485
PCTGUGMP	PERCENT3	CPSM	4	AVG	No	Percentage of GETMAIN requests purged in GUDSA	E640 E650 E660 E670	486
PCTLFACDSA	PERCENT3	CPSM	4	AVG	No	Largest percentage of free storage in CDSA		213
PCTLFAECDSA	PERCENT3	CPSM	4	AVG	No	Largest percentage of free storage in ECDSA		285
PCTLFAERDSA	PERCENT3	CPSM	4	AVG	No	Largest percentage of free storage in ERDSA		339
PCTLFAESDSA	PERCENT3	CPSM	4	AVG	No	Largest percentage of free storage in ESDSA		321
PCTLFAETDSA	PERCENT3	CPSM	4	AVG	No	Largest percentage of free storage in ETDSA	E640 E650 E660	449
PCTLFAEUDSA	PERCENT3	CPSM	4	AVG	No	Largest percentage of free storage in EUDSA		303
PCTLFARDSA	PERCENT3	CPSM	4	AVG	No	Largest percentage of free storage in RDSA		267

Table 74. CICSSTOR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
PCTLFASDSA	PERCENT3	CPSM	4	AVG	No	Largest percentage of free storage in SDSA		249
PCTLFAUDSA	PERCENT3	CPSM	4	AVG	No	Largest percentage of free storage in UDSA		231
PCTRCSH	PERCENT3	CPSM	4	AVG	No	Percentage of cushion releases in RDSA		273
PCTRFREE	PERCENT3	CPSM	4	AVG	No	Percentage of free storage in RDSA		264
PCTRGMF	PERCENT3	CPSM	4	AVG	No	Percentage of GETMAIN failures in RDSA		271
PCTRGMP	PERCENT3	CPSM	4	AVG	No	Percentage of GETMAIN requests purged in RDSA		272
PCTSCSH	PERCENT3	CPSM	4	AVG	No	Percentage of cushion releases in SDSA		255
PCTSFREE	PERCENT3	CPSM	4	AVG	No	Percentage of free storage in SDSA		246
PCTSGMF	PERCENT3	CPSM	4	AVG	No	Percentage of GETMAIN failures in SDSA		253
PCTSGMP	PERCENT3	CPSM	4	AVG	No	Percentage of GETMAIN requests purged in SDSA		254
PCTSTGCDSA	PERCENT3	CPSM	4	AVG	No	Percentage of CDSA storage below 16MB		208
PCTSTGECDSA	PERCENT3	CPSM	4	AVG	No	Percentage of storage above 16MB in ECDSA		280
PCTSTGERDSA	PERCENT3	CPSM	4	AVG	No	Percentage of storage above 16MB in ERDSA		334
PCTSTGESDSA	PERCENT3	CPSM	4	AVG	No	Percentage of storage above 16MB in ESDSA		316
PCTSTGETDSA	PERCENT3	CPSM	4	AVG	No	Percentage of storage above 16MB in ETDSA	E640 E650 E660	444
PCTSTGEUDSA	PERCENT3	CPSM	4	AVG	No	Percentage of storage above 16MB in EUDSA		298
PCTSTGGCDSA	PERCENT3	CPSM	4	AVG	No	Percentage of storage above the bar in GCDSA	E640	382
PCTSTGGSDSA	PERCENT3	CPSM	4	AVG	No	Percentage of storage above the bar in GSDSA	E640 E650 E660 E670	512
PCTSTGGUDSA	PERCENT3	CPSM	4	AVG	No	Percentage of storage above the bar in GUDSA	E640 E650 E660 E670	480
PCTSTGRDSA	PERCENT3	CPSM	4	AVG	No	Percentage of storage below 16MB in RDSA		262
PCTSTGSDSA	PERCENT3	CPSM	4	AVG	No	Percentage of storage below 16MB in SDSA		244
PCTSTGUDSA	PERCENT3	CPSM	4	AVG	No	Percentage of storage below 16MB in UDSA		226
PCTUCSH	PERCENT3	CPSM	4	AVG	No	Percentage of cushion releases in UDSA		237
PCTUFREE	PERCENT3	CPSM	4	AVG	No	Percentage of free storage in UDSA		228
PCTUGMF	PERCENT3	CPSM	4	AVG	No	Percentage of GETMAIN failures in UDSA		235

Table 74. CICSSTOR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
PCTUGMP	PERCENT3	CPSM	4	AVG	No	Percentage of GETMAIN requests purged in UDSA		236
PPCTCFREE	PERCENT3	CPSM	4	AVG	No	Peak percentage of free storage in CDSA		211
PPCTECFREE	PERCENT3	CPSM	4	AVG	No	Peak percent of free storage in ECDSA		283
PPCTERFREE	PERCENT3	CPSM	4	AVG	No	Peak percentage of free storage in ERDSA		337
PPCTESFREE	PERCENT3	CPSM	4	AVG	No	Peak percentage of free storage in ESDSA		319
PPCTETFREE	PERCENT3	CPSM	4	AVG	No	Peak percentage of free storage in ETDSA	E640 E650 E660	447
PPCTEUFREE	PERCENT3	CPSM	4	AVG	No	Peak percentage of free storage in EUDSA		301
PPCTRFREE	PERCENT3	CPSM	4	AVG	No	Peak percentage of free storage in RDSA		265
PPCTSFREE	PERCENT3	CPSM	4	AVG	No	Peak percentage of free storage in SDSA		247
PPCTSTGCDSA	PERCENT3	CPSM	4	AVG	No	Peak percentage in CDSA of peak storage below 16MB		209
PPCTSTGECDSA	PERCENT3	CPSM	4	AVG	No	Peak percent in ECDSA of peak storage above 16MB		281
PPCTSTGERDSA	PERCENT3	CPSM	4	AVG	No	Peak percent in ERDSA of peak storage above 16MB		335
PPCTSTGESDSA	PERCENT3	CPSM	4	AVG	No	Peak percent in ESDSA of peak storage above 16MB		317
PPCTSTGETDSA	PERCENT3	CPSM	4	AVG	No	Peak percent in ETDSA of peak storage above 16MB	E640 E650 E660	445
PPCTSTGEUDSA	PERCENT3	CPSM	4	AVG	No	Peak percent in EUDSA of peak storage above 16MB		299
PPCTSTGGCDSA	PERCENT3	CPSM	4	AVG	No	Peak percentage in GCDSA of storage above the bar	E640	383
PPCTSTGGSDSA	PERCENT3	CPSM	4	AVG	No	Peak percentage in GSDSA of storage above the bar	E640 E650 E660 E670	513
PPCTSTGGUDSA	PERCENT3	CPSM	4	AVG	No	Peak percentage in GUDSA of storage above the bar	E640 E650 E660 E670	481
PPCTSTGRDSA	PERCENT3	CPSM	4	AVG	No	Peak percentage in RDSA of peak storage below 16MB		263
PPCTSTGSDSA	PERCENT3	CPSM	4	AVG	No	Peak percentage in SDSA of peak storage below 16MB		245
PPCTSTGUDSA	PERCENT3	CPSM	4	AVG	No	Peak percentage in UDSA of peak storage below 16MB		227
PPCTUFREE	PERCENT3	CPSM	4	AVG	No	Peak percentage of free storage in UDSA		229
RAVGTIMESOS	INTTSTP	CPSM	8	AVG	No	Average time spent short-on-storage (SOS) in RDSA		276
RNONIMMGET	BINARY	CPSM	8	AVG	No	Number of RDSA non-immediate GETMAIN requests		270
RRATECREL	RATE3	CPSM	8	AVG	No	RDSA cushion release rate		275
RRATEEXTSA	RATE3	CPSM	8	AVG	No	RDSA extent increase rate		278

Table 74. CICSSTOR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
RRATEEXTSR	RATE3	CPSM	8	AVG	No	RDSA extent release rate		279
RRATEFM	RATE3	CPSM	8	AVG	No	RDSA FREEMAIN request rate		269
RRATEGM	RATE3	CPSM	8	AVG	No	RDSA GETMAIN request rate		268
RRATESTORV	RATE3	CPSM	8	AVG	No	RDSA storage violation rate		277
SAVGTIMESOS	INTTSTP	CPSM	8	AVG	No	Average time spent short-on-storage (SOS) in SDSA		258
SMSASACTIVE	BINARY	STAT	8	AVG	No	Current address space storage that is addressable	E640	361
SMSATBCUSHLI	BINARY	STAT	8	AVG	No	Cushion limit	E640	366
SMSATBCUSHRE	BINARY	STAT	8	AVG	No	Number of GCDSA cushion releases	E640	365
SMSCASR	BINARY	STAT	4	AVG	No	Number of CDSA ADD_SUBPOOL requests		29
SMSCCREL	BINARY	STAT	4	AVG	No	Number of CDSA cushion releases		35
SMSCCRISS	BINARY	STAT	4	AVG	No	Number of CDSA requests failing with no storage		31
SMSCCSIZE	BINARY	STAT	4	AVG	No	Current CDSA cushion size		26
SMSCCSUBP	BINARY	STAT	4	AVG	No	Current number of CDSA subpools		38
SMSCDSASZ	BINARY	STAT	4	AVG	No	Current size of CDSA		24
SMSCDSR	BINARY	STAT	4	AVG	No	Number of CDSA DELETE_SUBPOOL requests		30
SMSCEXTS	BINARY	STAT	4	AVG	No	Number of extents in the CDSA		44
SMSCEXTSA	BINARY	STAT	4	AVG	No	Number of CDSA extents added		45
SMSCEXTSR	BINARY	STAT	4	AVG	No	Number of CDSA extents released		46
SMSCFMREQ	BINARY	STAT	4	AVG	No	Number of CDSA FREEMAIN requests		28
SMSCFSTG	BINARY	STAT	4	AVG	No	Size of CDSA free storage including cushion		39
SMSCGMREQ	BINARY	STAT	4	AVG	No	Number of CDSA GETMAIN requests		27
SMSCHWMFSTG	BINARY	STAT	4	AVG	No	Peak free storage level in the CDSA		40
SMSCHWMSS	BINARY	STAT	4	AVG	No	Peak number of CDSA requests suspended		33
SMSCLFA	BINARY	STAT	4	AVG	No	Largest free area in the CDSA		42
SMSCLWMFSTG	BINARY	STAT	4	AVG	No	Lowest free storage level in the CDSA		41
SMSCPWWS	BINARY	STAT	4	AVG	No	Number of CDSA requests purged		34
SMSCSOS	BINARY	STAT	4	AVG	No	Number of times short-on-storage occurred in CDSA		37
SMSCSSCUM	BINARY	STAT	4	AVG	No	Total number of common subspace users		14
SMSCSSCUR	BINARY	STAT	4	AVG	No	Current number of common subspace users		13
SMSCSSHWM	BINARY	STAT	4	AVG	No	Peak number of common subspace users		15
SMSCSV	BINARY	STAT	4	AVG	No	Number of storage violations in the CDSA		43
SMSCTSOS	INTTSTP	STAT	8	AVG	No	Total time spent short-on-storage in the CDSA		36

Table 74. CICSSTOR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
SMSCUCSS	BINARY	STAT	4	AVG	No	Number of CDSA requests suspended		32
SMSDSALIMIT	BINARY	STAT	4	AVG	Yes	Current DSA limit		16
SMSDSATOTAL	BINARY	STAT	4	AVG	No	Total storage currently allocated to DSAs		18
SMSECASR	BINARY	STAT	4	AVG	No	Number of ECDSA ADD_SUBPOOL requests		121
SMSECCREL	BINARY	STAT	4	AVG	No	Number of ECDSA cushion releases		127
SMSECCRISS	BINARY	STAT	4	AVG	No	Number of ECDSA requests failing with no storage		123
SMSECCSIZE	BINARY	STAT	4	AVG	No	Current ECDSA cushion size		118
SMSECCSUBP	BINARY	STAT	4	AVG	No	Current number of subpools in the ECDSA		130
SMSECDASZ	BINARY	STAT	4	AVG	No	Current size of ECDSA		116
SMSECDSR	BINARY	STAT	4	AVG	No	Number of ECDSA DELETE_SUBPOOL requests		122
SMSEEXTS	BINARY	STAT	4	AVG	No	Number of ECDSA extents		136
SMSEEXTSA	BINARY	STAT	4	AVG	No	Number of ECDSA extents added		137
SMSEEXTSR	BINARY	STAT	4	AVG	No	Number of ECDSA extents released		138
SMSECFMREQ	BINARY	STAT	4	AVG	No	Number of ECDSA FREEMAIN requests		120
SMSECFSTG	BINARY	STAT	4	AVG	No	Size of ECDSA free storage including cushion		131
SMSECGMREQ	BINARY	STAT	4	AVG	No	Number of ECDSA GETMAIN requests		119
SMSECHWMFSTG	BINARY	STAT	4	AVG	No	Peak ECDSA free storage level		132
SMSECHWMSS	BINARY	STAT	4	AVG	No	Peak number of ECDSA requests suspended		125
SMSECLFA	BINARY	STAT	4	AVG	No	Largest ECDSA free area		134
SMSECLWMFSTG	BINARY	STAT	4	AVG	No	Lowest ECDSA free storage level		133
SMSECPWWS	BINARY	STAT	4	AVG	No	Number of ECDSA requests purged		126
SMSECSOS	BINARY	STAT	4	AVG	No	Number of times short-on-storage occurred in ECDSA		129
SMSECSV	BINARY	STAT	4	AVG	No	Number of ECDSA storage violations		135
SMSECTSOS	INTTSTP	STAT	8	AVG	No	Total time spent short-on-storage in the ECDSA		128
SMSECUCSS	BINARY	STAT	4	AVG	No	Number of ECDSA requests suspended		124
SMSEDSALIMIT	BINARY	STAT	4	AVG	Yes	Current EDSA limit		17
SMSEDSATOTAL	BINARY	STAT	4	AVG	No	Total storage currently allocated to EDSAs		19
SMSEASR	BINARY	STAT	4	AVG	No	Number of ERDSA ADD_SUBPOOL requests		190
SMSERCREL	BINARY	STAT	4	AVG	No	Number of ERDSA cushion releases		196
SMSERCRISS	BINARY	STAT	4	AVG	No	Number of ERDSA requests failing with no storage		192
SMSERCSIZE	BINARY	STAT	4	AVG	No	Current ERDSA cushion size		187

Table 74. CICSSTOR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
SMSERCSUBP	BINARY	STAT	4	AVG	No	Current number of ERDSA subpools		199
SMSERDSASZ	BINARY	STAT	4	AVG	No	Current size of ERDSA		185
SMSERDSR	BINARY	STAT	4	AVG	No	Number of ERDSA DELETE_SUBPOOL requests		191
SMSEREXTS	BINARY	STAT	4	AVG	No	Number of ERDSA extents		205
SMSEREXTSA	BINARY	STAT	4	AVG	No	Number of ERDSA extents added		206
SMSEREXTSR	BINARY	STAT	4	AVG	No	Number of ERDSA extents released		207
SMSERFMREQ	BINARY	STAT	4	AVG	No	Number of ERDSA FREEMAIN requests		189
SMSERFSTG	BINARY	STAT	4	AVG	No	Size of ERDSA free storage including cushion		200
SMSERGMREQ	BINARY	STAT	4	AVG	No	Number of ERDSA GETMAIN requests		188
SMSERHWMFSTG	BINARY	STAT	4	AVG	No	Peak ERDSA free storage level		201
SMSERHWMSS	BINARY	STAT	4	AVG	No	Peak number of ERDSA requests suspended		194
SMSERLFA	BINARY	STAT	4	AVG	No	Largest ERDSA free area		203
SMSERLWMFSTG	BINARY	STAT	4	AVG	No	Lowest ERDSA free storage level		202
SMSERPWWS	BINARY	STAT	4	AVG	No	Number of ERDSA requests purged		195
SMSERSOS	BINARY	STAT	4	AVG	No	Number of times short-on-storage occurred in ERDSA		198
SMSERSV	BINARY	STAT	4	AVG	No	Number of ERDSA storage violations		204
SMSERTSOS	INTTSTP	STAT	8	AVG	No	Total time spent short-on-storage (SOS) in ERDSA		197
SMSERUCSS	BINARY	STAT	4	AVG	No	Number of ERDSA requests suspended		193
SMSESASR	BINARY	STAT	4	AVG	No	Number of ESDSA ADD_SUBPOOL requests		167
SMSESCREL	BINARY	STAT	4	AVG	No	Number of ESDSA cushion releases		173
SMSESCRISS	BINARY	STAT	4	AVG	No	Number of ESDSA requests failing with no storage		169
SMSESCSIZE	BINARY	STAT	4	AVG	No	Current ESDSA cushion size		164
SMSESCSUBP	BINARY	STAT	4	AVG	No	Current number of ESDSA subpools		176
SMSESDSASZ	BINARY	STAT	4	AVG	No	Current size of ESDSA		162
SMSESDSR	BINARY	STAT	4	AVG	No	Number of ESDSA DELETE_SUBPOOL requests		168
SMSESEXTS	BINARY	STAT	4	AVG	No	Number of ESDSA extents		182
SMSESEXTSA	BINARY	STAT	4	AVG	No	Number of ESDSA extents added		183
SMSESEXTSR	BINARY	STAT	4	AVG	No	Number of ESDSA extents released		184
SMSESFMREQ	BINARY	STAT	4	AVG	No	Number of ESDSA FREEMAIN requests		166
SMSESFSTG	BINARY	STAT	4	AVG	No	ESDSA free storage including cushion		177
SMSESGMREQ	BINARY	STAT	4	AVG	No	Number of ESDSA GETMAIN requests		165

Table 74. CICSSTOR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
SMSESHWMFSTG	BINARY	STAT	4	AVG	No	Peak ESDSA free storage level		178
SMSESHWMSS	BINARY	STAT	4	AVG	No	Peak number of ESDSA requests suspended		171
SMSESLFA	BINARY	STAT	4	AVG	No	Largest ESDSA free area		180
SMSESLWMFSTG	BINARY	STAT	4	AVG	No	Lowest ESDSA free storage level		179
SMSESPWWS	BINARY	STAT	4	AVG	No	Number of ESDSA requests purged		172
SMSESSOS	BINARY	STAT	4	AVG	No	Number of times short-on-storage occurred in ESDSA		175
SMSESSV	BINARY	STAT	4	AVG	No	Number of ESDSA storage violations		181
SMSESTSOS	INTTSTP	STAT	8	AVG	No	Total time spent short-on-storage in the ESDSA		174
SMSESUCSS	BINARY	STAT	4	AVG	No	Number of ESDSA requests suspended		170
SMSETASR	BINARY	STAT	4	AVG	No	Number of ETDSA ADD_SUBPOOL requests	E640 E650 E660	425
SMSETCREL	BINARY	STAT	4	AVG	No	Number of ETDSA cushion releases	E640 E650 E660	431
SMSETCRISS	BINARY	STAT	4	AVG	No	Number of ETDSA requests failing with no storage	E640 E650 E660	427
SMSETCSIZE	BINARY	STAT	4	AVG	No	Current ETDSA cushion size	E640 E650 E660	422
SMSETCSUBP	BINARY	STAT	4	AVG	No	Current number of ETDSA subpools	E640 E650 E660	434
SMSETDSASZ	BINARY	STAT	4	AVG	No	Current size of ETDSA	E640 E650 E660	420
SMSETDSR	BINARY	STAT	4	AVG	No	Number of ETDSA DELETE_SUBPOOL requests	E640 E650 E660	426
SMSETEXTS	BINARY	STAT	4	AVG	No	Number of ETDSA extents	E640 E650 E660	440
SMSETEXTSA	BINARY	STAT	4	AVG	No	Number of ETDSA extents added	E640 E650 E660	441
SMSETEXTSR	BINARY	STAT	4	AVG	No	Number of ETDSA extents released	E640 E650 E660	443
SMSETFMREQ	BINARY	STAT	4	AVG	No	Number of ETDSA FREEMAIN requests	E640 E650 E660	424
SMSETFSTG	BINARY	STAT	4	AVG	No	Size of ETDSA free storage including cushion	E640 E650 E660	435
SMSETGMREQ	BINARY	STAT	4	AVG	No	Number of ETDSA GETMAIN requests	E640 E650 E660	423
SMSETHWMFSTG	BINARY	STAT	4	AVG	No	Peak ETDSA free storage level	E640 E650 E660	436

Table 74. CICSSTOR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
SMSETHWMSS	BINARY	STAT	4	AVG	No	Peak number of ETDSA requests suspended	E640 E650 E660	429
SMSETLFA	BINARY	STAT	4	AVG	No	Largest ETDSA free area	E640 E650 E660	438
SMSETLWMFSTG	BINARY	STAT	4	AVG	No	Lowest ETDSA free storage level	E640 E650 E660	437
SMSETPWWS	BINARY	STAT	4	AVG	No	Number of ETDSA requests purged	E640 E650 E660	430
SMSETSOS	BINARY	STAT	4	AVG	No	Number of times short-on-storage occurred in ETDSA	E640 E650 E660	432
SMSETSV	BINARY	STAT	4	AVG	No	Number of ETDSA storage violations	E640 E650 E660	439
SMSETTSOS	INTTSTP	STAT	8	AVG	No	Total time spent short-on-storage (SOS) in ETDSA	E640 E650 E660	433
SMSETUCSS	BINARY	STAT	4	AVG	No	Number of ETDSA requests suspended	E640 E650 E660	428
SMSEUASR	BINARY	STAT	4	AVG	No	Number of EUDSA ADD_SUBPOOL requests		144
SMSEUCREL	BINARY	STAT	4	AVG	No	Number of EUDSA cushion releases		150
SMSEUCRISS	BINARY	STAT	4	AVG	No	Number of EUDSA requests failing with no storage		146
SMSEUCSIZE	BINARY	STAT	4	AVG	No	Current EUDSA cushion size		141
SMSEUCSUBP	BINARY	STAT	4	AVG	No	Current number of EUDSA subpools		153
SMSEUDSASZ	BINARY	STAT	4	AVG	No	Current size of EUDSA		139
SMSEUDSR	BINARY	STAT	4	AVG	No	Number of EUDSA DELETE_SUBPOOL requests		145
SMSEUEXTS	BINARY	STAT	4	AVG	No	Number of EUDSA extents		159
SMSEUEXTSA	BINARY	STAT	4	AVG	No	Number of EUDSA extents added		160
SMSEUEXTSR	BINARY	STAT	4	AVG	No	Number of EUDSA extents released		161
SMSEUFMREQ	BINARY	STAT	4	AVG	No	Number of EUDSA FREEMAIN requests		143
SMSEUFSTG	BINARY	STAT	4	AVG	No	Size of EUDSA free storage including cushion		154
SMSEUGMREQ	BINARY	STAT	4	AVG	No	Number of EUDSA GETMAIN requests		142
SMSEUHMWFSTG	BINARY	STAT	4	AVG	No	Peak EUDSA free storage level		155
SMSEUHMWSS	BINARY	STAT	4	AVG	No	Peak number of EUDSA requests suspended		148
SMSEULFA	BINARY	STAT	4	AVG	No	Largest EUDSA free area		157
SMSEULWMFSTG	BINARY	STAT	4	AVG	No	Lowest EUDSA free storage level		156
SMSEUPWWS	BINARY	STAT	4	AVG	No	Number of EUDSA requests purged		149
SMSEUSOS	BINARY	STAT	4	AVG	No	Number of times short-on-storage occurred in EUDSA		152

Table 74. CICSSTOR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
SMSEUSV	BINARY	STAT	4	AVG	No	Number of EUDSA storage violations		158
SMSEUTSOS	INTTSTP	STAT	8	AVG	No	Total time spent short-on-storage in the EUDSA		151
SMSEUUCSS	BINARY	STAT	4	AVG	No	Number of EUDSA requests suspended		147
SMSFRMGFLSZ	BINARY	STAT	8	LIKE	No	The largest failing IARV64 CONVERT(FROMGUARD) request	E640 E650 E660	405
SMSFRMGRDFL	BINARY	STAT	8	LIKE	No	Number of IARV64 CONVERT(FROMGUARD) failures	E640 E650 E660	404
MSGCASR	BINARY	STAT	4	AVG	No	Number of GCDSA ADD_SUBPOOL requests	E640	371
MSGCCREL	BINARY	STAT	8	LIKE	No	Number of cushion releases	E640 E650 E660	413
MSGCCRISS	BINARY	STAT	4	AVG	No	Number of GCDSA requests failing with no storage	E640	373
MSGCCSIZE	BINARY	STAT	8	LIKE	No	Current GCDSA cushion size	E640 E650 E660	412
MSGCCSS	BINARY	STAT	4	AVG	No	Current requests suspended for GCDSA storage	E640	375
MSGCCSUBP	BINARY	STAT	4	AVG	No	Current number of subpools in GCDSA	E640	380
MSGCDSASZ	BINARY	STAT	8	AVG	No	Current size of GCDSA	E640	367
MSGCDSR	BINARY	STAT	4	AVG	No	Number of GCDSA DELETE_SUBPOOL requests	E640	372
MSGCFMREQ	BINARY	STAT	4	AVG	No	Number of GCDSA FREEMAIN requests	E640	370
MSGCFSTG	BINARY	STAT	8	LIKE	No	GCDSA Free storage	E640 E650 E660	414
MSGCGMREQ	BINARY	STAT	4	AVG	No	Number of GCDSA GETMAIN requests	E640	369
MSGCHWMSS	BINARY	STAT	4	AVG	No	Peak number of GCDSA requests suspended	E640	376
MSGCLFA	BINARY	STAT	8	LIKE	No	Largest free area in GCDSA	E640 E650 E660	417
MSGCPWWS	BINARY	STAT	4	AVG	No	Number of GCDSA requests purged	E640	377
MSGCSOS	BINARY	STAT	4	AVG	No	Number of times short-on-storage occurred in GCDSA	E640	378
MSGCSV	BINARY	STAT	4	AVG	No	Number of GCDSA storage violations	E640	381
MSGCTSOS	INTTSTP	STAT	8	AVG	No	Total time spent short-on-storage in the GCDSA	E640	379
MSGCUCSS	BINARY	STAT	4	AVG	No	Number of GCDSA requests suspended	E640	374
MSGDAACTIV	BINARY	STAT	8	AVG	No	The current GDSA active	E640	363
MSGDAALOC	BINARY	STAT	8	LIKE	No	Current GDSA allocated	E640 E650 E660	406

Table 74. CICSSTOR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
SMSGDSALIMIT	CNUMERIC	STAT	8	AVG	No	Current GDSA limit	E640 E650 E660	442
SMSGDSATOTAL	BINARY	STAT	8	AVG	No	Total storage currently allocated to GDSAs	E640 E650 E660	418
SMSGSTORSZ	BINARY	STAT	8	AVG	No	The GETSTOR request size	E640	360
SMSGASR	BINARY	STAT	4	AVG	No	Number of GSDSA ADD_SUBPOOL requests	E640 E650 E660 E670	501
SMSGSCREL	BINARY	STAT	8	LIKE	No	Number of GSDSA cushion releases	E640 E650 E660 E670	522
SMSGSCRISS	BINARY	STAT	4	AVG	No	Number of GSDSA requests failing with no storage	E640 E650 E660 E670	503
SMSGSCSIZE	BINARY	STAT	8	LIKE	No	Current GSDSA cushion size	E640 E650 E660 E670	521
SMSGSCSS	BINARY	STAT	4	AVG	No	Current requests suspended for GSDSA storage	E640 E650 E660 E670	505
SMSGSCSUBP	BINARY	STAT	4	AVG	No	Current number of subpools in GSDSA	E640 E650 E660 E670	510
SMSGSDSASZ	BINARY	STAT	8	AVG	No	Current size of GSDSA	E640 E650 E660 E670	497
SMSGSDSR	BINARY	STAT	4	AVG	No	Number of GSDSA DELETE_SUBPOOL requests	E640 E650 E660 E670	502
SMSGFMREQ	BINARY	STAT	4	AVG	No	Number of GSDSA FREEMAIN requests	E640 E650 E660 E670	500
SMSGSFSTG	BINARY	STAT	8	LIKE	No	GSDSA Free storage	E640 E650 E660 E670	523
SMSGGMREQ	BINARY	STAT	4	AVG	No	Number of GSDSA GETMAIN requests	E640 E650 E660 E670	499
SMSGSHWMSS	BINARY	STAT	4	AVG	No	Peak number of GSDSA requests suspended	E640 E650 E660 E670	506
SMSGSLFA	BINARY	STAT	8	LIKE	No	Largest free area in GSDSA	E640 E650 E660 E670	526
SMSGSPWWS	BINARY	STAT	4	AVG	No	Number of GSDSA requests purged	E640 E650 E660 E670	507

Table 74. CICSSTOR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
SMSGSSOS	BINARY	STAT	4	AVG	No	Number of times short on storage occurred in GSDSA	E640 E650 E660 E670	508
SMSGSSV	BINARY	STAT	4	AVG	No	Number of GSDSA storage violations	E640 E650 E660 E670	511
SMSGSTSOS	INTTSTP	STAT	8	AVG	No	Total time spent short on storage in the GSDSA	E640 E650 E660 E670	509
SMSGSUCSS	BINARY	STAT	4	AVG	No	Number of GSDSA requests suspended	E640 E650 E660 E670	504
SMSGUASR	BINARY	STAT	4	AVG	No	Number of GUDSA ADD_SUBPOOL requests	E640 E650 E660 E670	468
SMSGUCREL	BINARY	STAT	8	LIKE	No	Number of GUDSA cushion releases	E640 E650 E660 E670	490
SMSGUCRISS	BINARY	STAT	4	AVG	No	Number of GUDSA requests failing with no storage	E640 E650 E660 E670	470
SMSGUCSIZE	BINARY	STAT	8	LIKE	No	Current GUDSA cushion size	E640 E650 E660 E670	489
SMSGUCSS	BINARY	STAT	4	AVG	No	Current requests suspended for GUDSA storage	E640 E650 E660 E670	472
SMSGUCSUBP	BINARY	STAT	4	AVG	No	Current number of subpools in GUDSA	E640 E650 E660 E670	478
SMSGUDSASZ	BINARY	STAT	8	AVG	No	Current size of GUDSA	E640 E650 E660 E670	464
SMSGUDSR	BINARY	STAT	4	AVG	No	Number of GUDSA DELETE_SUBPOOL requests	E640 E650 E660 E670	469
SMSGUFMREQ	BINARY	STAT	4	AVG	No	Number of GUDSA FREEMAIN requests	E640 E650 E660 E670	467
SMSGUFSTG	BINARY	STAT	8	LIKE	No	GUDSA Free storage	E640 E650 E660 E670	491
SMSGUGMREQ	BINARY	STAT	4	AVG	No	Number of GUDSA GETMAIN requests	E640 E650 E660 E670	466
SMSGUHWMS	BINARY	STAT	4	AVG	No	Peak number of GUDSA requests suspended	E640 E650 E660 E670	473

Table 74. CICSSTOR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
SMSGULFA	BINARY	STAT	8	LIKE	No	Largest free area in GUDSA	E640 E650 E660 E670	494
SMSGUPWWS	BINARY	STAT	4	AVG	No	Number of GUDSA requests purged	E640 E650 E660 E670	474
SMSGUSOS	BINARY	STAT	4	AVG	No	Number of times short on storage occurred in GUDSA	E640 E650 E660 E670	475
SMSGUSV	BINARY	STAT	4	AVG	No	Number of GUDSA storage violations	E640 E650 E660 E670	479
SMSGUTSOS	INTTSTP	STAT	8	AVG	No	Total time spent short on storage in the GUDSA	E640 E650 E660 E670	477
SMSGUUCSS	BINARY	STAT	4	AVG	No	Number of GUDSA requests suspended	E640 E650 E660 E670	471
SMSHGDSAALC	BINARY	STAT	8	LIKE	No	Peak GDSA allocated	E640 E650 E660	407
SMSHPGSNREAL	BINARY	STAT	8	LIKE	No	Peak number of real storage frames to back 64-bit private memory	E640 E650 E660	409
SMSHVAXSLTS	BINARY	STAT	8	LIKE	No	Number of aux slots used to back 64-bit private storage	E640 E650 E660	399
SMSHVGAxSTS	BINARY	STAT	8	LIKE	No	Peak number of aux slots used to back 64-bit private storage	E640 E650 E660	400
SMSHWMASACT	BINARY	STAT	8	AVG	No	Peak address space that can be addressed	E640	362
SMSHWMCDsa	BINARY	STAT	4	AVG	No	Peak size of CDsa		25
SMSHWMDSATOT	BINARY	STAT	4	AVG	No	Peak amount of storage allocated to DSAs		20
SMSHWMCDsa	BINARY	STAT	4	AVG	No	Peak size of ECDSa		117
SMSHWMEDSATO	BINARY	STAT	4	AVG	No	Peak amount of storage allocated to EDSAs		21
SMSHWMERDSa	BINARY	STAT	4	AVG	No	Peak size of ERDSa		186
SMSHWMESDSa	BINARY	STAT	4	AVG	No	Peak size of ESDSa		163
SMSHWMETDSa	BINARY	STAT	4	AVG	No	Peak size of ETDSa	E640 E650 E660	421
SMSHWMEDUsa	BINARY	STAT	4	AVG	No	Peak size of EUDSa		140
SMSHWMGCDSa	BINARY	STAT	8	AVG	No	Peak size of GCDSa	E640	368
SMSHWMGCFSTG	BINARY	STAT	8	LIKE	No	Peak amount of GCDSa free storage (inc cushion)	E640 E650 E660	415
SMSHWMGDSaAC	BINARY	STAT	8	AVG	No	The peak amount of storage available for use above the bar	E640	364
SMSHWMGDSATO	BINARY	STAT	8	AVG	No	Peak amount of storage allocated to GDSAs	E640 E650 E660	419

Table 74. CICSSTOR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
SMSHWMGSDSA	BINARY	STAT	8	AVG	No	Peak size of GSDSA	E640 E650 E660 E670	498
SMSHWMGSFSTG	BINARY	STAT	8	LIKE	No	Peak amount of GSDSA free storage (inc cushion)	E640 E650 E660 E670	524
SMSHWMGUDSA	BINARY	STAT	8	AVG	No	Peak size of GUDSA	E640 E650 E660 E670	465
SMSHWMGUFSTG	BINARY	STAT	8	LIKE	No	Peak amount of GUDSA free storage (inc cushion)	E640 E650 E660 E670	492
SMSHWMRDSA	BINARY	STAT	4	AVG	No	Peak size of RDSA		94
SMSHWMSDSA	BINARY	STAT	4	AVG	No	Peak size of SDSA		71
SMSHWMUDSA	BINARY	STAT	4	AVG	No	Peak size of UDSA		48
SMSLRGMEMOBJ	BINARY	STAT	8	LIKE	No	Number of Large Memory Objects allocated	E640 E650 E660	410
SMSLRGPGBNRL	BINARY	STAT	8	LIKE	No	Number of Large Pages owned by this address space	E640 E650 E660	411
SMSLVABYTES	BINARY	STAT	8	LIKE	No	Number of bytes allocated from large virtual memory	E640 E650 E660	395
SMSLVGBYTES	BINARY	STAT	8	LIKE	No	Peak number of usable bytes within large virtual memory objects	E640 E650 E660	397
SMSLVHBYTES	BINARY	STAT	8	LIKE	No	Number of bytes hidden with large virtual memory objects	E640 E650 E660	396
SMSLVNMOMBS	BINARY	STAT	8	LIKE	No	Number of private memory objects allocated	E640 E650 E660	398
SMSLVSHRBTS	BINARY	STAT	8	LIKE	No	Number of shared bytes allocated from high virtual memory	E640 E650 E660	401
SMSLVSHRGBS	BINARY	STAT	8	LIKE	No	Peak number of shared bytes within large virtual memory objects	E640 E650 E660	402
SMSLVSHRNMO	BINARY	STAT	8	LIKE	No	Number of shared memory objects allocated	E640 E650 E660	403
SMSLWMGCFSTG	BINARY	STAT	8	LIKE	No	Lowest amount of GCDSA free storage (inc cushion)	E640 E650 E660	416
SMSLWMGSFSTG	BINARY	STAT	8	LIKE	No	Lowest amount of GSDSA free storage (inc cushion)	E640 E650 E660 E670	525
SMSLWMGUFSTG	BINARY	STAT	8	LIKE	No	Lowest amount of GUDSA free storage (inc cushion)	E640 E650 E660 E670	493
SMSMEMLIMIT	CNUMERIC	STAT	8	AVG	No	Maximum amount of above bar storage	E640	357

Table 74. CICSSTOR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
SMSMEMLIMSRC	EYUDA	STAT	4	LIKE	No	The source setting the memory limit	E640	356
SMSMEMLIMSRC Output valid values	JCL, REGION, SMF, IEFUSI							
SMSNPAGP	BINARY	STAT	2	AVG	No	Number of page pools		5
SMSPGSINREAL	BINARY	STAT	8	LIKE	No	Number of real storage frames used for 64-bit private memory	E640 E650 E660	408
SMSRASR	BINARY	STAT	4	AVG	No	Number of RDSA ADD_SUBPOOL requests		98
SMSRCREL	BINARY	STAT	4	AVG	No	Number of RDSA cushion releases		104
SMSRCRISS	BINARY	STAT	4	AVG	No	Number of RDSA requests failing with no storage		100
SMSRCSIZE	BINARY	STAT	4	AVG	No	Current RDSA cushion size		95
SMSRCSUBP	BINARY	STAT	4	AVG	No	Current number of RDSA subpools		107
SMSRDSASZ	BINARY	STAT	4	AVG	No	Current size of RDSA		93
SMSRDSR	BINARY	STAT	4	AVG	No	Number of RDSA DELETE_SUBPOOL requests		99
SMSRENTPGM	EYUDA	STAT	4	LIKE	No	Reentrant program protection status		8
SMSRENTPGM Output valid values	REENTPROT, NOREENTPROT							
SMSREXTS	BINARY	STAT	4	AVG	No	Number of RDSA extents		113
SMSREXTSA	BINARY	STAT	4	AVG	No	Number of RDSA extents added		114
SMSREXTSR	BINARY	STAT	4	AVG	No	Number of RDSA extents released		115
SMSRFMREQ	BINARY	STAT	4	AVG	No	Number of RDSA FREEMAIN requests		97
SMSRFSTG	BINARY	STAT	4	AVG	No	Size of RDSA free storage including cushion		108
SMSRGMREQ	BINARY	STAT	4	AVG	No	Number of RDSA GETMAIN requests		96
SMSRHWMFSTG	BINARY	STAT	4	AVG	No	Peak RDSA free storage level		109
SMSRHWMS	BINARY	STAT	4	AVG	No	Peak number of RDSA requests suspended		102
SMSRLFA	BINARY	STAT	4	AVG	No	Largest RDSA free area		111
SMSRLWMFSTG	BINARY	STAT	4	AVG	No	Lowest RDSA free storage level		110
SMSRPWWS	BINARY	STAT	4	AVG	No	Number of RDSA requests purged		103
SMSRQWAITMVS	BINARY	STAT	4	AVG	No	Number of requests for MVS storage causing wait		355
SMSRSOS	BINARY	STAT	4	AVG	No	Number of times short-on-storage occurred in RDSA		106
SMSRSV	BINARY	STAT	4	AVG	No	Number of RDSA storage violations		112
SMSRTSOS	INTTSTP	STAT	8	AVG	No	Total time spent short-on-storage in the RDSA		105
SMSRUCSS	BINARY	STAT	4	AVG	No	Number of RDSA requests suspended		101
SMSSASR	BINARY	STAT	4	AVG	No	Number of SDSA ADD_SUBPOOL requests		75
SMSSCREL	BINARY	STAT	4	AVG	No	Number of SDSA cushion releases		81
SMSSCRISS	BINARY	STAT	4	AVG	No	Number of SDSA requests failing with no storage		77

Table 74. CICSSTOR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
SMSSCSIZE	BINARY	STAT	4	AVG	No	Current SDSA cushion size		72
SMSSCSUBP	BINARY	STAT	4	AVG	No	Current number of subpools in the SDSA		84
SMSSDSASZ	BINARY	STAT	4	AVG	No	Current size of SDSA		70
SMSSDSR	BINARY	STAT	4	AVG	No	Number of SDSA DELETE_SUBPOOL requests		76
SMSSEXTS	BINARY	STAT	4	AVG	No	Number of extents in the SDSA		90
SMSSEXTSA	BINARY	STAT	4	AVG	No	Number of SDSA extents added		91
SMSSEXTSR	BINARY	STAT	4	AVG	No	Number of SDSA extents released		92
SMSSFMREQ	BINARY	STAT	4	AVG	No	Number of SDSA FREEMAIN requests		74
SMSSFSTG	BINARY	STAT	4	AVG	No	Size of SDSA free storage including cushion		85
SMSSGMREQ	BINARY	STAT	4	AVG	No	Number of SDSA GETMAIN requests		73
SMSSHWMFSTG	BINARY	STAT	4	AVG	No	Peak SDSA free storage level		86
SMSSHWMSS	BINARY	STAT	4	AVG	No	Peak number of SDSA requests suspended		79
SMSSLFA	BINARY	STAT	4	AVG	No	Largest SDSA free area		88
SMSSLWMFSTG	BINARY	STAT	4	AVG	No	Lowest SDSA free storage level		87
SMSSOSABAR	CVDAS	INQ	4	LIKE	No	Short on storage status above the bar	E640	391
SMSSOSABAR Output valid values	SOS, NOTSOS							
SMSSOSALINE	CVDAS	INQ	4	LIKE	No	Short on storage status above the line	E640	392
SMSSOSALINE Output valid values	SOS, NOTSOS							
SMSSOSBLINE	CVDAS	INQ	4	LIKE	No	Short on storage status below the line	E640	393
SMSSOSBLINE Output valid values	SOS, NOTSOS							
SMSSOSSTATUS	CVDAS	INQ	4	LIKE	No	Short on storage status below the bar		22
SMSSOSSTATUS Output valid values	SOS, NOTSOS, SOSABOVE, SOSBELOW							
SMSSPWWS	BINARY	STAT	4	AVG	No	Number of SDSA requests purged		80
SMSSSOS	BINARY	STAT	4	AVG	No	Number of times short-on-storage occurred in SDSA		83
SMSSSV	BINARY	STAT	4	AVG	No	Number of SDSA storage violations		89
SMSSTGPROT	EYUDA	STAT	4	LIKE	No	Storage protection status		7
SMSSTGPROT Output valid values	ACTIVE, INACTIVE							
SMSSTSOS	INTTSTP	STAT	8	AVG	No	Total time spent short-on-storage in the SDSA		82
SMSSUCSS	BINARY	STAT	4	AVG	No	Number of SDSA requests suspended		78
SMSTMWAITMVS	INTTSTP	STAT	8	AVG	No	Total time waiting for MVS storage		354
SMSTRANISO	EYUDA	STAT	4	LIKE	No	Transaction isolation status		9
SMSTRANISO Output valid values	ACTIVE, INACTIVE							

Table 74. CICSSTOR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
SMSUASR	BINARY	STAT	4	AVG	No	Number of UDSA ADD_SUBPOOL requests		52
SMSUCREL	BINARY	STAT	4	AVG	No	Number of UDSA cushion releases		58
SMSUCRISS	BINARY	STAT	4	AVG	No	Number of UDSA requests failing with no storage		54
SMSUCSIZE	BINARY	STAT	4	AVG	No	Current UDSA cushion size		49
SMSUCSUBP	BINARY	STAT	4	AVG	No	Current number of subpools in the UDSA		61
SMSUDSASZ	BINARY	STAT	4	AVG	No	Current size of UDSA		47
SMSUDSR	BINARY	STAT	4	AVG	No	Number of UDSA DELETE_SUBPOOL requests		53
SMSUEXTS	BINARY	STAT	4	AVG	No	Number of UDSA extents		67
SMSUEXTSA	BINARY	STAT	4	AVG	No	Number of UDSA extents added		68
SMSUEXTSR	BINARY	STAT	4	AVG	No	Number of UDSA extents released		69
SMSUFMREQ	BINARY	STAT	4	AVG	No	Number of UDSA FREEMAIN requests		51
SMSUFSTG	BINARY	STAT	4	AVG	No	Size of UDSA free storage including cushion		62
SMSUGMREQ	BINARY	STAT	4	AVG	No	Number of UDSA GETMAIN requests		50
SMSUHWMFSTG	BINARY	STAT	4	AVG	No	Peak UDSA free storage level		63
SMSUHMSS	BINARY	STAT	4	AVG	No	Peak number of UDSA requests suspended		56
SMSULFA	BINARY	STAT	4	AVG	No	Largest UDSA free area		65
SMSULWMFSTG	BINARY	STAT	4	AVG	No	Lowest UDSA free storage level		64
SMSUPWWS	BINARY	STAT	4	AVG	No	Number of UDSA requests purged		57
SMSUSOS	BINARY	STAT	4	AVG	No	Number of times short-on-storage occurred in UDSA		60
SMSUSSCUM	BINARY	STAT	4	AVG	No	Total number of unique subspace users		11
SMSUSSCUR	BINARY	STAT	4	AVG	No	Current number of unique subspace users		10
SMSUSSHWM	BINARY	STAT	4	AVG	No	Peak number of unique subspace users		12
SMSUSV	BINARY	STAT	4	AVG	No	Number of UDSA storage violations		66
SMSUTSOS	INTTSTP	STAT	8	AVG	No	Total time spent short-on-storage in the UDSA		59
SMSUUCSS	BINARY	STAT	4	AVG	No	Number of UDSA requests suspended		55
SNONIMMGET	BINARY	CPSM	8	AVG	No	Number of SDSA non-immediate GETMAIN requests		252
SRATECREL	RATE3	CPSM	8	AVG	No	SDSA cushion release rate		257
SRATEEXTSA	RATE3	CPSM	8	AVG	No	SDSA extent increase rate		260
SRATEEXTSR	RATE3	CPSM	8	AVG	No	SDSA extent release rate		261
SRATEFM	RATE3	CPSM	8	AVG	No	SDSA FREEMAIN request rate		251
SRATEGM	RATE3	CPSM	8	AVG	No	SDSA GETMAIN request rate		250
SRATESTORV	RATE3	CPSM	8	AVG	No	SDSA storage violation rate		259
UAVGTIMESOS	INTTSTP	CPSM	8	AVG	No	Average time spent short-on-storage (SOS) in UDSA		240

Table 74. CICSSTOR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
UNONIMMGET	BINARY	CPSM	8	AVG	No	Number of UDSA non-immediate GETMAIN requests		234
URATECREL	RATE3	CPSM	8	AVG	No	UDSA cushion release rate		239
URATEEXTSA	RATE3	CPSM	8	AVG	No	UDSA extent increase rate		242
URATEEXTSR	RATE3	CPSM	8	AVG	No	UDSA extent release rate		243
URATEFM	RATE3	CPSM	8	AVG	No	UDSA FREEMAIN request rate		233
URATEGM	RATE3	CPSM	8	AVG	No	UDSA GETMAIN request rate		232
URATESTORV	RATE3	CPSM	8	AVG	No	UDSA storage violation rate		241

Chapter 29. CLCACHE Resource Table

A CICS resource that provides information about the shared class cache for pooled JVMs. This resource is not supported in CICS TS for z/OS, Version 5.1 and later versions.

There is no key field for this resource class.

The following actions are supported:

PHASEOUT

Mark pooled JVMs for deletion.

PURGE

Terminate all tasks that use pooled JVMs in the shared class cache by using the **SET TASK PURGE** command.

FORCEPURGE

Terminate all tasks that use pooled JVMs in the shared class cache by using the **SET TASK FORCEPURGE** command.

START

Start the shared class cache for pooled JVMs.

RELOAD

Reload the shared class cache for pooled JVMs.

External resource name

CICSJVMClassCache

Length

80

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0139

Table 75. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM	PHASEOUT	AUTOSTARTST(ENABLED, DISABLED)	No
SET	PURGE	AUTOSTARTST(ENABLED, DISABLED)	No

Table 75. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
	FORCEPURGE	AUTOSTARTST(ENABLED, DISABLED)	No
	START	CACHESIZE(value)	No
		PROFILE(value)	No
	RELOAD	CACHESIZE(value)	No
		PROFILE(value)	No

Table 76. CLCACHE resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
AUTOSTARTST	CVDAS	INQ	4	LIKE	Yes	Autostart status	ENABLED		3
AUTOSTARTST Input/output valid values	ENABLED, DISABLED								
CACHEFREE	BINARY	INQ	8	AVG	No	Amount in bytes of free space within the cache			7
CACHESIZE	BINARY	INQ	8	AVG	No	Size of the class cache in bytes			6
JVMREQSCACHE	BINARY	STAT	4	AVG	No	JVM requests - class cache			13
OLDCACHES	BINARY	INQ	4	AVG	No	Number of class caches waiting for JVMs to terminate			4
PEAKCACHEJVM	BINARY	STAT	4	AVG	No	Peak pooled (class cache) JVMs			12
PHASINGOUT	BINARY	INQ	4	AVG	No	Number of JVMs being phased-out			2
PROFILE	CHAR	INQ	8	DIFF	No	Profile used to start or used to reload the cache		E660+	5
REUSEST	CVDAS	INQ	4	LIKE	No	JVM reuse status			11
REUSEST Output valid values	REUSE, RESET, UNKNOWN								
STARTTIME	DATETIME	INQ	8	MAX	No	The time that the class cache was started			9
STATUS	CVDAS	INQ	4	LIKE	No	Class cache status			8
STATUS Output valid values	STARTED, STARTING, STOPPED, RELOADING								
TOTALJVMs	BINARY	INQ	4	AVG	No	Number of JVMs dependent on the class cache			10

Chapter 30. CMASLIST Resource Table

A CPSM Communications Manager object that describes a CMAS instance and its connection characteristics as viewed by the current context CMAS. Each object instance reports on a particular CMAS. The object instance for the CMAS in which the GET was requested is identified by the ACCESTYPE(LOCAL) attribute. The CMASLIST resource table and its actions may be accessed on behalf of any CMAS with a direct or indirect connection to the CMAS to which the API program is connected.

Once a CMAS instance is discovered by CICSplex SM communications, it retains knowledge of the instance until the network is terminated. Network termination occurs when all CMAS instances are shutdown.

The **Primary** key field for this resource class is CMASNAME.

The following actions are supported:

SHUTDOWN

Shutdown the CMAS

PURGE

Purge incore ESM security profiles

SECUREBUILD

Rebuild the ESM Security profiles

These actions require no unique parameter data.

External resource name

CICSCICSManagingAddressSpaceList

Length

56

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

Yes

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2450

Table 77. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM SET	SHUTDOWN	None	N/A
	PURGE	None	N/A

Table 77. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
	SECREBUILD	None	N/A
	RESET	USERID(value)	Yes
	RESETTIME	None	N/A
	CPSMDUMP	ASID(value)	No
		BAS	No
		CHE	No
		COM	No
		DAT	No
		KNL	No
		MAS	No
		MON	No
		MSG	No
		QUE	No
		RTA	No
		SIM	No
		SLM	No
		SRV	No
		TOP	No
		TRC	No
		WLM	No

Table 78. CMASLIST FEEDBACK error codes

Value	Code	Description
1	CMASLIST_INV_DATA	Invalid attribute data
2	CMASLIST_REC_NOT_FOUND	Requested resource not found
22	CMASLIST_SECURITY_NOT_ACTIVE	Security not active
23	CMASLIST_INV_USERID	User ID missing or invalid

Table 79. CMASLIST resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
ACCESSTYPE	EYUDA	CPSM	4	LIKE	Type of access	9
ACCESSTYPE Output valid values	N_A, LOCAL, ADJACENT, INDIRECT					
CMASNAME-1	CHAR	CPSM	8	DIFF	CMAS	4
CPSMVER	CHAR	CPSM	4	DIFF	CPSM version of CMAS	7
JOBID	CHAR	CPSM	8	DIFF	MVS job ID	12
JOBNAME	CHAR	CPSM	8	DIFF	MVS job name	11
STATUS	EYUDA	CPSM	4	LIKE	Status of CMAS	8
STATUS Output valid values	N_A, INACTIVE, ACTIVE, LOSTCON, CREATING					

Table 79. CMASLIST resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
SYSID	CHAR	CPSM	4	DIFF	CICS system ID	6
TRANSITCMAS	CHAR	CPSM	8	DIFF	First transit CMAS	5
TRANSITCNT	BINARY	CPSM	2	AVG	Number of transit CMASs	10

Chapter 31. CMASPLEX Resource Table

A CPSM Communications Manager object that describes the management responsibility of a CMAS for a particular CICSplex.

The **Primary** key field for this resource class is PLEXNAME.

The **Secondary** key field for this resource class is MPSTATE.

External resource name

CICSCICSplexList

Length

48

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

Yes

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2452

Table 80. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	REMPLEX	None	N/A
SET	FORCEREMPLEX	None	N/A

Table 81. CMASPLEX FEEDBACK error codes		
Value	Code	Description
2	CMASPLEX_REC_NOT_FOUND	Requested resource not found
26	CMASPLEX_INV_NAMELIST	Invalid name list
27	CMASPLEX_MAS_ACTIVE	A connected MAS is active
28	CMASPLEX_NOT_FOUND	CICSplex not found
29	CMASPLEX_NOT_SUPPORTED	ACTION not supported by CMAS
30	CMASPLEX_BAD_REMOVE	MPSTATE must be INVALID for REMPLEX action

Table 81. CMASPLEX FEEDBACK error codes (continued)		
Value	Code	Description
31	CMASPLEX_BAD_FRCREM	MPSTATE must be NOTCONNECTED for FORCEREMPLEX action
32	CMASPLEX_BAD_ACTION	Invalid ACTION parameter specified

Table 82. CMASPLEX resource table attributes							
Name	Datatype	Source	Len	Sum	Description	Default	Attr ID
BOTRSUPD	BINARY	CPSM	1	DIFF	RS server bottom tier	1	16
DAYLGHTSV	EYUDA	CPSM	4	LIKE	Daylight saving time in effect		11
DAYLGHTSV Output valid values	YES, NO						
MPCMAS	CHAR	CPSM	8	DIFF	Maintenance point CMAS		18
MPSTATE-2	EYUDA	CPSM	4	LIKE	State of MP CMAS		19
MPSTATE-2 Output valid values	VALID, INVALID, NOTCONNECTED						
MPSTATUS	EYUDA	CPSM	4	LIKE	CMAS is maintenance point		5
MPSTATUS Output valid values	YES, NO						
PERFINTVL	BINARY	CPSM	2	AVG	Performance interval duration		7
PLEXNAME-1	CHAR	CPSM	8	DIFF	CICSplex		4
READRS	BINARY	CPSM	2	DIFF	RS server read interval	200	13
RSPOLID	CHAR	CPSM	8	DIFF	RS server pool name	DFHRSTAT	17
TMEZONE	CHAR	CPSM	1	DIFF	Time zone		10
TMEZONEO	BINARY	CPSM	1	AVG	Time zone offset		9
TOPRSUPD	BINARY	CPSM	1	DIFF	RS server top tier	5	15
UPDATERS	BINARY	CPSM	1	DIFF	RS server update frequency	15	14

Chapter 32. CMAS Resource Table

A CPSM Kernel Manager object that describes an active CMAS. Since a CMAS is itself a CICS system, selected CICS attributes are also provided. CMAS instances and actions can be accessed by setting the context of the request to the required CMAS. CRITERIA and filters may not be used to select multiple instances of the CMAS resource table. If you want to perform actions on more than one CMAS at a time, or use CRITERIA or filters to select the CMAS on which to act, use the CMASLIST resource table.

The **Primary** key field for this resource class is CMASNAME.

The following actions are supported:

SHUTDOWN

Shutdown the CMAS

PURGE

Purge incore ESM security profiles

SECUREBUILD

Rebuild the ESM Security profiles

These actions require no unique parameter data.

External resource name

CICSCICSManagingAddressSpace

Length

344

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

Yes

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSPlex SM Manager

Copybook identifier

EYUt2451

Table 83. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM	SHUTDOWN	None	N/A
SET			
	PURGE	None	N/A
	SECUREBUILD	None	N/A
	RESET	USERID(value)	Yes

Table 83. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
	RESETTIME	None	N/A
	CPSMDUMP	ASID(value)	No
		BAS	No
		CHE	No
		COM	No
		DAT	No
		KNL	No
		MAS	No
		MON	No
		MSG	No
		QUE	No
		RTA	No
		SIM	No
		SLM	No
		SRV	No
		TOP	No
		TRC	No
		WLM	No
	COMMAND	CMDTEXT(value)	Yes

Table 84. CMAS FEEDBACK error codes

Value	Code	Description
1	CMAS_INV_DATA	Attribute data invalid
2	CMAS_REC_NOT_FOUND	Requested resource not found
5	CMAS_REC_CHANGED	Resource definition already changed
21	CMAS_NO_ACTION_TO_PERFORM	No action to perform
22	CMAS_SECURITY_NOT_ACTIVE	Security not active
23	CMAS_INV_USERID	User ID missing or invalid
24	CMAS_INV_CMDTEXT	Command text invalid

Table 85. CMAS resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
AMAXTASK	BINARY	STAT	2	AVG	No	Maximum number of active tasks		30
APPLID	CHAR	CPSM	8	DIFF	No	Application ID		6
AUXSTATUS	CVDAS	INQ	4	LIKE	Yes	Auxiliary trace status		24
AUXSTATUS Input/output valid values	AUXSTART, AUXSTOP, AUXPAUSE							
AUXSWITCH	CVDAS	INQ	4	LIKE	Yes	Auxiliary trace switch status		25

Table 85. CMAS resource table attributes (continued)								
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
AUXSWITCH Input/output valid values	NOSWITCH, SWITCHALL, SWITCHNEXT							
BASTRACE	BITSTRIP	CPSM	4	LIKE	Yes	Business Application Services (BAS) trace flags		3
CASID	CHAR	CPSM	4	DIFF	No	Local coordinating address space (CAS) ID		9
CASSTATUS	EYUDA	CPSM	4	LIKE	No	Coordinating address space (CAS) connection status		27
CASSTATUS Output valid values	ACTIVE, INACTIVE, WAITING, LOSTCON, NOTAPPLIC							
CHETRACE	BITSTRIP	CPSM	4	LIKE	Yes	Cache services trace flags		37
CMASNAME-1	CHAR	CPSM	8	DIFF	No	CMAS		4
COMTRACE	BITSTRIP	CPSM	4	AVG	Yes	Communications trace flags		40
CPSMVER	CHAR	CPSM	4	DIFF	No	CPSM version of CMAS		10
CPUTIME	INTUSEC	CPSM	8	MAX	No	Total CPU time used		12
CURRTASKS	BINARY	STAT	2	AVG	No	Current number of tasks		29
DATTRACE	BITSTRIP	CPSM	4	LIKE	Yes	Data repository services trace flags		38
DAYLIGHT	EYUDA	CPSM	4	LIKE	Yes	Daylight saving time		58
DAYLIGHT Input/output valid values	YES, NO							
DREPDSN	CHAR	CPSM	44	DIFF	No	Data repository data set name		48
DREPSTATUS	CVDAS	INQ	4	LIKE	No	Data repository status		21
DREPSTATUS Output valid values	OPEN, CLOSED, OPENING, CLOSING, CLOSEREQUEST							
FREEOSSBCNT	BINARY	CPSM	4	AVG	No	Number of CPSM program-working-storage blocks free		16
FREEOSSBUSE	BINARY	CPSM	4	AVG	No	Number of times free working-storage blocks used		17
GETMAINOSSB	BINARY	CPSM	4	AVG	No	Number of GETMAINs for working-storage blocks		18
GTFSTATUS	CVDAS	INQ	4	LIKE	Yes	Generalized trace facility (GTF) trace status		26
GTFSTATUS Input/output valid values	GTFSTART, GTFSTOP							
IRCSTATUS	CVDAS	INQ	4	LIKE	Yes	Interregion communication status		20
IRCSTATUS Input/output valid values	OPEN, CLOSED							
IRCSTATUS Input valid values	IMMCLOSE							
IRCSTATUS Output valid values	CLOSING, IMMCLOSING							
JOBID	CHAR	CPSM	8	DIFF	No	MVS job ID		71
JOBNAME	CHAR	CPSM	8	DIFF	No	MVS job name		5
KNLTRACE	BITSTRIP	CPSM	4	LIKE	Yes	Kernel linkage trace flags		33
MAXSTCB	BINARY	CPSM	4	AVG	No	Maximum number of STCBs allocated		57
MAXTASK	BINARY	STAT	4	AVG	Yes	Maximum number of active and suspended tasks		45
MAXTCNT	BINARY	STAT	2	AVG	No	Number of times maximum task limit reached		32
MEMLIMIT	CNUMERIC	INQ	8	LIKE	No	Maximum amount of storage above the bar	E640	67

Table 85. CMAS resource table attributes (continued)								
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
MONMCONN	BINARY	CPSM	4	AVG	No	Number of pending connection-monitoring queues		49
MONMFILE	BINARY	CPSM	4	AVG	No	Number of pending file-monitoring queues		50
MONMJRNL	BINARY	CPSM	4	AVG	No	Number of pending journal-monitoring queues		51
MONMPROG	BINARY	CPSM	4	AVG	No	Number of pending program-monitoring queues		52
MONMSYS	BINARY	CPSM	4	AVG	No	Number of pending global-monitoring queues		56
MONMTDQ	BINARY	CPSM	4	AVG	No	Number of pending TD-monitoring queues		55
MONMTERM	BINARY	CPSM	4	AVG	No	Number of pending terminal-monitoring queues		53
MONMTRAN	BINARY	CPSM	4	AVG	No	Number of pending transaction-monitoring queues		54
MONTRACE	BITSTRIP	CPSM	4	LIKE	Yes	Monitoring trace flags		42
MSGTRACE	BITSTRIP	CPSM	4	LIKE	Yes	Message services trace flags		35
MVSLOC	CHAR	CPSM	4	DIFF	No	MVS system ID		7
NETALERT	BINARY	CPSM	8	AVG	No	Number of Netview alerts sent		60
NETVPPI	EYUDA	CPSM	4	LIKE	Yes	Netview PPI to be used		59
NETVPPI Input/output valid values	YES, NO							
PAGEIN	BINARY	CPSM	4	AVG	No	Number of page-in requests		13
PAGEOUT	BINARY	CPSM	4	AVG	No	Number of page-out requests		14
PEAKAMAX	BINARY	STAT	2	AVG	No	Peak number of user tasks eligible for dispatch		31
QUETRACE	BITSTRIP	CPSM	4	LIKE	Yes	Queue services trace flags		39
REALSTG	BINARY	CPSM	4	AVG	No	Real storage in use		15
RODMNAME	CHAR	CPSM	8	DIFF	No	Resource status facility name		63
RTATRACE	BITSTRIP	CPSM	4	LIKE	Yes	Real time analysis (RTA) trace flags		43
SDUMP	EYUDA	CPSM	4	LIKE	Yes	System dump option		62
SDUMP Input/output valid values	YES, NO, NEVER							
SOSABOVEBAR	CVDAS	INQ	4	LIKE	No	Short on storage status above the bar	E640	68
SOSABOVEBAR Output valid values	SOS, NOTSOS							
SOSABOVELINE	CVDAS	INQ	4	LIKE	No	Short on storage status above the line	E640	69
SOSABOVELINE Output valid values	SOS, NOTSOS							
SOSBELOWLINE	CVDAS	INQ	4	LIKE	No	Short on storage status below the line	E640	70
SOSBELOWLINE Output valid values	SOS, NOTSOS							
SRVTRACE	BITSTRIP	CPSM	4	LIKE	Yes	Common services trace flags		36
STRTTIME	TIMESTP	CPSM	8	MAX	No	Local time at which CMAS was started		11
SYSID	CHAR	CPSM	4	DIFF	No	CICS system ID		8

Table 85. CMAS resource table attributes (continued)								
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
SYSTEMSTATUS	CVDAS	INQ	4	LIKE	Yes	System trace status		22
SYSTEMSTATUS Input/output valid values	SYSTEMON, SYSTEMOFF							
TIMEZONE	CHAR	CPSM	1	DIFF	Yes	CMAS time zone		46
TOPTRACE	BITSTRIP	CPSM	4	LIKE	Yes	Topology trace flags		41
TOTLTASKS	BINARY	STAT	4	AVG	No	Total number of CICS tasks run in CMAS		28
TRATRACE	BITSTRIP	CPSM	4	LIKE	Yes	Trace services trace flags		34
USERSTATUS	CVDAS	INQ	4	LIKE	Yes	User trace status		23
USERSTATUS Input/output valid values	USERON, USEROFF							
VTAMACB	CVDAS	INQ	4	LIKE	Yes	VTAM ACB open status		19
VTAMACB Input/output valid values	OPEN, CLOSED							
VTAMACB Input valid values	IMMCLOSE, FORCECLOSE							
VTAMACB Output valid values	CLOSING, IMMCLOSING, FORCECLOSING							
WLMTRACE	BITSTRIP	CPSM	4	LIKE	Yes	Workload management trace flags		44
XCFGROUP	CHAR	INQ	8	LIKE	No	XCF group ID	E640	65
ZONEOFFS	BINARY	CPSM	1	DIFF	Yes	CMAS time zone offset		47

Chapter 33. CMDMPAPS Resource Table

A CPSM Real Time Analysis Definition that identifies the role of a primary CMAS within the scope of an analysis specification.

The **Primary** key field for this resource class is CMASNAME.

The **Secondary** key field for this resource class is SPEC.

There are no object specific actions for this resource class.

External resource name

CICSPrimaryAnalysisPointCMAS

Length

56

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt4353

Table 86. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 87. CMDMPAPS FEEDBACK error codes		
Value	Code	Description
1	CMDMPAPS_INV_DATA	Attribute data invalid
2	CMDMPAPS_REC_NOT_FOUND	Requested resource not found
3	CMDMPAPS_INV_REFERENCE	Attribute references an invalid resource
4	CMDMPAPS_REC_EXISTS	Resource already exists
6	CMDMPAPS_INV_RESTYPE	Invalid resource type
7	CMDMPAPS_INV_VER	Invalid resource version
21	CMDMPAPS_CMAS_NOT_UNIQUE	Association is not unique

Table 87. CMDMPAPS FEEDBACK error codes (continued)		
Value	Code	Description
22	CMDMPAPS_DUP_ASSOCIATION	Duplicate association

Table 88. CMDMPAPS resource table attributes							
Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	7
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	10
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	9
CMASNAME-1	CHAR	CPSM	8	Yes	DIFF	Primary CMAS	5
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	8
SPEC-2	CHAR	CPSM	8	Yes	DIFF	Analysis point specification	6

Chapter 34. CMDMSAPS Resource Table

A CPSM Real Time Analysis Definition that identifies the role of a secondary CMAS within the scope of an analysis specification.

The **Primary** key field for this resource class is CMASNAME.

The **Secondary** key field for this resource class is SPEC.

There are no object specific actions for this resource class.

External resource name

CICSSecondaryAnalysisPointCMAS

Length

56

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt4354

Table 89. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 90. CMDMSAPS FEEDBACK error codes		
Value	Code	Description
1	CMDMSAPS_INV_DATA	Attribute data invalid
2	CMDMSAPS_REC_NOT_FOUND	Requested resource not found
3	CMDMSAPS_INV_REFERENCE	Attribute references an invalid resource
4	CMDMSAPS_REC_EXISTS	Resource already exists
6	CMDMSAPS_INV_RESTYPE	Invalid resource type
7	CMDMSAPS_INV_VER	Invalid resource version
22	CMDMSAPS_DUP_ASSOCIATION	Duplicate association

Table 91. CMDMSAPS resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	7
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	10
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	9
CMASNAME-1	CHAR	CPSM	8	Yes	DIFF	Secondary CMAS	5
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	8
SPEC-2	CHAR	CPSM	8	Yes	DIFF	Analysis point specification	6

Chapter 35. CMDT Resource Table

CICS Resource that describes a data table in an active CICS system managed by CICSplex SM. The data presented is from the perspective of the file associated with the data table.

The **Primary** key field for this resource class is FILE.

The following actions are supported:

CLOSE

Close the data table file.

The parameter data for the CLOSE action is:

```
PARM('BUSY(cvda)')
```

where *cvda* is required and must be one of the following valid CVDAs for the file busy condition:

WAIT
NOWAIT
FORCE

DISABLE

Disable the data table file.

The parameter data for the DISABLE action is:

```
PARM('BUSY(cvda)')
```

where *cvda* is required and must be one of the following valid CVDAs for the file busy condition:

WAIT
NOWAIT
FORCE

DISCARD

Discard the data table file.

ENABLE

Enable the data table file.

OPEN

Open the data table file.

External resource name

CICSDataTable

Length

384

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0041

Table 92. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	CLOSE	BUSY(WAIT, NOWAIT, FORCE)	Yes
	DISABLE	BUSY(WAIT, NOWAIT, FORCE)	Yes
	DISCARD	None	N/A
	ENABLE	None	N/A
	OPEN	None	N/A

Table 93. CMDT FEEDBACK error codes

Value	Code	Description
1	CMDT_INV_DATA	Attribute data invalid

Table 94. CMDT resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
ADD	CVDAS	INQ	4	LIKE	Yes	Add option			2
ADD Input/output valid values	ADDABLE, NOTADDABLE								
ADDCNT	BINARY	STAT	4	AVG	No	Number of WRITE requests			26
ADDFRREAD	BINARY	STAT	4	AVG	No	Number of records added to table by READ requests			34
ADDREJ	BINARY	STAT	4	AVG	No	Number of add requests rejected by user exit			36
ADDREQ	BINARY	STAT	4	AVG	No	Number of records added from WRITE requests			35
ADDTFULL	BINARY	STAT	4	AVG	No	Number of add requests rejected when table full			37
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0	E640 E650	76
BROWSE	CVDAS	INQ	4	LIKE	Yes	Browse option			3
BROWSE Input/output valid values	BROWSABLE, NOTBROWSABLE								
BROWSECNT	BINARY	STAT	4	AVG	No	Number of READNEXT and READPREV requests			25
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent		E640 E650	68
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, TABLE, SYSTEM, CREATESPI, NOTAPPLIC								

Table 94. CMDT resource table attributes (continued)									
Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release		E640 E650	69
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time		E640 E650	70
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID		E640 E650	67
CONTENTION	CNUMERIC	STAT	4	AVG	No	Number of CFDT contentions			66
CURCOUNT	BINARY	STAT	4	AVG	No	Current number of records in data table file			41
DATASETTYPE	CHAR	STAT	1	DIFF	No	Data set type			60
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition		E640 E650	71
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time		E640 E650	72
DELETE	CVDAS	INQ	4	LIKE	Yes	Delete option			4
DELETE Input/output valid values	DELETABLE, NOTDELETABLE								
DELETEREQ	BINARY	STAT	4	AVG	No	Number of DELETE requests			39
DEXPCNT	BINARY	STAT	4	AVG	No	Number of I/O operations on data component			29
DISPOSITION	CVDAS	INQ	4	LIKE	Yes	Disposition of associated data set			5
DISPOSITION Input/output valid values	OLD, SHARE								
DSNAME	CHAR	INQ	44	DIFF	Yes	Data set name			6
ENABLESTATUS	CVDAS	INQ	4	LIKE	Yes	Enablement status			7
ENABLESTATUS Input/output valid values	ENABLED, DISABLED								
ENABLESTATUS Output valid values	UNENABLED, DISABLING, UNENABLING								
FILE-1	CHAR	INQ	8	DIFF	No	File ID			1
FWDRECSTATUS	CVDAS	INQ	4	LIKE	No	Forward recovery option			8
FWDRECSTATUS Output valid values	FWDRECOVERABLE, NOTFWDRCVBLE								
GETCNT	BINARY	STAT	4	AVG	No	Number of READ requests			23
GETUPDCNT	BINARY	STAT	4	AVG	No	Number of READ UPDATE requests			24
GMTFILECLS	TIMESTP	STAT	8	MAX	No	GMT file close time			58
GMTFILEOPN	TIMESTP	STAT	8	MAX	No	GMT file open time			57
IEXPCNT	BINARY	STAT	4	AVG	No	Number of I/O operations on index component			30
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent		E640 E650	75
INSTALLAGENT Input/output valid values	CSDAPI, CREATSPI, TABLE, SYSTEM, GRPLIST								
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time		E640 E650	74
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID		E640 E650	73
JOURNALNUM	BINARY	INQ	2	AVG	No	Journal number			51
KEYLENGTH	BINARY	INQ	4	AVG	No	Key length			9

Table 94. CMDT resource table attributes (continued)									
Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
KEYPOSITION	BINARY	INQ	4	AVG	No	Key position			10
LOADTYPE	CVDAS	INQ	4	LIKE	Yes	CFDT load type			65
LOADTYPE Input/output valid values	LOAD, NOLOAD, NOTAPPLIC								
LOCDELCNT	BINARY	STAT	4	AVG	No	Number of DELETE requests			28
LSRPOOLID	BINARY	INQ	2	MAX	Yes	LSR Pool number			53
MAXNUMRECS	BINARY	INQ	4	AVG	Yes	Maximum number of records table can hold			11
MAXTSIZE	BINARY	STAT	4	AVG	No	Maximum table size			40
NUMACTSTRING	BINARY	STAT	2	AVG	No	Number of active strings			56
NUMDATBUFF	BINARY	STAT	2	AVG	No	Number of data buffers			54
NUMINDEXBUFF	BINARY	STAT	2	AVG	No	Number of index buffers			55
NUMSTRINGWT	BINARY	STAT	2	AVG	No	Number of active string waits			59
OPENSTATUS	CVDAS	INQ	4	LIKE	Yes	Open status			12
OPENSTATUS Input/output valid values	OPEN, CLOSED								
OPENSTATUS Output valid values	OPENING, CLOSING, CLOSEREQUEST								
POOLNAME	CHAR	INQ	8	DIFF	Yes	CFDT pool name			62
READ	CVDAS	INQ	4	LIKE	Yes	Read option			13
READ Input/output valid values	READABLE, NOTREADABLE								
READRETRY	BINARY	STAT	4	AVG	No	Number of READ retries			42
READS	BINARY	STAT	4	AVG	No	Number of successful READs			32
RECNOTFND	BINARY	STAT	4	AVG	No	Total number of records not found in table			33
RECORDFORMAT	CVDAS	INQ	4	LIKE	No	Record format			14
RECORDFORMAT Output valid values	FIXED, VARIABLE, UNDEFINED								
RECORDSIZE	BINARY	INQ	4	AVG	No	Record size			15
RECOVSTATUS	CVDAS	INQ	4	LIKE	No	Recovery type			16
RECOVSTATUS Output valid values	RECOVERABLE, NOTRECOVERABLE								
REWRITE	BINARY	STAT	4	AVG	No	Number of REWRITE requests			38
STGALCINU	BINARY	STAT	4	AVG	No	Total storage in use (kilobytes)			44
STGALCTOT	BINARY	STAT	4	AVG	No	Total storage allocated (kilobytes)			43
STGDTAINU	BINARY	STAT	4	AVG	No	Storage in use for record data (kilobytes)			50
STGDTATOT	BINARY	STAT	4	AVG	No	Storage allocated for record data (kilobytes)			49
STGENTINU	BINARY	STAT	4	AVG	No	Storage in use for record entry blocks (KB)			46
STGENTTOT	BINARY	STAT	4	AVG	No	Storage allocated for record entry blocks (KB)			45
STGIDXINU	BINARY	STAT	4	AVG	No	Storage in use for index (kilobytes)			48
STGIDXTOT	BINARY	STAT	4	AVG	No	Storage allocated for index (kilobytes)			47

Table 94. CMDT resource table attributes (continued)									
Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
STRINGS	BINARY	INQ	4	AVG	Yes	Number of strings			17
TABLE	CVDAS	INQ	4	LIKE	Yes	Type of data table			18
TABLE Input/output valid values	CICSTABLE, USERTABLE, CFTABLE, NOTTABLE								
TABLE Output valid values	NOTAPPLIC								
TABLENAME	CHAR	INQ	8	DIFF	Yes	CFDT table name			63
TIMECLOSE	DECTSTP	STAT	4	MAX	No	Local time file was closed			22
TIMEOPEN	DECTSTP	STAT	4	MAX	No	Local time file was opened			21
UPDATE	CVDAS	INQ	4	LIKE	Yes	Update option			20
UPDATE Input/output valid values	UPDATABLE, NOTUPDATABLE								
UPDATECNT	BINARY	STAT	4	AVG	No	Number of REWRITE requests			27
UPDATEMODEL	CVDAS	INQ	4	LIKE	Yes	CFDT update model			64
UPDATEMODEL Input/output valid values	LOCKING, CONTENTION, NOTAPPLIC								
VSAMTYPE	CVDAS	INQ	4	LIKE	No	Type of VSAM data set			19
VSAMTYPE Input/output valid values	NOTAPPLIC								
VSAMTYPE Output valid values	ESDS, KSDS, RRDS, VRRDS								
WSTRCCURCNT	BINARY	STAT	2	AVG	No	Peak concurrent requests queued - strings in use			52
WSTRCNT	BINARY	STAT	4	AVG	No	Total requests queued because strings in use			31

Chapter 36. CMTCMDEF Resource Table

A CPSM Communications Definition that describes a CMAS-to-CMAS connection from the perspective of the context CMAS.

Each CMTCMDEF instance has a related CICS CONNECTION, SESSION definition set. For LU6.2 connections, a CICS PARTNER definition also exists. These CICS CSD resources are managed internally by CICSplex SM.

The **Primary** key field for this resource class is TARGETNAME.

There are no object specific actions for this resource class.

Note: For CMTCMDEF, API UPDATE is only valid for the DESC attribute.

External resource name

CICSCMASToCMASLinkDefinition

Length

168

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

Yes

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt2732

Table 95. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
UPDATE		None	N/A
REMOVE		None	N/A

Table 96. CMTCMDEF FEEDBACK error codes		
Value	Code	Description
1	CMTCMDEF_INV_DATA	Attribute data invalid
2	CMTCMDEF_REC_NOT_FOUND	Requested resource not found
4	CMTCMDEF_REC_EXISTS	Resource already exists
5	CMTCMDEF_REC_CHANGED	Resource definition already changed

Table 96. CMTCMDEF FEEDBACK error codes (continued)

Value	Code	Description
8	CMTCMDEF_REPOSITORY_FAILURE	Error in data repository
21	CMTCMDEF_CEDA_TIMEOUT	Timeout whilst updating CICS CSD
22	CMTCMDEF_CEDA_FAILURE_DEFINE	Failure defining resource on CICS CSD
23	CMTCMDEF_CEDA_FAILURE_INSTALL	Install to CICS CSD failed
24	CMTCMDEF_CEDA_FAILURE_MOVE	Move on CICS CSD failed
25	CMTCMDEF_CONNECTION_ACTIVE	Connection active
26	CMTCMDEF_CONNECTION_PENDING	Connection pending
27	CMTCMDEF_CONNECTION_RESET	Connection reset
28	CMTCMDEF_SYSID_DUP	Duplicate system ID
29	CMTCMDEF_APPLID_DUP	Duplicate application ID
30	CMTCMDEF_LINK_TYPE	Invalid link type
31	CMTCMDEF_LINK_DATA	Link data
32	CMTCMDEF_UNKNOWN_METH_STATUS	Unexpected return code from internal program call
33	CMTCMDEF_TIMEOUT	Timeout
34	CMTCMDEF_MISMATCH_TARGNAME	Target CMAS exists with different Target Applid/SYSID
35	CMTCMDEF_MISMATCH_APPLID	Target Applid does not match existing Target CMAS/SYSID
36	CMTCMDEF_MISMATCH_SYSID	SYSID does not match existing Target CMAS/Aplid
37	CMTCMDEF_CRTE_FAILURE_DEFN	Creating the CICS CONNECTION or SESSION failed
38	CMTCMDEF_CRTE_FAILURE_COMP	Completing the CICS connection failed
39	CMTCMDEF_CRTE_FAILURE_DISC	Discarding the aborted CICS connection failed

Table 97. CMTCMDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			19
CHANGEAGENT Input/ output valid values	DREPAPI								
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			22
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification			1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			21
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created			20
DESC	CHAR	CPSM	58	No	DIFF	Description			12
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999	18
MODENAME	CHAR	CPSM	8	No	DIFF	LU 6.2 mode			9
PROTOCOL	EYUDA	CPSM	4	Yes	LIKE	Link protocol			8

Table 97. CMTCMDEF resource table attributes (continued)									
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
PROTOCOL Input/output valid values	LU62, MRO								
RECVBUF	BINARY	CPSM	2	Yes	AVG	Receive buffer size		256-30720	14
RECVPFX	CHAR	CPSM	2	No	DIFF	MRO receive prefix			10
SECATTACH	CHAR	CPSM	16	Yes	DIFF	Type of attach-time security to be used			15
SECATTACH Input/output valid values	LOCAL, IDENTIFY								
SECNAME	CHAR	CPSM	8	No	DIFF	User ID of remote system for security purposes			16
SENDBUF	BINARY	CPSM	2	Yes	AVG	Send buffer size		256-30720	13
SENDPFX	CHAR	CPSM	2	No	DIFF	MRO send prefix			11
SYSID	CHAR	CPSM	4	Yes	DIFF	Target system ID			7
TARGETAPPL	CHAR	CPSM	8	Yes	DIFF	Target VTAM application ID			6
TARGETNAME-1	CHAR	CPSM	8	Yes	DIFF	Target CMAS			5

Chapter 37. CMTCMLNK Resource Table

A CPSM Communications Manager object that describes an installed CMAS-to-CMAS connection from the perspective of the context CMAS. CMTCMLNK instances can be accessed only when you are connected to the CMAS that is the CICSplex Maintenance Point.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

ACQUIRE

Attempt to place the CICS Connection used by the CMTCMLNK, INSERVICE and ACQUIRED. This action can only be used on CMTCMLNKs using a PROTOCOL of LU62.

DISCARD

Discard the connection.

The DISCARD action requires no unique parameter data.

External resource name

CICSCMASToCMASLink

Length

152

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

Yes

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2444

Table 98. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET	ACQUIRE	None	N/A

Table 99. CMTCMLNK FEEDBACK error codes

Value	Code	Description
1	CMTCMLNK_INV_DATA	Attribute data invalid
2	CMTCMLNK_REC_NOT_FOUND	Requested resource not found

Table 99. CMTCMLNK FEEDBACK error codes (continued)

Value	Code	Description
21	CMTCMLNK_LINK_IS_ACTIVE	Link is active
22	CMTCMLNK_LINK_RESET	Link reset
23	CMTCMLNK_LINK_PENDING	Link pending
24	CMTCMLNK_DISCARD_FAILED	Discard failed
25	CMTCMLNK_CICS_FAILURE	CICS failure
26	CMTCMLNK_RECNAME_MISSING	Record name missing
27	CMTCMLNK_PLEXNAME_MISSING	CICSplex name missing
28	CMTCMLNK_LINK_NOTINSERVICE	CICS link not INSERVICE
29	CMTCMLNK_LINK_NOTACQUIRED	CICS link not Acquired
30	CMTCMLNK_LINK_NOTLU62	Link protocol not LU62

Table 100. CMTCMLNK resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
APPLID	CHAR	CPSM	8	DIFF	Application ID	24
CBYTRCVD	BINARY	CPSM	8	AVG	Number of bytes received (compressed)	19
CBYTSENT	BINARY	CPSM	8	AVG	Number of bytes sent (compressed)	14
CICSCONN	CVDAS	INQ	4	LIKE	CICS connection status	7
CICSCONN Output valid values	RELEASED, OBTAINING, ACQUIRED, FREEING, AVAILABLE					
CICSSERV	CVDAS	INQ	4	LIKE	CICS service status	8
CICSSERV Output valid values	INSERVICE, OUTSERVICE, GOINGOUT					
CPSMCONN	EYUDA	CPSM	4	LIKE	Connection status	9
CPSMCONN Output valid values	CONACT, RESET, PENDING					
EXECCLK	INTUSEC	CPSM	8	MAX	Cumulative time to execute CICSplex SM service requests	22
MALSRCVD	BINARY	CPSM	8	AVG	Total requests received	15
MALSSSENT	BINARY	CPSM	8	AVG	Total requests sent	10
MSGSRCVD	BINARY	CPSM	8	AVG	Number of message packets received	16
MSGSSSENT	BINARY	CPSM	8	AVG	Number of message packets sent	11
NAME-1	CHAR	CPSM	8	DIFF	Target CMAS	4
PROTOCOL	EYUDA	CPSM	4	LIKE	Link protocol	6
PROTOCOL Output valid values	LU62, MRO					
RCVCLK	INTUSEC	CPSM	8	MAX	Cumulative time to receive CICSplex SM service requests	23
SCHEDCLK	INTUSEC	CPSM	8	MAX	Cumulative time to schedule CICSplex SM service requests	20
SYSID	CHAR	CPSM	4	DIFF	Target system ID	5
TBUFRCD	BINARY	CPSM	8	AVG	Number of transit buffers received	17
TBUFSSENT	BINARY	CPSM	8	AVG	Number of transit buffers sent	12
TRANSCLK	INTUSEC	CPSM	8	MAX	Cumulative time to transmit CICSplex SM service requests	21
UBYTRCVD	BINARY	CPSM	8	AVG	Number of bytes received (uncompressed)	18
UBYTSENT	BINARY	CPSM	8	AVG	Number of bytes sent (uncompressed)	13

Chapter 38. CMTPLNK Resource Table

A CPSM Communications Manager object that describes an installed CMAS-to-MAS connection from the perspective of the context CMAS. The information displayed is for both local and remote MAS instances. CMTPLNK instances can be accessed only when you are connected to the CMAS that is the CICSplex Maintenance Point.

The **Primary** key field for this resource class is NAME.

The following action is supported:

DISCARD

Discard a Remote MAS connection. DISCARD is not valid for a local MAS connection.

The DISCARD action requires no unique parameter data.

External resource name

CICSCMASToMASLink

Length

160

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

Yes

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2445

Table 101. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET			

Table 102. CMTPLNK FEEDBACK error codes

Value	Code	Description
1	CMTPLNK_INV_DATA	Attribute data invalid
2	CMTPLNK_REC_NOT_FOUND	Requested resource not found
21	CMTPLNK_LINK_IS_ACTIVE	Link is active
22	CMTPLNK_LINK_RESET	Link reset
23	CMTPLNK_LINK_PENDING	Link pending

Table 102. CMTPLNK FEEDBACK error codes (continued)

Value	Code	Description
24	CMTPLNK_DISCARD_FAILED	Discard failed
25	CMTPLNK_CICS_FAILURE	CICS failure
26	CMTPLNK_RECNAME_MISSING	Record name missing
27	CMTPLNK_PLEXNAME_MISSING	CICSplex name missing

Table 103. CMTPLNK resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
APPLID	CHAR	CPSM	8	DIFF	VTAM application ID	25
CBYTRCVD	BINARY	CPSM	8	AVG	Number of bytes received (compressed)	19
CBYTSENT	BINARY	CPSM	8	AVG	Number of bytes sent (compressed)	14
CICSCONN	CVDAS	INQ	4	LIKE	CICS connection status	7
CICSCONN Output valid values	RELEASED, OBTAINING, ACQUIRED, FREEING, AVAILABLE					
CICSSERV	CVDAS	INQ	4	LIKE	CICS service status	8
CICSSERV Output valid values	INSERVICE, OUTSERVICE, GOINGOUT					
CPSMCONN	EYUDA	CPSM	4	LIKE	CICSplex SM connection status	9
CPSMCONN Output valid values	CONTACT, RESET, PENDING					
EXECCLK	INTUSEC	CPSM	8	MAX	Total execution time for CICSplex SM service requests	22
MALSRCVD	BINARY	CPSM	8	AVG	Number of service requests and responses received	15
MALSSSENT	BINARY	CPSM	8	AVG	Number of service requests and responses sent	10
MSGSRCVD	BINARY	CPSM	8	AVG	Number of message packets received	16
MSGSSSENT	BINARY	CPSM	8	AVG	Number of message packets sent	11
NAME-1	CHAR	CPSM	8	DIFF	MAS name	4
PLEXNAME	CHAR	CPSM	8	DIFF	Name of CICSplex which MAS belongs to	24
PROTOCOL	EYUDA	CPSM	4	LIKE	Link protocol	6
PROTOCOL Output valid values	LU62, MRO, ESSS					
RCVCLK	INTUSEC	CPSM	8	MAX	Total receive time for CICSplex SM service requests	23
SCHEDCLK	INTUSEC	CPSM	8	MAX	Total wait time for CICSplex SM service requests	20
SYSID	CHAR	CPSM	4	DIFF	MAS system ID	5
TBUFRCD	BINARY	CPSM	8	AVG	Number of transit buffers received	17
TBUFSSENT	BINARY	CPSM	8	AVG	Number of transit buffers sent	12
TRANSCLK	INTUSEC	CPSM	8	MAX	Total transmit time for CICSplex SM service requests	21
UBYTRCVD	BINARY	CPSM	8	AVG	Number of bytes received (uncompressed)	18
UBYTSENT	BINARY	CPSM	8	AVG	Number of bytes sent (uncompressed)	13

Chapter 39. CONINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a connection definition (CONNDEF) in a resource group (RESGROUP). A CONNDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is CONNGROUP.

The **Secondary** key field for this resource class is CONNNAME.

The **Tertiary** key field for this resource class is CONNVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6145

Table 104. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 105. CONINGRP FEEDBACK error codes

Value	Code	Description
1	CONINGRP_INV_DATA	Attribute data invalid
2	CONINGRP_REC_NOT_FOUND	Requested resource not found
4	CONINGRP_REC_EXISTS	Resource already exists
6	CONINGRP_INV_RESTYPE	Invalid resource type
7	CONINGRP_INV_VER	Invalid resource version
11	CONINGRP_NON_MP	Maintenance point CMAS not available

Table 105. CONINGRP FEEDBACK error codes (continued)

Value	Code	Description
12	CONINGRP_INV_CONTEXT	Context not found
21	CONINGRP_INCONSISTENT_SET	Inconsistent set
22	CONINGRP_DIFF_VERSION	Different version
23	CONINGRP_INV_NAME	Invalid name
24	CONINGRP_INV_MINNAME	Invalid minor name

Table 106. CONINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CONNGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
CONNNAME-2	CHAR	CPSM	8	Yes	DIFF	Connection definition name	6
CONNVER-3	BINARY	CPSM	1	Yes	AVG	Connection definition version	7
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9

Chapter 40. CONNDEF Resource Table

A CICS Definition that describes an ISC or MRO connection between CICS and a remote system.

The **Primary** key field for this resource class is NAME. A connection name can be only 4 characters long. The remainder of the 8-character NAME field should be padded with blank spaces.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install a Connection Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionISCMROConnection

Length

408

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3800

Table 107. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM SET	INSTALL	FORCEINS(YES, NO)	No

Table 107. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		MODE(value)	No
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		REFASSIGN(value)	Yes
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 108. CONNDEF FEEDBACK error codes

Value	Code	Description
1	CONNDEF_INV_DATA	Attribute data invalid
2	CONNDEF_REC_NOT_FOUND	Requested resource not found
4	CONNDEF_REC_EXISTS	Resource already exists
5	CONNDEF_REC_CHANGED	Resource definition already changed
6	CONNDEF_INV_RESTYPE	Invalid resource type
7	CONNDEF_INV_VER	Invalid resource version
11	CONNDEF_NON_MP	Maintenance point CMAS not available
12	CONNDEF_INV_CONTEXT	Context not found
13	CONNDEF_INCONSISTENT_SET	Inconsistent set condition
14	CONNDEF_INV_RESGROUP	Resource group not found
21	CONNDEF_INV_ACTION	Invalid action
22	CONNDEF_INV_RECADDR	Invalid record address
23	CONNDEF_INV_RECLEN	Invalid record length
24	CONNDEF_DIFF_VERSION	Different version
25	CONNDEF_EARLY_NAMELIST_END	Early name list end
26	CONNDEF_INV_NAMELIST	Invalid name list
27	CONNDEF_INV_NAME	Invalid name
28	CONNDEF_INV_MINNAME	Invalid minor name
29	CONNDEF_NOTIFY	Notify
30	CONNDEF_PARTIAL_INSTALL	Partial install

Table 108. CONNDEF FEEDBACK error codes (continued)

Value	Code	Description
31	CONNDEF_NOTHING_INSTALLED	Nothing installed
32	CONNDEF_NO_TARGETS	No targets
33	CONNDEF_NO_RELATED	No related systems
34	CONNDEF_INV_TSCOPE	Invalid target scope
35	CONNDEF_INV_RSCOPE	Invalid related scope
36	CONNDEF_INV_USAGE	Invalid usage
37	CONNDEF_INV_MODE	Invalid mode
38	CONNDEF_INV_STATECHK	Invalid state check
39	CONNDEF_INV_FORCEINS	Invalid force install
40	CONNDEF_INV_NOTIFY	Invalid notify
41	CONNDEF_INV_OVERTYPE	Invalid over type
42	CONNDEF_INV_OVRBLOCK	Invalid override block
43	CONNDEF_INV_ORSTRING	Invalid override string
44	CONNDEF_INV_STRNGTERM	Invalid string terminator
45	CONNDEF_INV_EMBEDTERM	Invalid embedded terminator
46	CONNDEF_INV_ATTRIBUTE	Invalid attribute
47	CONNDEF_INV_LITERAL	Invalid literal
48	CONNDEF_INV_ORSTGNA	Invalid override string
49	CONNDEF_SCOPE_REQUIRED	Scope required
50	CONNDEF_USAGE_CONFLICT	Usage conflict
51	CONNDEF_REFASSGN_REQ	Referenced resource assignment required
52	CONNDEF_REFASSIGN_NOTFND	Referenced resource assignment not found
53	CONNDEF_SESS_NOTINSTL	Session not installed
54	CONNDEF_NODEFS_SELECTED	No definitions selected
55	CONNDEF_MORE_THAN_1_RELSYS	More than one related system
56	CONNDEF_MISSING_RELSYSID	Missing related system identifier
57	CONNDEF_SCOPE_CONFLICT	Scope conflict
58	CONNDEF_REFASSIGN_EMPTY	Referenced resource assignment empty
59	CONNDEF_INV_CSDGROUP	Invalid CSD group
60	CONNDEF_REC_NOT_REMOVED	Record not removed
61	CONNDEF_INV_RESOURCE	Invalid resource
62	CONNDEF_INV_CICS_RESTYPE	Invalid CICS restype
63	CONNDEF_PARTIAL_ACTION	Partial action
64	CONNDEF_NOTHING_ACTIONED	Nothing actioned

Table 108. CONNDEF FEEDBACK error codes (continued)

Value	Code	Description
65	CONNDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
66	CONNDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
67	CONNDEF_CSD_ERROR	CSD access error

Table 109. CONNDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
ACCESSMETHOD	CVDAS	CPSM	4	Yes	LIKE	Access method	VTAM			9
ACCESSMETHOD Input/output valid values	VTAM, IRC, INDIRECT, XM, NETBIOS, TCPIP									
ATTACHSEC	EYUDA	CPSM	4	Yes	LIKE	Level of attach-time security	LOCAL			10
ATTACHSEC Input/output valid values	LOCAL, IDENTIFY, MIXIDPE, PERSISTENT, VERIFY									
AUTOCONNECT	EYUDA	CPSM	4	Yes	LIKE	Autoconnect sessions for VTAM	NO			11
AUTOCONNECT Input/output valid values	NO, ALL, YES									
BINDPASSWORD	HIDCHAR	CPSM	16	No	DIFF	Bind password			E410 +	12
BINDSECURITY	EYUDA	CPSM	4	Yes	LIKE	Bind time security	NO			13
BINDSECURITY Input/output valid values	YES, NO									
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	50
CHANGEAGENT Input/output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	52
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	51
CONNPRORITY	CHAR	CPSM	4	No	DIFF	Connection priority	86	0-255	EALL	30
CONNTYPE	CVDAS	CPSM	4	Yes	LIKE	Nature of connection	NOTAPPLIC			14
CONNTYPE Input/output valid values	GENERIC, SPECIFIC, NOTAPPLIC, APPC, NETBIOS, TCPIP									
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				33
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	54
DATASTREAM	EYUDA	CPSM	4	Yes	LIKE	Data stream type	USER			15
DATASTREAM Input/output valid values	USER, LMS, SCS, STRFIELD, 3270									
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		49
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				37
INDSYS	CHAR	CPSM	4	No	DIFF	Intermediate system name				16

Table 109. CONNDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
INSERVICE	EYUDA	CPSM	4	Yes	LIKE	Connection status	YES			17
INSERVICE Input/output valid values	YES, NO									
LOCLHOSTNAME	CHAR	CPSM	40	No	DIFF	TCP/IP local host name			EALL	46
LUALIAS	CHAR	CPSM	8	No	DIFF	Local logical unit alias name			EALL	31
MAXQTIME	CHAR	CPSM	8	No	DIFF	Maximum queue time	NO	0-9999		18
MAXQTIME Input/output valid values	NO									
MODENAME	CHAR	CPSM	8	No	DIFF	Communication mode name			EALL	43
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
NETBIOSADAPT	CHAR	CPSM	1	No	DIFF	NETBIOS logical LAN adapter		0-1	EALL	44
NETBIOSADAPT Input/output valid values	B									
NETNAME	CHAR	CPSM	8	No	DIFF	Network name				19
PARTCODEPAGE	CHAR	CPSM	6	No	DIFF	Partner code page	37	1-99999	EALL	42
PARTLUALIAS	CHAR	CPSM	8	No	DIFF	Partner logical unit alias name			EALL	32
PROTOCOL	CVDAS	CPSM	4	Yes	LIKE	Protocol	APPC			20
PROTOCOL Input/output valid values	APPC, EXCI, LU61, NOTAPPLIC, N_A									
PSRECOVERY	EYUDA	CPSM	4	Yes	LIKE	Persistent session recovery	SYSDEFAULT			21
PSRECOVERY Input/output valid values	NONE, SYSDEFAULT, N_A									
QUEUELIMIT	CHAR	CPSM	8	No	DIFF	Queue limit	NO	0-9999		22
QUEUELIMIT Input/output valid values	NO									
RECORDFORMAT	EYUDA	CPSM	4	Yes	LIKE	Record format	U			23
RECORDFORMAT Input/output valid values	U, VB									
REMOTENAME	CHAR	CPSM	4	No	DIFF	Connection name in remote system				24
REMOTESYSNET	CHAR	CPSM	8	No	DIFF	Net name of the owning TOR				25
REMOTESYSTEM	CHAR	CPSM	4	No	DIFF	Remote connection name				26
REMSYSAPPLID	CHAR	CPSM	8	No	DIFF	NETBIOS remote system application ID			EALL	45
REMTHOSTNAME	CHAR	CPSM	40	No	DIFF	TCP/IP remote host name			EALL	47
REMTHOSTPORT	CHAR	CPSM	6	No	DIFF	TCP/IP remote host port	1435	1-65535	EALL	48
REMTHOSTPORT Input/output valid values	*									
SECURITYNAME	CHAR	CPSM	8	No	DIFF	Security name for remote system				27
SESSBUFFSIZE	CHAR	CPSM	6	No	DIFF	Maximum session buffer size	16384	512-40000	EALL	40
SESSCOUNT	CHAR	CPSM	2	No	DIFF	Number of concurrently active sessions	1	1-99	EALL	41

Table 109. CONNDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
SINGLESESS	EYUDA	CPSM	4	Yes	LIKE	APPC terminal on single session APPC link	NO			28
SINGLESESS Input/output valid values	YES, NO, N_A									
USEDFLTUSER	EYUDA	CPSM	4	Yes	LIKE	Use default user ID	N_A			39
USEDFLTUSER Input/output valid values	NO, YES, N_A									
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				34
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				35
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				36
XLNACTION	EYUDA	CPSM	4	Yes	LIKE	Exchange lognames (XLN) action	N_A			29
XLNACTION Input/output valid values	KEEP, FORCE, N_A									

Chapter 41. CONNECT Resource Table

A CICS Resource that describes an ISC or MRO connection in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

ACQUIRE

Acquire the connection.

BACKOUT

Back out shunted units of work associated with the connection.

CANCEL

Cancel the connection.

COMMIT

Commit shunted units of work associated with the connection.

DISCARD

Discard the connection.

ENDAFFINITY

End the connection's affinity with a VTAM® generic resource group.

FORCE

Force shunted units of work associated with the connection to commit or back out.

FORCECANCEL

Cancel all AIDs, including system AIDs, queuing for the connection.

FORCEPURGE

Force purge all transactions running on sessions on the connected system.

INSERVICE

Place the connection in service.

KILL

Kill all transactions running on sessions on the connected system.

Note: Kill can lead to unpredictable results and should be used only in exceptional circumstances.

NORECOVDATA

Override the normal resynchronization process.

NOTPENDING

Set the connection not pending.

OUTSERVICE

Place the connection out of service.

PURGE

Purge the connection.

RELEASE

Release the connection.

RESYNC

Resynchronize shunted units of work associated with the connection.

These actions require no unique parameter data.

Some of these actions may be valid only for particular types of CICS connections. Refer to the appropriate CICS documentation for details.

Note: The value returned by CICS conflicts with CVDA values in other CICS environments. In order to retain the attribute's uniqueness, CICSplex SM adds either 8000 or 9000 to the value returned by CICS. For more information about translating CVDA values, see [TRANSLATE command](#).

External resource name

CICSISCMROConnection

Length

392

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0006

Table 110. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM	DISCARD	None	N/A
SET			
	BACKOUT	None	N/A
	COMMIT	None	N/A
	RESYNC	None	N/A
	FORCE	None	N/A
	ACQUIRE	None	N/A
	INSERVICE	None	N/A
	NOTPENDING	None	N/A
	OUTSERVICE	None	N/A
	PURGE	None	N/A
	CANCEL	None	N/A
	RELEASE	None	N/A
	ENDAFFINITY	None	N/A
	NORECOVDATA	None	N/A
	FORCEPURGE	None	N/A
	KILL	None	N/A

Table 110. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
FORCECANCEL		None	N/A

Table 111. CONNECT resource table attributes									
Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
ACCESSMETHOD	CVDAS	INQ	4	LIKE	No	Access method			4
ACCESSMETHOD Output valid values	VTAM, IRC, INDIRECT, XM, XCF, NETBIOS, TCPIP								
AIDS	BINARY	STAT	2	AVG	No	Number of automatic initiator descriptors (AIDs)			13
ALLOCATES	BINARY	STAT	4	AVG	No	Total number of allocate requests			22
ALLOCQLIMIT	CNUMERIC	STAT	2	AVG	No	Allocate queue limit (QUEUELIMIT)			39
ATISBPRI	BINARY	STAT	4	AVG	No	Number of ATIs satisfied by primary sessions			19
ATISBSEC	BINARY	STAT	4	AVG	No	Number of ATIs satisfied by secondary sessions			20
AUTOSTATUS	CVDAS	INQ	4	LIKE	No	Autoconnect option			6
AUTOSTATUS Output valid values	AUTOCONN, NONAUTOCONN, ALLCONN								
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0	E640 E650	79
BIDSENT	BINARY	STAT	4	AVG	No	Total number of bids sent			21
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent		E640 E650	70
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, AUTOINSTALL, CREATESPI, NOTAPPLIC								
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release		E640 E650	72
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time		E640 E650	73
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID		E640 E650	71
CONCURBIDS	BINARY	STAT	2	AVG	No	Number of bids currently in progress			15
CONNCREATIME	TIMESTP	STAT	8	MAX	No	Local connection create time			51
CONNDELETIME	TIMESTP	STAT	8	MAX	No	Local connection delete time			53
CONNSTATUS	CVDAS	INQ	4	LIKE	Yes	Connection status			5
CONNSTATUS Input/output valid values	RELEASED, ACQUIRED								
CONNSTATUS Output valid values	OBTAINING, FREEING, AVAILABLE, NOTAPPLIC								
CONNTYPE	CVDAS	INQ	4	LIKE	No	External CICS interface type			35
CONNTYPE Output valid values	SPECIFIC, GENERIC, NOTAPPLIC								
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition		E640 E650	74

Table 111. CONNECT resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time		E640 E650	75
DLIFUNCSHIP	BINARY	STAT	4	AVG	No	Number of DL/I function ships			30
DPLFUNCSHIP	BINARY	STAT	4	AVG	No	Number of Distributed Program Link function ships			58
ESTICCHNL	BINARY	STAT	4	AVG	No	Interval Control FS start requests with channels			64
ESTICCHNRCVD	BINARY	STAT	8	AVG	No	Number of bytes received on START channel requests			66
ESTICCHNSENT	BINARY	STAT	8	AVG	No	Number of bytes sent on START channel requests			65
ESTPCCHNL	BINARY	STAT	4	AVG	No	Program Control FS LINK requests with channels			61
ESTPCCHNRCVD	BINARY	STAT	8	AVG	No	Bytes received on LINK channel requests			63
ESTPCCHNSENT	BINARY	STAT	8	AVG	No	Bytes sent on LINK channel requests			62
ESTTCCHNL	BINARY	STAT	4	AVG	No	Number of terminal sharing channel requests			67
ESTTCCHNRCVD	BINARY	STAT	8	AVG	No	Bytes received on terminal sharing channel requests			69
ESTTCCHNSENT	BINARY	STAT	8	AVG	No	Bytes sent on terminal sharing channel requests			68
EXITTRACING	CVDAS	INQ	4	LIKE	Yes	Exit Tracing status			7
EXITTRACING Input/output valid values	EXITTRACE, NOEXITTRACE								
EXITTRACING Output valid values	NOTAPPLIC								
EXIT_REJALLC	BINARY	STAT	4	AVG	No	Allocates rejected because QUEUELIMIT reached			34
FAILEDOTHERS	BINARY	STAT	4	AVG	No	Number of allocate requests with other failure			25
FAILINKALLOC	BINARY	STAT	4	AVG	No	Number of allocate requests with link failure			24
FCFUNCSHIP	BINARY	STAT	4	AVG	No	Number of File Control function ships			26
GMTCREATIME	TIMESTP	STAT	8	MAX	No	GMT connection create time			50
GMTDELETIME	TIMESTP	STAT	8	MAX	No	GMT connection delete time			52
GRNAME	CHAR	INQ	8	DIFF	No	APPC generic resource			56
ICFUNCSHIP	BINARY	STAT	4	AVG	No	Number of Interval Control function ships			27
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent		E640 E650	78
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, AUTOINSTALL, GRPLIST								
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time		E640 E650	77
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID		E640 E650	76
LINKSYSTEM	CHAR	INQ	4	DIFF	No	Name of real link towards TOR			49
MAXBIDS	BINARY	STAT	2	AVG	No	Maximum number of concurrent bids			17

Table 111. CONNECT resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
MAXPRIMARIES	BINARY	STAT	2	AVG	No	Peak number of primary sessions in use			32
MAXQTALLCPRG	BINARY	STAT	2	AVG	No	Number of allocates purged when MAXQTIME exceeded			43
MAXQTIME	CNUMERIC	STAT	2	AVG	No	Maximum queue time			38
MAXQTPURGCNT	BINARY	STAT	2	AVG	No	Number of allocates purged due to MAXQTIME value			33
MAXSECOND	BINARY	STAT	2	AVG	No	Peak number of secondaries in use at one time			16
MEMBERNAME	CHAR	INQ	8	DIFF	No	Member name of connected LU			57
NAME-1	CHAR	INQ	4	DIFF	No	Connection ID			1
NETNAME	CHAR	INQ	8	DIFF	No	Net name			8
NONSPECAIDS	BINARY	STAT	2	AVG	No	Number of AIDs waiting for a session			14
NQNAME	CHAR	INQ	17	DIFF	No	Network qualified name			59
OUTSALLOC	BINARY	STAT	2	AVG	No	Peak number of outstanding allocate requests			18
PENDSTATUS	CVDAS	INQ	4	LIKE	Yes	Pending status			10
PENDSTATUS Input/output valid values	NOTPENDING								
PENDSTATUS Output valid values	PENDING, NOTAPPLIC								
PRICURRUDED	BINARY	STAT	2	AVG	No	Number of primaries currently in use			54
PROTOCOL	CVDAS	INQ	4	LIKE	No	Connection protocol			2
PROTOCOL Output valid values	EXCI, LU61, APPC, NOTAPPLIC								
QUEDALLOCATE	BINARY	STAT	4	AVG	No	Number of queued allocate requests			23
RECEIVECOUNT	CNUMERIC	INQ	4	AVG	No	Number of defined receive sessions			36
RECOVSTATUS	CVDAS	INQ	4	LIKE	Yes	Recovery status			45
RECOVSTATUS Input/output valid values	NORECOVDATA								
RECOVSTATUS Output valid values	RECOVDATA, NRS, NOTAPPLIC								
REMOTENAME	CHAR	INQ	4	DIFF	No	Connection name in remote system			48
REMOTESYSNET	CHAR	INQ	8	DIFF	No	Net name of the owning TOR			47
REMOTESYSTEM	CHAR	INQ	4	DIFF	No	Remote connection name			46
SECCURRUDED	BINARY	STAT	2	AVG	No	Number of secondaries currently in use			55
SENDCOUNT	CNUMERIC	INQ	4	AVG	No	Number of defined send sessions			37
SERVSTATUS	CVDAS	INQ	4	LIKE	Yes	Service status			9
SERVSTATUS Input/output valid values	INSERVICE, OUTSERVICE								
SERVSTATUS Output valid values	GOINGOUT								
TDFUNCSHIP	BINARY	STAT	4	AVG	No	Number of Transient Data function ships			28

Table 111. CONNECT resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
TERMSHAREREQ	BINARY	STAT	4	AVG	No	Number of terminal sharing requests			31
TSFUNCSHIP	BINARY	STAT	4	AVG	No	Number of Temporary Storage function ships			29
TYPE	EYUDA	CPSM	4	LIKE	No	Connection type			3
TYPE Output valid values	LU61, LU62, INDIRECT, MRO, NETBIOS, TCPIP								
XLNSTATUS	CVDAS	INQ	4	LIKE	No	Exchange lognames (XLN) status			11
XLNSTATUS Output valid values	XOK, XNOTDONE, NOTAPPLIC								
XZIQALLCPRG	BINARY	STAT	2	AVG	No	Number of allocates purged by XZIQUE exit			42
XZIQPRGCNT	BINARY	STAT	2	AVG	No	Number of queue purges requested by XZIQUE exit			41
XZIQREJS	BINARY	STAT	4	AVG	No	Number of allocates rejected by XZIQUE exit			40
ZCPTRACING	CVDAS	INQ	4	LIKE	Yes	ZCP tracing			12
ZCPTRACING Input/output valid values	ZCPTRACE, NOZCPTRACE								
ZCPTRACING Output valid values	NOTAPPLIC								

Chapter 42. CPLEXDEF Resource Table

A CPSM Communications Definition that describes a CICSplex. CPLEXDEF instances can be accessed only when you are connected to the CMAS that is the CICSplex Maintenance Point.

The **Primary** key field for this resource class is CICSplex.

Note: The value for the DAYLGHTSV attribute in the CPLEXDEF definition is stored for documentation purposes, but it is not used in time zone calculations.

The following actions are supported:

ASSIGN

Assign CMAS to manage CICSplex.

The parameter data for the ASSIGN action is:

```
PARM('CICSplex(plex) CMAS(cmas).')  
  
where:  
  
plex = (Required) Name of a CICSplex to which the CMAS  
        is assigned.  
cmas = (Required) Name of a CMAS.
```

UNASSIGN

Unassign CMAS from CICSplex management role.

The parameter data for the UNASSIGN action is:

```
PARM('CICSplex(plex) CMAS(cmas) [FORCE].')  
  
where:  
  
plex = (Required) Name of a CICSplex from which the CMAS  
        is unassigned.  
cmas = (Required) Name of a CMAS.
```

External resource name

CICSCICSplexDefinition

Length

152

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

Yes

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt2736

Table 112. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSplex(value)	No
CREATE		None	N/A
UPDATE		None	N/A
REMOVE		None	N/A
PERFORM SET	ASSIGN	CICSplex(value)	No
		CMAS(value)	Yes
	UNASSIGN	CICSplex(value)	No
		CMAS(value)	Yes
		FORCE	No

Table 113. CPLEXDEF FEEDBACK error codes		
Value	Code	Description
1	CPLEXDEF_INV_DATA	Attribute data invalid
2	CPLEXDEF_REC_NOT_FOUND	Requested resource not found
4	CPLEXDEF_REC_EXISTS	Resource already exists
5	CPLEXDEF_REC_CHANGED	Resource definition already changed
8	CPLEXDEF_REPOSITORY_FAILURE	Error in data repository
21	CPLEXDEF_REMOTE_METH_FAIL	Attempt to run program in remote system failed
22	CPLEXDEF_REM_EYUDREP_CORRUPT	Error updating remote data repository
23	CPLEXDEF_DIRECTORY_ERROR	Directory error
24	CPLEXDEF_ALL_COUNTS_ZERO	All counts zero
25	CPLEXDEF_DELETE_PENDING	CICSplex delete pending
26	CPLEXDEF_MAS_ACTIVE	MAS active
27	CPLEXDEF_LCL_EYUDREP_CORRUPT	Error updating local data repository
28	CPLEXDEF_INV_CMASNAME	Invalid CMAS name
29	CPLEXDEF_CMAS_IS_MP	CMAS is maintenance point
30	CPLEXDEF_DELETING_MP	Removing maintenance point
31	CPLEXDEF_DEL_PENDING	Removal pending
32	CPLEXDEF_CMAS_LEVEL	CMAS at higher level
33	CPLEXDEF_LCL_EYUDREP_FAILURE	Error in local repository
34	CPLEXDEF_LCL_REP_INV_LENGTH	Record length error in local repository

Table 114. CPLEXDEF resource table attributes									
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
BOTRSUPD	BINARY	CPSM	1	Yes	DIFF	RS server bottom tier	1	1-25	38
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			32

Table 114. CPLEXDEF resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
CHANGEAGENT Input/output valid values	DREPAPI, DREPBATCH								
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			35
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification			1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			34
CICSplex-1	CHAR	CPSM	8	Yes	DIFF	CICSplex name			5
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created			33
DAYLGHTSV	EYUDA	CPSM	4	Yes	LIKE	Daylight saving time	NO		17
DAYLGHTSV Input/output valid values	YES, NO								
DESC	CHAR	CPSM	58	No	DIFF	Description			8
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999	28
INTVL	BINARY	CPSM	2	Yes	AVG	Monitor interval (minutes)	480	15-1440	9
READRS	BINARY	CPSM	2	Yes	DIFF	RS server read interval	200	0-2000	30
RODMPOP	EYUDA	CPSM	4	Yes	LIKE	Resource status facility population	NO		27
RODMPOP Input/output valid values	YES, NO								
RSPOLID	CHAR	CPSM	8	Yes	DIFF	RS server pool name	DFHRSTAT		39
SECBYPASS	EYUDA	CPSM	4	Yes	LIKE	Security checking exemption	NO		10
SECBYPASS Input/output valid values	YES, NO								
SECCMDCHK	EYUDA	CPSM	4	Yes	LIKE	Simulated CICS-command security checking	NO		6
SECCMDCHK Input/output valid values	YES, NO								
SECRESCHK	EYUDA	CPSM	4	Yes	LIKE	Simulated CICS-resource security checking	NO		7
SECRESCHK Input/output valid values	YES, NO								
STATE	EYUDA	CPSM	4	No	DIFF	State of CICSplex			29
STATE Input/output valid values	ACTIVE, PENDING, RECREATED								
STATUS	BINARY	CPSM	1	Yes	AVG	Status of attempt to delete CICSplex			13
STATUS Input/output valid values	1 (ACTIVE) - CICSplex Active, 2 (DELPEND) - Removal pending, 3 (UNDELETE) - Definition re-created								
TMEZONE	CHAR	CPSM	1	Yes	DIFF	Time zone	B		15
TMEZONEO	BINARY	CPSM	1	Yes	AVG	Time zone offset	0	1-59	14
TOPRSUPD	BINARY	CPSM	1	Yes	DIFF	RS server top tier	5	1-25	37
UPDATERS	BINARY	CPSM	1	Yes	DIFF	RS server update frequency	15	0-25	31

Chapter 43. CPLXCMAS Resource Table

A CPSM Communications Definition that provides information about CMASs associated with a CICSplex. CPLXCMAS instances can be accessed only when you are connected to the local CMAS that is the CICSplex Maintenance Point.

The **Primary** key field for this resource class is CMASNAME.

The **Secondary** key field for this resource class is CICSplex.

The following actions are supported:

UNASSIGN

Unassign CMAS from CICSplex management role.

The parameter data for the UNASSIGN action is:

```
PARM( ' [FORCE] . ' )
```

Specify FORCE to unassign the CMAS from the CICSplex management role when the CMAS is inaccessible.

External resource name

CICSCMASInCICSplex

Length

120

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

Yes

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt2737

Table 115. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	UNASSIGN	FORCE	No
SET			

Table 116. CPLXCMAS FEEDBACK error codes

Value	Code	Description
1	CPLXCMAS_INV_DATA	Attribute data invalid

Table 116. CPLXCMAS FEEDBACK error codes (continued)

Value	Code	Description
2	CPLXCMAS_REC_NOT_FOUND	Requested resource not found
8	CPLXCMAS_LCL_REP_INV_LENGTH	Record length error in local repository
21	CPLXCMAS_REMOTE_METH_FAIL	Attempt to run program in remote system failed
22	CPLXCMAS_REM_EYUDREP_CORRUPT	Error updating remote data repository
26	CPLXCMAS_MAS_ACTIVE	MAS active
27	CPLXCMAS_LCL_EYUDREP_CORRUPT	Error updating local data repository
28	CPLXCMAS_INV_CMASNAME	Invalid CMAS name
30	CPLXCMAS_DELETING_MP	Unassign not valid for MP CMAS

Table 117. CPLXCMAS resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
BOTRSUPD	BINARY	CPSM	1	Yes	DIFF	RS server bottom tier	1	1-25	46
CHANGEAGENT	CV DAS	CPSM	4	No	LIKE	Last modification agent			40
CHANGEAGENT Input/output valid values	DREPAPI, DREPBATCH								
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			43
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification			1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			42
CICSplex-2	CHAR	CPSM	8	Yes	DIFF	CICSplex			6
CMASNAME-1	CHAR	CPSM	8	Yes	DIFF	CMAS			5
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created			41
DAYLIGHTSV	EYUDA	CPSM	4	Yes	LIKE	Daylight saving time in effect			23
DAYLIGHTSV Input/output valid values	YES, NO								
INTERVAL	BINARY	CPSM	2	Yes	AVG	Performance data interval			7
MPNAME	CHAR	CPSM	8	Yes	DIFF	Maintenance point CMAS			19
MPSTATUS	EYUDA	CPSM	4	Yes	LIKE	CMAS maintenance point status			37
MPSTATUS Output valid values	YES, NO								
READRS	BINARY	CPSM	2	Yes	DIFF	RS server read interval	200	0-2000	38
RODMPOP	EYUDA	CPSM	4	Yes	LIKE	Resource status facility populate indicator			34
RODMPOP Input/output valid values	YES, NO								
RSPOOLID	CHAR	CPSM	8	Yes	DIFF	RS server pool name	DFHRSTAT		47
SECBYPASS	EYUDA	CPSM	4	Yes	LIKE	Bypass security			14
SECBYPASS Input/output valid values	YES, NO								
SECMDCHK	EYUDA	CPSM	4	Yes	LIKE	Security command check			11
SECMDCHK Input/output valid values	YES, NO								

Table 117. CPLXCMAS resource table attributes (continued)									
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
SECRESCHK	EYUDA	CPSM	4	Yes	LIKE	Security resource check			12
SECRESCHK Input/output valid values	YES, NO								
STATE	EYUDA	CPSM	4	Yes	LIKE	State			36
STATE Output valid values	NORMAL, REMOVING, CREATING								
STATUS	BINARY	CPSM	1	Yes	MIN	Status			17
STATUS Input/output valid values	1 (CREPEND) - Create pending, 2 (ACTIVE) - CICSplex Active, 3 (UPDPEND) - Updates pending, 4 (DELPEND) - Removal pending, 5 (UNDELETE) - Recreated								
SYSID	CHAR	CPSM	4	Yes	DIFF	CMAS system ID			16
TMEZONE	CHAR	CPSM	1	Yes	DIFF	Time zone			21
TMEZONEO	BINARY	CPSM	1	Yes	AVG	Time zone offset			20
TOPRSUPD	BINARY	CPSM	1	Yes	DIFF	RS server top tier	5	1-25	45
UPDATERS	BINARY	CPSM	1	No	DIFF	RS server update frequency	15	0-25	39

Chapter 44. CRESAIMD Resource Table

A CPSM Topology Manager object that describes an instance of an autoinstalled terminal model within a CICS system. Information about the monitoring and resource status facility processing defined for the resource is provided. Certain operational state values may also be provided,

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyAutoInstallModel

Length

32

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2813

Table 118. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 119. CRESAIMD resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	5
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted					
NAME-1	CHAR	CPSM	8	DIFF	Autoinstall model	4

Chapter 45. CRESATOM Resource Table

A CPSM Topology Manager object that describes an instance of an Atom service, feed, collection, or category document definition within a CICS system.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyAtomService

Length

32

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2842

Table 120. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 121. CRESATOM resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name	6
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved	
ENABLESTATUS	CVDAS	INQ	4	LIKE	Yes	Enable status	
ENABLESTATUS Input/output valid values	ENABLED, DISABLED						
MONSTAT	BIT	CPSM	1	LIKE	No	Monitoring status	5
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active						
NAME-1	CHAR	CPSM	8	DIFF	No	ATOMSERVICE name	4

Chapter 46. CRESBUND Resource Table

A CPSM Topology Manager object that describes an instance of a bundle definition in a CICS system.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyBundle

Length

120

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2843

Table 122. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 123. CRESBUND resource table attributes							
Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name	9
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved	
BUNDLEID	CHAR	INQ	64	DIFF	No	Bundle ID	6
ENABLESTATUS	CVDAS	INQ	4	LIKE	Yes	Enable status	6
ENABLESTATUS Input/output valid values	ENABLED, DISABLED, ENABLING, DISABLING, DISCARDING						
MAJORVERSION	BINARY	INQ	4	MAX	No	Major Version	10
MGMTPART	CHAR	CPSM	8	DIFF	No	Management Part	13
MICROVERSION	BINARY	INQ	4	MAX	No	Micro Version	12
MINORVERSION	BINARY	INQ	4	MAX	No	Minor Version	11
MONSTAT	BIT	CPSM	1	LIKE	No	Monitoring status	5
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active						

Table 123. CRESBUND resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
NAME-1	CHAR	CPSM	8	DIFF	No	BUNDLE name	4
PARTCOUNT	BINARY	INQ	4	SUM	No	Part count	8

Chapter 47. CRESCONN Resource Table

A CPSM Topology Manager object that describes an instance of an ISC connection within a CICS system. Information about the monitoring and resource status facility processing defined for the resource is provided. Certain operational state values may also be provided.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyISCMROConnection

Length

48

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2803

Table 124. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 125. CRESCONN resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	8
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
CONNSTATUS	CVDAS	INQ	4	LIKE	Connection status	
CONNSTATUS Output valid values		RELEASED, OBTAINING, ACQUIRED, FREEING, AVAILABLE, NOTAPPLIC				
CTYPE	EYUDA	CPSM	4	LIKE	Connection type	4
CTYPE Output valid values		LU61, LU62, MRO, INDIRECT, EXCI				
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	7
MONSTAT Input/output valid values		1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active				
NAME-1	CHAR	CPSM	4	DIFF	Connection	5
NETNAME	CHAR	INQ	8	DIFF	Net name of remote system	6

Table 125. CRESCONN resource table attributes (continued)						
Name	Datatype	Source	Len	Sum	Description	Attr ID
SERVSTATUS	CVDAS	INQ	4	LIKE	Service status	9
SERVSTATUS Output valid values	INSERVICE, OUTSERVICE, GOINGOUT					

Chapter 48. CRESDB2C Resource Table

A CPSM Topology Manager object that describes an instance of a DB2® connection within a CICS system.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyDb2Connection

Length

32

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2826

Table 126. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 127. CRESDB2C resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	5
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	
MONSTAT Input/output valid values						
1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active						
NAME-1	CHAR	CPSM	8	DIFF	DB2 connection	4

Chapter 49. CRESDB2E Resource Table

A CPSM Topology Manager object that describes an instance of a DB2 entry within a CICS system.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyDb2Entry

Length

32

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2827

Table 128. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 129. CRESDB2E resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	5
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active					
NAME-1	CHAR	CPSM	8	DIFF	DB2 entry	4

Chapter 50. CRESDB2P Resource Table

A CPSM Topology Manager object that describes an instance of a DB2 packageset within a CICS system.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is APPLTOKEN.

The **Tertiary** key field for this resource class is PLATTOKEN.

There are no object specific actions for this resource class.

External resource name

CICSTopologyDb2Packageset

Length

168

Usage

API or CICS Management Client Interface or EVALDEF

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2856

Table 130. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 131. CRESDB2P resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
APPLTOKEN-2	HEX	CPSM	8	MAX	Application Qualifier Token	5
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	7
MONSTAT Input/output valid values		1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active				
NAME-1	CHAR	CPSM	128	DIFF	DB2 Packageset	4
PLATTOKEN-3	HEX	CPSM	8	MAX	Platform Qualifier Token	6

Chapter 51. CRESDB2T Resource Table

A CPSM Topology Manager object that describes an instance of a DB2 transaction within a CICS system.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyDb2Transaction

Length

32

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2828

Table 132. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 133. CRESDB2T resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	5
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active					
NAME-1	CHAR	CPSM	8	DIFF	DB2 transaction	4

Chapter 52. CRESDOCT Resource Table

A CPSM Topology Manager object that describes an instance of a Document Template within a CICS system. Information about the monitoring and resource status facility processing defined for the resource is provided. Certain operational state values may also be provided.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyDocumentTemplate

Length

32

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2834

Table 134. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 135. CRESDOCT resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	5
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active					
NAME-1	CHAR	CPSM	8	DIFF	Document template	4

Chapter 53. CRESDSNM Resource Table

A CPSM Topology Manager object that describes an instance of a data set within a CICS system. Information about the monitoring and resource status facility processing defined for the resource is provided. Certain operational state values may also be provided.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyDataSet

Length

80

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2819

Table 136. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 137. CRESDSNM resource table attributes							
Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release		
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved		
BACKOUTSTAT	CVDAS	INQ	4	LIKE	Backout status	E510+	7
BACKOUTSTAT Output valid values		NORMALBKOUT, FAILEDBKOUT, FAILINGBKOUT, N_A					
DTYPE	CVDAS	CPSM	4	LIKE	Data set type		4
DTYPE Output valid values		VSAM, BDAM					
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status		6
MONSTAT Input/output valid values		1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active					
NAME-1	CHAR	CPSM	44	DIFF	Data set		5
VALIDITY	CVDAS	INQ	4	LIKE	Validity status		8

Table 137. CRESDSNM resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
VALIDITY Output valid values	VALID, INVALID						

Chapter 54. CRESENQM Resource Table

A CPSM Topology Manager object that describes an instance of an ENQ/DEQ model within a CICS system. Information about the monitoring and resource status facility processing defined for the resource is provided. Certain operational state values may also be provided.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyEnqueueModel

Length

32

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2830

Table 138. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 139. CRESENQM resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	5
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active					
NAME-1	CHAR	CPSM	8	DIFF	Enqueue model	4

Chapter 55. CRESEPAD Resource Table

A CPSM Topology Manager object that describes an instance of an event processing adapter.

The **Primary** key field for this resource class is NAME.

This resource class has no object specific actions.

External resource name

CICSTopologyEPAdapter

Length

56

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2849

Table 140. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	6
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ENABLESTATUS	CVDAS	INQ	4	LIKE	Enabled status	
ENABLESTATUS Output valid values	ENABLED, DISABLED					
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	5
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active					
NAME-1	CHAR	CPSM	32	DIFF	EP adapter	4

Chapter 56. CRESEPAS Resource Table

A CPSM Topology Manager object that describes an instance of an event processing adapter set.
 The **Primary** key field for this resource class is NAME.
 This resource class has no object specific actions.

External resource name
 CICSTopologyEPAdapterSet

Length
 56

Usage
 API or CICS Management Client Interface

API view
 No

CMAS context
 No

SCOPE applies
 Yes

Only query CMASs in workload
 No

Object type
 CICSplex SM Manager

Copybook identifier
 EYUt2855

Table 142. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	6
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ENABLESTATUS	CVDAS	INQ	4	LIKE	Enabled status	
ENABLESTATUS Output valid values	ENABLED, DISABLED					
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	5
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active					
NAME-1	CHAR	CPSM	32	DIFF	EP adapter set	4

Chapter 57. CRESEVBD Resource Table

A CPSM Topology Manager object that describes an instance of an event binding in a CICS system.

The **Primary** key field for this resource class is NAME.

This resource class has no object specific actions.

External resource name

CICSTopologyEventBinding

Length

56

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2844

Table 144. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 145. CRESEVBD resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	6
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ENABLESTATUS	CVDAS	INQ	4	LIKE	Enabled status	
ENABLESTATUS Input/output valid values	ENABLED, DISABLED					
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	5
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active					
NAME-1	CHAR	CPSM	32	DIFF	Event binding name	4

Chapter 58. CRESEVCS Resource Table

A CPSM Topology Manager object that describes an instance of a capture specification in a CICS system.

The **Primary** key field for this resource class is EVENTBINDING.

The **Secondary** key field for this resource class is NAME.

This resource class has no object specific actions.

External resource name

CICSTopologyCaptureSpecification

Length

88

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2847

Table 146. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 147. CRESEVCS resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	4
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
EVENTBINDING-1	CHAR	CPSM	32	DIFF	Event binding name	
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	6
MONSTAT Input/output valid values		1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active				
NAME-2	CHAR	CPSM	32	DIFF	Event processing capture specification name	5

Chapter 59. CRESFECO Resource Table

A CPSM Topology Manager object that describes an instance of a FEPI connection within a CICS system. Information about the monitoring and resource status facility processing defined for the resource is provided. Certain operational state values may also be provided.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyFEPIConnection

Length

48

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2820

Table 148. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 149. CRESFECO resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	6
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ACQSTATUS	CVDAS	INQ	4	LIKE	Acquired status	
ACQSTATUS Output valid values	RELEASED, RELEASING, ACQUIRED, ACQUIRING					
MONSTAT	BIT	CPSM	1	LIKE	FEPI connection monitoring status	5
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active					
NAME-1	CHAR	CPSM	16	DIFF	Target and node names of connection	4
SERVSTATUS	CVDAS	INQ	4	LIKE	Service status	7
SERVSTATUS Output valid values	INSERVICE, OUTSERVICE, GOINGOUT					

Chapter 60. CRESFEND Resource Table

A CPSM Topology Manager object that describes an instance of a FEPI node within a CICS system. Information about the monitoring and resource status facility processing defined for the resource is provided. Certain operational state values may also be provided.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyFEPINode

Length

32

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2814

Table 150. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 151. CRESFEND resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	5
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	
MONSTAT Input/output valid values						
1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted						
NAME-1	CHAR	CPSM	8	DIFF	FEPI node	4

Chapter 61. CRESFEPO Resource Table

A CPSM Topology Manager object that describes an instance of a FEPI pool within a CICS system. Information about the monitoring and resource status facility processing defined for the resource is provided. Certain operational state values may also be provided.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyFEPIPool

Length

32

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2815

Table 152. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 153. CRESFEPO resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	5
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted					
NAME=1	CHAR	CPSM	8	DIFF	FEPI pool	4

Chapter 62. CRESFETR Resource Table

A CPSM Topology Manager object that describes an instance of a FEPI target within a CICS system. Information about the monitoring and resource status facility processing defined for the resource is provided. Certain operational state values may also be provided.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyFEPITarget

Length

32

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2816

Table 154. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 155. CRESFETR resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	5
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted					
NAME-1	CHAR	CPSM	8	DIFF	FEPI target	4

Chapter 63. CRESFILE Resource Table

A CPSM Topology Manager object that describes an instance of a file within a CICS system. Information about the monitoring and resource status facility processing defined for the resource is provided. Certain operational state values may also be provided.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyFile

Length

96

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2801

<i>Table 156. Valid CPSM operations</i>			
Operations	Actions	Parameters	Required
GET		None	N/A

<i>Table 157. CRESFILE resource table attributes</i>						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	11
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
DSNAME	CHAR	CPSM	44	DIFF	Data set name	11
ENABLESTATUS	CVDAS	INQ	4	LIKE	Enabled status	9
ENABLESTATUS Output valid values		ENABLED, DISABLED, UNENABLED, DISABLING, UNENABLING				
FTYPE	EYUDA	CPSM	4	LIKE	File type	4
FTYPE Output valid values		LFILE, RFILE, CTABL, UTABL, CFTBL				
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	8
MONSTAT Input/output valid values		1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active				
NAME-1	CHAR	CPSM	8	DIFF	File	5

Table 157. CRESFILE resource table attributes (continued)						
Name	Datatype	Source	Len	Sum	Description	Attr ID
OPENSTATUS	CVDAS	INQ	4	LIKE	Open status	10
OPENSTATUS Output valid values	OPEN, OPENING, CLOSED, CLOSING, CLOSEREQUEST					
REMOTENAME	CHAR	CPSM	8	DIFF	File name on remote system	6
REMOTESYSTEM	CHAR	CPSM	4	DIFF	Remote system ID	7

Chapter 64. CRESGLUE Resource Table

A CPSM Topology Manager object that describes an instance of a global user exit within a CICS system. Information about the monitoring and resource status facility processing defined for the resource is provided. Certain operational state values may also be provided.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is EXITNAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyGlobalUserExit

Length

40

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2821

Table 158. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 159. CRESGLUE resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	5
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
EXITNAME-2	CHAR	CPSM	8	DIFF	Exit point name	
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	6
MONSTAT Input/output valid values		1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active				
NAME-1	CHAR	CPSM	8	DIFF	Global user exit program	4
STARTSTATUS	CVDAS	INQ	4	LIKE	Start status	7
STARTSTATUS Output valid values		STARTED, STOPPED				

Chapter 65. CRESIPCN Resource Table

The CRESIPCN views display information about an instance of an IPIC connection (IPCONN) within a CICS system.

The **Primary** key field for this resource class is NAME. Note that a connection name can be only 4 characters long. The remainder of the 8-character NAME field should be padded with blank spaces.

The following actions are supported:

GET

Get data for the named IPCONN.

External resource name

CICSTopologyIPICConnection

Length

48

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2835

Table 160. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 161. CRESIPCN resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	8
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
CONNSTATUS	CVDAS	INQ	4	LIKE	Connection status	
CONNSTATUS Output valid values	RELEASED, OBTAINING, ACQUIRED, FREEING, AVAILABLE, NOTAPPLIC					
CTYPE	EYUDA	INQ	4	LIKE	Connection type	4
CTYPE Output valid values	IPIC					
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	7
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active					

Table 161. CRESIPCN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
NAME-1	CHAR	CPSM	8	DIFF	Connection name	5
NETNAME	CHAR	INQ	8	DIFF	Net name of remote system	6
SERVSTATUS	CVDAS	INQ	4	LIKE	Service status	9
SERVSTATUS Output valid values	INSERVICE, OUTSERVICE, GOINGOUT					

Chapter 66. CRESJRNL Resource Table

A CPSM Topology Manager object that describes an instance of a journal within a CICS system. Information about the monitoring and resource status facility processing defined for the resource is provided. Certain operational state values may also be provided.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

Length

32

Usage

API or WUI

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2804

Table 162. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 163. CRESJRNL resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	4
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
JTYPE	CVDAS	CPSM	4	LIKE	Journal type	
JTYPE Output valid values	DISK1, DISK2, DISK2PAUSE, SMF, TAPE1, TAPE2					
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	6
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active					
NAME-1	BINARY	CPSM	2	AVG	Journal	5
OPENSTATUS	CVDAS	INQ	4	LIKE	Open status	7
OPENSTATUS Output valid values	OPENOUTPUT, CLOSED					

Chapter 67. CRESJRNM Resource Table

A CPSM Topology Manager object that describes an instance of a journal name within a CICS system. Information about the monitoring and resource status facility processing defined for the resource is provided. Certain operational state values may also be provided.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyJournalName

Length

40

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2825

Table 164. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 165. CRESJRNM resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	4
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
JNTYPE	CVDAS	CPSM	4	LIKE	Journal type	
JNTYPE Output valid values	MVS, SMF, DUMMY					
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	6
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active					
NAME-1	CHAR	CPSM	8	DIFF	Journal	5
STATUS	CVDAS	CPSM	4	LIKE	Journal status	7
STATUS Output valid values	ENABLED, DISABLED, FAILED					

Chapter 68. CRESJVMS Resource Table

A CPSM Topology Manager object that describes an instance of a JVMSERVER definition in a CICS system.
The **Primary** key field for this resource class is NAME.
There are no object specific actions for this resource class.

External resource name
CICSTopologyJVMServer

Length
32

Usage
API or WUI or CICS Management Client Interface

API view
No

CMAS context
No

SCOPE applies
Yes

Only query CMASs in workload
No

Object type
CICSplex SM Manager

Copybook identifier
EYUt2846

Table 166. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 167. CRESJVMS resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	7
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ENABLESTATUS	CVDAS	CPSM	4	LIKE	Enable status	
ENABLESTATUS Input/output valid values	ENABLED, DISABLED					
ENABLESTATUS Output valid values	ENABLING, DISABLING, DISCARDING					
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	5
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active					
NAME-1	CHAR	CPSM	8	DIFF	JVM server name	4

Chapter 69. CRESLIBR Resource Table

A CPSM Topology Manager object that describes an instance of a LIBRARY definition in a CICS system.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is APPLTOKEN.

There are no object specific actions for this resource class.

External resource name

CICSTopologyLibrary

Length

48

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2836

Table 168. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 169. CRESLIBR resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release		
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved		
APPLTOKEN	BINARY	CPSM	8	MAX	No	Application Qualifier Token	E640 E650 E660 E670 E680	8
CRITSTATUS	CVDAS	INQ	4	LIKE	Yes	Critical status		6
CRITSTATUS Input/output valid values	CRITICAL, NONCRITICAL							
ENABLESTATUS	CVDAS	INQ	4	LIKE	Yes	Enable status		7
ENABLESTATUS Input/output valid values	DISABLED, ENABLED, DISABLING, ENABLING, DISCARDING							

Table 169. CRESLIBR resource table attributes (continued)								
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
MONSTAT	BIT	CPSM	1	LIKE	No	Monitoring status		5
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active							
NAME-1	CHAR	CPSM	8	DIFF	No	LIBRARY name		4

Chapter 70. CRESMODE Resource Table

A CPSM Topology Manager object that describes an instance of an LU6.2 modename within a CICS System. Information about the monitoring and resource status facility processing defined for the resource is provided. Certain operational state values may also be provided.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is CONNNAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyLU62ModeName

Length

40

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2807

Table 170. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 171. CRESMODE resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	6
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
CONNNAME-2	CHAR	CPSM	4	DIFF	Connection	
CONNSTATUS	CVDAS	INQ	4	LIKE	Connection status	7
CONNSTATUS Output valid values		RELEASED, OBTAINING, ACQUIRED, FREEING, AVAILABLE, CLOSED				
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	5
MONSTAT Input/output valid values		1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active				
NAME-1	CHAR	CPSM	8	DIFF	Mode name	4

Chapter 71. CRESMQMN Resource Table

A CPSM Topology Manager object that describes an instance of a MQMONITOR definition in a CICS system.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyMQmonitor

Length

32

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2857

<i>Table 172. Valid CPSM operations</i>			
Operations	Actions	Parameters	Required
GET		None	N/A

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	5
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active					
NAME-1	CHAR	CPSM	8	DIFF	MQMONITOR entry	4

Chapter 72. CRESPART Resource Table

A CPSM Topology Manager object that describes an instance of a partner table within a CICS system. Information about the monitoring and resource status facility processing defined for the resource is provided. Certain operational state values may also be provided.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyPartner

Length

32

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2817

Table 174. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 175. CRESPART resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	5
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted					
NAME-1	CHAR	CPSM	8	DIFF	Partner	4

Chapter 73. CRESPIPE Resource Table

A CPSM Topology Manager object that describes an instance of a PIPELINE definition in a CICS system.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name
CICSTopologyPipeline

Length
32

Usage
API or WUI or CICS Management Client Interface

API view
No

CMAS context
No

SCOPE applies
Yes

Only query CMASs in workload
No

Object type
CICSplex SM Manager

Copybook identifier
EYUt2841

Table 176. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 177. CRESPIPE resource table attributes							
Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name	6
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved	
ENABLESTATUS	CVDAS	INQ	4	LIKE	Yes	Enable status	
ENABLESTATUS Input/output valid values	ENABLED, DISABLED, ENABLING, DISABLING, DISCARDING						
MONSTAT	BIT	CPSM	1	LIKE	No	Monitoring status	5
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active						
NAME-1	CHAR	CPSM	8	DIFF	No	PIPELINE name	4

Chapter 74. CRESPRGM Resource Table

A CPSM Topology Manager object that describes an instance of a program within a CICS system. Information about the monitoring and resource status facility processing defined for the resource is provided. Certain operational state values may also be provided.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is APPLTOKEN.

There are no object specific actions for this resource class.

External resource name

CICSTopologyProgram

Length

56

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2802

Table 178. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 179. CRESPRGM resource table attributes

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release		
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved		
APPLTOKEN	BINARY	CPSM	8	MAX	Application Qualifier Token	E640 E650 E660 E670 E680	9
ENABLESTATUS	CVDAS	INQ	4	LIKE	Enabled status		8
ENABLESTATUS Output valid values		ENABLED, DISABLED					
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status		7

Table 179. CRESPRGM resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active						
NAME-1	CHAR	CPSM	8	DIFF	Program		4
REMOTENAME	CHAR	CPSM	8	DIFF	Program name on remote system		5
REMOTESYSTEM	CHAR	CPSM	4	DIFF	Remote system ID		6

Chapter 75. CRESPROF Resource Table

A CPSM Topology Manager object that describes an instance of a profile within a CICS system. Information about the monitoring and resource status facility processing defined for the resource is provided. Certain operational state values may also be provided.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyProfile

Length

32

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2818

Table 180. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 181. CRESPROF resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	5
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted					
NAME-1	CHAR	CPSM	8	DIFF	Profile	4

Chapter 76. CRESPTY Resource Table

A CPSM Topology Manager object that describes an instance of a process type within a CICS system. Information about the monitoring and resource status facility processing defined for the resource is provided. Certain operational state values may also be provided.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyBTSPProcessType

Length

32

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2832

Table 182. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 183. CRESPTY resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	5
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
MONSTAT	BIT	CPSM	1	LIKE	BTS process type monitoring status	
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active					
NAME-1	CHAR	CPSM	8	DIFF	BTS process type	4

Chapter 77. CRESRQMD Resource Table

A CPSM Topology Manager object that describes an instance of a request within a CICS system. Information about the monitoring and resource status facility processing defined for the resource is provided. Certain operational state values may also be provided.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name
CICSTopologyRequestModel

Length
32

Usage
API or WUI or CICS Management Client Interface

API view
No

CMAS context
No

SCOPE applies
Yes

Only query CMASs in workload
No

Object type
CICSplex SM Manager

Copybook identifier
EYUt2831

Table 184. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	5
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active					
NAME-1	CHAR	CPSM	8	DIFF	Request model	4

Chapter 78. CRESSDMP Resource Table

A CPSM Topology Manager object that describes an instance of a system dump code within a CICS system. Information about the monitoring and resource status facility processing defined for the resource is provided. Certain operational state values may also be provided.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name
CICSTopologySystemDump

Length
40

Usage
API or WUI or CICS Management Client Interface

API view
No

CMAS context
No

SCOPE applies
Yes

Only query CMASs in workload
No

Object type
CICSplex SM Manager

Copybook identifier
EYUt2822

Table 186. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	5
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
MONSTAT	BIT	CPSM	1	LIKE	System dump monitoring status	
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active					
NAME-1	CHAR	CPSM	8	DIFF	System dump code	4
SDMPSTATUS	CVDAS	INQ	4	LIKE	System dump status	7
SDMPSTATUS Output valid values	SYSDUMP, NOSYSDUMP					
SHUTDSTATUS	CVDAS	INQ	4	LIKE	Shutdown status	6
SHUTDSTATUS Output valid values	SHUTDOWN, NOSHUTDOWN					

Chapter 79. CRESTCPS Resource Table

A CPSM Topology Manager object that describes an instance of a TCPIP Service within a CICS system. Information about the monitoring and resource status facility processing defined for the resource is provided. Certain operational state values may also be provided.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name
CICSTopologyTCPIPService

Length
32

Usage
API or WUI or CICS Management Client Interface

API view
No

CMAS context
No

SCOPE applies
Yes

Only query CMASs in workload
No

Object type
CICSplex SM Manager

Copybook identifier
EYUt2833

Table 188. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 189. CRESTCPS resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	5
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active					
NAME-1	CHAR	CPSM	8	DIFF	TCP/IP service	4

Chapter 80. CRESTDMP Resource Table

A CPSM Topology Manager object that describes an instance of a transaction dump code within a CICS system. Information about the monitoring and resource status facility processing defined for the resource is provided. Certain operational state values may also be provided.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyTransactionDump

Length

40

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2823

Table 190. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 191. CRESTDMP resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	5
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
MONSTAT	BIT	CPSM	1	LIKE	Transaction dump monitoring status	
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active					
NAME-1	CHAR	CPSM	4	DIFF	Transaction dump code	4
SDMPSTATUS	CVDAS	INQ	4	LIKE	System dump status	7
SDMPSTATUS Output valid values	SYSDUMP, NOSYSDUMP					
SHUTDSTATUS	CVDAS	INQ	4	LIKE	Shutdown status	6
SHUTDSTATUS Output valid values	SHUTDOWN, NOSHUTDOWN					
TDMSTATUS	CVDAS	INQ	4	LIKE	Transaction dump status	8

Table 191. CRESTDMP resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
TDMPSTATUS Output valid values	TRANDUMP, NOTRANDUMP					

Chapter 81. CRESTDQ Resource Table

A CPSM Topology Manager object that describes an instance of a transient data queue within a CICS system. Information about the monitoring and resource status facility processing defined for the resource is provided. Certain operational state values may also be provided.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyTDQueue

Length

48

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2805

Table 192. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 193. CRESTDQ resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	9
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ENABLESTATUS	CVDAS	INQ	4	LIKE	Enabled status	
ENABLESTATUS Output valid values	ENABLED, DISABLED, NOTAPPLIC					
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	8
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active					
NAME-1	CHAR	CPSM	4	DIFF	TDQ queue	5
OPENSTATUS	CVDAS	INQ	4	LIKE	Open status	10
OPENSTATUS Output valid values	OPEN, OPENING, CLOSED, CLOSING, SWITCHING, NOTAPPLIC					
QTYPE	CVDAS	CPSM	4	LIKE	TD queue type	4

Table 193. CRESTDQ resource table attributes (continued)						
Name	Datatype	Source	Len	Sum	Description	Attr ID
QTYPE Output valid values	INTRA, EXTRA, REMOTE, INDIRECT					
REMOTENAME	CHAR	CPSM	4	DIFF	TD queue name on remote system	6
REMOTESYSTEM	CHAR	CPSM	4	DIFF	Remote system ID	7

Chapter 82. CRESTERM Resource Table

A CPSM Topology Manager object that describes an instance of a terminal within a CICS system. Information about the monitoring and resource status facility processing defined for the resource is provided. Certain operational state values may also be provided.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyTerminal

Length

40

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2806

Table 194. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 195. CRESTERM resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	6
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ACQSTATUS	CVDAS	INQ	4	LIKE	Acquired status	
ACQSTATUS Output valid values	ACQUIRED, ACQUIRING, RELEASED, RELEASING, NOTAPPLIC					
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	5
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active					
NAME-1	CHAR	CPSM	4	DIFF	Terminal	4
NETNAME	CHAR	CPSM	8	DIFF	Terminal network name	8
SERVSTATUS	CVDAS	INQ	4	LIKE	Service status	7
SERVSTATUS Output valid values	INSERVICE, OUTSERVICE					

Chapter 83. CRESTRAN Resource Table

A CPSM Topology Manager object that describes an instance of a transaction within a CICS system. Information about the monitoring and resource status facility processing defined for the resource is provided. Certain operational state values may also be provided.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyTransaction

Length

56

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2800

Table 196. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 197. CRESTRAN resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ENABLESTATUS	CVDAS	INQ	4	LIKE	Enabled status	9
ENABLESTATUS Output valid values	ENABLED, DISABLED					
MONSTAT	BIT	CPSM	1	LIKE	Transaction monitoring status	8
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active					
NAME-1	CHAR	CPSM	4	DIFF	Transaction ID	5
PGMNAME	CHAR	CPSM	8	DIFF	First program name	10
REMOtename	CHAR	CPSM	8	DIFF	Transaction ID on remote system	6
REMOTESYSTEM	CHAR	CPSM	4	DIFF	Remote system ID	7

Table 197. CRESTRAN resource table attributes (continued)						
Name	Datatype	Source	Len	Sum	Description	Attr ID
TTYPE	EYUDA	CPSM	4	LIKE	Transaction type	4
TTYPE Output valid values	LTRAN, RTRAN					

Chapter 84. CRESTRUE Resource Table

A CPSM Topology Manager object that describes an instance of a task-related user exit within a CICS system. Information about the monitoring and resource status facility processing defined for the resource is provided. Certain operational state values may also be provided.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is ENTRYNME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyTaskRelatedExit

Length

40

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2824

Table 198. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 199. CRESTRUE resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	7
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ENTRYNME-2	CHAR	CPSM	8	DIFF	Entry name	
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	5
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active					
NAME-1	CHAR	CPSM	8	DIFF	Task-related user exit program	4
STARTSTATUS	CVDAS	INQ	4	LIKE	Start status	6
STARTSTATUS Output valid values	STARTED, STOPPED					

Chapter 85. CRESTSMD Resource Table

A CPSM Topology Manager object that describes an instance of a temporary storage queue within a CICS system. Information about the monitoring and resource status facility processing defined for the resource is provided. Certain operational state values may also be provided.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyTSMModel

Length

32

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2829

Table 200. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 201. CRESTSMD resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	5
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active					
NAME-1	CHAR	CPSM	8	DIFF	Temporary storage model	4

Chapter 86. CRESURIM Resource Table

A CPSM Topology Manager object that describes an instance of a URIMAP definition in a CICS system.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyURIMap

Length

32

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2840

Table 202. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 203. CRESURIM resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name	6
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved	
ENABLESTATUS	CVDAS	INQ	4	LIKE	Yes	Enable status	
ENABLESTATUS Input/output valid values	ENABLED, DISABLED, DISABLEDHOST						
MONSTAT	BIT	CPSM	1	LIKE	No	Monitoring status	5
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active						
NAME-1	CHAR	CPSM	8	DIFF	No	URIMAP name	4

Chapter 87. CRESWEBS Resource Table

A CPSM Topology Manager object that describes an instance of a WEBSERVICE definition in a CICS system.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyWebService

Length

56

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2839

Table 204. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 205. CRESWEBS resource table attributes							
Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name	5
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved	
MONSTAT	BIT	CPSM	1	LIKE	No	Monitoring status	
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active						
NAME-1	CHAR	CPSM	32	DIFF	No	WEBSERVICE name	4
STATE	CVDAS	INQ	4	LIKE	Yes	Web service state	6
STATE Input/output valid values	DISCARDING, INITING, INSERVICE, UNUSABLE						

Chapter 88. CRESXMLT Resource Table

A CPSM Topology Manager object that describes an instance of an XMLTRANSFORM resource in a CICS system.

The **Primary** key for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTopologyXMLTransform

Length

56

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2848

<i>Table 206. Valid CPSM operations</i>			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 207. CRESXMLT resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	6
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ENABLESTATUS	CVDAS	INQ	4	LIKE	Enabled status	
ENABLESTATUS Input/output valid values	ENABLED, DISABLED					
ENABLESTATUS Output valid values	ENABLING, DISABLING					
MONSTAT	BIT	CPSM	1	LIKE	Monitoring status	5
MONSTAT Input/output valid values	1 (POSDATA) - Possible Data, 2 (COLDATA) - Collect Data, 4 (USERDEF) - User Monitor Definition, 8 (SYSDEF) - System Monitor Definition, 16 (DELETED) - Resource Logically Deleted, 32 (RODMACT) - Resource Status Facility Active					
NAME-1	CHAR	CPSM	32	DIFF	XML Transform name	4

Chapter 89. CSDGROUP Resource Table

A CICSplex SM CICS System Definition (CSD) that provides the association anchor for a set of CICS CSD resources. References to a CSDGROUP are inferred to be references to the set of associated CICS CSD resources.

The **Primary** key field for this resource class is NAME.

Note: When querying the CSDGROUP resource, the SCOPE option must specify an active MAS.

The following actions are supported:

CSDADD

Adds a CSD group to a CSD list.

The parameter data for the CSDADD action is described in [Managing CICS definitions in the CSD](#).

CSDINSTALL

Install the CICS CSD resource definitions in a CSD group into an active system.

The parameter data for the CSDINSTALL action is described in [Managing CICS definitions in the CSD](#).

CSDLOCK

Restricts update or delete access to a CSD list. When you lock a CSD list, other users can view or copy it, but they are restricted from changing or deleting it.

CSDUNLOCK

Removes the lock from a CSD list previously locked by the CSDLOCK action.

External resource name

CICSCSDGroup

Length

16

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt3701

Table 208. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
REMOVE		LISTREMOVE	No
PERFORM SET	CSDADD	ADD_CSDGROUP(value)	No

Table 208. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		ADD_LOCATION(BEFORE, AFTER)	No
		TO_CSDLIST(value)	Yes
	CSDINSTALL	None	N/A
	CSDLOCK	None	N/A
	CSDUNLOCK	None	N/A

Table 209. CSDGROUP FEEDBACK error codes

Value	Code	Description
1	CSDGROUP_INV_DATA	Attribute data invalid
2	CSDGROUP_REC_NOT_FOUND	Requested resource not found
21	CSDGROUP_PARTIAL_ACTION	Partial action
22	CSDGROUP_NOTHING_ACTIONED	Nothing actioned
23	CSDGROUP_PARTIAL_INSTALL	Partial install
24	CSDGROUP_NOTHING_INSTALLED	Nothing installed
25	CSDGROUP_REC_NOT_REMOVED	Requested resource not removed
26	CSDGROUP_CSD_ERROR	CSD access error

Table 210. CSDGROUP resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
CICSSYS	CHAR	CPSM	8	DIFF	CICS system name	5
NAME-1	CHAR	CPSM	8	DIFF	CSD group name	4

Chapter 90. CSDINGRP Resource Table

A CICSplex SM CICS System Definition (CSD) resource class that references the CICS CSD resources associated with a specific CSDGROUP resource class.

The **Primary** key field for this resource class is CSDGROUP.

The **Secondary** key field for this resource class is DEFNAME.

The **Tertiary** key field for this resource class is DEFTYPE.

Note: When querying the CSDINGRP resource, the SCOPE option must specify an active MAS.

The following action is supported:

CSDINSTALL

Install the CICS CSD resource definitions in a CSD group into an active system.

The parameter data for the CSDINSTALL action is described in [Managing CICS definitions in the CSD](#).

External resource name

CICSCSDResource

Length

32

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt3751

Table 211. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	CSDINSTALL	None	N/A
SET			

Table 212. CSDINGRP FEEDBACK error codes

Value	Code	Description
1	CSDINGRP_INV_DATA	Attribute data invalid
2	CSDINGRP_REC_NOT_FOUND	Requested resource not found
23	CSDINGRP_PARTIAL_INSTALL	Partial install

Table 212. CSDINGRP FEEDBACK error codes (continued)

Value	Code	Description
24	CSDINGRP_NOTHING_INSTALLED	Nothing installed
25	CSDINGRP_CSD_ERROR	CSD access error

Table 213. CSDINGRP resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
CICSSYS	CHAR	CPSM	8	DIFF	CICS system name	8
CPSMTYPE	RESTYPE	CPSM	2	LIKE	CPSM resource definition type	7
CSDGROUP-1	CHAR	CPSM	8	DIFF	CSD group name	4
DEFNAME-2	CHAR	CPSM	8	DIFF	Resource definition	5
DEFTYPE-3	CVDAS	CPSM	4	LIKE	CICS resource definition type	6
DEFTYPE-3 Output valid values	ATOMSERVICE, BUNDLE, CONNECTION, CORBASERVER, DB2CONN, DB2ENTRY, DB2TRAN, DJAR, DOCTEMPLATE, ENQMODEL, FILE, IPCONN, JOURNALMODEL, JVMSERVER, LIBRARY, LSRPOOL, MAP, MQCONN, PARTITIONSET, PARTNER, PIPELINE, PROCESSTYPE, PROFILE, PROGRAM, REQUESTMODEL, SESSIONS, TCPIPService, TDQUEUE, TERMINAL, TRANCLASS, TRANSACTION, TSMODEL, TYPETERM, URIMAP, WEBSERVICE					

Chapter 91. CSDINLST Resource Table

A CICSplex SM CICS System Definition (CSD) resource class that references the CICS CSD groups associated with a specific CSDLIST.

The **Primary** key field for this resource class is CSDLIST.

The **Secondary** key field for this resource class is LISTSEQ.

The **Tertiary** key field for this resource class is CSDGROUP.

Note: When querying the CSDINLST resource, the SCOPE option must specify an active MAS.

There are no object specific actions for this resource class.

External resource name

CICSCSDGroupInList

Length

32

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt3750

Table 214. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
REMOVE		None	N/A

Table 215. CSDINLST FEEDBACK error codes

Value	Code	Description
1	CSDINLST_INV_DATA	Attribute data invalid
2	CSDINLST_REC_NOT_FOUND	Requested resource not found
21	CSDINLST_REC_NOT_REMOVED	Requested resource not removed
22	CSDINLST_CSD_ERROR	CSD access error

Table 216. CSDINLST resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
CICSSYS	CHAR	CPSM	8	DIFF	CICS system name	6
CSDGROUP-3	CHAR	CPSM	8	DIFF	CSD group name	5
CSDLIST-1	CHAR	CPSM	8	DIFF	CSD list name	4
LISTSEQ-2	BINARY	CPSM	4	DIFF	CSD list sequence number	7

Chapter 92. CSDLIST Resource Table

A CICSplex SM CICS System Definition (CSD) object that lists collections of CSD groups that can be installed in CICS systems manually or during a cold or initial start.

The **Primary** key field for this resource class is NAME.

Note: When querying the CSDLIST resource, the SCOPE option must specify an active MAS.

The following actions are supported:

CSDAPPEND

Append the CSD groups in one CSD list to another list.

The parameter data for the CSDAPPEND action is described in [Managing CICS definitions in the CSD](#).

CSDINSTALL

Install the CICS CSD resource definitions in a CSD list into an active system.

The parameter data for the CSDINSTALL action is described in [Managing CICS definitions in the CSD](#).

CSDLOCK

Restricts update or delete access to a CSD list. When you lock a CSD list, other users can view or copy it, but they are restricted from changing or deleting it.

CSDUNLOCK

Removes the lock from a CSD list previously locked by the CSDLOCK action.

External resource name

CICSCSDList

Length

16

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt3700

Table 217. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	CSDAPPEND	To_CSDList(value)	Yes
SET	CSDINSTALL	None	N/A
	CSDLOCK	None	N/A

Table 217. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
	CSDUNLOCK	None	N/A

Table 218. CSDLIST FEEDBACK error codes		
Value	Code	Description
1	CSDLIST_INV_DATA	Attribute data invalid
2	CSDLIST_REC_NOT_FOUND	Requested resource not found
21	CSDLIST_PARTIAL_INSTALL	Partial install
22	CSDLIST_NOTHING_INSTALLED	Nothing installed
23	CSDLIST_PARTIAL_ACTION	Partial action
24	CSDLIST_NOTHING_ACTIONED	Nothing actioned
25	CSDLIST_CSD_ERROR	CSD access error

Table 219. CSDLIST resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
CICSSYS	CHAR	CPSM	8	DIFF	CICS system name	5
NAME-1	CHAR	CPSM	8	DIFF	CSD list name	4

Chapter 93. CSGLCGCG Resource Table

A CPSM Topology Definition that describes the involuted association link of a CICS system group within an outer system group.

The **Primary** key field for this resource class is TOGROUP.

The **Secondary** key field for this resource class is GROUP.

There are no object specific actions for this resource class.

External resource name

CICSSystemGroupToSystemGroup

Length

56

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt4099

Table 220. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 221. CSGLCGCG FEEDBACK error codes		
Value	Code	Description
1	CSGLCGCG_INV_DATA	Attribute data invalid
2	CSGLCGCG_REC_NOT_FOUND	Requested resource not found
3	CSGLCGCG_INV_REFERENCE	Attribute references an invalid resource
4	CSGLCGCG_REC_EXISTS	Resource already exists
21	CSGLCGCG_ASSOCIATION	Invalid associated group
22	CSGLCGCG_INCONSISTENT_SET	BAS inconsistent set
23	CSGLCGCG_CYCLIC_GROUPS	Link causes cyclical groups

Table 221. CSGLCGCG FEEDBACK error codes (continued)

Value	Code	Description
24	CSGLCGCG_INCONSISTENT_SCOPES	Inconsistent scopes
25	CSGLCGCG_INV_ATTR	Must be a system group
26	CSGLCGCG_IS_PLATFORM_SYSGROUP	System group is a platform group
27	CSGLCGCG_UNKNOWN_SCOPE	Unknown scope

Table 222. CSGLCGCG resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	7
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	10
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	9
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	8
GROUP-2	CHAR	CPSM	8	Yes	DIFF	Group within containing group	5
TOGROUP-1	CHAR	CPSM	8	Yes	DIFF	Name of containing group	6

Chapter 94. CSGLCGCS Resource Table

A CPSM Topology Definition that describes the association link of a CICS System to a CICS system group.

The **Primary** key field for this resource class is GROUP.

The **Secondary** key field for this resource class is CICSNAME.

There are no object specific actions for this resource class.

The CREATE and REMOVE actions have special parameters MONSPC_INHRT, RTASPC_INHRT, and WLMSPC_INHRT. These parameters indicate how monitoring, real-time-analysis, or workload management specifications associated with the CICS system group are handled. The keywords for the parameters are as follows:

ACTION: CREATE, PARM: MONSPC_INHRT, RTASPC_INHRT, WLMSPC_INHRT

Indicates whether the CICS system is to inherit a MON, RTA, or WLM specification from the CICS system group with which you are associating it.

KEEP

This is the default. The CICS system is not to inherit the specification associated with the CICS system group. When you want real-time analysis to occur, you must associate the CICS system with an appropriate specification.

NULL

The CICS system is to inherit the specification associated with the CICS system group if there is no specification already associated with the CICS system. If there is no association between a CICS system group and a specification, the CICS system inherits no specification.

FORCE

The CICS system must inherit the specification associated with the CICS system group. If there is no association between a CICS system group and a specification, the CICS system inherits no specification.

ACTION: REMOVE, PARM: MONSPC_INHRT, RTASPC_INHRT, WLMSPC_INHRT

Indicates how the CICS systems comprising the CICS system group are to use any specifications associated with the system group.

KEEP

This is the default. Those CICS systems that inherited a specification from the CICS system group are explicitly assigned the specification.

NONE

Those CICS systems that inherited a specification from the CICS system group are not to use that specification.

External resource name

CICSSystemToSystemGroup

Length

56

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt4098

Table 223. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		MONSPC_INHRT(KEEP, NULL, FORCE)	No
		RTASPC_INHRT(KEEP, NULL, FORCE)	No
		WLMSPC_INHRT(KEEP, NULL, FORCE)	No
REMOVE		MONSPC_INHRT(NONE, KEEP)	No
		RTASPC_INHRT(NONE, KEEP)	No
		WLMSPC_INHRT(NONE, KEEP)	No

Table 224. CSGLCGCS FEEDBACK error codes

Value	Code	Description
1	CSGLCGCS_INV_DATA	Attribute data invalid
2	CSGLCGCS_REC_NOT_FOUND	Requested resource not found
3	CSGLCGCS_INV_REFERENCE	Attribute references an invalid resource
4	CSGLCGCS_REC_EXISTS	Resource already exists
21	CSGLCGCS_ASSOCIATION	Invalid group association
22	CSGLCGCS_INCONSISTENT_SET	BAS inconsistent set
23	CSGLCGCS_INCONSISTENT_SCOPES	Inconsistent scopes
24	CSGLCGCS_UNKNOWN_SCOPE	Unknown scope
25	CSGLCGCS_INV_ATTR	Must be a system definition
26	CSGLCGCS_IS_PLATFORM_SYSGROUP	System group is a platform group
27	CSGLCGCS_CICSSYS_IN_USE	CICS system is currently in use
28	CSGLCGCS_INVALID_SCOPE	Unknown scope treated as invalid

Table 225. CSGLCGCS resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	7
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	10
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	9
CICSNAME-2	CHAR	CPSM	8	Yes	DIFF	CICS system	6
CREATEORIGIN	EYUDA	CPSM	4	No	DIFF	Definition origin	12

Table 225. CSGLCGCS resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CREATEORIGIN Input/output valid values	N_A, PLATFORM						
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	8
GROUP-1	CHAR	CPSM	8	Yes	DIFF	CICS system group	5

Chapter 95. CSYSDEF Resource Table

A CPSM Topology Definition that describes a CICS system to be managed as part of a CICSplex.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

Some of the attributes of a CICS system definition can be inherited from a Workload Manager, Real Time Analysis, or Monitor specification with which the system is associated. The attribute value you should use to request inheritance varies by field:

TMEZONE

Specify an asterisk (*) to request inheritance in all languages. You should also use an asterisk to request inheritance if you are creating this field by the batched repository-update facility.

TMEZONEO

For the batched repository-update facility and REXX API programs, specify an asterisk (*) to request inheritance. For API programs in all other languages, specify 255 to request inheritance.

BOTRSUP, CICSSAMP, CONNSAMP, DBXSAMP, FILESAMP, GLBLSAMP, JRNLAMP, PROGSAMP, RETENTION, READRS, TDQSAMP, TERMSAMP, TOPRSUPD and TRANSAMP

For the batched repository-update facility and REXX API programs, specify an asterisk (*) to request inheritance. For API programs in all other languages, specify -1 to request inheritance.

SAMACTION, SOSACTION, SDMACTION, TDMACTION, MXTACTION, and STLACTION

Specify an asterisk (*) to request inheritance in all languages. You should also use an asterisk to request inheritance if you are creating this field by the batched repository-update facility.

EYUDA

Specify INHERIT when using the batched repository-update facility or REXX API programs. For API programs in all other languages, initialize the field to EYUDA_INHERIT. See the CSYSDEF table below to find the fields of type EYUDA which allow the value INHERIT.

The use of the xxxACTION and xxxSEV attributes is described in [Special attribute and resource table considerations](#).

External resource name

CICSRegionDefinition

Length

472

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt3500

Table 226. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		MODEL(value)	No
UPDATE		MODEL(value)	No
REMOVE		None	N/A
PERFORM SET	ADDTGRP	MONSPC_INHRT(KEEP, NULL, FORCE)	No
		RTASPC_INHRT(KEEP, NULL, FORCE)	No
		TOGROUP(value)	Yes
		WLMSPC_INHRT(KEEP, NULL, FORCE)	No

Table 227. CSYSDEF FEEDBACK error codes

Value	Code	Description
1	CSYSDEF_INV_DATA	Attribute data invalid
2	CSYSDEF_REC_NOT_FOUND	Requested resource not found
3	CSYSDEF_INV_REFERENCE	Group not found
4	CSYSDEF_REC_EXISTS	Resource already exists
5	CSYSDEF_REC_CHANGED	Resource definition already changed
6	CSYSDEF_INV_RESTYPE	Invalid resource type
21	CSYSDEF_INV_SYS_NAME	Invalid system name
22	CSYSDEF_INV_MODEL_NAME	Invalid model name
23	CSYSDEF_INV_RECADDR	Invalid record address
24	CSYSDEF_INV_RECLEN	Invalid record length
25	CSYSDEF_INCONSISTENT_SET	BAS inconsistent set
26	CSYSDEF_INCONSISTENT_SCOPES	BAS inconsistent Scopes
27	CSYSDEF_ASSOCIATION	Invalid group association
28	CSYSDEF_CYCLIC_GROUPS	Link causes cyclic groups
29	CSYSDEF_CICSSYS_IN_USE	Requested resource in use
30	CSYSDEF_IS_PLATFORM_SYSGROUP	System group is a platform group
31	CSYSDEF_IS_PLATFORM_SYSTEM	System is a platform system
32	CSYSDEF_PLATFORM_PROTECT_FIELD	Platform protected field

Table 228. CSYSDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
ACTVTIME	CHAR	CPSM	8	No	DIFF	Period definition name			37
AINSFAIL	EYUDA	CPSM	4	Yes	LIKE	BAS install failure action	CONTINUE		45
AINSFAIL Input/output valid values	CONTINUE, IMMEDIATE, NORMAL, PROMPT, TERMINATE								
APPLID	CHAR	CPSM	8	Yes	DIFF	Application ID			43

Table 228. CSYSDEF resource table attributes (continued)									
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
AUTOINST	EYUDA	CPSM	4	Yes	LIKE	Install BAS resources option	NEVER		44
AUTOINST Input/output valid values	NEVER, ALWAYS, COLDONLY, WARMONLY								
BOTRSUPD	BINARY	CPSM	1	Yes	DIFF	RS server bottom tier	*	1-25	61
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			53
CHANGEAGENT Input/output valid values	DREPAPI, DREPBATCH								
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			56
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification			1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			55
CICSSAMP	BINARY	CPSM	4	Yes	AVG	Sample interval for CICS region monitoring	INHERIT	0-86400	8
CONNSAMP	BINARY	CPSM	4	Yes	AVG	Sample interval for connection monitoring	INHERIT	0-86400	11
CONTEXT	CHAR	CPSM	8	No	DIFF	CSYSDEF context			59
CREATEORIGIN	EYUDA	CPSM	4	No	LIKE	Definition origin			67
CREATEORIGIN Input/output valid values	N_A, PLATFORM								
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created			54
DAYLIGHTSV	EYUDA	CPSM	4	Yes	LIKE	Daylight saving time in effect	INHERIT		41
DAYLIGHTSV Input/output valid values	YES, NO, INHERIT								
DBXSAMP	BINARY	CPSM	4	Yes	AVG	Sample interval for DB2/DBCTRL monitoring	INHERIT	0-86400	10
DESC	CHAR	CPSM	58	No	DIFF	Description			38
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999	47
DYNROUTE	EYUDA	CPSM	4	Yes	LIKE	Target region active at startup	YES		6
DYNROUTE Input/output valid values	YES, NO								
FILESAMP	BINARY	CPSM	4	Yes	AVG	Sample interval for file monitoring	INHERIT	0-86400	12
GLBLSAMP	BINARY	CPSM	4	Yes	AVG	Sample interval for global region monitoring	INHERIT	0-86400	9
HOST	CHAR	CPSM	116	No	DIFF	Host name			49
JRNLSAMP	BINARY	CPSM	4	Yes	AVG	Sample interval for journal monitoring	INHERIT	0-86400	13
MONSTATUS	EYUDA	CPSM	4	Yes	LIKE	Monitoring status	INHERIT		18
MONSTATUS Input/output valid values	YES, NO, INHERIT								
MPCMASID	CHAR	CPSM	8	No	DIFF	Maintenance point CMAS ID			58
MXTACTION	CHAR	CPSM	8	No	DIFF	Action for CICS-at-maximum-tasks event	*		34
MXTSEV	EYUDA	CPSM	4	No	LIKE	Severity for CICS-at-maximum-tasks event	HS		28
MXTSEV Input/output valid values	N_A, NO, VLS, LS, LW, HW, HS, VHS, INHERIT								

Table 228. CSYSDEF resource table attributes (continued)									
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
NAME-1	CHAR	CPSM	8	Yes	DIFF	CICS system definition name			5
NETWORKID	CHAR	CPSM	8	No	DIFF	Network ID			48
NRMACTION	CHAR	CPSM	8	No	DIFF	Action for Non-responsive-MAS event	*		66
NRMSEV	EYUDA	CPSM	4	No	LIKE	Severity for Non-responsive-MAS event	HW		65
NRMSEV Input/output valid values	N_A, NO, VLS, LS, LW, HW, HS, VHS, INHERIT								
PORT	CHAR	CPSM	8	No	DIFF	Port number		1-65535	50
PRICMAS	CHAR	CPSM	8	No	DIFF	Primary CMAS name			36
PROGSAMP	BINARY	CPSM	4	Yes	AVG	Sample interval for program monitoring	INHERIT	0-86400	14
READRS	BINARY	CPSM	2	No	DIFF	RS server read interval	*	0-2000	51
RETENTION	BINARY	CPSM	4	Yes	AVG	Time data is kept after monitoring stops (minutes)	INHERIT	0-1440	7
RTASTATUS	EYUDA	CPSM	4	Yes	LIKE	Real time analysis status	YES		19
RTASTATUS Input/output valid values	YES, NO, SAM, MRM								
SAMACTION	CHAR	CPSM	8	No	DIFF	Action for system availability monitoring event	*		30
SAMSEV	EYUDA	CPSM	4	No	LIKE	Severity for system availability monitoring event	VHS		24
SAMSEV Input/output valid values	N_A, NO, VLS, LS, LW, HW, HS, VHS, INHERIT								
SDMACTION	CHAR	CPSM	8	No	DIFF	Action for system dump event	*		32
SDMSEV	EYUDA	CPSM	4	No	LIKE	Severity for system dump event	VHS		26
SDMSEV Input/output valid values	N_A, NO, VLS, LS, LW, HW, HS, VHS, INHERIT								
SECBYPASS	EYUDA	CPSM	4	Yes	LIKE	Exemption from simulated security checks	INHERIT		23
SECBYPASS Input/output valid values	YES, NO, INHERIT								
SECCMDCHK	EYUDA	CPSM	4	Yes	LIKE	Simulated CICS-command security checking status	INHERIT		21
SECCMDCHK Input/output valid values	YES, NO, INHERIT								
SECRESCHK	EYUDA	CPSM	4	Yes	LIKE	Simulated CICS-resource security checking status	INHERIT		22
SECRESCHK Input/output valid values	YES, NO, INHERIT								
SOSACTION	CHAR	CPSM	8	No	DIFF	Action for short on storage (SOS) event	*		31
SOSSEV	EYUDA	CPSM	4	No	LIKE	Severity for short-on-storage (SOS) event	HS		25
SOSSEV Input/output valid values	N_A, NO, VLS, LS, LW, HW, HS, VHS, INHERIT								
STLACTION	CHAR	CPSM	8	No	DIFF	Action for CICS-stalled event	*		35
STLSEV	EYUDA	CPSM	4	No	LIKE	Severity for CICS-stalled event	VHS		29

Table 228. CSYSDEF resource table attributes (continued)									
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
STLSEV Input/output valid values	N_A, NO, VLS, LS, LW, HW, HS, VHS, INHERIT								
SYSID	CHAR	CPSM	4	Yes	DIFF	System ID			46
TDMACTION	CHAR	CPSM	8	No	DIFF	Action for transaction dump event	*		33
TDMSEV	EYUDA	CPSM	4	No	LIKE	Severity for transaction dump event	HW		27
TDMSEV Input/output valid values	N_A, NO, VLS, LS, LW, HW, HS, VHS, INHERIT								
TDQSAMP	BINARY	CPSM	4	Yes	AVG	Sample interval for TDQ monitoring	INHERIT	0-86400	16
TERMSAMP	BINARY	CPSM	4	Yes	AVG	Sample interval for terminal monitoring	INHERIT	0-86400	15
TMEZONE	CHAR	CPSM	1	Yes	DIFF	Time zone	*		40
TMEZONEO	BINARY	CPSM	1	Yes	AVG	Time zone offset	*	0-59	39
TOPRSUPD	BINARY	CPSM	1	Yes	DIFF	RS server top tier	*	1-25	60
TRANSAMP	BINARY	CPSM	4	Yes	AVG	Sample interval for transaction monitoring	INHERIT	0-86400	17
UPDATERS	BINARY	CPSM	1	No	DIFF	RS server update frequency	*	0-25	52
WLMOPTEN	EYUDA	CPSM	4	Yes	LIKE	WLM optimization enablement	DISABLED		64
WLMOPTEN Input/output valid values	ENABLED, DISABLED								
WLMQMODE	EYUDA	CPSM	4	Yes	LIKE	Task load queue mode	ALL		63
WLMQMODE Input/output valid values	ALL, MAXTASK								
WLMSTATUS	EYUDA	CPSM	4	Yes	LIKE	Routing region active at startup	YES		20
WLMSTATUS Input/output valid values	YES, NO								
WLMTHRSH	BINARY	CPSM	1	Yes	DIFF	Task load health threshold	60	1-100	62

Chapter 96. CSYSGRP Resource Table

A CPSM Topology Definition that describes a CICS system group, which is used to describe the scope for a CICSplex.

The **Primary** key field for this resource class is GROUP.

The following action is supported:

ADDTOGRP

Add a group to group link.

External resource name

CICSRegionGroup

Length

184

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt3501

Table 229. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
UPDATE		None	N/A
REMOVE		None	N/A
PERFORM SET	ADDTOGRP	TOGROUP(value)	Yes

Table 230. CSYSGRP FEEDBACK error codes

Value	Code	Description
1	CSYSGRP_INV_DATA	Attribute data invalid
2	CSYSGRP_REC_NOT_FOUND	Requested resource not found
3	CSYSGRP_INV_REFERENCE	Group does not exist
4	CSYSGRP_REC_EXISTS	Resource already exists

Table 230. CSYSGRP FEEDBACK error codes (continued)

Value	Code	Description
5	CSYSGRP_REC_CHANGED	Resource definition already changed
21	CSYSGRP_INV_GROUP	Invalid group
22	CSYSGRP_SYSGROUP_IN_USE	System group in use
23	CSYSGRP_ASSOCIATION	Togroup matches group
24	CSYSGRP_INCONSISTENT_SET	BAS inconsistent set
25	CSYSGRP_CYCLIC_GROUPS	Link causes cyclic groups
26	CSYSGRP_INCONSISTENT_SCOPES	BAS inconsistent set
27	CSYSGRP_IS_PLATFORM_SYSGROUP	System group is a platform group
28	CSYSGRP_NOT_PLATFORM_SYSGROUP	System group is a not a platform group
29	CSYSGRP_INV_REGIONTYPE	Region type invalid
30	CSYSGRP_INV_PLATDEF	Platform definition invalid

Table 231. CSYSGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			8
CHANGEAGENT Input/ output valid values	DREPAPI								
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed			1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			10
CREATEORIGIN	EYUDA	CPSM	4	No	DIFF	Definition origin			15
CREATEORIGIN Input/ output valid values	N_A, PLATFORM								
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created			9
DESC	CHAR	CPSM	58	No	DIFF	Description			6
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999	7
GROUP-1	CHAR	CPSM	8	Yes	DIFF	System group name			5
PLATDEF	CHAR	CPSM	8	No	DIFF	Associated platform definition			13
REGIONTYPE	CHAR	CPSM	64	No	DIFF	Region type			14

Chapter 97. D2CINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a DB2 connection definition (DB2CDEF) in a resource group (RESGROUP). A DB2CDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is DB2CGROUP.

The **Secondary** key field for this resource class is DB2CNAME.

The **Tertiary** key field for this resource class is DB2CVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6162

Table 232. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 233. D2CINGRP FEEDBACK error codes		
Value	Code	Description
1	D2CINGRP_INV_DATA	Attribute data invalid
2	D2CINGRP_REC_NOT_FOUND	Requested resource not found
4	D2CINGRP_REC_EXISTS	Resource already exists
6	D2CINGRP_INV_RESTYPE	Invalid resource type
7	D2CINGRP_INV_VER	Invalid resource version
11	D2CINGRP_NON_MP	Maintenance point CMAS not available

Table 233. D2CINGRP FEEDBACK error codes (continued)

Value	Code	Description
12	D2CINGRP_INV_CONTEXT	Context not found
21	D2CINGRP_INCONSISTENT_SET	Inconsistent set
22	D2CINGRP_DIFF_VERSION	Different version
23	D2CINGRP_INV_NAME	Invalid name
24	D2CINGRP_INV_MINNAME	Invalid minor name

Table 234. D2CINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
DB2CGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
DB2CNAME-2	CHAR	CPSM	8	Yes	DIFF	DB2 connection definition name	6
DB2CVER-3	BINARY	CPSM	1	Yes	AVG	DB2 connection definition version	7

Chapter 98. D2EINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a DB2 entry definition (DB2EDEF) in a resource group (RESGROUP). A DB2EDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is DB2EGROUP.

The **Secondary** key field for this resource class is DB2ENAME.

The **Tertiary** key field for this resource class is DB2EVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6163

Table 235. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 236. D2EINGRP FEEDBACK error codes

Value	Code	Description
1	D2EINGRP_INV_DATA	Attribute data invalid
2	D2EINGRP_REC_NOT_FOUND	Requested resource not found
4	D2EINGRP_REC_EXISTS	Resource already exists
6	D2EINGRP_INV_RESTYPE	Invalid resource type
7	D2EINGRP_INV_VER	Invalid resource version
11	D2EINGRP_NON_MP	Maintenance point CMAS not available
12	D2EINGRP_INV_CONTEXT	Context not found

Table 236. D2EINGRP FEEDBACK error codes (continued)

Value	Code	Description
21	D2EINGRP_INCONSISTENT_SET	Inconsistent set
22	D2EINGRP_DIFF_VERSION	Different version
23	D2EINGRP_INV_NAME	Invalid name
24	D2EINGRP_INV_MINNAME	Invalid minor name

Table 237. D2EINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
DB2EGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
DB2ENAME-2	CHAR	CPSM	8	Yes	DIFF	DB2 entry definition name	6
DB2EVER-3	BINARY	CPSM	1	Yes	AVG	DB2 entry definition version	7

Chapter 99. D2TINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a DB2 transaction definition (DB2TDEF) in a resource group (RESGROUP). A DB2TDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is DB2TGROUP.

The **Secondary** key field for this resource class is DB2TNAME.

The **Tertiary** key field for this resource class is DB2TVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6164

Table 238. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 239. D2TINGRP FEEDBACK error codes

Value	Code	Description
1	D2TINGRP_INV_DATA	Attribute data invalid
2	D2TINGRP_REC_NOT_FOUND	Requested resource not found
4	D2TINGRP_REC_EXISTS	Resource already exists
6	D2TINGRP_INV_RESTYPE	Invalid resource type
7	D2TINGRP_INV_VER	Invalid resource version
11	D2TINGRP_NON_MP	Maintenance point CMAS not available

Table 239. D2TINGRP FEEDBACK error codes (continued)

Value	Code	Description
12	D2TINGRP_INV_CONTEXT	Context not found
21	D2TINGRP_INCONSISTENT_SET	Inconsistent set
22	D2TINGRP_DIFF_VERSION	Different version
23	D2TINGRP_INV_NAME	Invalid name
24	D2TINGRP_INV_MINNAME	Invalid minor name

Table 240. D2TINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
DB2TGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
DB2TNAME-2	CHAR	CPSM	8	Yes	DIFF	DB2 transaction definition name	6
DB2TVER-3	BINARY	CPSM	1	Yes	AVG	DB2 transaction definition version	7

Chapter 100. DB2CDEF Resource Table

A CICS Definition that describes the connection properties of a DB2 connection.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install a DB2 connection definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionDb2Connection

Length

280

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3817

Table 241. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM	INSTALL SET	FORCEINS(YES, NO)	No
SET		MODE(value)	No

Table 241. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 242. DB2CDEF FEEDBACK error codes

Value	Code	Description
1	DB2CDEF_INV_DATA	Attribute data invalid
2	DB2CDEF_REC_NOT_FOUND	Requested resource not found
4	DB2CDEF_REC_EXISTS	Resource already exists
5	DB2CDEF_REC_CHANGED	Resource definition already changed
6	DB2CDEF_INV_RESTYPE	Invalid resource type
7	DB2CDEF_INV_VER	Invalid resource version
11	DB2CDEF_NON_MP	Maintenance point CMAS not available
12	DB2CDEF_INV_CONTEXT	Context not found
13	DB2CDEF_INCONSISTENT_SET	Inconsistent set condition
14	DB2CDEF_INV_RESGROUP	Resource group not found
21	DB2CDEF_INV_ACTION	Invalid action
22	DB2CDEF_INV_RECADDR	Invalid record address
23	DB2CDEF_INV_RECLEN	Invalid record length
24	DB2CDEF_DIFF_VERSION	Different version
25	DB2CDEF_EARLY_NAMELIST_END	Early name list end
26	DB2CDEF_INV_NAMELIST	Invalid name list
27	DB2CDEF_INV_NAME	Invalid name
28	DB2CDEF_INV_MINNAME	Invalid minor name
29	DB2CDEF_NOTIFY	Notify
30	DB2CDEF_PARTIAL_INSTALL	Partial install
31	DB2CDEF_NOTHING_INSTALLED	Nothing installed

Table 242. DB2CDEF FEEDBACK error codes (continued)

Value	Code	Description
32	DB2CDEF_NO_TARGETS	No targets
33	DB2CDEF_NO_RELATED	No related systems
34	DB2CDEF_INV_TSCOPE	Invalid target scope
35	DB2CDEF_INV_RSCOPE	Invalid related scope
36	DB2CDEF_INV_USAGE	Invalid usage
37	DB2CDEF_INV_MODE	Invalid mode
38	DB2CDEF_INV_STATECHK	Invalid state check
39	DB2CDEF_INV_FORCEINS	Invalid force install
40	DB2CDEF_INV_NOTIFY	Invalid notify
41	DB2CDEF_INV_OVERTYPE	Invalid over type
42	DB2CDEF_INV_OVRBLOCK	Invalid override block
43	DB2CDEF_INV_ORSTRING	Invalid override string
44	DB2CDEF_INV_STRNGTERM	Invalid string terminator
45	DB2CDEF_INV_EMBEDTERM	Invalid embedded terminator
46	DB2CDEF_INV_ATTRIBUTE	Invalid attribute
47	DB2CDEF_INV_LITERAL	Invalid literal
48	DB2CDEF_INV_ORSTGNA	Invalid override string
49	DB2CDEF_SCOPE_REQUIRED	Scope required
50	DB2CDEF_USAGE_CONFLICT	Usage conflict
51	DB2CDEF_NODEFS_SELECTED	No definitions selected
52	DB2CDEF_MORE_THAN_1_RELSYS	More than one related system
53	DB2CDEF_MISSING_RELSYSID	Missing related system identifier
54	DB2CDEF_SCOPE_CONFLICT	Scope conflict
55	DB2CDEF_INV_CSDGROUP	Invalid CSD group
56	DB2CDEF_REC_NOT_REMOVED	Record not removed
57	DB2CDEF_INV_RESOURCE	Invalid resource
58	DB2CDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	DB2CDEF_PARTIAL_ACTION	Partial action
60	DB2CDEF_NOTHING_ACTIONED	Nothing actioned
61	DB2CDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	DB2CDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	DB2CDEF_CSD_ERROR	CSD access error

Table 243. DB2CDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
ACCOUNTREC	CVDAS	CPSM	4	Yes	LIKE	Accounting record option	NONE			22
ACCOUNTREC Input/output valid values	NONE, UOW, TASK, TXID									
AUTHID	CHAR	CPSM	8	No	DIFF	Pool thread authorization ID				23
AUTHTYPE	CVDAS	CPSM	4	Yes	LIKE	Pool thread authorization type	NOTAPPLIC			24
AUTHTYPE Input/output valid values	USERID, GROUP, TERM, TX, OPID, SIGN, NOTAPPLIC									
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	43
CHANGEAGENT Input/output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	45
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	44
COMAUTHID	CHAR	CPSM	8	No	DIFF	Command thread authorization ID				32
COMAUTHTYPE	CVDAS	CPSM	4	Yes	LIKE	Command thread authorization type	NOTAPPLIC			33
COMAUTHTYPE Input/output valid values	USERID, GROUP, TERM, TX, OPID, SIGN, NOTAPPLIC									
COMTHREADLIM	CHAR	CPSM	4	Yes	DIFF	Maximum number of command threads	3	0-2000		31
CONNECTERROR	CVDAS	CPSM	4	Yes	LIKE	Connection error processing option	SQLCODE			9
CONNECTERROR Input/output valid values	ABEND, SQLCODE									
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				34
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	47
DB2GROUPID	CHAR	CPSM	4	No	DIFF	DB2 data sharing group ID				40
DB2ID	CHAR	CPSM	4	No	DIFF	DB2 subsystem ID				10
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		42
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				38
DROLLBACK	EYUDA	CPSM	4	Yes	LIKE	Deadlock resolution rollback option	YES			25
DROLLBACK Input/output valid values	YES, NO									
MSGQUEUE1	CHAR	CPSM	4	Yes	DIFF	Unsolicited error message TDQ name 1	CDB2			11
MSGQUEUE2	CHAR	CPSM	4	No	DIFF	Unsolicited error message TDQ name 2				12
MSGQUEUE3	CHAR	CPSM	4	No	DIFF	Unsolicited error message TDQ name 3				13
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
NONTERMREL	EYUDA	CPSM	4	Yes	LIKE	Non-terminal transaction thread-release option	YES			14

Table 243. DB2CDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
NONTERMREL Input/output valid values	YES, NO									
PLAN	CHAR	CPSM	8	No	DIFF	Name of plan used for pool				26
PLANEXITNAME	CHAR	CPSM	8	No	DIFF	Name of dynamic plan exit used for pool threads				27
PRIORITY	CVDAS	CPSM	4	Yes	LIKE	TCB priority	HIGH			28
PRIORITY Input/output valid values	HIGH, LOW, EQUAL									
PURGE CYCLEM	CHAR	CPSM	2	Yes	DIFF	Protected thread purge cycle (minutes)	0	0-59		15
PURGE CYCLES	CHAR	CPSM	2	Yes	DIFF	Protected thread purge cycle (seconds)	30	0-59		16
RESYNCMEMBER	EYUDA	CPSM	4	Yes	LIKE	Resynchronization member	YES			41
RESYNCMEMBER Input/output valid values	YES, NO									
REUSELIMIT	CHAR	CPSM	5	Yes	LIKE	Thread reuse limit	1000	0-10000	E640 E650 E660	48
SIGNID	CHAR	CPSM	8	No	DIFF	Authorization ID used by CICS-DB2 attach				17
STANDBYMODE	CVDAS	CPSM	4	Yes	LIKE	Standby mode	RECONNECT			18
STANDBYMODE Input/output valid values	RECONNECT, NOCONNECT, CONNECT									
STATSQUEUE	CHAR	CPSM	4	Yes	DIFF	Attachment statistics TDQ name	CDB2			19
TCBLIMIT	CHAR	CPSM	4	Yes	DIFF	Maximum number of connections into DB2	12	4-2000		20
THREADERROR	CVDAS	CPSM	4	Yes	LIKE	Action following thread error	N906D			21
THREADERROR Input/output valid values	ABEND, N906D, N906									
THREADLIMIT	CHAR	CPSM	4	Yes	DIFF	Maximum number of pool threads	3	3-2000		30
THREADWAIT	EYUDA	CPSM	4	Yes	LIKE	Thread wait option	YES			29
THREADWAIT Input/output valid values	YES, NO									
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				35
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				36
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				37

Chapter 101. DB2CONN Resource Table

A CICS Resource that describes a DB2 connection in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

REBUILD

Rebuild the security environment.

CONNECT

Connect to the DB2 environment.

The CONNECT action does have a parameter, BUSY, but this is ignored and deprecated. Applications should not specify the BUSY parameter. Note that the BUSY parameter still applies to DISCONNECT and is a required parameter.

DISCONNECT

Disconnect from the DB2 environment.

The parameter data for the DISCONNECT action is:

```
PARM('BUSY(cvda).')
```

where *cvda* is required and is one of the following valid CVDA values for the DB2 connection busy condition:

WAIT
NOWAIT
FORCE

FORCE

Force disconnection from the DB2 environment.

DISCARD

Discard the DB2 connection.

External resource name

CICSDB2Connection

Length

408

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0086

Table 244. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	REBUILD	None	N/A
	CONNECT	BUSY(value)	No
	DISCONNECT	BUSY(WAIT, NOWAIT, FORCE)	Yes
	FORCE	None	N/A
	DISCARD	None	N/A

Table 245. DB2CONN resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
ACCOUNTREC	CVDAS	INQ	4	LIKE	Yes	Accounting record option			2
ACCOUNTREC Input/output valid values	UOW, TXID, NONE, TASK								
AUTHID	CHAR	INQ	8	DIFF	Yes	Pool thread authorization ID			3
AUTHTYPE	CVDAS	INQ	4	LIKE	Yes	Pool thread authorization type			4
AUTHTYPE Input/output valid values	GROUP, SIGN, TERM, TX, OPID, USERID								
AUTHTYPE Output valid values	NOTAPPLIC								
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0	E640 E650	77
CCALLS	CNUMERIC	STAT	4	AVG	No	Number of calls using command threads			55
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent		E640 E650	69
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATC, DREPAPI, DREPBATCH, CREATESPI, NOTAPPLIC								
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release		E640 E650	70
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time		E640 E650	72
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID		E640 E650	68
COMAUTHID	CHAR	INQ	8	DIFF	Yes	Command thread authorization ID			7
COMAUTHTYPE	CVDAS	INQ	4	LIKE	Yes	Command thread authorization type			8
COMAUTHTYPE Input/output valid values	CGROUP, CSIGN, CTERM, CTX, COPID, CUSERID								
COMAUTHTYPE Output valid values	NOTAPPLIC								
COMTHREADLIM	CNUMERIC	INQ	4	AVG	Yes	Maximum number of command threads			6

Table 245. DB2CONN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
COMTHREADS	CNUMERIC	INQ	4	AVG	No	Number of active command threads			5
CONNECTERROR	CVDAS	INQ	4	LIKE	Yes	Connection error processing option			9
CONNECTERROR Input/output valid values	ABEND, SQLCODE								
CONNECTST	CVDAS	INQ	4	LIKE	Yes	Connection status			10
CONNECTST Input/output valid values	CONNECTED, NOTCONNECTED								
CONNECTST Output valid values	CONNECTING, DISCONNING								
CSIGNONS	CNUMERIC	STAT	4	AVG	No	Number of command thread signons			56
CTCURR	CNUMERIC	STAT	4	AVG	No	Current number of command threads			60
CTHWM	CNUMERIC	STAT	4	AVG	No	Peak number of command threads			61
CTIMEGMT	TIMESTP	STAT	8	MAX	No	GMT connect time			32
CTIMELOC	TIMESTP	STAT	8	MAX	No	Local connect time			33
CTLIMIT	CNUMERIC	STAT	4	AVG	No	Maximum number of command threads			59
CTOVERF	CNUMERIC	STAT	4	AVG	No	Number of command thread overflows to pool			58
CTTERM	CNUMERIC	STAT	4	AVG	No	Number of command thread terminations			57
DB2GROUPID	CHAR	INQ	4	DIFF	Yes	DB2 data sharing group ID			65
DB2ID	CHAR	INQ	4	DIFF	Yes	DB2 subsystem ID			11
DB2RELEASE	CHAR	INQ	4	DIFF	No	DB2 version and release			12
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition		E640 E650	73
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time		E640 E650	74
DROLLBACK	CVDAS	INQ	4	LIKE	No	Deadlock resolution rollback option			13
DROLLBACK Output valid values	ROLLBACK, NOROLLBACK								
DTIMEGMT	TIMESTP	STAT	8	MAX	No	GMT disconnect time			34
DTIMELOC	TIMESTP	STAT	8	MAX	No	Local disconnect time			35
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent		E640 E650	71
INSTALLAGENT Input/output valid values	CSDAPI, CREATSPI, GRPLIST								
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time		E640 E650	76
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID		E640 E650	75
MSGQUEUE1	CHAR	INQ	4	DIFF	Yes	Unsolicited error message TDQ name 1			14
MSGQUEUE2	CHAR	INQ	4	DIFF	Yes	Unsolicited error message TDQ name 2			15
MSGQUEUE3	CHAR	INQ	4	DIFF	Yes	Unsolicited error message TDQ name 3			16

Table 245. DB2CONN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
NAME-1	CHAR	INQ	8	DIFF	No	DB2 connection name			1
NONTERMREL	CVDAS	INQ	4	LIKE	Yes	Non-terminal transaction thread-release option			17
NONTERMREL Input/output valid values	RELEASE, NORELEASE								
PABORTS	CNUMERIC	STAT	4	AVG	No	Number of pool thread aborts			42
PCALLS	CNUMERIC	STAT	4	AVG	No	Number of calls using pool threads			39
PCOMMITS	CNUMERIC	STAT	4	AVG	No	Number of pool thread commits			41
PLAN	CHAR	INQ	8	DIFF	Yes	Name of plan used for pool			18
PLANEXITNAME	CHAR	INQ	8	DIFF	Yes	Name of dynamic plan exit used for pool threads			19
PPSIGNONS	BINARY	STAT	4	AVG	No	Number of pool thread partial signons		E640 E650 E660 E670 E680 E690 E700	81
PREUSELIMCT	BINARY	STAT	4	AVG	No	Number of times a pool thread reached REUSELIMIT		E640 E650 E660	80
PRIORITY	CVDAS	INQ	4	LIKE	Yes	TCB priority			20
PRIORITY Input/output valid values	HIGH, EQUAL, LOW								
PRQCUR	CNUMERIC	STAT	4	AVG	No	Current number of tasks waiting for pool thread			53
PRQHWM	CNUMERIC	STAT	4	AVG	No	Peak number of tasks waiting for pool thread			54
PSIGNONS	CNUMERIC	STAT	4	AVG	No	Number of pool thread signons			40
PSPHASE	CNUMERIC	STAT	4	AVG	No	Number of units of work with single phase commit			43
PTCREATE	BINARY	STAT	4	AVG	No	Number of times threads created		E640 E650 E660 E670 E680 E690 E700	82
PTCURR	CNUMERIC	STAT	4	AVG	No	Current number of active pool threads			48
PTHWM	CNUMERIC	STAT	4	AVG	No	Peak number of active pool threads			49
PTLIMIT	CNUMERIC	STAT	4	AVG	No	Maximum number of pool threads			47
PTREUSE	CNUMERIC	STAT	4	AVG	No	Number of times transactions reused pool threads			44
PTTERM	CNUMERIC	STAT	4	AVG	No	Number of times threads terminated			45
PTWAIT	CNUMERIC	STAT	4	AVG	No	Number of pool thread waits			46
PURGECYCLEM	CNUMERIC	INQ	4	AVG	Yes	Protected thread purge cycle (minutes)			21
PURGECYCLES	CNUMERIC	INQ	4	AVG	Yes	Protected thread purge cycle (seconds)			22

Table 245. DB2CONN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
PXCURR	CNUMERIC	STAT	4	AVG	No	Current number of tasks using a pool thread			50
PXHWM	CNUMERIC	STAT	4	AVG	No	Peak number of tasks using a pool thread			51
PXTOTAL	CNUMERIC	STAT	4	AVG	No	Total number of tasks that used a pool thread			52
RESYNCMEMBER	CVDAS	INQ	4	LIKE	Yes	Resynchronization member			66
RESYNCMEMBER Input/output valid values	RESYNC, NORESYNC, NOTAPPLIC								
REUSELIMIT	BINARY	INQ	4	AVG	Yes	Thread reuse limit		E640 E650 E660	79
SIGNID	CHAR	INQ	8	DIFF	Yes	Authorization ID used by CICS-DB2 attach			23
STANDBYMODE	CVDAS	INQ	4	LIKE	Yes	Standby mode action			31
STANDBYMODE Input/output valid values	NOCONNECT, CONNECT, RECONNECT								
STATSQUEUE	CHAR	INQ	4	DIFF	Yes	Attachment statistics TDQ name			24
TCBFREE	CNUMERIC	STAT	4	AVG	No	Current number of connections without a TCB			62
TCBLIMIT	CNUMERIC	INQ	4	AVG	Yes	Maximum number of connections (TCBLIMIT)			26
TCBRDYQCURR	CNUMERIC	STAT	4	AVG	No	Current number of tasks waiting for a connection			63
TCBRDYQHWM	CNUMERIC	STAT	4	AVG	No	Peak number of tasks waiting for a connection			64
TCBS	CNUMERIC	INQ	4	AVG	No	Current number of connections with a TCB			25
TCURR	CNUMERIC	STAT	4	AVG	No	Current number of connections with a TCB			37
THREADERROR	CVDAS	INQ	4	LIKE	No	Action following thread error			27
THREADERROR Output valid values	ABEND, N906D, N906								
THREADLIMIT	CNUMERIC	INQ	4	AVG	Yes	Maximum number of pool threads			29
THREADS	CNUMERIC	INQ	4	AVG	No	Number of active pool threads			30
THREADWAIT	CVDAS	INQ	4	LIKE	Yes	Thread wait option			28
THREADWAIT Input/output valid values	TWAIT, NOTWAIT								
THWM	CNUMERIC	STAT	4	AVG	No	Peak number of subtask TCBs			38
TLIMIT	CNUMERIC	STAT	4	AVG	No	Current maximum number of subtask TCBs			36

Chapter 102. DB2EDEF Resource Table

A CICS Definition that describes the properties of a DB2 entry definition.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install a DB2 entry definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionDb2Entry

Length

200

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3818

Table 246. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM	INSTALL SET	FORCEINS(YES, NO)	No
SET		MODE(value)	No

Table 246. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 247. DB2EDEF FEEDBACK error codes

Value	Code	Description
1	DB2EDEF_INV_DATA	Attribute data invalid
2	DB2EDEF_REC_NOT_FOUND	Requested resource not found
4	DB2EDEF_REC_EXISTS	Resource already exists
5	DB2EDEF_REC_CHANGED	Resource definition already changed
6	DB2EDEF_INV_RESTYPE	Invalid resource type
7	DB2EDEF_INV_VER	Invalid resource version
11	DB2EDEF_NON_MP	Maintenance point CMAS not available
12	DB2EDEF_INV_CONTEXT	Context not found
13	DB2EDEF_INCONSISTENT_SET	Inconsistent set condition
14	DB2EDEF_INV_RESGROUP	Resource group not found
21	DB2EDEF_INV_ACTION	Invalid action
22	DB2EDEF_INV_RECADDR	Invalid record address
23	DB2EDEF_INV_RECLEN	Invalid record length
24	DB2EDEF_DIFF_VERSION	Different version
25	DB2EDEF_EARLY_NAMELIST_END	Early name list end
26	DB2EDEF_INV_NAMELIST	Invalid name list
27	DB2EDEF_INV_NAME	Invalid name
28	DB2EDEF_INV_MINNAME	Invalid minor name
29	DB2EDEF_NOTIFY	Notify
30	DB2EDEF_PARTIAL_INSTALL	Partial install
31	DB2EDEF_NOTHING_INSTALLED	Nothing installed

Table 247. DB2EDEF FEEDBACK error codes (continued)

Value	Code	Description
32	DB2EDEF_NO_TARGETS	No targets
33	DB2EDEF_NO_RELATED	No related systems
34	DB2EDEF_INV_TSCOPE	Invalid target scope
35	DB2EDEF_INV_RSCOPE	Invalid related scope
36	DB2EDEF_INV_USAGE	Invalid usage
37	DB2EDEF_INV_MODE	Invalid mode
38	DB2EDEF_INV_STATECHK	Invalid state check
39	DB2EDEF_INV_FORCEINS	Invalid force install
40	DB2EDEF_INV_NOTIFY	Invalid notify
41	DB2EDEF_INV_OVERTYPE	Invalid over type
42	DB2EDEF_INV_OVRBLOCK	Invalid override block
43	DB2EDEF_INV_ORSTRING	Invalid override string
44	DB2EDEF_INV_STRNGTERM	Invalid string terminator
45	DB2EDEF_INV_EMBEDTERM	Invalid embedded terminator
46	DB2EDEF_INV_ATTRIBUTE	Invalid attribute
47	DB2EDEF_INV_LITERAL	Invalid literal
48	DB2EDEF_INV_ORSTGNA	Invalid override string
49	DB2EDEF_SCOPE_REQUIRED	Scope required
50	DB2EDEF_USAGE_CONFLICT	Usage conflict
51	DB2EDEF_NODEFS_SELECTED	No definitions selected
52	DB2EDEF_MORE_THAN_1_RELSYS	More than one related system
53	DB2EDEF_MISSING_RELSYSID	Missing related system identifier
54	DB2EDEF_SCOPE_CONFLICT	Scope conflict
55	DB2EDEF_INV_CSDGROUP	Invalid CSD group
56	DB2EDEF_REC_NOT_REMOVED	Record not removed
57	DB2EDEF_INV_RESOURCE	Invalid resource
58	DB2EDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	DB2EDEF_PARTIAL_ACTION	Partial action
60	DB2EDEF_NOTHING_ACTIONED	Nothing actioned
61	DB2EDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	DB2EDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	DB2EDEF_CSD_ERROR	CSD access error

Table 248. DB2EDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
ACCOUNTREC	CVDAS	CPSM	4	Yes	LIKE	Accounting record option	NONE			10
ACCOUNTREC Input/output valid values	NONE, UOW, TASK, TXID									
AUTHID	CHAR	CPSM	8	No	DIFF	Thread authorization ID				12
AUTHTYPE	CVDAS	CPSM	4	Yes	LIKE	Authorization type	NOTAPPLIC			13
AUTHTYPE Input/output valid values	NOTAPPLIC, GROUP, SIGN, TERM, TX, OPID, USERID									
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	26
CHANGEAGENT Input/output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	28
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	27
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				20
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	30
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		25
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				24
DROLLBACK	EYUDA	CPSM	4	Yes	LIKE	Deadlock rollback option	YES			14
DROLLBACK Input/output valid values	YES, NO									
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
PLAN	CHAR	CPSM	8	No	DIFF	Plan name				15
PLANEXITNAME	CHAR	CPSM	8	No	DIFF	Dynamic plan exit name				16
PRIORITY	CVDAS	CPSM	4	Yes	LIKE	TCB priority	HIGH			17
PRIORITY Input/output valid values	HIGH, EQUAL, LOW									
PROTECTNUM	CHAR	CPSM	4	Yes	DIFF	Maximum number of protected threads	0	0-2000		18
THREADLIMIT	CHAR	CPSM	4	Yes	DIFF	Maximum number of active threads	0	0-2000		11
THREADWAIT	EYUDA	CPSM	4	Yes	LIKE	Thread wait option	POOL			19
THREADWAIT Input/output valid values	POOL, YES, NO									
TRANSID	CHAR	CPSM	4	Yes	DIFF	Transaction ID				9
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				21
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				22
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				23

Chapter 103. DB2ENTRY Resource Table

A CICS Resource that describes a DB2 entry in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

DISCARD

Discard the DB2 entry.

DISABLE

Disable the DB2 entry.

The parameter data for the DISABLE action is:

```
PARM('BUSY(cvda).')
```

where *cvda* is required and is one of the following valid CVDA values for the DB2 entry busy condition:

WAIT
NOWAIT
FORCE

External resource name

CICSdb2Entry

Length

248

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0087

Table 249. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	DISABLE	BUSY(WAIT, NOWAIT, FORCE)	Yes
	DISCARD	None	N/A
	ENABLE	None	N/A

Table 250. DB2ENTRY resource table attributes									
Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
ABORTS	CNUMERIC	STAT	4	AVG	No	Number of aborts			19
ACCOUNTREC	CVDAS	INQ	4	LIKE	Yes	Accounting record option			2
ACCOUNTREC Input/output valid values	NONE, TASK, TXID, UOW								
AUTHID	CHAR	INQ	8	DIFF	Yes	Thread authorization ID			6
AUTHTYPE	CVDAS	INQ	4	LIKE	Yes	Authorization type			7
AUTHTYPE Input/output valid values	GROUP, SIGN, TERM, TX, OPID, USERID								
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0	E640 E650	44
CALLS	CNUMERIC	STAT	4	AVG	No	Number of calls			16
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent		E640 E650	35
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATC, DREPAPI, DREPBATCH, CREATESPI, NOTAPPLIC								
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release		E640 E650	37
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time		E640 E650	38
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID		E640 E650	36
COMMITTS	CNUMERIC	STAT	4	AVG	No	Number of commits			18
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition		E640 E650	39
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time		E640 E650	40
DISABLEDACT	CVDAS	INQ	4	LIKE	Yes	Disabled action			3
DISABLEDACT Input/output valid values	ABEND, SQLCODE, POOL								
DROLLBACK	CVDAS	INQ	4	LIKE	No	Deadlock rollback option			8
DROLLBACK Output valid values	ROLLBACK, NOROLLBACK								
ENABLESTATUS	CVDAS	INQ	4	LIKE	Yes	Enabled status			9
ENABLESTATUS Input/output valid values	ENABLED, DISABLED								
ENABLESTATUS Output valid values	DISABLING								
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent		E640 E650	43
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, GRPLIST								
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time		E640 E650	42
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID		E640 E650	41
NAME-1	CHAR	INQ	8	DIFF	No	DB2 entry name			1
PLAN	CHAR	INQ	8	DIFF	Yes	Plan name			10

Table 250. DB2ENTRY resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
PLANEXITNAME	CHAR	INQ	8	DIFF	Yes	Dynamic plan exit name			11
PRIORITY	CVDAS	INQ	4	LIKE	Yes	TCB priority			12
PRIORITY Input/output valid values	HIGH, EQUAL, LOW								
PROTECTNUM	CNUMERIC	INQ	4	AVG	Yes	Maximum number of protected threads			15
PSIGNONS	BINARY	STAT	4	AVG	No	Number of partial signons		E640 E650 E660 E670 E680 E690 E700	47
PTCURR	CNUMERIC	STAT	4	AVG	No	Current number of protected threads			28
PTHREADS	CNUMERIC	INQ	4	AVG	No	Number of protected threads			4
PTHWM	CNUMERIC	STAT	4	AVG	No	Peak number of protected threads			29
PTLIM	CNUMERIC	STAT	4	AVG	No	Maximum number of protected threads			27
REUSELIMCT	BINARY	STAT	4	AVG	No	Number of times a DB2ENTRY thread reached REUSELIMIT		E640 E650 E660	46
RQCUR	CNUMERIC	STAT	4	AVG	No	Current number of tasks waiting for thread			33
RQHWM	CNUMERIC	STAT	4	AVG	No	Peak number of tasks waiting for thread			34
SIGNONS	CNUMERIC	STAT	4	AVG	No	Number of signons			17
SPHASE	CNUMERIC	STAT	4	AVG	No	Number of UOWs with single phase commit			20
TCREATE	BINARY	STAT	4	AVG	No	Number of times threads created		E640 E650 E660 E670 E680 E690 E700	48
TCURR	CNUMERIC	STAT	4	AVG	No	Current number of threads			25
THREADLIMIT	CNUMERIC	INQ	4	AVG	Yes	Maximum number of active threads			14
THREADS	CNUMERIC	INQ	4	AVG	No	Number of active threads			5
THREADWAIT	CVDAS	INQ	4	LIKE	Yes	Thread wait option			13
THREADWAIT Input/output valid values	TWAIT, NOTWAIT, TPOOL								
THWM	CNUMERIC	STAT	4	AVG	No	Peak number of active threads			26
TLIMIT	CNUMERIC	STAT	4	AVG	No	Maximum number of threads			24
TREUSE	CNUMERIC	STAT	4	AVG	No	Number of times threads reused			21
TTERM	CNUMERIC	STAT	4	AVG	No	Number of times threads terminated			22
TWORO	CNUMERIC	STAT	4	AVG	No	Number of thread waits or overflows			23
XCURR	CNUMERIC	STAT	4	AVG	No	Current number of tasks			30
XHWM	CNUMERIC	STAT	4	AVG	No	Peak number of tasks			31

Table 250. DB2ENTRY resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
XTOTAL	CNUMERIC	STAT	4	AVG	No	Total number of tasks			32

Chapter 104. DB2PKGST Resource Table

A CICS Resource that describes a DB2 packageset associated with a CICS Platform or a CICS Cloud application.

The **Primary** key field for this resource class is NAME. In addition, a parameter or criteria is required to name a platform or an application name and its major, minor and micro version.

External resource name

CICSDB2Packageset

Length

352

Usage

API or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0216

Table 251. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		APPLICATION(value)	No
		APPLMAJORVER(value)	No
		APPLMICROVER(value)	No
		APPLMINORVER(value)	No
		PLATFORM(value)	Yes

Table 252. DB2PKGST resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
BASEAPMAJVER	BINARY	INQ	4	MAX	Base application major version	13
BASEAPMICVER	BINARY	INQ	4	MAX	Base application micro version	15
BASEAPMINVER	BINARY	INQ	4	MAX	Base application minor version	14
BASEAPPLICTN	CHAR	INQ	64	DIFF	Base application name	12
BASEPLATFORM	CHAR	INQ	64	DIFF	Base platform name	11

Table 252. DB2PKGST resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	INQ	4	LIKE	Last modification agent	2
CHANGEAGENT Input/output valid values	CSDAPI, CREATSPI, CSDBATCH, DREPAPI, NOTAPPLIC					
CHANGEAGREL	CHAR	INQ	4	DIFF	Last modification agent release	3
CHANGETIME	DATETIME	INQ	8	MAX	Last modification time	7
CHANGEUSRID	CHAR	INQ	8	DIFF	Last modification user ID	4
DEFINESOURCE	CHAR	INQ	8	DIFF	Source of the resource definition	5
DEFINETIME	DATETIME	INQ	8	MAX	Creation time	6
ENABLESTATUS	CVDAS	INQ	4	LIKE	Enabled status	16
ENABLESTATUS Input/output valid values	ENABLED, DISABLED					
INSTALLAGENT	CVDAS	INQ	4	LIKE	Installation agent	9
INSTALLAGENT Input/output valid values	BUNDLE					
INSTALLTIME	DATETIME	INQ	8	MAX	Installation time	8
INSTALLUSRID	CHAR	INQ	8	DIFF	Installation user ID	10
NAME-1	CHAR	INQ	128	DIFF	DB2 Packageset	1

Chapter 105. DB2SS Resource Table

A CICS Resource that describes the attachment between an active CICS system and a DB2 subsystem.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

Length

80

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0032

Table 253. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 254. DB2SS resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
CURTHREAD	BINARY	CPSM	4	AVG	Number of current active tasks	11
ERRDEST1	CHAR	CPSM	4	DIFF	First error destination	8
ERRDEST2	CHAR	CPSM	4	DIFF	Second error destination	9
ERRDEST3	CHAR	CPSM	4	DIFF	Third error destination	10
LOCATION	CHAR	CPSM	4	DIFF	MVS system ID	2
MAXTHREAD	BINARY	CPSM	4	AVG	Maximum number of threads	12
NAME-1	CHAR	CPSM	4	DIFF	DB2 ID	1
PLANENTRTRC	BINARY	CPSM	2	AVG	Plan allocation entry trace ID	13
PLANEXITTRC	BINARY	CPSM	2	AVG	Plan allocation exit trace ID	14
RCTNAME	CHAR	CPSM	8	DIFF	DB2 connection name	6
RELEASE	CHAR	CPSM	4	DIFF	DB2 subsystem release level	3

Table 254. DB2SS resource table attributes (continued)						
Name	Datatype	Source	Len	Sum	Description	Attr ID
SNAPCLASS	CHAR	CPSM	1	DIFF	Snap dump output class	16
SQLTRCID	BINARY	CPSM	2	AVG	SQL trace ID	15
STATSDEST	CHAR	CPSM	4	DIFF	Transient data destination for CICS DB2 statistics	7
STATUS	EYUDA	CPSM	4	LIKE	DB2 CICS attachment status	4
STATUS Output valid values	ACTIVE, INACTIVE, WAITING, QUIESCING, CONNECTING, DISCONNING					
WAIT	EYUDA	CPSM	4	LIKE	Wait for DB2 subsystem option	5
WAIT Output valid values	YES, NO, RECONNECT					

Chapter 106. DB2TDEF Resource Table

A CICS Definition that describes the relationship between a transaction and its related DB2 Entry.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install a DB2 transaction definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionDb2Transaction

Length

152

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3819

Table 255. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM SET	INSTALL	FORCEINS(YES, NO)	No
		MODE(value)	No

Table 255. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 256. DB2TDEF FEEDBACK error codes

Value	Code	Description
1	DB2TDEF_INV_DATA	Attribute data invalid
2	DB2TDEF_REC_NOT_FOUND	Requested resource not found
4	DB2TDEF_REC_EXISTS	Resource already exists
5	DB2TDEF_REC_CHANGED	Resource definition already changed
6	DB2TDEF_INV_RESTYPE	Invalid resource type
7	DB2TDEF_INV_VER	Invalid resource version
11	DB2TDEF_NON_MP	Maintenance point CMAS not available
12	DB2TDEF_INV_CONTEXT	Context not found
13	DB2TDEF_INCONSISTENT_SET	Inconsistent set condition
14	DB2TDEF_INV_RESGROUP	Resource group not found
21	DB2TDEF_INV_ACTION	Invalid action
22	DB2TDEF_INV_RECADDR	Invalid record address
23	DB2TDEF_INV_RECLEN	Invalid record length
24	DB2TDEF_DIFF_VERSION	Different version
25	DB2TDEF_EARLY_NAMELIST_END	Early name list end
26	DB2TDEF_INV_NAMELIST	Invalid name list
27	DB2TDEF_INV_NAME	Invalid name
28	DB2TDEF_INV_MINNAME	Invalid minor name
29	DB2TDEF_NOTIFY	Notify
30	DB2TDEF_PARTIAL_INSTALL	Partial install
31	DB2TDEF_NOTHING_INSTALLED	Nothing installed

Table 256. DB2TDEF FEEDBACK error codes (continued)

Value	Code	Description
32	DB2TDEF_NO_TARGETS	No targets
33	DB2TDEF_NO_RELATED	No related systems
34	DB2TDEF_INV_TSCOPE	Invalid target scope
35	DB2TDEF_INV_RSCOPE	Invalid related scope
36	DB2TDEF_INV_USAGE	Invalid usage
37	DB2TDEF_INV_MODE	Invalid mode
38	DB2TDEF_INV_STATECHK	Invalid state check
39	DB2TDEF_INV_FORCEINS	Invalid force install
40	DB2TDEF_INV_NOTIFY	Invalid notify
41	DB2TDEF_INV_OVERTYPE	Invalid over type
42	DB2TDEF_INV_OVRBLOCK	Invalid override block
43	DB2TDEF_INV_ORSTRING	Invalid override string
44	DB2TDEF_INV_STRNGTERM	Invalid string terminator
45	DB2TDEF_INV_EMBEDTERM	Invalid embedded terminator
46	DB2TDEF_INV_ATTRIBUTE	Invalid attribute
47	DB2TDEF_INV_LITERAL	Invalid literal
48	DB2TDEF_INV_ORSTGNA	Invalid override string
49	DB2TDEF_SCOPE_REQUIRED	Scope required
50	DB2TDEF_USAGE_CONFLICT	Usage conflict
51	DB2TDEF_NODEFS_SELECTED	No definitions selected
52	DB2TDEF_MORE_THAN_1_RELSYS	More than one related system
53	DB2TDEF_MISSING_RELSYSID	Missing related system identifier
54	DB2TDEF_SCOPE_CONFLICT	Scope conflict
55	DB2TDEF_INV_CSDGROUP	Invalid CSD group
56	DB2TDEF_REC_NOT_REMOVED	Record not removed
57	DB2TDEF_INV_RESOURCE	Invalid resource
58	DB2TDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	DB2TDEF_PARTIAL_ACTION	Partial action
60	DB2TDEF_NOTHING_ACTIONED	Nothing actioned
61	DB2TDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	DB2TDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	DB2TDEF_CSD_ERROR	CSD access error

Table 257. DB2TDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
CHANGEAGENT	CV DAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	17
CHANGEAGENT Input/ output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	19
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	18
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				11
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	21
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		16
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				15
ENTRY	CHAR	CPSM	8	Yes	DIFF	Name of associated DB2 entry				9
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
TRANSID	CHAR	CPSM	4	No	DIFF	Transaction ID associated with DB2 entry				10
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				12
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				13
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				14

Chapter 107. DB2THRD Resource Table

A CICS Resource that describes an attachment thread from an active CICS system to a DB2 subsystem.

The **Primary** key field for this resource class is INITTRAN.

External resource name

Length

96

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0033

Table 258. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 259. DB2THRD resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ABORTCNT	BINARY	CPSM	4	AVG	Number of aborts	14
AUTHCNT	BINARY	CPSM	4	AVG	Number of authorizations performed	11
AUTHTYPE	EYUDA	CPSM	4	LIKE	Authorization type	2
AUTHTYPE Output valid values	USER, TERMID, TRANID, SIGNID, CHARSTR, USERID, RACFGID, NULL, NA					
CURTHREADS	BINARY	CPSM	2	AVG	Number of current threads	6
DPMODE	EYUDA	CPSM	4	LIKE	Dispatching mode	3
DPMODE Output valid values	HIGH, LOW, EQ					
INITTRAN-1	CHAR	CPSM	4	DIFF	Initial transaction	1
MAXTHREADS	BINARY	CPSM	2	AVG	Maximum number of threads	5
NAME	CHAR	CPSM	4	DIFF	DB2 subsystem	18
OTHERIDS	BINARY	CPSM	4	AVG	Number of transactions in group	16
PLANNAME	CHAR	CPSM	8	DIFF	Plan	10

Table 259. DB2THRD resource table attributes (continued)						
Name	Datatype	Source	Len	Sum	Description	Attr ID
PLANPRGM	CHAR	CPSM	8	DIFF	Dynamic plan exit for pool threads	9
READCOMMIT	BINARY	CPSM	4	AVG	Number of read-only commits	15
ROLLBACKOPT	EYUDA	CPSM	4	LIKE	Rollback option	4
ROLLBACKOPT Output valid values	YES, NO					
RSVTHREADS	BINARY	CPSM	4	AVG	Number of reserved threads	7
THREADHWM	BINARY	CPSM	2	AVG	Peak number of concurrent threads in use	17
THREADWAIT	BINARY	CPSM	4	AVG	Number of thread waits	13
THREADWOPT	EYUDA	CPSM	4	LIKE	Thread wait option	8
THREADWOPT Output valid values	TWAIT, NOTWAIT, POOL, YES, NO, NA					
USECOUNT	BINARY	CPSM	4	AVG	Number of times plan used	12

Chapter 108. DB2TRAN Resource Table

A CICS Resource that describes a transaction defined as using a DB2 thread and resource.

The **Primary** key field for this resource class is INITTRAN.

The **Secondary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

Length

24

Usage

API or WUI

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0034

Table 260. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 261. DB2TRAN resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	1
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
INITTRAN-1	CHAR	CPSM	4	DIFF	Initial transaction	
NAME-2	CHAR	CPSM	4	DIFF	Associated transaction ID	2

Chapter 109. DB2TRN Resource Table

A CICS Resource that describes a DB2 transaction in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

DISCARD

Discard the DB2 transaction.

These actions require no unique parameter data.

External resource name

CICSDB2Transaction

Length

120

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0088

Table 262. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	DISCARD	None	N/A

Table 263. DB2TRN resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0	E640 E650	15
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent		E640 E650	6

Table 263. DB2TRN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, DYNAMIC, CREATESPI, NOTAPPLIC								
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release		E640 E650	8
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time		E640 E650	10
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID		E640 E650	7
DB2ENTRY	CHAR	INQ	8	DIFF	Yes	DB2 entry name for DB2TRN			2
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition		E640 E650	11
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time		E640 E650	12
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent		E640 E650	9
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, DYNAMIC, GRPLIST								
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time		E640 E650	14
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID		E640 E650	13
NAME-1	CHAR	INQ	8	DIFF	No	DB2 transaction name			1
PLAN	CHAR	CPSM	8	DIFF	No	Plan name			4
PLANEXITNAME	CHAR	CPSM	8	DIFF	No	Plan exit name			5
TRANSID	CHAR	INQ	4	DIFF	Yes	Transaction ID associated with DB2 entry			3

Chapter 110. DBCTLSS Resource Table

A CICS Resource that describes the connection of an active CICS system to a DBCTRL subsystem.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSDBCTLSubsystem

Length

104

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0031

Table 264. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 265. DBCTLSS resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
CICSNAME	CHAR	CPSM	8	DIFF	CICS system name used to attach	4
DBCTLOVERRIDE	CHAR	CPSM	4	DIFF	DBCTL ID override	16
LOCATION	CHAR	CPSM	4	DIFF	MVS system ID	2
MAXTHRDCNT	BINARY	CPSM	4	AVG	Number of times maximum threads reached	12
MAXTHRDTIME	BINARY	CPSM	4	AVG	Elapsed time at maximum threads condition	13
MAXTHREAD	BINARY	CPSM	2	AVG	Maximum number of threads	10
MINTHRDCNT	BINARY	CPSM	4	AVG	Number of times minimum threads reached	11
MINTHREAD	BINARY	CPSM	2	AVG	Minimum number of threads	9
NAME-1	CHAR	CPSM	4	DIFF	DBCTL subsystem name	1

Table 265. DBCTLSS resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
PEAKTHREADS	BINARY	CPSM	4	AVG	Peak number of threads in use	14
PRPNAME	CHAR	CPSM	8	DIFF	Fully qualified startup table name	5
PSBSCHED	BINARY	CPSM	4	AVG	Number of times PSB successfully scheduled	15
RSENAME	CHAR	CPSM	8	DIFF	Recoverable Service Element (RSE) name	6
STATUS	EYUDA	CPSM	4	LIKE	DBCTL CICS attachment status	3
STATUS Output valid values	ACTIVE, INACTIVE, WAITING					
TIMEOFF	TIMESTP	CPSM	8	MAX	Time at which disconnect occurred	8
TIMEON	TIMESTP	CPSM	8	MAX	Time at which connect occurred	7

Chapter 111. DOCDEF Resource Table

A CICS Definition that describes a document template.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install a document Template Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionDocumentTemplate

Length

512

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3824

Table 266. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM	INSTALL SET	FORCEINS(YES, NO)	No
SET		MODE(value)	No

Table 266. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 267. DOCDEF FEEDBACK error codes

Value	Code	Description
1	DOCDEF_INV_DATA	Attribute data invalid
2	DOCDEF_REC_NOT_FOUND	Requested resource not found
4	DOCDEF_REC_EXISTS	Resource already exists
5	DOCDEF_REC_CHANGED	Resource definition already changed
6	DOCDEF_INV_RESTYPE	Invalid resource type
7	DOCDEF_INV_VER	Invalid resource version
11	DOCDEF_NON_MP	Maintenance point CMAS not available
12	DOCDEF_INV_CONTEXT	Context not found
13	DOCDEF_INCONSISTENT_SET	Inconsistent set condition
14	DOCDEF_INV_RESGROUP	Resource group not found
21	DOCDEF_INV_ACTION	Invalid action
22	DOCDEF_INV_RECADDR	Invalid record address
23	DOCDEF_INV_RECLN	Invalid record length
24	DOCDEF_DIFF_VERSION	Different version
25	DOCDEF_EARLY_NAMELIST_END	Early name list end
26	DOCDEF_INV_NAMELIST	Invalid name list
27	DOCDEF_INV_NAME	Invalid name
28	DOCDEF_INV_MINNAME	Invalid minor name
29	DOCDEF_NOTIFY	Notify
30	DOCDEF_PARTIAL_INSTALL	Partial install
31	DOCDEF_NOTHING_INSTALLED	Nothing installed

Table 267. DOCDEF FEEDBACK error codes (continued)

Value	Code	Description
32	DOCDEF_NO_TARGETS	No targets
33	DOCDEF_NO_RELATED	No related systems
34	DOCDEF_INV_TSCOPE	Invalid target scope
35	DOCDEF_INV_RSCOPE	Invalid related scope
36	DOCDEF_INV_USAGE	Invalid usage
37	DOCDEF_INV_MODE	Invalid mode
38	DOCDEF_INV_STATECHK	Invalid state check
39	DOCDEF_INV_FORCEINS	Invalid force install
40	DOCDEF_INV_NOTIFY	Invalid notify
41	DOCDEF_INV_OVERTYPE	Invalid over type
42	DOCDEF_INV_OVRBLOCK	Invalid override block
43	DOCDEF_INV_ORSTRING	Invalid override string
44	DOCDEF_INV_STRNGTERM	Invalid string terminator
45	DOCDEF_INV_EMBEDTERM	Invalid embedded terminator
46	DOCDEF_INV_ATTRIBUTE	Invalid attribute
47	DOCDEF_INV_LITERAL	Invalid literal
48	DOCDEF_INV_ORSTGNA	Invalid override string
49	DOCDEF_SCOPE_REQUIRED	Scope required
50	DOCDEF_USAGE_CONFLICT	Usage conflict
51	DOCDEF_NODEFS_SELECTED	No definitions selected
52	DOCDEF_MORE_THAN_1_RELSYS	More than one related system
53	DOCDEF_MISSING_RELSYSID	Missing related system identifier
54	DOCDEF_SCOPE_CONFLICT	Scope conflict
55	DOCDEF_INV_CSDGROUP	Invalid CSD group
56	DOCDEF_REC_NOT_REMOVED	Record not removed
57	DOCDEF_INV_RESOURCE	Invalid resource
58	DOCDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	DOCDEF_PARTIAL_ACTION	Partial action
60	DOCDEF_NOTHING_ACTIONED	Nothing actioned
61	DOCDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	DOCDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	DOCDEF_CSD_ERROR	CSD access error

Table 268. DOCDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
APPENDCRLF	EYUDA	CPSM	4	Yes	LIKE	Carriage return line feed (CRLF) append option	YES			23
APPENDCRLF Input/output valid values	YES, NO									
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	27
CHANGEAGENT Input/output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	29
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	28
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				16
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	31
DDNAME	CHAR	CPSM	8	No	DIFF	DDname of partitioned data set				10
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		26
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				20
DOCTYPE	CVDAS	CPSM	4	Yes	LIKE	Document content type	EBCDIC			24
DOCTYPE Input/output valid values	EBCDIC, BINARY									
EXITPGM	CHAR	CPSM	8	No	DIFF	Exit program name				8
FILE	CHAR	CPSM	8	No	DIFF	File name				9
HFSFILE	CHAR	CPSM	25 5	No	DIFF	zSeries File System template file				25
MEMBERNAME	CHAR	CPSM	8	No	DIFF	Member of partitioned data set				11
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
PROGRAM	CHAR	CPSM	8	No	DIFF	Program name				12
TDQUEUE	CHAR	CPSM	4	No	DIFF	Transient data queue name				14
TEMPLATENAME	CHAR	CPSM	48	No	DIFF	Document template name				21
TSQUEUE	CHAR	CPSM	16	No	DIFF	Temporary storage queue name				13
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				17
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				18
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				19

Chapter 112. DOCINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a document template definition (DOCDEF) in a resource group (RESGROUP). A DOCDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is DOCGROUP.

The **Secondary** key field for this resource class is DOCNAME.

The **Tertiary** key field for this resource class is DOCVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6169

Table 269. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 270. DOCINGRP FEEDBACK error codes

Value	Code	Description
1	DOCINGRP_INV_DATA	Attribute data invalid
2	DOCINGRP_REC_NOT_FOUND	Requested resource not found
4	DOCINGRP_REC_EXISTS	Resource already exists
6	DOCINGRP_INV_RESTYPE	Invalid resource type
7	DOCINGRP_INV_VER	Invalid resource version
11	DOCINGRP_NON_MP	Maintenance point CMAS not available

Table 270. DOCINGRP FEEDBACK error codes (continued)

Value	Code	Description
12	DOCINGRP_INV_CONTEXT	Context not found
21	DOCINGRP_INCONSISTENT_SET	Inconsistent set
22	DOCINGRP_DIFF_VERSION	Different version
23	DOCINGRP_INV_NAME	Invalid name
24	DOCINGRP_INV_MINNAME	Invalid minor name

Table 271. DOCINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
DOCGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
DOCNAME-2	CHAR	CPSM	8	Yes	DIFF	Document template definition name	6
DOCVER-3	BINARY	CPSM	1	Yes	AVG	Document template definition version	7

Chapter 113. DOCTEMP Resource Table

A CICS Resource that describes a Document Template in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

DISCARD

Discard a Document Template

These actions require no unique parameter data.

External resource name

CICSDocumentTemplate

Length

536

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0105

Table 272. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM	DISCARD	None	N/A
SET	NEWCOPY	None	N/A

Table 273. DOCTEMP resource table attributes									
Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			13
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
APPENDCRLF	CVDAS	CPSM	4	LIKE	No	Carriage return line feed (CRLF) append option			

Table 273. DOCTEMP resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
APPENDCRLF Output valid values	APPEND, NOAPPEND								
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0	E640 E650	32
CACHEDELD	BINARY	STAT	4	AVG	No	Total number of DOCTEMPLATE deletes from Cache		E640	22
CACHESIZE	BINARY	INQ	4	AVG	No	Size in bytes of DOCTEMPLATE		E640	17
CACHEUSED	BINARY	STAT	4	AVG	No	Total number of DOCTEMPLATE accesses from Cache		E640	21
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent		E640 E650	24
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, DYNAMIC, CREATESPI, NOTAPPLIC								
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release		E640 E650	25
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time		E640 E650	26
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID		E640 E650	23
COPY	CVDAS	INQ	4	LIKE	Yes	New copy status of the DOCTEMPLATE		E640	16
COPY Input valid values	NEWCOPY								
COPY Output valid values	N_A								
DDNAME	CHAR	CPSM	8	DIFF	No	DD name of the partitioned data set			4
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition		E640 E650	27
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time		E640 E650	28
DOCTYPE	CVDAS	CPSM	4	LIKE	No	Document content type			12
DOCTYPE Output valid values	BINARY, EBCDIC								
DSNAME	CHAR	CPSM	44	DIFF	No	Data set name of partitioned data set			11
EXITPGM	CHAR	CPSM	8	DIFF	No	Exit program name			2
FILE	CHAR	CPSM	8	DIFF	No	File name			3
HFSFILE	CHAR	CPSM	255	DIFF	No	zSeries File System template file			14
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent		E640 E650	31
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, GRPLIST, DYNAMIC								
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time		E640 E650	30
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID		E640 E650	29
MEMBER	CHAR	CPSM	8	DIFF	No	Name of the member in partitioned data set			5
NAME-1	CHAR	INQ	8	DIFF	No	Document template name			1
NEWCOPYCNT	BINARY	STAT	4	AVG	No	Total number of NEWCOPY requests issued		E640	19

Table 273. DOCTEMP resource table attributes (continued)									
Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
PROGRAM	CHAR	CPSM	8	DIFF	No	Program name			6
READCOUNT	BINARY	STAT	4	AVG	No	Total number of DOCTEMPLATE reads		E640	20
TDQUEUE	CHAR	CPSM	4	DIFF	No	Transient data queue name			8
TEMPLATENAME	CHAR	CPSM	48	DIFF	No	Extended document template name			10
TEMPLATETYPE	CVDAS	CPSM	4	LIKE	No	Document template type			9
TEMPLATETYPE Output valid values	MEMBER, FILE, PROGRAM, TSQUEUE, TDQUEUE, EXITPGM, HFS								
TSQUEUE	CHAR	CPSM	16	DIFF	No	Temporary storage queue name			7
USECOUNT	BINARY	STAT	4	AVG	No	Total number of times DOCTEMPLATE has been used		E640	18

Chapter 114. DOMSPOOL Resource Table

A CICS Resource that describes CICS storage domain subpools in an active system being managed by CICSplex SM.

The **Primary** key field for this resource class is SMSDSPN.

There are no object specific actions for this resource class.

External resource name

CICSDomainSubpool

Length

144

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0118

Table 274. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 275. DOMSPOOL resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	28
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
DSAELEMPCT	PERCENT3	CPSM	4	AVG	Percentage of DSA used by elements	
DSAPAGEPCT	PERCENT3	CPSM	4	AVG	Percentage of DSA used by pages	29
DSAPAGEPPCT	PERCENT3	CPSM	4	AVG	Peak percentage of DSA page use	30
FREEMAINRTE	RATE3	CPSM	8	AVG	FREEMAIN rate since last reset	33
GETMAINRTE	RATE3	CPSM	8	AVG	GETMAIN rate since last reset	32
PAGEELEMPCT	PERCENT3	CPSM	4	AVG	Percentage of page pool used by elements	34
PAGEPAGEPCT	PERCENT3	CPSM	4	AVG	Percentage of page pool used by pages	35
PAGEPAGPPCT	PERCENT3	CPSM	4	AVG	Peak percentage of page pool used by pages	36
SMDACCESS	EYUDA	STAT	4	LIKE	Subpool access type	15

Table 275. DOMSPool resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
SMDACCESS Output valid values	CICS, USER, READONLY, TRUSTED					
SMDBNDRY	BINARY	STAT	4	AVG	Subpool element boundary	13
SMDCELEM	BINARY	STAT	4	AVG	Current number of elements	21
SMDCES	BINARY	STAT	4	AVG	Sum of all element lengths	19
SMDPCS	BINARY	STAT	4	AVG	Current page storage	20
SMDDSANAME	CHAR	INQ	8	DIFF	Name of dynamic storage area (DSA)	6
SMDELCHN	BIT	STAT	1	LIKE	Element chaining indicator	10
SMDETYPE	BIT	STAT	1	LIKE	Subpool element type	7
SMDFLEN	BINARY	STAT	4	AVG	Subpool element length	9
SMDFMREQ	BINARY	STAT	4	AVG	Number of FREEMAIN requests	18
SMDGMREQ	BINARY	STAT	4	AVG	Number of GETMAIN requests	17
SMDHWMPs	BINARY	STAT	4	AVG	Peak page storage	22
SMDIFREE	BINARY	STAT	4	AVG	Initial free area size	16
SMDLOCN	EYUDA	STAT	4	LIKE	Location above/below 16M or above the bar	14
SMDLOCN Output valid values	ABOVE, BELOW, ABOVEBAR					
SMDSPN-1	CHAR	INQ	8	DIFF	Domain subpool name	5
SMSDSABYTES	BINARY	STAT	8	AVG	Current size of DSA in bytes	39
SMSDSASZ	BINARY	STAT	4	AVG	Current size of DSA	27
SMSDSATOTAL	BINARY	STAT	4	AVG	Current DSA total	26

Chapter 115. DSKJRNL Resource Table

A CICS Resource that describes a disk journal in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is JOURNALNUM.

The following actions are supported:

ADVANCE

Advance to the next journal.

CLOSE

Close the journal.

OPEN

Open the journal.

These actions require no unique parameter data.

External resource name

Length

64

Usage

EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0013

Table 276. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	ADVANCE	None	N/A
	CLOSE	None	N/A
	OPEN	None	N/A

Table 277. DSKJRNL resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release	

Table 277. DSKJRNL resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved	5
ARCHSTAT	CVDAS	INQ	4	LIKE	No	Archive status	
ARCHSTAT Output valid values	AUTOARCH, NOAUTOARCH, REVERTED						
ARCHSUBCNT	BINARY	STAT	2	AVG	No	Number of archives submitted	7
ARCHWCNT	BINARY	STAT	2	AVG	No	Number of waits for archive to complete	2
AVGSIZE	BINARY	STAT	2	AVG	No	Average block size	12
BLKWRCNT	DECIMAL	STAT	4	AVG	No	Number of blocks written	11
BUFULLCNT	DECIMAL	STAT	3	AVG	No	Number of times buffer was full	14
DISKASTATUS	CVDAS	INQ	4	LIKE	No	Disk A status	8
DISKASTATUS Output valid values	CURRENT, READY, NOTREADY, NOTAPPLIC						
DISKBSTATUS	CVDAS	INQ	4	LIKE	No	Disk B status	9
DISKBSTATUS Output valid values	CURRENT, READY, NOTREADY, NOTAPPLIC						
DISKXSTATUS	CVDAS	INQ	4	LIKE	No	Disk X status	10
DISKXSTATUS Output valid values	CURRENT, READY, NOTREADY						
DSOPENCNT	BINARY	STAT	2	AVG	No	Number of journal data sets opened	6
JOURNALNUM-1	BINARY	INQ	2	AVG	No	Journal number	1
OPENSTATUS	CVDAS	INQ	4	LIKE	Yes	Open status	4
OPENSTATUS Input/output valid values	OPENOUTPUT, CLOSED						
OPENSTATUS Input valid values	ADVANCE, CLOSELEAVE						
RECWRCNT	DECIMAL	STAT	5	AVG	No	Number of records written	13
TYPE	CVDAS	INQ	4	LIKE	No	Journal type	3
TYPE Output valid values	TAPE1, TAPE2, DISK1, DISK2, DISK2PAUSE, SMF						

Chapter 116. DSNNAME Resource Table

A CICS Resource that describes a data set in use by an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is DSNNAME.

The following actions are supported:

BACKOUT

Back out shunted indoubt units of work associated with the data set.

COMMIT

Commit shunted indoubt units of work associated with the data set.

FORCE

Force shunted indoubt units of work associated with the data set to commit or back out.

IMMQUIESCE

Immediately quiesce the data set; all units of work are abended.

QUIESCE

Quiesce the data set; all units of work are allowed to reach syncpoint.

REMOVE

Remove the data set.

UNQUIESCE

Unquiesce the data set.

The parameter data for the IMMQUIESCE, QUIESCE, and UNQUIESCE actions is:

```
PARM(' BUSY(cvda) . ')
```

where *cvda* is required and is one of the following valid CVDA values for the data set busy condition:

WAIT
NOWAIT

External resource name

CICSDataSetName

Length

184

Usage

API or WUI or CICS Management Client Interface

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0011

Table 278. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
REMOVE		None	N/A
PERFORM SET	IMMQUIESE	BUSY(WAIT, NOWAIT)	Yes
	QUIESE	BUSY(WAIT, NOWAIT)	Yes
	UNQUIESE	BUSY(WAIT, NOWAIT)	Yes
	IMMQUIESCE	BUSY(WAIT, NOWAIT)	Yes
	QUIESCE	BUSY(WAIT, NOWAIT)	Yes
	UNQUIESCE	BUSY(WAIT, NOWAIT)	Yes
	BACKOUT	None	N/A
	COMMIT	None	N/A
	FORCE	None	N/A

Table 279. DSNNAME resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release		
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved		
ACCESSMETHOD	CVDAS	INQ	4	LIKE	No	Access method		2
ACCESSMETHOD Input/output valid values	VSAM, BDAM, NOTAPPLIC							
AVAILABILITY	CVDAS	INQ	4	LIKE	Yes	Availability status		12
AVAILABILITY Input/output valid values	AVAILABLE, UNAVAILABLE, RREPL							
AVAILABILITY Output valid values	NOTAPPLIC							
BACKUPTYPE	CVDAS	INQ	4	LIKE	No	Type of backup		3
BACKUPTYPE Output valid values	STATIC, DYNAMIC, UNDETERMINED, NOTAPPLIC							
BASEDSNAME	CHAR	INQ	44	DIFF	No	Base data set name		4
BKOUTSTATUS	CVDAS	INQ	4	LIKE	Yes	Backout status	E510+	5
BKOUTSTATUS Input/output valid values	NORMALBKOUT, FAILEDBKOUT							
BKOUTSTATUS Output valid values	FAILINGBKOUT, NOTAPPLIC							
DSNAME-1	CHAR	INQ	44	DIFF	No	Data set name		1
FILECOUNT	BINARY	INQ	4	AVG	No	Number of file definitions that reference data set		6
FWDRECOVLOG	CNUMERIC	INQ	2	AVG	No	Journal number		10
FWDRECOVLSN	CHAR	INQ	26	DIFF	No	Forward recovery log stream name		11
LOGREPSTATUS	CVDAS	INQ	4	LIKE	No	Replication Logging		16
LOGREPSTATUS Output valid values	LOGREPLICATE, NOLOGREPLICA, NOTAPPLIC							

Table 279. DSNAME resource table attributes (continued)								
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
LOSTLOCKS	CVDAS	INQ	4	LIKE	No	Lost locks status		13
LOSTLOCKS Output valid values	NOLOSTLOCKS, REMLOSTLOCKS, RECOVERLOCKS, NOTAPPLIC							
OBJECT	CVDAS	INQ	4	LIKE	No	Data set type		7
OBJECT Output valid values	BASE, PATH, NOTAPPLIC							
QUIESCESTATE	CVDAS	INQ	4	LIKE	Yes	Record level sharing (RLS) quiesce state		14
QUIESCESTATE Input/output valid values	UNQUIESCED, QUIESCED							
QUIESCESTATE Output valid values	QUIESCING, NOTAPPLIC							
RECOVSTATUS	CVDAS	INQ	4	LIKE	No	Recovery status		8
RECOVSTATUS Output valid values	RECOVERABLE, FWDRECOVERABLE, NOTRECOVERABLE, UNDETERMINED, NOTAPPLIC							
RETLOCKS	CVDAS	INQ	4	LIKE	No	Retained record locks status		15
RETLOCKS Output valid values	RETAINED, NORETAINED, NOTAPPLIC							
VALIDITY	CVDAS	INQ	4	LIKE	No	Data set validity status		9
VALIDITY Output valid values	VALID, INVALID							

Chapter 117. DSPGBL Resource Table

A CICS Resource that provides global CICS dispatcher information in an active system being managed by CICSplex SM.

The DSPGBL resource class does not provide an explicit key attribute. The set of object instances returned is a function of the scope in effect when the request is made.

There are no object specific actions for this resource class.

External resource name

CICSGlobalDispatcher

Length

104

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0131

Table 280. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A

Table 281. DSPGBL resource table attributes								
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release		
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved		
DSGCNT	BINARY	STAT	2	AVG	No	Current number of tasks		11
DSGEJST	INTTSTP	STAT	8	LIKE	No	Elapsed job step timing		16
DSGICVRT	BINARY	STAT	4	AVG	Yes	Runaway task time interval (ICVR) (milliseconds)		6
DSGICVSD	BINARY	STAT	2	AVG	Yes	Terminal scan delay time (ICVTSD) (milliseconds)		7
DSGICVT	BINARY	STAT	4	AVG	Yes	Current region exit time (ICV) (milliseconds)		5
DSGLSTRT	TIMESTP	STAT	8	LIKE	No	Dispatcher start time LOCAL		15

Table 281. DSPGBL resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
DSGLXSCN	DATETIME	STAT	8	LIKE	No	Last excess TCB scan	E640 E650 E660 E670 E680	22
DSGLXSND	DATETIME	STAT	8	LIKE	No	Last excess TCB scan - no TCB detached	E640 E650 E660 E670 E680	23
DSGMBTCH	BINARY	STAT	2	AVG	No	MRO batching value (MROBTCH)		10
DSGPNT	BINARY	STAT	2	AVG	No	Peak number of tasks		12
DSGPRIAG	BINARY	STAT	2	AVG	Yes	Priority aging value (PRTYAGE) (milliseconds)		8
DSGSRBT	INTTSTP	STAT	8	LIKE	No	Accumulated SRB time		17
DSGSTART	TIMESTP	STAT	8	LIKE	No	Dispatcher start time GMT		14
DSGSTSKS	BINARY	STAT	2	AVG	No	Number of subtasks		9
DSGXSCNN	BINARY	STAT	4	AVG	No	Number of excess TCB scans with no TCB detached		19
DSGXSCNS	BINARY	STAT	4	AVG	No	Number of excess TCB scans		18
DSGXTCBD	BINARY	STAT	4	AVG	No	Total number of excess TCBs detached		20
FORCEQR	CVDAS	INQ	4	LIKE	Yes	Quasi-reentrancy force option		21
FORCEQR Input/output valid values	FORCE, NOFORCE							

Chapter 118. DSPMODE Resource Table

A CICS Resource that provides CICS dispatcher TCB mode information in an active system being managed by CICSplex SM.

The **Primary** key field for this resource class is DSGTCBNM.

There are no object specific actions for this resource class.

External resource name

CICSTCBMode

Length

144

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0132

Table 282. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 283. DSPMODE resource table attributes

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release		
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved		
DSGACT	INTTSTP	STAT	8	LIKE	Total CPU time used by this TCB		28
DSGNTCBA	BINARY	STAT	4	AVG	Number of TCB attaches		10
DSGSYSW	BINARY	STAT	4	AVG	Number of partition exits		23
DSGTCBAF	BINARY	STAT	4	AVG	Number of TCB attach failures		11
DSGTCBAL	BINARY	STAT	4	AVG	Number of TCBs allocated		16
DSGTCBCA	BINARY	STAT	4	AVG	Current number of TCBs attached		12
DSGTCBCU	BINARY	STAT	4	AVG	Current number of TCBs used by mode		14
DSGTCBDO	BINARY	STAT	4	AVG	Number of other detaches		20
DSGTCBDS	BINARY	STAT	4	AVG	Number of stolen detaches		18

Table 283. DSPMODE resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
DSGTCBDU	BINARY	STAT	4	AVG	Number of unclean detaches		17
DSGTCBDX	BINARY	STAT	4	AVG	Number of excess detaches		19
DSGTCBMD	EYUDA	STAT	4	LIKE	Open status		7
DSGTCBMD Output valid values	OPEN, NOTOPEN, UNKNOWN						
DSGTCBMM	BINARY	STAT	4	AVG	Number of TCB mismatches		22
DSGTCBMP	BINARY	STAT	2	MIN	TCB mode pool number		8
DSGTCBMP Input/output valid values	0 (NOTAPPLI) - Not applicable, 1 (OPEN) - Open, 2 (JVM) - JVM, 3 (HOTPOOL) - Hot pooling, 3 (XPLINK) - XPLink, 4 (SSL) - SSL, 5 (THREADED) - THREADED						
DSGTCBNM-1	CHAR	STAT	2	DIFF	TCB mode name		5
DSGTCBPA	BINARY	STAT	4	AVG	Peak number of TCBs attached		13
DSGTCBPU	BINARY	STAT	4	AVG	Peak number of TCBs used by mode		15
DSGTCBST	BINARY	STAT	4	AVG	Number of TCB steals		21
DSGTCT	INTTSTP	STAT	8	LIKE	CPU time used by this TCB for dispatcher task		27
DSGTDI	INTTSTP	STAT	8	LIKE	Total of real time TCB has been dispatched by MVS		26
DSGTMDQ	AVERAGE3	STAT	4	LIKE	Dispatchable Queue - Average	E640 E650 E660 E670 E680	33
DSGTMDQ	BINARY	STAT	4	LIKE	Dispatchable Queue - Current	E640 E650 E660 E670 E680	30
DSGTMPDQ	BINARY	STAT	4	LIKE	Dispatchable Queue - Peak	E640 E650 E660 E670 E680	31
DSGTWT	INTTSTP	STAT	8	LIKE	Real time CICS spent in MVS wait		25
TCBPOOLN	EYUDA	CPSM	4	LIKE	TCB mode pool name		29
TCBPOOLN Output valid values	N_A, OPEN, JVM, HOTPOOL, XPLINK, SSL, THREADED						

Chapter 119. DSPPOOL Resource Table

A CICS Resource that provides CICS dispatcher TCB pool information in an active system being managed by CICSplex SM.

The **Primary** key field for this resource class is POOLNAME.

There are no object specific actions for this resource class.

External resource name

CICSTCBPool

Length

144

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0133

Table 284. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A

Table 285. DSPPOOL resource table attributes								
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release		
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved		
DSGCMWWS	BINARY	STAT	4	AVG	No	Current TCB Mismatch waits		26
DSGCMWWT	INTTSTP	STAT	8	LIKE	No	Current TCB Mismatch wait time		25
DSGCMUAT	BINARY	STAT	4	AVG	No	Current number of TCBs attached		8
DSGCMUUS	BINARY	STAT	4	AVG	No	Current number of TCBs in use		10
DSGCURNW	BINARY	STAT	4	AVG	No	Current number of tasks waiting for TCB		17
DSGCURWT	INTTSTP	STAT	8	LIKE	No	Current waiting time at TCB limit		15

Table 285. DSPPool resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
DSGLTCBL	DATETIME	STAT	8	LIKE	No	Time Max TCB Pool Limit last reached	E640 E650 E660 E670 E680	33
DSGMMWTM	INTTSTP	STAT	8	LIKE	No	Total TCB Mismatch wait time		24
DSGMMWTS	BINARY	STAT	4	AVG	No	Total TCB Mismatch waits		23
DSGMXTCB	BINARY	STAT	4	AVG	Yes	Maximum number of TCBs		7
DSGNTCBL	BINARY	STAT	4	AVG	No	Number of times at pool limit		12
DSGPEANW	BINARY	STAT	4	AVG	No	Peak number of tasks waiting for TCB		18
DSGPMWS	BINARY	STAT	4	AVG	No	Peak TCB Mismatch waits		27
DSGPNUAT	BINARY	STAT	4	AVG	No	Peak number of TCBs attached		9
DSGPNUUS	BINARY	STAT	4	AVG	No	Peak number of TCBs in use		11
DSGTCBPN	BINARY	STAT	2	AVG	No	TCB pool number		5
DSGTOTMT	INTTSTP	STAT	8	AVG	No	Total MVS storage wait time		28
DSGTOTMW	BINARY	STAT	4	AVG	No	Total number of MVS storage waiters		29
DSGTOTNW	BINARY	STAT	4	AVG	No	Total number of waits		16
DSGTOTWL	INTTSTP	STAT	8	LIKE	No	Total waiting time at TCB limit		14
POOLNAME-1	CHAR	CPSM	12	DIFF	No	TCB pool name		19

Chapter 120. DTRINGRP Resource Table

A CPSM Workload Manager definition that describes a dynamic transaction used in a workload. Only transactions that have workload separation or affinity relationships need to be defined.

The **Primary** key field for this resource class is TRANGRP.

The **Secondary** key field for this resource class is TRANID.

There are no object specific actions for this resource class.

External resource name

CICSTransactionInGroup

Length

56

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt5379

Table 286. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 287. DTRINGRP FEEDBACK error codes		
Value	Code	Description
1	DTRINGRP_INV_DATA	Attribute data invalid
2	DTRINGRP_REC_NOT_FOUND	Requested resource not found
3	DTRINGRP_INV_REFERENCE	Attribute references an invalid resource
4	DTRINGRP_REC_EXISTS	Resource already exists
21	DTRINGRP_TRANID_NOT_UNIQUE	Transaction ID not unique

Table 288. DTRINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification userid	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
PCONV	EYUDA	CPSM	4	Yes	LIKE	Pseudo-conversational mode	7
PCONV Input/output valid values	START, END, N_A						
TRANGRP-1	CHAR	CPSM	8	Yes	DIFF	Transaction group	5
TRANID-2	CHAR	CPSM	8	Yes	DIFF	Transaction	6

Chapter 121. EACTNTFN Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

EACTNTFN is emitted when an operation change against a Real Time Analysis generated external notification occurs.

External resource name

Length

200

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2527

<i>Table 289. Valid CPSM operations</i>			
Operations	Actions	Parameters	Required
Not applicable			

<i>Table 290. EACTNTFN resource table attributes</i>						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTDEF	CHAR	CPSM	8	LIKE	Action name	8
ACTION	BINARY	CPSM	1	LIKE	Control action	11
ACTION Input/output valid values	1 (CREATE) - Create external ntnfn, 2 (UPDATE) - Update external ntnfn, 3 (REMOVE) - Remove external ntnfn, 4 (RESOLVED) - External ntnfn resolved					
ACTNAME	CHAR	CPSM	8	LIKE	External event name	7
ACTNTIME	TIMESTP	CPSM	8	LIKE	Local time at which this action occurred	16
DEFTYPE	BINARY	CPSM	1	LIKE	Action reference type	10
DEFTYPE Input/output valid values	1 (SAM) - RTASAM sensed condition, 2 (APM) - APM RTADEF True transition, 3 (MRM) - MRM true transition					
KEY	CHAR	CPSM	134	LIKE	Resource key	14
NTFNTYPE	BIT	CPSM	1	LIKE	Type of external notification	9
NTFNTYPE Input/output valid values	128 (EVENT) - CPSM Event, 64 (EXTMSG) - External Message, 32 (ALERT) - SNA Alert					
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4
RESTYPE	CHAR	CPSM	8	LIKE	Resource type	13

Table 290. EACTNTFN resource table attributes (continued)						
Name	Datatype	Source	Len	Sum	Description	Attr ID
SCOPE	CHAR	CPSM	8	LIKE	Scope target	5
SEVERITY	EYUDA	CPSM	4	LIKE	Current severity	12
SEVERITY Output valid values	VLS, LS, LW, HW, HS, VHS					
SPEC	CHAR	CPSM	8	LIKE	RTA or analysis point specification name	6

Chapter 122. ECSYSCHG Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ECSYSCHG is emitted by a Topology control object when a CICS system definition is created, updated, or removed.

External resource name

Length

24

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2518

Table 291. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 292. ECSYSCHG resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	BINARY	CPSM	1	LIKE	Action	6
ACTION Input/output valid values	1 (CSYSADD) - CICS System Add, 2 (CSYSUPD) - CICS System Update, 3 (CSYSREM) - CICS System Remove					
CICSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
CICSPLEX	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 123. EJCINGRP Resource Table

A CICSplex SM Business Application Services Definition that describes the membership of a CorbaServer definition (EJCODEF) in a resource group (RESGROUP). An EJCODEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is EJCGROUP.

The **Secondary** key field for this resource class is EJCNAME.

The **Tertiary** key field for this resource class is EJCVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6176

Table 293. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 294. EJCINGRP FEEDBACK error codes

Value	Code	Description
1	EJCINGRP_INV_DATA	Attribute data invalid
2	EJCINGRP_REC_NOT_FOUND	Requested resource not found
4	EJCINGRP_REC_EXISTS	Resource already exists
6	EJCINGRP_INV_RESTYPE	Invalid resource type
7	EJCINGRP_INV_VER	Invalid resource version
11	EJCINGRP_NON_MP	Maintenance point CMAS not available

Table 294. EJCINGRP FEEDBACK error codes (continued)

Value	Code	Description
12	EJCINGRP_INV_CONTEXT	Context not found
21	EJCINGRP_INCONSISTENT_SET	Inconsistent set
22	EJCINGRP_DIFF_VERSION	Different version
23	EJCINGRP_INV_NAME	Invalid name
24	EJCINGRP_INV_MINNAME	Invalid minor name

Table 295. EJCINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
EJCGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
EJCNAME-2	CHAR	CPSM	8	Yes	DIFF	CorbaServer definition name	6
EJCVER-3	BINARY	CPSM	1	Yes	AVG	CorbaServer definition version	7

Chapter 124. EJCOBEAN Resource Table

A CICS Resource that describes an Enterprise Bean object in a CorbaServer being managed by CICSplex SM.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is BEANNAME.

There are no actions supported against it.

External resource name

CICSBeansInCorbaServer

Length

312

Usage

API or WUI or CICS Management Client Interface

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0110

Table 296. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 297. EJCOBEAN resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	4
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
BEANACTIVATE	BINARY	STAT	4	AVG	Number of Bean state Activates	
BEANCREATES	BINARY	STAT	4	AVG	Number of Bean Creates	6
BEANMETHCALL	BINARY	STAT	4	AVG	Number of Bean Method calls	8
BEANNAME-2	CHAR	INQ	240	DIFF	Enterprise bean name	2
BEANPASSIVAT	BINARY	STAT	4	AVG	Number of Bean state Passivates	5
BEANREMOVES	BINARY	STAT	4	AVG	Number of Bean Removes	7
DJAR	CHAR	INQ	32	DIFF	CICS-deployed JAR file	3
NAME-1	CHAR	INQ	4	DIFF	CorbaServer name	1

Chapter 125. EJCODEF Resource Table

A CICS Definition that describes a CorbaServer.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following action is supported:

INSTALL

Install a CorbaServer definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionCorbaServer

Length

1336

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3831

Table 298. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM	INSTALL SET	FORCEINS(YES, NO)	No
SET		MODE(value)	No

Table 298. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 299. EJCODEF FEEDBACK error codes

Value	Code	Description
1	EJCODEF_INV_DATA	Attribute data invalid
2	EJCODEF_REC_NOT_FOUND	Requested resource not found
4	EJCODEF_REC_EXISTS	Resource already exists
5	EJCODEF_REC_CHANGED	Resource definition already changed
6	EJCODEF_INV_RESTYPE	Invalid resource type
7	EJCODEF_INV_VER	Invalid resource version
11	EJCODEF_NON_MP	Maintenance point CMAS not available
12	EJCODEF_INV_CONTEXT	Context not found
13	EJCODEF_INCONSISTENT_SET	Inconsistent set condition
14	EJCODEF_INV_RESGROUP	Resource group not found
21	EJCODEF_INV_ACTION	Invalid action
22	EJCODEF_INV_RECADDR	Invalid record address
23	EJCODEF_INV_RECLEN	Invalid record length
24	EJCODEF_DIFF_VERSION	Different version
25	EJCODEF_EARLY_NAMELIST_END	Early name list end
26	EJCODEF_INV_NAMELIST	Invalid name list
27	EJCODEF_INV_NAME	Invalid name
28	EJCODEF_INV_MINNAME	Invalid minor name
29	EJCODEF_NOTIFY	Notify
30	EJCODEF_PARTIAL_INSTALL	Partial install
31	EJCODEF_NOTHING_INSTALLED	Nothing installed

Table 299. EJCODEF FEEDBACK error codes (continued)

Value	Code	Description
32	EJCODEF_NO_TARGETS	No targets
33	EJCODEF_NO_RELATED	No related systems
34	EJCODEF_INV_TSCOPE	Invalid target scope
35	EJCODEF_INV_RSCOPE	Invalid related scope
36	EJCODEF_INV_USAGE	Invalid usage
37	EJCODEF_INV_MODE	Invalid mode
38	EJCODEF_INV_STATECHK	Invalid state check
39	EJCODEF_INV_FORCEINS	Invalid force install
40	EJCODEF_INV_NOTIFY	Invalid notify
41	EJCODEF_INV_OVERTYPE	Invalid over type
42	EJCODEF_INV_OVRBLOCK	Invalid override block
43	EJCODEF_INV_ORSTRING	Invalid override string
44	EJCODEF_INV_STRNGTERM	Invalid string term
45	EJCODEF_INV_EMBEDTERM	Invalid embedded terminator
46	EJCODEF_INV_ATTRIBUTE	Invalid attribute
47	EJCODEF_INV_LITERAL	Invalid literal
48	EJCODEF_INV_ORSTGNA	Invalid override string
49	EJCODEF_SCOPE_REQUIRED	Scope required
50	EJCODEF_USAGE_CONFLICT	Usage conflict
51	EJCODEF_NODEFS_SELECTED	No definitions selected
52	EJCODEF_MORE_THAN_1_RELSYS	More than one related system
53	EJCODEF_MISSING_RELSYSID	Missing related system identifier
54	EJCODEF_SCOPE_CONFLICT	Scope conflict
55	EJCODEF_NOT_SUPPORTED	Attribute obsolete and unsupported
56	EJCODEF_INV_CSDGROUP	Invalid CSD group
57	EJCODEF_REC_NOT_REMOVED	Record not removed
58	EJCODEF_INV_RESOURCE	Invalid resource
59	EJCODEF_INV_CICS_RESTYPE	Invalid CICS restype
60	EJCODEF_PARTIAL_ACTION	Partial action
61	EJCODEF_NOTHING_ACTIONED	Nothing actioned
62	EJCODEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
63	EJCODEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
67	EJCODEF_CSD_ERROR	CSD access error

Table 300. EJCODEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
ASSERTED	CHAR	CPSM	8	No	DIFF	TCP/IP service for Asserted Identity protocol				29
AUTOPUBLISH	EYUDA	CPSM	4	Yes	LIKE	Auto publish beans to Java naming directory (JNDI)	NO			24
AUTOPUBLISH Input/output valid values	NO, YES									
CERTIFICATE	CHAR	CPSM	56	No	DIFF	Secure sockets layer (SSL) client certificate				22
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	33
CHANGEAGENT Input/output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	35
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	34
CIPHERS	CHAR	CPSM	56	No	LIKE	SSL cipher suite codes				31
CLIENTCERT	CHAR	CPSM	8	No	DIFF	TCP/IP service for client certificated protocol				26
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				9
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	37
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		32
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				13
DJARDIR	CHAR	CPSM	25 5	No	DIFF	CICS-deployed JAR file pickup directory				23
HOST	CHAR	CPSM	25 5	Yes	DIFF	TCP/IP host address				21
JNDIPREFIX	CHAR	CPSM	25 5	No	DIFF	Java naming directory (JNDI) prefix				18
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
OUTPRIVACY	CVDAS	CPSM	4	No	LIKE	Outbound privacy	SUPPORTED		E640 +	30
OUTPRIVACY Input/output valid values	REQUIRED, SUPPORTED, NOTSUPPORTED									
PORT	CHAR	CPSM	5	No	DIFF	TCP/IP port number		1-65535	E620 +	16
SESSBEANTIME	CHAR	CPSM	6	Yes	DIFF	Session bean timeout (DDHHMM)	000010			19
SHELF	CHAR	CPSM	25 5	No	DIFF	zSeries File System (zFS) shelf directory	/var/cicsts			20
SSL	EYUDA	CPSM	4	No	LIKE	Secure socket layer (SSL) usage	NO		E620 +	15
SSL Input/output valid values	YES, NO, CLIENTCERT									
SSLPORT	CHAR	CPSM	5	No	DIFF	Secure socket layer (SSL) port number		1-65535	E620 +	17
SSLPORT Input/output valid values	NO									

Table 300. EJCODEF resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
SSLUNAUTH	CHAR	CPSM	8	No	DIFF	TCP/IP service for SSL AUTHENTICATE=NO protocol				27
STATUS	CVDAS	CPSM	4	Yes	LIKE	Status	ENABLED			28
STATUS Input/output valid values	ENABLED, DISABLED									
UNAUTH	CHAR	CPSM	8	Yes	DIFF	TCP/IP service for unauthenticated protocol				25
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				10
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				11
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				12

Chapter 126. EJCOSE Resource Table

A CICS Resource that describes a CorbaServer object being managed by CICSplex SM. This resource is not supported in CICS TS for z/OS, Version 5.1 and later versions.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

PUBLISH

Publish the Corbaserver to the JNDI directory.

RETRACT

Retract the CorbaServer from the JNDI directory.

DISCARD

Discard the CorbaServer from its associated MAS.

External resource name

CICSCorbaServer

Length

1344

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0108

Table 301. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM	PUBLISH	None	N/A
SET	RETRACT	None	N/A
	DISCARD	None	N/A
	SCAN	None	N/A

Table 302. EJCOSSE resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
ASSERTED	CHAR	INQ	8	DIFF	No	TCP/IP service for Asserted Identity protocol			20
AUTOPUBLISH	CVDAS	INQ	4	LIKE	Yes	Auto publish beans to Java naming directory (JNDI)	NOAUTO		12
AUTOPUBLISH Input/output valid values	AUTOPUB, NOAUTO								
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0	E640 E650	34
CERTIFICATE	CHAR	INQ	56	DIFF	No	Secure sockets layer (SSL) client certificate			9
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent		E640 E650	25
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, CREATESPI, NOTAPPLIC								
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release		E640 E650	27
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time		E640 E650	28
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID		E640 E650	26
CIPHERS	CHAR	INQ	56	LIKE	No	SSL cipher suite codes			22
CLIENTCERT	CHAR	INQ	8	DIFF	No	TCP/IP service for client certificated protocol			14
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition		E640 E650	29
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time		E640 E650	30
DJARDIR	CHAR	INQ	255	DIFF	No	CICS-deployed JAR file pickup directory			11
ENABLESTATUS	CVDAS	INQ	4	LIKE	Yes	CorbaServer status			16
ENABLESTATUS Input/output valid values	ENABLED, DISABLED								
ENABLESTATUS Output valid values	ENABLING, DISABLING, DISCARDING								
FAILACTIVATE	BINARY	STAT	4	AVG	No	Number of Failed Activates			19
HOST	CHAR	INQ	255	DIFF	No	Host name or IP address			8
HOSTTYPE	CVDAS	INQ	4	LIKE	No	The format of the host name or address		E640 E650	37
HOSTTYPE Output valid values	HOSTNAME, IPV4, IPV6, NOTAPPLIC								
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent		E640 E650	33
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, GRPLIST								
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time		E640 E650	32
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID		E640 E650	31
IPFAMILY	CVDAS	INQ	4	LIKE	No	The format of the resolved IP address		E640 E650	36

Table 302. EJCOSSE resource table attributes (continued)									
Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
IPFAMILY Output valid values	IPV4, IPV6, UNKNOWN								
IPRESOLVED	CHAR	INQ	39	DIFF	No	The resolved address of this CORBA server		E640 E650	35
JNDIPREFIX	CHAR	INQ	255	DIFF	No	Java naming directory (JNDI) prefix			7
NAME-1	CHAR	INQ	4	DIFF	No	CorbaServer name			1
NUMCIPHERS	BINARY	INQ	2	LIKE	No	Number of SSL cipher suite codes			23
OBJECTACTIVATES	BINARY	STAT	4	AVG	No	Number of Object Activates			17
OBJSTORES	BINARY	STAT	4	AVG	No	Number of Object Stores			18
OUTPRIVACY	CVDAS	INQ	4	LIKE	No	Outbound privacy			21
OUTPRIVACY Input/output valid values	REQUIRED, SUPPORTED, NOTSUPPORTED								
PORT	BINARY	INQ	4	AVG	No	TCP/IP port number		E620+	5
SESSBEANTIME	BINARY	INQ	4	AVG	Yes	Session bean timeout (minutes)			2
SHELF	CHAR	INQ	255	DIFF	No	zSeries File System (zFS) shelf directory			10
SSL	CVDAS	INQ	4	LIKE	No	Secure sockets layer (SSL) usage	NOSSL	E620+	3
SSL Output valid values	NOSSL, SSL, CLIENTCERT								
SSLPORT	BINARY	INQ	4	AVG	No	Secure sockets layer (SSL) port number		E620+	6
SSLUNAUTH	CHAR	INQ	8	DIFF	No	TCP/IP service for SSL AUTHENTICATE=NO protocol			15
STATE	CVDAS	INQ	4	LIKE	No	CorbaServer state usage	UNUSABLE	E630+	4
STATE Output valid values	INITING, INSERVICE, PENDINIT, PENDRESOLVE, UNRESOLVED, UNUSABLE, DISCARDING, RESOLVING								
UNAUTH	CHAR	INQ	8	DIFF	No	TCP/IP service for unauthenticated protocol			13

Chapter 127. EJDINGRP Resource Table

A CICSplex SM Business Application Services Definition that describes the membership of a CICS-deployed JAR file definition (EJDJDEF) in a resource group (RESGROUP). An EJDJDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is EJDGROUP.

The **Secondary** key field for this resource class is EJDNAME.

The **Tertiary** key field for this resource class is EJDVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6177

Table 303. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 304. EJDINGRP FEEDBACK error codes		
Value	Code	Description
1	EJDINGRP_INV_DATA	Attribute data invalid
2	EJDINGRP_REC_NOT_FOUND	Requested resource not found
4	EJDINGRP_REC_EXISTS	Resource already exists
6	EJDINGRP_INV_RESTYPE	Invalid resource type
7	EJDINGRP_INV_VER	Invalid resource version
11	EJDINGRP_NON_MP	Maintenance point CMAS not available

Table 304. EJDINGRP FEEDBACK error codes (continued)

Value	Code	Description
12	EJDINGRP_INV_CONTEXT	Context not found
21	EJDINGRP_INCONSISTENT_SET	Inconsistent set
22	EJDINGRP_DIFF_VERSION	Different version
23	EJDINGRP_INV_NAME	Invalid name
24	EJDINGRP_INV_MINNAME	Invalid minor name

Table 305. EJDINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
EJDGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
EJDNAME-2	CHAR	CPSM	8	Yes	DIFF	CICS-deployed JAR file definition name	6
EJDVER-3	BINARY	CPSM	1	Yes	AVG	CICS-deployed JAR file definition version	7

Chapter 128. EJDJAR Resource Table

A CICS Resource that describes a CICS-deployed JAR file object being managed by CICSplex SM. This resource is not supported in CICS TS for z/OS, Version 5.1 and later versions.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

PUBLISH

Publish the CICS-deployed JAR file to the JNDI directory.

RETRACT

Retract the CICS-deployed JAR file from the JNDI directory.

DISCARD

Discard the CICS-deployed JAR file from the JNDI directory.

External resource name

CICSDeployedJARFile

Length

384

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0109

Table 306. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	PUBLISH	None	N/A
SET	RETRACT	None	N/A
	DISCARD	None	N/A

Table 307. EJDJAR resource table attributes								
Name	Datatype	Source	Len	Sum	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release			

Table 307. EJDJAR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Default	Get Invalid	Attr ID
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved			
BASDEFINEVER	BINARY	CPSM	1	AVG	BAS resource definition version	0	E640 E650	16
CHANGEAGENT	CVDAS	INQ	4	LIKE	Last modification agent		E640 E650	7
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, DYNAMIC, CREATSPI, NOTAPPLIC							
CHANGEAGREL	CHAR	INQ	4	DIFF	Last modification agent release		E640 E650	9
CHANGETIME	DATETIME	INQ	8	MAX	Last modification time		E640 E650	10
CHANGEUSRID	CHAR	INQ	8	DIFF	Last modification user ID		E640 E650	8
CORBASERVER	CHAR	INQ	4	DIFF	CorbaServer name			2
DEFINESOURCE	CHAR	INQ	8	DIFF	Source of the resource definition		E640 E650	11
DEFINETIME	DATETIME	INQ	8	MAX	Creation time		E640 E650	12
HFSFILE	CHAR	INQ	255	DIFF	zSeries File System (zFS) path			4
INSTALLAGENT	CVDAS	INQ	4	LIKE	Installation agent		E640 E650	15
INSTALLAGENT Input/output valid values	CSDAPI, CREATSPI, DYNAMIC, GRPLIST							
INSTALLTIME	DATETIME	INQ	8	MAX	Installation time		E640 E650	14
INSTALLUSRID	CHAR	INQ	8	DIFF	Installation user ID		E640 E650	13
LASTMODTIME	DATETIME	INQ	8	MAX	Time the DJAR was last modified			6
NAME-1	CHAR	INQ	32	DIFF	CICS-deployed JAR file			1
STATE	CVDAS	INQ	4	LIKE	CICS-deployed JAR file status	UNUSABLE		3
STATE Output valid values	INITING, INSERVICE, PENDINIT, PENDRESOLVE, UNRESOLVED, UNUSABLE, DISCARDING, RESOLVING							

Chapter 129. EJDJBEAN Resource Table

A CICS Resource that describes an Enterprise Bean object in a CICS-deployed JAR file being managed by CICSplex SM.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is BEANNAME.

The **Tertiary** key field for this resource class is CORBASERVER.

There are no actions supported against it.

External resource name

CICSBeansInDeployedJARFile

Length

312

Usage

API or WUI or CICS Management Client Interface

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0112

<i>Table 308. Valid CPSM operations</i>			
Operations	Actions	Parameters	Required
GET		None	N/A

<i>Table 309. EJDJBEAN resource table attributes</i>						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
BEANACTIVATE	BINARY	STAT	4	AVG	Number of Bean state Activates	4
BEANCREATES	BINARY	STAT	4	AVG	Number of Bean Creates	6
BEANMETHCALL	BINARY	STAT	4	AVG	Number of Bean Method calls	8
BEANNAME-2	CHAR	INQ	240	DIFF	Enterprise bean name	2
BEANPASSIVAT	BINARY	STAT	4	AVG	Number of Bean state Passivates	5
BEANREMOVES	BINARY	STAT	4	AVG	Number of Bean Removes	7
CORBASERVER-3	CHAR	INQ	4	DIFF	CorbaServer name	3

Table 309. EJDJBEAN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
NAME-1	CHAR	INQ	32	DIFF	CICS-deployed JAR file	1

Chapter 130. EJDJDEF Resource Table

A CICS Definition that describes a CICS-deployed JAR file.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Secondary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install a CICS-deployed JAR file definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionDeployedJARFile

Length

400

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3832

Table 310. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM SET	INSTALL	FORCEINS(YES, NO)	No
		MODE(value)	No

Table 310. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 311. EJDJDEF FEEDBACK error codes

Value	Code	Description
1	EJDJDEF_INV_DATA	Attribute data invalid
2	EJDJDEF_REC_NOT_FOUND	Requested resource not found
4	EJDJDEF_REC_EXISTS	Resource already exists
5	EJDJDEF_REC_CHANGED	Resource definition already changed
6	EJDJDEF_INV_RESTYPE	Invalid resource type
7	EJDJDEF_INV_VER	Invalid resource version
11	EJDJDEF_NON_MP	Maintenance point CMAS not available
12	EJDJDEF_INV_CONTEXT	Context not found
13	EJDJDEF_INCONSISTENT_SET	Inconsistent set condition
14	EJDJDEF_INV_RESGROUP	Resource group not found
21	EJDJDEF_INV_ACTION	Invalid action
22	EJDJDEF_INV_RECADDR	Invalid record address
23	EJDJDEF_INV_RECLN	Invalid record length
24	EJDJDEF_DIFF_VERSION	Different version
25	EJDJDEF_EARLY_NAMELIST_END	Early name list end
26	EJDJDEF_INV_NAMELIST	Invalid name list
27	EJDJDEF_INV_NAME	Invalid name
28	EJDJDEF_INV_MINNAME	Invalid minor name
29	EJDJDEF_NOTIFY	Notify
30	EJDJDEF_PARTIAL_INSTALL	Partial install
31	EJDJDEF_NOTHING_INSTALLED	Nothing installed

Table 311. EJDJDEF FEEDBACK error codes (continued)

Value	Code	Description
32	EJDJDEF_NO_TARGETS	No targets
33	EJDJDEF_NO_RELATED	No related systems
34	EJDJDEF_INV_TSCOPE	Invalid target scope
35	EJDJDEF_INV_RSCOPE	Invalid related scope
36	EJDJDEF_INV_USAGE	Invalid usage
37	EJDJDEF_INV_MODE	Invalid mode
38	EJDJDEF_INV_STATECHK	Invalid state check
39	EJDJDEF_INV_FORCEINS	Invalid force install
40	EJDJDEF_INV_NOTIFY	Invalid notify
41	EJDJDEF_INV_OVERTYPE	Invalid oertype
42	EJDJDEF_INV_OVRBLOCK	Invalid override block
43	EJDJDEF_INV_ORSTRING	Invalid override string
44	EJDJDEF_INV_STRNGTERM	Invalid string terminator
45	EJDJDEF_INV_EMBEDTERM	Invalid embedded terminator
46	EJDJDEF_INV_ATTRIBUTE	Invalid attribute
47	EJDJDEF_INV_LITERAL	Invalid literal
48	EJDJDEF_INV_ORSTGNA	Invalid override string
49	EJDJDEF_SCOPE_REQUIRED	Scope required
50	EJDJDEF_USAGE_CONFLICT	Usage conflict
51	EJDJDEF_NODEFS_SELECTED	No definitions selected
52	EJDJDEF_MORE_THAN_1_RELSYS	More than one related system
53	EJDJDEF_MISSING_RELSYSID	Missing related system identifier
54	EJDJDEF_SCOPE_CONFLICT	Scope conflict
55	EJDJDEF_INV_CSDGROUP	Invalid CSD group
56	EJDJDEF_REC_NOT_REMOVED	Record not removed
57	EJDJDEF_INV_RESOURCE	Invalid resource
58	EJDJDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	EJDJDEF_PARTIAL_ACTION	Partial action
60	EJDJDEF_NOTHING_ACTIONED	Nothing actioned
61	EJDJDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	EJDJDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	EJDJDEF_CSD_ERROR	CSD access error

Table 312. EJDJDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
CHANGEAGENT	CV DAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	18
CHANGEAGENT Input/ output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	20
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	19
CORBASERVER	CHAR	CPSM	4	Yes	DIFF	CorbaServer name				15
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				9
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	22
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		17
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				13
HFSFILE	CHAR	CPSM	25 5	Yes	DIFF	zSeries File System (zFS) path				16
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				10
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				11
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				12

Chapter 131. ELSIGNAL Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

EL SIGNAL is emitted by a local MAS agent when an SVCDUMP is about to be taken. The SVCDUMP completion is noted by an EMASWELL notification.

External resource name

Length

48

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2568

Table 313. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 314. ELSIGNAL resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
DUMPCODE	CHAR	CPSM	8	LIKE	SVC dump dumpcode	8
DUMPTERM	CHAR	CPSM	4	LIKE	SVC dump terminal ID	11
DUMPTRAN	CHAR	CPSM	4	LIKE	SVC dump transaction ID	10
DUMPUSER	CHAR	CPSM	8	LIKE	SVC dump user ID	9
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4
SIGTYPE	BINARY	CPSM	1	LIKE	Local signal type	6
SIGTYPE Input/output valid values		1 (LOWEST) - Lowest Signal Type, 1 (SVCDUMP) - MAS is issuing an SVC Dump, 1 (HIGHEST) - Highest Signal Type				

Chapter 132. EMASJOIN Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

EMASJOIN is emitted by a Topology control object when a CICS system connects to another CMAS managing theCICSplex .

External resource name

Length

176

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2405

Table 315. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 316. EMASJOIN resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
CECNAME	CHAR	CPSM	8	LIKE	CEC name	24
CMASNAME	CHAR	CPSM	8	LIKE	CMAS name	4
CSYSAPPL	CHAR	CPSM	8	LIKE	VTAM application ID	14
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	6
DAYLGHTSV	EYUDA	CPSM	4	LIKE	Daylight saving time in effect	19
DAYLGHTSV Output valid values	YES, NO					
DESC	CHAR	CPSM	58	DIFF	Description	13
DYNROUTE	BINARY	CPSM	1	LIKE	Dynamic routing mode	11
DYNROUTE Input/output valid values	1 (ACTIVE) - Routing active, 2 (SUSPEND) - Routing suspended					
DYNTYPE	CHAR	CPSM	3	LIKE	Dynamic routing type	12
JOBNAME	CHAR	CPSM	8	LIKE	MAS job name	23
MASSTART	TIMESTP	CPSM	8	LIKE	MAS start time	15
MON_SPEC	CHAR	CPSM	8	LIKE	Monitor specification name	7

Table 316. EMASJOIN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
MVSNAME	CHAR	CPSM	4	LIKE	MVS system name	22
OPSYSREL	CHAR	CPSM	4	LIKE	MAS operating system release	21
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	5
RTA_SPEC	CHAR	CPSM	8	LIKE	Real Time Analysis (RTA) specification name	8
STATUS	BIT	CPSM	1	LIKE	Status	10
STATUS Input/output valid values	128 (LOCAL) - Local MAS, 64 (REMOTE) - Remote MAS					
SYSID	CHAR	CPSM	4	LIKE	MAS system ID	20
SYSPLEX	CHAR	CPSM	8	LIKE	SYSPlex name	25
TMEZONE	CHAR	CPSM	1	LIKE	Time zone	17
TMEZONEO	BINARY	CPSM	1	LIKE	Time zone offset	16
WLM_SPEC	CHAR	CPSM	8	LIKE	Workload manager specification name	9

Chapter 133. EMASSICK Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

EMASSICK is emitted by a MAS agent to identify a condition that affects the health of the CICS system. An EMASSICK instance identifies a single specific sickness type. It also carries the complete health status of the MAS as reported by previous EMASSICK or ELSIGNAL notifications.

If a region starts to produce a system dump, this event is reported by the ELSIGNAL notification and not by the EMASSICK notification. After the system dump is produced, an EMASWELL notification is issued. To capture the system dump notification, use the ELSIGNAL notification instead.

External resource name

Length

208

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2402

Table 317. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 318. EMASSICK resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
CHGSTALL1	BIT	CPSM	1	LIKE	First stall indicator flag	43
CHGSTALL1 Input/output valid values	128 (ENQUEUE) - Enqueue suspended, 64 (TASKWAIT) - Task wait suspended, 32 (DLI) - DLI suspended, 16 (DBCTRL) - DB control suspended, 8 (STORAGE) - Storage suspended, 4 (UNKNOWN) - Unknown suspended, 2 (DISPABLE) - Dispable (not used), 1 (RUNNING) - Running (not used)					
CHGSTALL2	BIT	CPSM	1	LIKE	Second stall indicator flag	42
CHGSTALL2 Input/output valid values	128 (DISP) - Dispatcher suspended, 64 (ALLCSESS) - Allocate session suspended, 32 (TERM) - Terminal control suspended, 16 (INTV) - Interval control suspended, 8 (FILE) - File I/O suspended, 4 (TEMPSTOR) - Temporary storage suspend, 2 (TSDATA) - Transient data suspended, 1 (JOURNAL) - Journal suspended					
CHGSTALL3	BIT	CPSM	1	LIKE	Third stall indicator flag	41
CHGSTALL3 Input/output valid values	128 (EJB) - Enterprise java suspended, 64 (LOGGER) - Log Manager suspended, 32 (IRLINK) - Interregn link suspended, 16 (DB2) - DB2 suspended, 8 (LOCK) - Lock manager suspended, 4 (XRF) - XRF suspended, 2 (PROGRAM) - Program manager suspended, 1 (TRANSACTION) - Transaction manager suspended					

Table 318. EMASICK resource table attributes (continued)						
Name	Datatype	Source	Len	Sum	Description	Attr ID
CHGSTALL4	BIT	CPSM	1	LIKE	Fourth stall indicator flag	40
CHGSTALL4 Input/output valid values	128 (ASYNC) - Asynchronous API task suspended, 64 (IPIC) - IP interconnectivity suspended, 32 (RMI) - Resource manager suspended, 16 (CONSOLE) - Console domain suspended, 8 (SOCKETS) - Sockets domain suspended, 4 (MQSERIES) - MQSeries suspended, 2 (USERWAIT) - User suspended, 1 (WEBSERV) - Web services suspended					
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
CURSTALL1	BIT	CPSM	1	LIKE	First stall indicator flag	38
CURSTALL1 Input/output valid values	128 (ENQUEUE) - Enqueue suspended, 64 (TASKWAIT) - Task wait suspended, 32 (DLI) - DLI suspended, 16 (DBCTRL) - DB control suspended, 8 (STORAGE) - Storage suspended, 4 (UNKNOWN) - Unknown suspended, 2 (DISPABLE) - Dispable (not used), 1 (RUNNING) - Running (not used)					
CURSTALL2	BIT	CPSM	1	LIKE	Second stall indicator flag	37
CURSTALL2 Input/output valid values	128 (DISP) - Dispatcher suspended, 64 (ALLCSESS) - Allocate session suspended, 32 (TERM) - Terminal control suspended, 16 (INTV) - Interval control suspended, 8 (FILE) - File I/O suspended, 4 (TEMPSTOR) - Temporary storage suspended, 2 (TSDATA) - Transient data suspended, 1 (JOURNAL) - Journal suspended					
CURSTALL3	BIT	CPSM	1	LIKE	Third stall indicator flag	36
CURSTALL3 Input/output valid values	128 (EJB) - Enterprise java suspended, 64 (LOGGER) - Log Manager suspended, 32 (IRLINK) - Interreg link suspended, 16 (DB2) - DB2 suspended, 8 (LOCK) - Lock manager suspended, 4 (XRF) - XRF suspended, 2 (PROGRAM) - Program manager suspended, 1 (TRANSACTION) - Transaction manager suspended					
CURSTALL4	BIT	CPSM	1	LIKE	Fourth stall indicator flag	35
CURSTALL4 Input/output valid values	128 (ASYNC) - Asynchronous API task suspended, 64 (IPIC) - IP interconnectivity suspended, 32 (RMI) - Resource manager suspended, 16 (CONSOLE) - Console domain suspended, 8 (SOCKETS) - Sockets domain suspended, 4 (MQSERIES) - MQSeries suspended, 2 (USERWAIT) - User suspended, 1 (WEBSERV) - Web services suspended					
DUMP_CODE	CHAR	CPSM	8	LIKE	Dump code	31
DUMP_PROGRAM	CHAR	CPSM	8	LIKE	Abending program	30
DUMP_TERMID	CHAR	CPSM	4	LIKE	Terminal ID	27
DUMP_TRANID	CHAR	CPSM	4	LIKE	Transaction ID	28
DUMP_USERID	CHAR	CPSM	8	LIKE	User ID	29
LOSTMAS_TIM	TIMESTP	CPSM	8	LIKE	MAS lost contact time	46
MASTYPE	BIT	CPSM	1	LIKE	Status	6
MASTYPE Input/output valid values	128 (LOCAL) - Local MAS, 64 (REMOTE) - Remote MAS					
MAXTASK_TIM	TIMESTP	CPSM	8	LIKE	Time detected maximum task limit reached	13
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4
SICKTYPE	EYUDA	CPSM	4	LIKE	Specific sick identification	10
SICKTYPE Output valid values	SYSDUMP, TRANDUMP, MAXTASK, STALLED, SOSUDSA, SOSCDSA, SOSEUDSA, SOSECDSA, SOSERDSA, SOSSDSA, SOSESDSA, SOSRDSA, SOSMVS, SOSBELOW, SOSABOVE, SOSGCDSA, LOSTMAS					
SOSABOVE_TIM	TIMESTP	CPSM	8	LIKE	Time detected SOS above 16M	24
SOSBELOW_TIM	TIMESTP	CPSM	8	LIKE	Time detected SOS below 16M	25
SOSCDSA_TIM	TIMESTP	CPSM	8	LIKE	Time detected CDSA SOS	17
SOSCONDS	BIT	CPSM	1	LIKE	Storage health indicators	8
SOSCONDS Input/output valid values	128 (SOSUDSA) - UDSA SOS, 64 (SOSCDSA) - CDSA SOS, 32 (SOSEUDSA) - EUDSA SOS, 16 (SOSECDSA) - ECDSA SOS, 8 (SOSERDSA) - ERDSA SOS, 4 (SOSSDSA) - SDSA SOS, 2 (SOSESDSA) - ESDSA SOS, 1 (SOSRDSA) - RDSA SOS					
SOSCONDS2	BIT	CPSM	1	LIKE	Storage health indicators	9
SOSCONDS2 Input/output valid values	128 (SOSABOVE) - SOS above 16M, 64 (SOSBELOW) - SOS below 16M, 32 (SOSMVS) - MVS is short on storage, 16 (SOSGCDSA) - SOS Above bar					
SOSECDSA_TIM	TIMESTP	CPSM	8	LIKE	Time detected ECDSA SOS	19
SOSERDSA_TIM	TIMESTP	CPSM	8	LIKE	Time detected ERDSA SOS	20
SOSESDSA_TIM	TIMESTP	CPSM	8	LIKE	Time detected ESDSA SOS	22
SOSEUDSA_TIM	TIMESTP	CPSM	8	LIKE	Time detected EUDSA SOS	18
SOSGCDSA_TIM	TIMESTP	CPSM	8	LIKE	Time detected SOS above bar	45

Table 318. EMASICK resource table attributes (continued)						
Name	Datatype	Source	Len	Sum	Description	Attr ID
SOSMVS_TIM	TIMESTP	CPSM	8	LIKE	Time detected MVS SOS	44
SOSRDSA_TIM	TIMESTP	CPSM	8	LIKE	Time detected RDSA SOS	23
SOSSDSA_TIM	TIMESTP	CPSM	8	LIKE	Time detected SDSA SOS	21
SOSUDSA_TIM	TIMESTP	CPSM	8	LIKE	Time detected UDSA SOS	16
STALL_TIM	TIMESTP	CPSM	8	LIKE	Time detected system stalled	14
SYSCONDS	BIT	CPSM	1	LIKE	System health indicators	7
SYSCONDS Input/output valid values	128 (SYSDUMP) - System dumping, 64 (TRANDUMP) - Transaction dumping, 32 (MAXTASK) - Max tasks, 16 (STALLED) - System stalled					
SYSDUMP_TIM	TIMESTP	CPSM	8	LIKE	Time detected system dumping	11
TRANDUMP_CNT	BINARY	CPSM	4	LIKE	Transaction dump use count	32
TRANDUMP_TIM	TIMESTP	CPSM	8	LIKE	Time detected transaction dumping	12

Chapter 134. EMASSTOP Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

EMASSTOP is emitted by a Topology control object when a CICS system terminates. The CICS system may have been attached to the localCMAS or some other CMAS in the CICSplex. EMASSTOP can normally be used to indicate that the CICS system has shut down. However, if the MAS agent is terminated, that event also generates an EMASSTOP notification.

External resource name

Length

168

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2401

Table 319. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 320. EMASSTOP resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
CECNAME	CHAR	CPSM	8	LIKE	CEC name	20
CMASNAME	CHAR	CPSM	8	LIKE	CMAS name	4
CSYSAPPL	CHAR	CPSM	8	LIKE	VTAM application ID	14
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	6
DESC	CHAR	CPSM	58	DIFF	Description	13
DYNROUTE	BINARY	CPSM	1	LIKE	Dynamic routing mode	11
DYNROUTE Input/output valid values						
1 (ACTIVE) - Routing active, 2 (SUSPEND) - Routing suspended						
DYNTYPE	CHAR	CPSM	3	LIKE	Dynamic routing type	12
JOBNAME	CHAR	CPSM	8	LIKE	MAS job name	19
MASSTART	TIMESTP	CPSM	8	LIKE	MAS start time	15
MON_SPEC	CHAR	CPSM	8	LIKE	Monitor specification name	7

Table 320. EMASSTOP resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
MVSNAME	CHAR	CPSM	4	LIKE	MVS system name	18
OPSYSREL	CHAR	CPSM	4	LIKE	MAS operating system release	17
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	5
RTA_SPEC	CHAR	CPSM	8	LIKE	Real Time Analysis (RTA) specification name	8
STATUS	BIT	CPSM	1	LIKE	Status	10
STATUS Input/output valid values	128 (LOCAL) - Local MAS stop, 64 (REMOTE) - Remote MAS stop, 32 (LOCAL) - Local MAS lost contact, 16 (REMOTEL) - Remote MAS lost contact, 8 (GONEL) - Local MAS no longer active, 4 (GONER) - Remote MAS no longer active, 2 (MASREM) - MAS Removal Invoked					
SYSID	CHAR	CPSM	4	LIKE	MAS system ID	16
SYSPLEX	CHAR	CPSM	8	LIKE	SYSplex name	21
WLM_SPEC	CHAR	CPSM	8	LIKE	Workload manager specification name	9

Chapter 135. EMASSTRT Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

EMASSTRT is emitted by a Topology control object when a CICS system connects to the local CMAS. The CICS system connect is seen in other CMAS instances in the CICSplex as an EMASJOIN notification.

External resource name

Length

176

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2400

Table 321. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 322. EMASSTRT resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
CECNAME	CHAR	CPSM	8	LIKE	CEC name	24
CMASNAME	CHAR	CPSM	8	LIKE	CMAS name	4
CSYSAPPL	CHAR	CPSM	8	LIKE	VTAM application ID	14
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	6
DAYLGHTSV	EYUDA	CPSM	4	LIKE	Daylight saving time in effect	19
DAYLGHTSV Output valid values	YES, NO					
DESC	CHAR	CPSM	58	DIFF	Description	13
DYNROUTE	BINARY	CPSM	1	LIKE	Dynamic routing mode	11
DYNROUTE Input/output valid values	1 (ACTIVE) - Routing ACTIVE, 2 (SUSPEND) - Routing SUSPENDED					
DYNTYPE	CHAR	CPSM	3	LIKE	Dynamic routing type	12
JOBNAME	CHAR	CPSM	8	LIKE	MAS job name	23
MASSTART	TIMESTP	CPSM	8	LIKE	MAS start time	15
MON_SPEC	CHAR	CPSM	8	LIKE	Monitor specification name	7

Table 322. EMASSTR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
MVSNAME	CHAR	CPSM	4	LIKE	MVS system name	22
OPSYSREL	CHAR	CPSM	4	LIKE	MAS operating system release	21
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	5
RTA_SPEC	CHAR	CPSM	8	LIKE	Real Time Analysis (RTA) specification name	8
STATUS	BIT	CPSM	1	LIKE	Status	10
STATUS Input/output valid values	128 (LOCAL) - Local MAS, 64 (REMOTE) - Remote MAS					
SYSID	CHAR	CPSM	4	LIKE	MAS system ID	20
SYSPLEX	CHAR	CPSM	8	LIKE	SYSPlex name	25
TMEZONE	CHAR	CPSM	1	LIKE	Time zone	17
TMEZONEO	BINARY	CPSM	1	LIKE	Time zone offset	16
WLM_SPEC	CHAR	CPSM	8	LIKE	Workload manager specification name	9

Chapter 136. EMASWELL Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

EMASWELL is emitted by a MAS agent to report the resolution of a health condition in a CICS system that was reported by a previous EMASICK notification. An EMASWELL instance identifies a single specific sickness resolution. It also carries the complete health status of the MAS as reported by previous EMASICK or ELSIGNAL notifications.

External resource name

Length

208

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2403

Table 323. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 324. EMASWELL resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
CHGSTALL1	BIT	CPSM	1	LIKE	First stall indicator flag	43
CHGSTALL1 Input/output valid values	128 (ENQUEUE) - Enqueue suspend, 64 (TASKWAIT) - Task wait suspend, 32 (DLI) - DLI suspend, 16 (DBCTRL) - DB control suspend, 8 (STORAGE) - Storage suspend, 4 (UNKNOWN) - Unknown suspend, 2 (DISPABLE) - Dispable (not used), 1 (RUNNING) - Running (not used)					
CHGSTALL2	BIT	CPSM	1	LIKE	Second stall indicator flag	42
CHGSTALL2 Input/output valid values	128 (DISP) - Dispatcher suspend, 64 (ALLCSESS) - Allc session suspend, 32 (TERM) - Terminal control, 16 (INTV) - Intv control suspend, 8 (FILE) - File I/O suspend, 4 (TEMPSTOR) - Temp stor suspend, 2 (TSDATA) - Transi data suspend, 1 (JOURNAL) - Journal suspend					
CHGSTALL3	BIT	CPSM	1	LIKE	Third stall indicator flag	41
CHGSTALL3 Input/output valid values	128 (EJB) - Enterprise java suspend, 64 (LOGGER) - Log manager suspend, 32 (IRLINK) - Interregn link suspend, 16 (DB2) - DB2 suspend, 8 (LOCK) - Lockmgr suspend, 4 (XRF) - XRF suspend, 2 (PROGRAM) - Progmgr suspend, 1 (TRANSACTION) - Transmgr suspend					
CHGSTALL4	BIT	CPSM	1	LIKE	Fourth stall indicator flag	40

Table 324. EMASWELL resource table attributes (continued)						
Name	Datatype	Source	Len	Sum	Description	Attr ID
CHGSTALL4 Input/output valid values	128 (ASYNCR) - Asynchronous API task suspended, 64 (IPIC) - IP interconnectivity suspend, 32 (RMI) - Resource manager suspend, 16 (CONSOLE) - Console domain suspend, 8 (SOCKETS) - Sockets domain suspend, 4 (MQSERIES) - MQSeries suspend, 2 (USERWAIT) - User suspend, 1 (WEBSERV) - Web services suspend					
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
CURSTALL1	BIT	CPSM	1	LIKE	First stall indicator flag	38
CURSTALL1 Input/output valid values	128 (ENQUEUE) - Enqueue suspend, 64 (TASKWAIT) - Task wait suspend, 32 (DLI) - DLI suspend, 16 (DBCTRL) - DB control suspend, 8 (STORAGE) - Storage suspend, 4 (UNKNOWN) - Unknown suspend, 2 (DISPABLE) - Dispable (not used), 1 (RUNNING) - Running (not used)					
CURSTALL2	BIT	CPSM	1	LIKE	Second stall indicator flag	37
CURSTALL2 Input/output valid values	128 (DISP) - Dispatcher suspend, 64 (ALLCSESS) - Allc session suspend, 32 (TERM) - Terminal control, 16 (INTV) - Intv control suspend, 8 (FILE) - File I/O suspend, 4 (TEMPSTOR) - Temp stg suspend, 2 (TSDATA) - Transi data suspend, 1 (JOURNAL) - Journal suspend					
CURSTALL3	BIT	CPSM	1	LIKE	Third stall indicator flag	36
CURSTALL3 Input/output valid values	128 (EJB) - Enterprise java suspend, 64 (LOGGER) - Log manager suspend, 32 (IRLINK) - Interregn link suspend, 16 (DB2) - DB2 suspend, 8 (LOCK) - Lockmgr suspend, 4 (XRF) - XRF suspend, 2 (PROGRAM) - Progmr suspend, 1 (TRANSACTION) - Tranmgr suspend					
CURSTALL4	BIT	CPSM	1	LIKE	Fourth stall indicator flag	35
CURSTALL4 Input/output valid values	128 (ASYNCR) - Asynchronous API task suspended, 64 (IPIC) - IP interconnectivity suspend, 32 (RMI) - Resource manager suspend, 16 (CONSOLE) - Console domain suspend, 8 (SOCKETS) - Sockets domain suspend, 4 (MQSERIES) - MQSeries suspend, 2 (USERWAIT) - User suspend, 1 (WEBSERV) - Web services suspend					
DUMP_CODE	CHAR	CPSM	8	LIKE	Last dump code	31
DUMP_PROGRAM	CHAR	CPSM	8	LIKE	Last dump abending program	30
DUMP_TERMID	CHAR	CPSM	4	LIKE	Last dump terminal ID	27
DUMP_TRANID	CHAR	CPSM	4	LIKE	Last dump transaction ID	28
DUMP_USERID	CHAR	CPSM	8	LIKE	Last dump user ID	29
LOSTMAS_TIM	TIMESTP	CPSM	8	LIKE	Time relieved MAS lost contact	46
MASTYPE	BIT	CPSM	1	LIKE	Status	6
MASTYPE Input/output valid values	128 (LOCAL) - Local MAS, 64 (REMOTE) - Remote MAS					
MAXTASK_TIM	TIMESTP	CPSM	8	LIKE	Time relieved maximum task limit	13
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4
SOSABOVE_TIM	TIMESTP	CPSM	8	LIKE	Time relieved SOS above 16M	24
SOSBELOW_TIM	TIMESTP	CPSM	8	LIKE	Time relieved SOS below 16M	25
SOSCDSA_TIM	TIMESTP	CPSM	8	LIKE	Time relieved CDSA SOS	17
SOSCONDS	BIT	CPSM	1	LIKE	Storage health indicators	8
SOSCONDS Input/output valid values	128 (SOSUDSA) - On-not UDSA SOS, 64 (SOSCDSA) - On-not CDSA SOS, 32 (SOSEUDSA) - On-not EUDSA SOS, 16 (SOSECDSA) - On-not ECDSA SOS, 8 (SOSERDSA) - On-not ERDSA SOS, 4 (SOSSDSA) - On-not SDSA SOS, 2 (SOSESDSA) - On-not ESDSA SOS, 1 (SOSRDSA) - On-not RDSA SOS					
SOSCONDS2	BIT	CPSM	1	LIKE	Storage health indicators	9
SOSCONDS2 Input/output valid values	128 (SOSABOVE) - On-not SOS above 16M, 64 (SOSBELOW) - On-not SOS below 16M, 32 (SOSMVS) - On-not SOS in MVS, 16 (SOSGCDSA) - On-not SOS above bar					
SOSECDSA_TIM	TIMESTP	CPSM	8	LIKE	Time relieved ECDSA SOS	19
SOSERDSA_TIM	TIMESTP	CPSM	8	LIKE	Time relieved ERDSA SOS	20
SOSESDSA_TIM	TIMESTP	CPSM	8	LIKE	Time relieved ESDSA SOS	22
SOSEUDSA_TIM	TIMESTP	CPSM	8	LIKE	Time relieved EUDSA SOS	18
SOSGCDSA_TIM	TIMESTP	CPSM	8	LIKE	Time relieved SOS above bar	45
SOSMVS_TIM	TIMESTP	CPSM	8	LIKE	Time relieved MVS SOS	44
SOSRDSA_TIM	TIMESTP	CPSM	8	LIKE	Time relieved RDSA SOS	23
SOSSDSA_TIM	TIMESTP	CPSM	8	LIKE	Time relieved SDSA SOS	21
SOSUDSA_TIM	TIMESTP	CPSM	8	LIKE	Time relieved UDSA SOS	16

Table 324. EMASWELL resource table attributes (continued)						
Name	Datatype	Source	Len	Sum	Description	Attr ID
STALL_TIM	TIMESTP	CPSM	8	LIKE	Time relieved system stalled	14
SYSCONDS	BIT	CPSM	1	LIKE	System health indicators	7
SYSCONDS Input/output valid values	128 (SYSDUMP) - On-not sys dumping, 64 (TRANDUMP) - On-not tran dumping, 32 (MAXTASK) - On-not at max tasks, 16 (STALLED) - On-not stalled					
SYSDUMP_TIM	TIMESTP	CPSM	8	LIKE	Time relieved system dumping	11
TRANDUMP_CNT	BINARY	CPSM	4	LIKE	Transaction dump use count	32
TRANDUMP_TIM	TIMESTP	CPSM	8	LIKE	Time relieved tran dumping	12
WELLTYPE	EYUDA	CPSM	4	LIKE	Specific well identification	10
WELLTYPE Output valid values	SYSDUMP, TRANDUMP, MAXTASK, STALLED, SOSUDSA, SOSCDSDA, SOSEUDSA, SOSECDSA, SOSERDSA, SOSSDSA, SOSESDSA, SOSRDSA, SOSMVS, SOSBELOW, SOSABOVE, SOSGCDSA, LOSTMAS					

Chapter 137. EMCICS Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

EMCICS is emitted by a Monitor control object when data is received from the MAS Monitor agents for the MCICS resource class. This notification can be used to trigger sampling of CICS Monitored resource objects. The notification is generated after the data has been processed by the Monitor collection objects in the CMAS.

External resource name

Length

24

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2467

Table 325. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 326. EMCICS resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
INTERVAL	BINARY	CPSM	2	LIKE	Interval which data received	8
MONCLASS	EYUDA	CPSM	4	LIKE	Monitor resource class	6
MONCLASS Output valid values		MCICS				
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 138. EMCONN Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

EMCONN is emitted by a Monitor control object when data is received from the MAS Monitor agents for the MCONN resource class. This notification can be used to trigger sampling of CICS Monitored resource objects. The notification is generated after the data has been processed by the Monitor collection objects in the CMAS .

External resource name

Length

24

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2470

Table 327. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 328. EMCONN resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
INTERVAL	BINARY	CPSM	2	LIKE	Interval which data received	8
MONCLASS	EYUDA	CPSM	4	LIKE	Monitor resource class	6
MONCLASS Output valid values		MCONN				
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 139. EMDBX Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

EMDBX is emitted by a Monitor control object when data is received from the MAS Monitor agents for the MDBX resource class. This notification can be used to trigger sampling of CICS Monitored resource objects. The notification is generated after the data has been processed by the Monitor collection objects in the CMAS .

External resource name

Length

24

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2469

Table 329. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 330. EMDBX resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
INTERVAL	BINARY	CPSM	2	LIKE	Interval which data received	8
MONCLASS	EYUDA	CPSM	4	LIKE	Monitor resource class	6
MONCLASS Output valid values		MDBX				
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 140. EMFILE Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

EMFILE is emitted by a Monitor control object when data is received from the MAS Monitor agents for the MFILE resource class. This notification can be used to trigger sampling of CICS Monitored resource objects. The notification is generated after the data has been processed by the Monitor collection objects in the CMAS .

External resource name

Length

24

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2471

Table 331. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 332. EMFILE resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
INTERVAL	BINARY	CPSM	2	LIKE	Interval which data received	8
MONCLASS	EYUDA	CPSM	4	LIKE	Monitor resource class	6
MONCLASS Output valid values		MFILE				
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 141. EMGLBL Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

EMGLBL is emitted by a Monitor control object when data is received from the MAS Monitor agents for the MGLBL resource class. This notification can be used to trigger sampling of CICS Monitored resource objects. The notification is generated after the data has been processed by the Monitor collection objects in the CMAS .

External resource name

Length

24

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2468

Table 333. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 334. EMGLBL resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
INTERVAL	BINARY	CPSM	2	LIKE	Interval which data received	8
MONCLASS	EYUDA	CPSM	4	LIKE	Monitor resource class	6
MONCLASS Output valid values		MGLBL				
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 142. EMJRNL Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

EMJRNL is emitted by a Monitor control object when data is received from the MAS Monitor agents for the MJRNL resource class. This notification can be used to trigger sampling of CICS Monitored resource objects. The notification is generated after the data has been processed by the Monitor collection objects in the CMAS .

External resource name

Length

24

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2472

Table 335. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 336. EMJRNL resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
INTERVAL	BINARY	CPSM	2	LIKE	Interval which data received	8
MONCLASS	EYUDA	CPSM	4	LIKE	Monitor resource class	6
MONCLASS Output valid values		MJRNL				
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 143. EMPROG Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

EMPROG is emitted by a Monitor control object when data is received from the MAS Monitor agents for the MPROG resource class. This notification can be used to trigger sampling of CICS Monitored resource objects. The notification is generated after the data has been processed by the Monitor collection objects in the CMAS .

External resource name

Length

24

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2473

Table 337. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 338. EMPROG resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
INTERVAL	BINARY	CPSM	2	LIKE	Interval which data received	8
MONCLASS	EYUDA	CPSM	4	LIKE	Monitor resource class	6
MONCLASS Output valid values		MPROG				
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 144. EMSTATUS Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

EMSTATUS is emitted by a MAS agent to identify the current health of the MAS. This is a periodic notification that is often referred to as the MAS heartbeat. EMSTATUS contains all currently active MAS sickness indicators as reported by previous EMASICK notifications. Other critical data of interest to various CPSM management applications is also provided.

The frequency of EMSTATUS emissions is not an externally documented value and is subject to change. It is important to note that every MAS generates multiple EMSTATUS notifications every minute. If an API program registers interest in EMSTATUS, the program must be prepared to receive the asynchronous output on a regular and frequent basis. A program should assume that each MAS generates an EMSTATUS notification at least every 15 seconds for as long as it is connected to the CICSplex. In a CICSplex with 50 active MAS instances, this can result in 200 EMSTATUS notifications every minute in every CMAS managing the CICSplex. If a program registers interest in EMSTATUS, but does not process the notifications in a timely manner, large amounts of data space storage will be used to hold copies of these notifications.

External resource name

Length

240

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2507

Table 339. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 340. EMSTATUS resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
AMAXTASKS	BINARY	INQ	4	LIKE	Maximum number of active tasks	35
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
CURRTASKS	BINARY	INQ	4	LIKE	Current number of tasks	36
CURSTALL1	BIT	CPSM	1	LIKE	First stall indicator flag	46

Table 340. EMSTATUS resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
CURSTALL1 Input/output valid values	128 (ENQUEUE) - Enqueue suspended, 64 (TASKWAIT) - Task wait suspended, 32 (DLI) - DLI suspended, 16 (DBCTRL) - DB control suspended, 8 (STORAGE) - Storage suspended, 4 (UNKNOWN) - Unknown suspended, 2 (DISPABLE) - Dispatched-unused, 1 (RUNNING) - Running-unused					
CURSTALL2	BIT	CPSM	1	LIKE	Second stall indicator flag	45
CURSTALL2 Input/output valid values	128 (DISP) - Dispatcher suspended, 64 (ALLCSESS) - Allocate session suspended, 32 (TERM) - Terminal control suspended, 16 (INTV) - Interval control suspended, 8 (FILE) - File I/O suspended, 4 (TEMPSTOR) - Temporary storage suspend, 2 (TSDATA) - Transient data suspended, 1 (JOURNAL) - Journal suspended					
CURSTALL3	BIT	CPSM	1	LIKE	Third stall indicator flag	44
CURSTALL3 Input/output valid values	128 (EJB) - Enterprise java suspended, 64 (LOGGER) - Log manager suspended, 32 (IRLINK) - Interreg link suspended, 16 (DB2) - DB2 suspended, 8 (LOCK) - Lock manager suspended, 4 (XRF) - XRF suspended, 2 (PROGRAM) - Program manager suspended, 1 (TRANSACTION) - Transaction Manager suspended					
CURSTALL4	BIT	CPSM	1	LIKE	Fourth stall indicator flag	43
CURSTALL4 Input/output valid values	128 (ASYNC) - Asynchronous API task suspended, 64 (IPIC) - IP interconnectivity suspended, 32 (RMI) - Resource manager suspended, 16 (CONSOLE) - Console suspended, 8 (SOCKETS) - Sockets domain suspended, 4 (MQSERIES) - MQSeries suspended, 2 (USERWAIT) - User suspended, 1 (WEBSERV) - Web services suspended					
DUMP_CODE	CHAR	CPSM	8	LIKE	Last dump code	31
DUMP_PROGRAM	CHAR	CPSM	8	LIKE	Last dump abending program	30
DUMP_TERMID	CHAR	CPSM	4	LIKE	Last dump terminal ID	27
DUMP_TRANID	CHAR	CPSM	4	LIKE	Last dump transaction ID	28
DUMP_USERID	CHAR	CPSM	8	LIKE	Last dump user ID	29
IRCSTAT	CVDAS	INQ	4	LIKE	Interregion communication status	38
IRCSTAT Output valid values	OPEN, CLOSED, CLOSING, IMMCLOSING					
LASTTYPE	EYUDA	CPSM	4	LIKE	Last sick/well identification	10
LASTTYPE Output valid values	SYSDUMP, TRANDUMP, MAXTASK, STALLED, SOSUDSA, SOSCDSDA, SOSEUDSA, SOSECDSDA, SOSERDSA, SOSSSDSA, SOSESDDSA, SOSRDSA, SOSMVS, SOSBELOW, SOSABOVE, SOSGCDSDA, LOSTMAS					
LOSTCON_TIM	TIMESTP	CPSM	8	LIKE	MAS lost contact time	50
MASTYPE	BIT	CPSM	1	LIKE	Status	6
MASTYPE Input/output valid values	128 (LOCAL) - Local MAS, 64 (REMOTE) - Remote MAS, 32 (CPSMWRAM) - Using CPSM WRAM program, 16 (RSFAILED) - RS Domain reporting problems, 08 (RSTRACED) - RS Domain trace issued, 04 (NOMVSWLM) - No MVS/WLM Support, 02 (MVSSRM) - MVS/WLM in SRM Mode, 01 (MVSGOAL) - MVS/WLM in GOAL Mode					
MAXTASKS	BINARY	INQ	4	LIKE	Maximum number of active and suspended tasks	34
MAXTASK_TIM	TIMESTP	CPSM	8	LIKE	Last sick/well time	13
MEXPANSION	BINARY	CPSM	20	LIKE	Stall condition indications	42
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4
SOSABOVE_TIM	TIMESTP	CPSM	8	LIKE	Last sick/well time	24
SOSBELOW_TIM	TIMESTP	CPSM	8	LIKE	Last sick/well time	25
SOSCDSDA_TIM	TIMESTP	CPSM	8	LIKE	Last sick/well time	17
SOSCONDS	BIT	CPSM	1	LIKE	Storage health indicators	8
SOSCONDS Input/output valid values	128 (SOSUDSA) - UDSA SOS, 64 (SOSCDSDA) - CDSA SOS, 32 (SOSEUDSA) - EUDSA SOS, 16 (SOSECDSDA) - ECDSA SOS, 8 (SOSERDSA) - ERDSA SOS, 4 (SOSSSDSA) - SDSA SOS, 2 (SOSESDDSA) - ESDSA SOS, 1 (SOSRDSA) - RDSA SOS					
SOSCONDS2	BIT	CPSM	1	LIKE	Storage health indicators	9
SOSCONDS2 Input/output valid values	128 (SOSABOVE) - SOS above 16M, 64 (SOSBELOW) - SOS below 16M, 32 (SOSMVS) - Short of MVS storage, 16 (SOSGCDSDA) - SOS above bar					
SOSECDSDA_TIM	TIMESTP	CPSM	8	LIKE	Last sick/well time	19
SOSERDSA_TIM	TIMESTP	CPSM	8	LIKE	Last sick/well time	20
SOSESDDSA_TIM	TIMESTP	CPSM	8	LIKE	Last sick/well time	22
SOSEUDSA_TIM	TIMESTP	CPSM	8	LIKE	Last sick/well time	18
SOSGCDSDA_TIM	TIMESTP	CPSM	8	LIKE	Last sick/well time	49

Table 340. EMSTATUS resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
SOSMVS_TIM	TIMESTP	CPSM	8	LIKE	Last sick/well time	48
SOSRDSA_TIM	TIMESTP	CPSM	8	LIKE	Last sick/well time	23
SOSSDSA_TIM	TIMESTP	CPSM	8	LIKE	Last sick/well time	21
SOSUDSA_TIM	TIMESTP	CPSM	8	LIKE	Last sick/well time	16
STALL_TIM	TIMESTP	CPSM	8	LIKE	Last sick/well time	14
SYSCONDS	BIT	CPSM	1	LIKE	System health indicators	7
SYSCONDS Input/output valid values	128 (SYSDUMP) - System dumping, 64 (TRANDUMP) - Transaction dumping, 32 (MAXTASK) - At max tasks, 16 (STALLED) - Stalled, 08 (NRM) - Non-responsive, 01 (MODEOK) - CICS V3 modename Queue OK					
SYSDUMP_TIM	TIMESTP	CPSM	8	LIKE	Last sick/well time	11
TRANDUMP_CNT	BINARY	CPSM	4	LIKE	Last transaction dump use count	32
TRANDUMP_TIM	TIMESTP	CPSM	8	LIKE	Last sick/well time	12
VTAMACB	CVDAS	INQ	4	LIKE	VTAM ACB open status	37
VTAMACB Output valid values	OPEN, CLOSED, CLOSING, IMMCLOSING, FORCECLOSING, N_A					

Chapter 145. EMTDQS Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

EMTDQS is emitted by a Monitor control object when data is received from the MAS Monitor agents for the MTDQS resource class. This notification can be used to trigger sampling of CICS Monitored resource objects. The notification is generated after the data has been processed by the Monitor collection objects in the CMAS.

External resource name

Length

24

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2474

Table 341. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 342. EMTDQS resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
INTERVAL	BINARY	CPSM	2	LIKE	Interval which data received	8
MONCLASS	EYUDA	CPSM	4	LIKE	Monitor resource class	6
MONCLASS Output valid values		MTDQS				
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 146. EMTERM Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

EMTERM is emitted by a Monitor control object when data is received from the MAS Monitor agents for the MTERM resource class. This notification can be used to trigger sampling of CICS Monitored resource objects. The notification is generated after the data has been processed by the Monitor collection objects in the CMAS .

External resource name

Length

24

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2534

Table 343. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 344. EMTERM resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
INTERVAL	BINARY	CPSM	2	LIKE	Interval which data received	8
MONCLASS	EYUDA	CPSM	4	LIKE	Monitor resource class	6
MONCLASS Output valid values		MTERM				
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 147. EMTRAN Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

EMTRAN is emitted by a Monitor control object when data is received from the MAS Monitor agents for the MTRAN resource class. This notification can be used to trigger sampling of CICS Monitored resource objects. The notification is generated after the data has been processed by the Monitor collection objects in the CMAS .

External resource name

Length

24

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2475

Table 345. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 346. EMTRAN resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
INTERVAL	BINARY	CPSM	2	LIKE	Interval which data received	8
MONCLASS	EYUDA	CPSM	4	LIKE	Monitor resource class	6
MONCLASS Output valid values		MTRAN				
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 148. ENQINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of an ENQ/DEQ model definition (ENQMDEF) in a resource group (RESGROUP). A ENQMDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is ENQMGROUP.

The **Secondary** key field for this resource class is ENQMNAME.

The **Tertiary** key field for this resource class is ENQMVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6167

Table 347. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 348. ENQINGRP FEEDBACK error codes

Value	Code	Description
1	ENQINGRP_INV_DATA	Attribute data invalid
2	ENQINGRP_REC_NOT_FOUND	Requested resource not found
4	ENQINGRP_REC_EXISTS	Resource already exists
6	ENQINGRP_INV_RESTYPE	Invalid resource type
7	ENQINGRP_INV_VER	Invalid resource version
11	ENQINGRP_NON_MP	Maintenance point CMAS not available

Table 348. ENQINGRP FEEDBACK error codes (continued)

Value	Code	Description
12	ENQINGRP_INV_CONTEXT	Context not found
21	ENQINGRP_INCONSISTENT_SET	Inconsistent set
22	ENQINGRP_DIFF_VERSION	Different version
23	ENQINGRP_INV_NAME	Invalid name
24	ENQINGRP_INV_MINNAME	Invalid minor name

Table 349. ENQINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
ENQMGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
ENQMNAME-2	CHAR	CPSM	8	Yes	DIFF	Enqueue model definition name	6
ENQMVER-3	BINARY	CPSM	1	Yes	AVG	Enqueue model definition version	7

Chapter 149. ENQMDEF Resource Table

A CICS Definition that describes an ENQ/DEQ model.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install an ENQ/DEQ Model Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionEnqueueModel

Length

408

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3822

Table 350. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM SET	INSTALL	FORCEINS(YES, NO)	No
		MODE(value)	No

Table 350. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 351. ENQMDEF FEEDBACK error codes

Value	Code	Description
1	ENQMDEF_INV_DATA	Attribute data invalid
2	ENQMDEF_REC_NOT_FOUND	Requested resource not found
4	ENQMDEF_REC_EXISTS	Resource already exists
5	ENQMDEF_REC_CHANGED	Resource definition already changed
6	ENQMDEF_INV_RESTYPE	Invalid resource type
7	ENQMDEF_INV_VER	Invalid resource version
11	ENQMDEF_NON_MP	Maintenance point CMAS not available
12	ENQMDEF_INV_CONTEXT	Context not found
13	ENQMDEF_INCONSISTENT_SET	Inconsistent set condition
14	ENQMDEF_INV_RESGROUP	Resource group not found
21	ENQMDEF_INV_ACTION	Invalid action
22	ENQMDEF_INV_RECADDR	Invalid record address
23	ENQMDEF_INV_RECLN	Invalid record length
24	ENQMDEF_DIFF_VERSION	Different version
25	ENQMDEF_EARLY_NAMELIST_END	Early name list end
26	ENQMDEF_INV_NAMELIST	Invalid name list
27	ENQMDEF_INV_NAME	Invalid name
28	ENQMDEF_INV_MINNAME	Invalid minor name
29	ENQMDEF_NOTIFY	Notify
30	ENQMDEF_PARTIAL_INSTALL	Partial install
31	ENQMDEF_NOTHING_INSTALLED	Nothing installed

Table 351. ENQMDEF FEEDBACK error codes (continued)

Value	Code	Description
32	ENQMDEF_NO_TARGETS	No targets
33	ENQMDEF_NO_RELATED	No related systems
34	ENQMDEF_INV_TSCOPE	Invalid target scope
35	ENQMDEF_INV_RSCOPE	Invalid related scope
36	ENQMDEF_INV_USAGE	Invalid usage
37	ENQMDEF_INV_MODE	Invalid mode
38	ENQMDEF_INV_STATECHK	Invalid state check
39	ENQMDEF_INV_FORCEINS	Invalid force install
40	ENQMDEF_INV_NOTIFY	Invalid notify
41	ENQMDEF_INV_OVERTYPE	Invalid over type
42	ENQMDEF_INV_OVRBLOCK	Invalid override block
43	ENQMDEF_INV_ORSTRING	Invalid override string
44	ENQMDEF_INV_STRNGTERM	Invalid string terminator
45	ENQMDEF_INV_EMBEDTERM	Invalid embedded terminator
46	ENQMDEF_INV_ATTRIBUTE	Invalid attribute
47	ENQMDEF_INV_LITERAL	Invalid literal
48	ENQMDEF_INV_ORSTGNA	Invalid override string
49	ENQMDEF_SCOPE_REQUIRED	Scope required
50	ENQMDEF_USAGE_CONFLICT	Usage conflict
51	ENQMDEF_NODEFS_SELECTED	No definitions selected
52	ENQMDEF_MORE_THAN_1_RELSYS	More than one related system
53	ENQMDEF_MISSING_RELSYSID	Missing related system identifier
54	ENQMDEF_SCOPE_CONFLICT	Scope conflict
55	ENQMDEF_INV_CSDGROUP	Invalid CSD group
56	ENQMDEF_REC_NOT_REMOVED	Record not removed
57	ENQMDEF_INV_RESOURCE	Invalid resource
58	ENQMDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	ENQMDEF_PARTIAL_ACTION	Partial action
60	ENQMDEF_NOTHING_ACTIONED	Nothing actioned
61	ENQMDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	ENQMDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	ENQMDEF_CSD_ERROR	CSD access error

Table 352. ENQMDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	18
CHANGEAGENT Input/ output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	20
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	19
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				12
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	22
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		17
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				16
ENQNAME	CHAR	CPSM	25 5	Yes	DIFF	Enqueue resource name				11
ENQSCOPE	CHAR	CPSM	4	No	DIFF	Enqueue scope name				9
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
STATUS	CVDAS	CPSM	4	Yes	LIKE	Enqueue status	ENABLED			10
STATUS Input/output valid values	ENABLED, DISABLED									
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				13
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				14
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				15

Chapter 150. ENQMODEL Resource Table

A CICS Resource that describes a ENQ/DEQ model in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

DISABLE

Disable an ENQ/DEQ model.

DISCARD

Discard an ENQ/DEQ model.

ENABLE

Enable an ENQ/DEQ model.

These actions require no unique parameter data.

External resource name

CICSEnqueueModel

Length

352

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0093

Table 353. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	DISCARD	None	N/A
	DISABLE	None	N/A
	ENABLE	None	N/A

Table 354. ENQMODEL resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0	E640 E650	15
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent		E640 E650	6
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, SYSTEM, CREATESPI, NOTAPPLIC								
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release		E640 E650	8
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time		E640 E650	9
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID		E640 E650	7
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition		E640 E650	10
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time		E640 E650	11
ENQNAME	CHAR	INQ	255	DIFF	No	Enqueue resource name			3
ENQSCOPE	CHAR	INQ	4	DIFF	No	Enqueue scope name			2
ENQSTATUS	CVDAS	INQ	4	LIKE	Yes	Enqueue status			4
ENQSTATUS Input/output valid values	ENABLED, DISABLED, WAITING								
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent		E640 E650	14
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, GRPLIST								
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time		E640 E650	13
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID		E640 E650	12
NAME-1	CHAR	INQ	8	DIFF	No	Enqueue model name			1

Chapter 151. ENQUEUE Resource Table

A CICS Resource that provides CICS enqueues in an active system being managed by CICSplex SM.

The **Primary** key field for this resource class is NQGPOOL.

There are no object specific actions for this resource class.

External resource name

CICSEnqueue

Length

168

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0123

Table 355. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 356. ENQUEUE resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	28
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
NQGACNQRT	INTTSTP	STAT	8	MAX	Average retention time for enqueue requests	26
NQGAGNQWT	INTTSTP	STAT	8	MAX	Average waiting time for sysplex enqueue requests	24
NQGATNQWT	INTTSTP	STAT	8	MAX	Average waiting time for enqueue requests	29
NQGCACNQRT	INTTSTP	STAT	8	MAX	Average retention time for current enqueues	27
NQGCAGNQWT	INTTSTP	STAT	8	MAX	Average waiting time for current sysplex enqueues	25
NQGCATNQWT	INTTSTP	STAT	8	MAX	Average waiting time for current waiting enqueues	23
NQGCNQRT	INTTSTP	STAT	8	MAX	Retention time for enqueues retained currently	

Table 356. ENQUEUE resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
NQGCNQSR	BINARY	STAT	4	AVG	Number of enqueue requests retained currently	12
NQGCNQSW	BINARY	STAT	4	AVG	Number of enqueue requests waiting currently	8
NQGCNQWT	INTTSTP	STAT	8	MAX	Waiting time for current waiting enqueue requests	19
NQGGNQSW	BINARY	STAT	4	AVG	Total sysplex enqueue requests that waited	9
NQGGNQWT	INTTSTP	STAT	8	MAX	Total waiting time for sysplex enqueue requests	20
NOGPOOL-1	CHAR	STAT	8	DIFF	Enqueue pool ID	5
NQGSNQSW	BINARY	STAT	4	AVG	Sysplex enqueue request count waiting currently	10
NQGSNQWT	INTTSTP	STAT	8	MAX	Waiting time for current sysplex enqueue requests	21
NQGTIRJB	BINARY	STAT	4	AVG	Total enqueue requests rejected with ENQBUSY	13
NQGTIRJR	BINARY	STAT	4	AVG	Total enqueue requests rejected ENQ retained	14
NQGTNQRT	INTTSTP	STAT	8	MAX	Total retention time for enqueue requests	22
NQGTNQSI	BINARY	STAT	4	AVG	Total number of enqueues issued	6
NQGTNQSR	BINARY	STAT	4	AVG	Total enqueue requests that were retained	11
NQGTNQSW	BINARY	STAT	4	AVG	Total number of enqueue requests that waited	7
NQGTNQWT	INTTSTP	STAT	8	MAX	Total waiting time for enqueue requests	18
NQGTWPOP	BINARY	STAT	4	AVG	Total waiting enqueue requests purged by operator	16
NQGTWPTO	BINARY	STAT	4	AVG	Total waiting enqueue requests purged by timeout	17
NQGTWRJR	BINARY	STAT	4	AVG	Total waiting enqueues rejected ENQ retained	15

Chapter 152. EPADAPT Resource Table

This CICS resource object provides information about event processing adapters.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

DISABLE

Disable an EP adapter. When disabled, the EP adapter and its associated resources are not available to CICS.

ENABLE

Enable an EP adapter. When enabled, the EP Adapter and its associated resources are available to CICS.

External resource name

CICSEPAadapter

Length

240

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0199

Table 357. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	ENABLE	None	N/A
	DISABLE	None	N/A

Table 358. EPADAPT resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name	3
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved	
ADAPTERTYPE	CVDAS	INQ	4	LIKE	No	Adapter type	

Table 358. EPADAPT resource table attributes (continued)							
Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
ADAPTERTYPE Input/output valid values	CUSTOM, HTTP, TDQUEUE, TRANSTART, TSQUEUE, WMQ						
AUTHORITY	CVDAS	INQ	4	LIKE	No	Authority	4
AUTHORITY Input/output valid values	CONTEXT, REGION, USERID, DEFAULT						
AUTHUSERID	CHAR	INQ	8	DIFF	No	Authority user ID	16
BUNDLE	CHAR	INQ	8	DIFF	No	Bundle name	25
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent	6
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, CREATESPI, NOTAPPLIC						
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release	7
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time	14
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID	8
CONFIGDATA1	CHAR	INQ	64	DIFF	No	Event processing adapter configuration data	17
DATAFORMAT	CVDAS	INQ	4	LIKE	No	Event format	18
DATAFORMAT Input/output valid values	USER, CBER, CBE, CCE, CFE, WBE, DSIE						
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition	9
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time	13
EMITMODE	CVDAS	INQ	4	LIKE	No	Emission mode	19
EMITMODE Input/output valid values	ASYNCHRONOUS, SYNCHRONOUS						
ENABLESTATUS	CVDAS	CPSM	4	LIKE	Yes	Enabled status	2
ENABLESTATUS Input/output valid values	ENABLED, DISABLED						
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent	10
INSTALLAGENT Input/output valid values	BUNDLE						
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time	15
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID	11
INVOKETYPE	CVDAS	INQ	4	LIKE	No	Invoke type	20
INVOKETYPE Input/output valid values	ATTACH, LINK						
NAME-1	CHAR	INQ	32	DIFF	No	Name	1
PRIORITY	CVDAS	INQ	4	LIKE	No	Priority	21
PRIORITY Input/output valid values	HIGH, NORMAL						
PROGRAM	CHAR	INQ	8	DIFF	No	Program	22
PUTEVENTS	BINARY	STAT	4	MAX	No	Number of events emitted	26
TRANSACTION	CHAR	INQ	4	DIFF	No	Transaction	23
TRANSMODE	CVDAS	INQ	4	LIKE	No	Transactionality	24
TRANSMODE Input/output valid values	NONTRANS, TRANS						

Chapter 153. EPADSET Resource Table

This CICS resource object provides information about event processing adapter sets.

The **Primary** key field for this resource class is EPADAPTERSET.

The following actions are supported:

DISABLE

Disable an EP adapter set. When disabled, the EP adapter set is not available to CICS.

ENABLE

Enable an EP adapter set. When enabled, the EP adapter set is available to CICS.

External resource name

CICSEPAadapterSet

Length

120

Usage

API or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0212

Table 359. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM	ENABLE	None	N/A
SET	DISABLE	None	N/A

Table 360. EPADSET resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved	
ADAPTERNUM	BINARY	INQ	4	SUM	No	EP adapter count	3
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent	4

Table 360. EPADSET resource table attributes (continued)							
Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, CREATESPI, NOTAPPLIC						
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release	5
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time	12
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID	6
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition	7
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time	11
ENABLESTATUS	CVDAS	INQ	4	LIKE	Yes	Enabled status	2
ENABLESTATUS Input/output valid values	ENABLED, DISABLED						
EPADAPTERSET-1	CHAR	INQ	32	DIFF	No	Name	1
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent	8
INSTALLAGENT Input/output valid values	BUNDLE						
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time	13
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID	10

Chapter 154. EPAINSET Resource Table

This CICS resource object provides the name of event processing adapters in an event processing adapter set.

The **Primary** key field for this resource class is EPADAPTERSET.

The **Secondary** key field for this resource class is EPADAPTER.

This resource class has no object specific actions.

External resource name

CICSEPAadapterInSet

Length

80

Usage

API or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0213

Table 361. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 362. EPAINSET resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	1
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
EPADAPTER-2	CHAR	INQ	32	DIFF	EP adapter name	
EPADAPTERSET-1	CHAR	INQ	32	DIFF	EP adapter set name	2

Chapter 155. EPLEXCHG Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

EPLEXCHG is emitted by a Communications control object when aCICSplex definition is created, updated, or removed.

External resource name

Length

40

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2480

Table 363. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 364. EPLEXCHG resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	BINARY	CPSM	1	LIKE	Status	7
ACTION Input/output valid values	1 (PLEXADD) - CICSplex Add, 2 (PLEXUPD) - CICSplex Update, 3 (PLEXREM) - CICSplex Remove, 4 (PLEXA_E) - CICSplex Add - Plex Exists, 5 (PLEXA_F) - CICSplex Add - Add Failed, 6 (PLEXA_U) - CICSplex Add - Undelete					
BOTRSUPD	BINARY	CPSM	1	LIKE	RS server bottom tier	16
CICSplex	CHAR	CPSM	8	LIKE	CICSplex name	4
DAYLGHTSV	EYUDA	CPSM	4	LIKE	Daylight saving time in effect	11
DAYLGHTSV Output valid values	YES, NO					
INTERVAL	BINARY	CPSM	2	LIKE	Performance interval	6
READRS	BINARY	CPSM	2	LIKE	RS server read interval	13
RSPoolID	CHAR	CPSM	8	LIKE	RS server pool name	17
TMEZONE	CHAR	CPSM	1	LIKE	Time zone	9
TMEZONEO	BINARY	CPSM	1	LIKE	Time zone offset	8
TOPRSUPD	BINARY	CPSM	1	LIKE	RS server top tier	15

Table 364. EPLEXCHG resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
UPDATERS	BINARY	CPSM	1	LIKE	RS server update frequency	14

Chapter 156. ERESSTAT Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERESSTAT is emitted by a Topology control object when a CICS Resource object has an operational state transition. ERESSTAT is only emitted if the MAS is the target of resource status facility status monitoring.

External resource name

Length

72

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2605

Table 365. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 366. ERESSTAT resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
CICSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4
RESCLASS	CHAR	CPSM	8	LIKE	Resource class	6
RESNAME	CHAR	CPSM	44	LIKE	Resource name	7
RESSTAT	BINARY	CPSM	4	LIKE	Resource class status	8

Chapter 157. ERMCAIMD Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMCAIMD is emitted by a Topology control object when a autoinstall terminal model resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

32

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2557

Table 367. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 368. ERMCAIMD resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values		I (INS) - Install Resource, D (DSC) - Discard Resource, U (UPD) - Update Resource				
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	8	LIKE	Autoinstalled model name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 158. ERMCATOM Resource Table

A CICSplex SM notification table. You can register interest in this notification by issuing a **LISTEN** command and naming this resource in the EVENT option.

CICSplex SM notifications have no key fields and do not support object specific actions.

ERMCATOM is emitted by a Topology control object when a ATOMSERVICE resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

32

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2651

Table 369. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 370. ERMCATOM resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values		I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource				
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	8	LIKE	ATOMSERVICE name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 159. ERMCBUND Resource Table

A CICSplex SM notification table. You can register interest in this notification by issuing a **LISTEN** command and naming this resource in the EVENT option.

CICSplex SM notifications have no key fields and do not support object specific actions.

ERMCBUND is emitted by a Topology control object when a BUNDLE resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

120

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2652

Table 371. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 372. ERMCBUND resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values		I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource				
BUNDLEID	CHAR	INQ	64	DIFF	Bundle ID	10
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
MAJORVERSION	BINARY	INQ	4	MAX	Major Version	11
MGMTPART	CHAR	CPSM	8	DIFF	Management Part	14
MICROVERSION	BINARY	INQ	4	MAX	Micro Version	13
MINORVERSION	BINARY	INQ	4	MAX	Minor Version	12
NAME	CHAR	CPSM	8	LIKE	BUNDLE name	6
PARTCOUNT	BINARY	INQ	4	LIKE	Part count	9
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 160. ERMCCONN Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMCCONN is emitted by a Topology control object when a connection resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

40

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2492

Table 373. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 374. ERMCCONN resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	9
ACTION Input/output valid values		I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource				
CONNTYPE	EYUDA	CPSM	4	LIKE	Connection type	7
CONNTYPE Output valid values		LU61, LU62, MRO, INDIRECT, EXCI				
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	4	LIKE	Connection name	6
NETNAME	CHAR	INQ	8	LIKE	Target network name	8
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 161. ERMCDDB2C Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMCDDB2C is emitted by a Topology control object when a DB2 connection resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

32

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2621

Table 375. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 376. ERMCDDB2C resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values	I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource					
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	8	LIKE	DB2 connection name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 162. ERMCDDB2E Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMCDDB2E is emitted by a Topology control object when a DB2 entry resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

32

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2622

Table 377. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 378. ERMCDDB2E resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values	I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource					
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	8	LIKE	DB2 entry name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 163. ERMCDDB2P Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMCDDB2P is emitted by a Topology control object when a DB2 packageset resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

168

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2671

Table 379. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 380. ERMCDDB2P resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	9
ACTION Input/output valid values		I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource				
APPLTOKEN	HEX	CPSM	8	LIKE	Application Qualifier Token	8
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	128	LIKE	DB2 packageset name	6
PLATTOKEN	HEX	CPSM	8	LIKE	Platform Qualifier Token	7
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 164. ERMCDDB2T Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMCDDB2T is emitted by a Topology control object when a DB2 transaction resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

32

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2623

Table 381. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 382. ERMCDDB2T resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values	I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource					
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	8	LIKE	DB2 transaction name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 165. ERMCDOCT Resource Table

A CPSM notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM notifications have no key fields and do not support object specific actions.

ERMCDOCT is emitted by a Topology control object when a Document Template resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

32

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2631

Table 383. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 384. ERMCDOCT resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values	I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource					
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	8	LIKE	Document template name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 166. ERMCDSNM Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMCDSNM is emitted by a Topology control object when a data set resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

72

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2585

Table 385. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 386. ERMCDSNM resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	8
ACTION Input/output valid values	I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource					
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
DTYPE	CVDAS	CPSM	4	LIKE	Data set type	7
DTYPE Output valid values	VSAM, BDAM					
NAME	CHAR	CPSM	44	LIKE	Data set name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 167. ERMENQM Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMENQM is emitted by a Topology control object when a ENQ/DEQ resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

32

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2625

Table 387. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 388. ERMENQM resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values	I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource					
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	8	LIKE	Enqueue model name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 168. ERMCEVBD Resource Table

A CICSplex SM notification table. You can register interest in this notification by issuing a **LISTEN** command and naming this resource in the EVENT option.

CICSplex SM notifications have no key fields and do not support object specific actions.

ERMCEVBD is emitted by a Topology control object when an EVENTBINDING resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

56

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2654

Table 389. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 390. ERMCEVBD resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values		I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource				
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	32	LIKE	Event Binding name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 169. ERMCEVCS Resource Table

A CICSplex SM notification table. You can register interest in this notification by issuing a **LISTEN** command and naming this resource in the EVENT option.

CICSplex SM notifications have no key fields and do not support object specific actions.

ERMCEVCS is emitted by a Topology control object when a CAPTURESPEC resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

88

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2657

Table 391. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 392. ERMCEVCS resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	8
ACTION Input/output valid values		I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource				
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
EVENTBINDING	CHAR	CPSM	32	LIKE	Event binding name	7
NAME	CHAR	CPSM	32	LIKE	Event Processing Capture Spec name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 170. ERMCFECO Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMCFECO is emitted by a Topology control object when a FEPI connection resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

24

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2586

Table 393. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 394. ERMCFECO resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values	I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource					
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	4	LIKE	FEPI connection name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 171. ERMCFEND Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMCFEND is emitted by a Topology control object when a FEPI node resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

32

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2558

Table 395. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 396. ERMCFEND resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values		I (INS) - Install Resource, D (DSC) - Discard Resource, U (UPD) - Update Resource				
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	8	LIKE	FEPI node name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 172. ERMCFEPO Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMCFEPO is emitted by a Topology control object when a FEPI pool resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

32

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2559

Table 397. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 398. ERMCFEPO resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values		I (INS) - Install Resource, D (DSC) - Discard Resource, U (UPD) - Update Resource				
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	8	LIKE	FEPI pool name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 173. ERMCFETR Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMCFETR is emitted by a Topology control object when a FEPI target resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

32

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2560

Table 399. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 400. ERMCFETR resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values		I (INS) - Install Resource, D (DSC) - Discard Resource, U (UPD) - Update Resource				
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	8	LIKE	FEPI target name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 174. ERMCFILE Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMCFILE is emitted by a Topology control object when a file resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

48

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2493

<i>Table 401. Valid CPSM operations</i>			
Operations	Actions	Parameters	Required
Not applicable			

<i>Table 402. ERMCFILE resource table attributes</i>						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	10
ACTION Input/output valid values	I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource					
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
FILETYPE	EYUDA	CPSM	4	LIKE	File type	7
FILETYPE Output valid values	LFILE, RFILE, CTABL, UTABL, CFTBL					
NAME	CHAR	CPSM	8	LIKE	File name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4
REMOTENAME	CHAR	CPSM	8	LIKE	Remote file name	8
REMOTESYSTEM	CHAR	CPSM	4	LIKE	Remote system name	9

Chapter 175. ERMCGLUE Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMCGLUE is emitted by a Topology control object when a global user exit resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

40

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2587

Table 403. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 404. ERMCGLUE resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	8
ACTION Input/output valid values		I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource				
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
EXITNAME	CHAR	CPSM	8	LIKE	Exit point name	7
NAME	CHAR	CPSM	8	LIKE	Global user exit program name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 176. ERMCI PCN Resource Table

The ERMCI PCN views display changes to an instance of an IPIC connection (IPCONN) within a CICS system.

External resource name

Length

40

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2642

Table 405. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 406. ERMCI PCN resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	9
ACTION Input/output valid values	I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource					
CONNTYPE	EYUDA	CPSM	4	LIKE	Connection type	7
CONNTYPE Output valid values	IPIC					
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	8	LIKE	IP Connection name	6
NETNAME	CHAR	INQ	8	LIKE	Target network name	8
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 177. ERM CJRNL Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERM CJRNL is emitted by a Topology control object when a journal resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

24

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2494

Table 407. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 408. ERM CJRNL resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	8
ACTION Input/output valid values	I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource					
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
JRNLTPE	CVDAS	INQ	4	LIKE	Journal type	6
JRNLTPE Output valid values	DISK1, DISK2, DISK2PAUSE, SMF, TAPE1, TAPE2					
NAME	BINARY	INQ	2	LIKE	Journal name	7
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 178. ERM CJRNM Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERM CJRNM is emitted by a Topology control object when a journal name resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

24

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2600

Table 409. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 410. ERM CJRNM resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	8
ACTION Input/output valid values	I (INS) - Install resource, D (DSC) - Discard resource, U (UPD) - Update resource					
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
JRNLTPE	CVDAS	INQ	4	LIKE	Log stream type	6
JRNLTPE Output valid values	MVS, SMF, DUMMY					
NAME	BINARY	INQ	2	LIKE	Journal name	7
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 179. ERM CJVMS Resource Table

A CICSplex SM notification table. You can register interest in this notification by issuing a **LISTEN** command and naming this resource in the EVENT option.

CICSplex SM notifications have no key fields and do not support object specific actions.

ERM CJVMS is emitted by a Topology control object when a JVM SERVER resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

32

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2656

Table 411. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 412. ERM CJVMS resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values	I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource					
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	8	LIKE	JVM server name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 180. ERMCLIBR Resource Table

A CICSplex SM notification table. You can register interest in this notification by issuing a **LISTEN** command and naming this resource in the EVENT option.

CICSplex SM notifications have no key fields and do not support object specific actions.

ERMCLIBR is emitted by a Topology control object when a LIBRARY resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

40

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2645

<i>Table 413. Valid CPSM operations</i>			
Operations	Actions	Parameters	Required
Not applicable			

<i>Table 414. ERMCLIBR resource table attributes</i>							
Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action		7
ACTION Input/output valid values		I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource					
APPLTOKEN	BINARY	CPSM	8	MAX	Application Qualifier Token	E640 E650 E660 E670 E680	8
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name		5
NAME	CHAR	CPSM	8	LIKE	LIBRARY name		6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name		4

Chapter 181. ERMCMODE Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMCMODE is emitted by a Topology control object when a modename resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

32

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2495

Table 415. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 416. ERMCMODE resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values		I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource				
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	INQ	8	LIKE	Mode name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 182. ERMCOSGB Resource Table

A CICSplex SM notification table. You can register interest in this notification by issuing a **LISTEN** command and naming this resource in the EVENT option.

CICSplex SM notifications have no key fields and do not support object specific actions.

ERMCOSGB is emitted by topology control object when an OSGIBUNDLE resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

40

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2668

Table 417. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 418. ERMCOSGB resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	11
ACTION Input/output valid values	I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource					
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
JVMSEVER	CHAR	CPSM	8	LIKE	JVM server name	7
OSGIBUNDLEID	BINARY	CPSM	8	LIKE	OSGI bundle ID	6
OSGISTATUS	CVDAS	INQ	4	LIKE	OSGI bundle Status	8
OSGISTATUS Input/output valid values	ACTIVE, INSTALLED, RESOLVED, STARTING, STOPPING, UNINSTALLED					
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 183. ERMCOSGS Resource Table

A CICSplex SM notification table. You can register interest in this notification by issuing a **LISTEN** command and naming this resource in the EVENT option.

CICSplex SM notifications have no key fields and do not support object specific actions.

ERMCOSGS is emitted by topology control object when an OSGISERVICE resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

40

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2667

<i>Table 419. Valid CPSM operations</i>			
Operations	Actions	Parameters	Required
Not applicable			

<i>Table 420. ERMCOSGS resource table attributes</i>						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	11
ACTION Input/output valid values		I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource				
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
JVMSEVER	CHAR	CPSM	8	LIKE	JVM server name	7
OSGISERVID	BINARY	CPSM	8	LIKE	OSGI service ID	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4
SRVCSTATUS	CVDAS	INQ	4	LIKE	Service Status	8
SRVCSTATUS Input/output valid values		ACTIVE, INACTIVE				

Chapter 184. ERMCPART Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMCPART is emitted by a Topology control object when a partner table resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

32

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2561

Table 421. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 422. ERMCPART resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values		I (INS) - Install Resource, D (DSC) - Discard Resource, U (UPD) - Update Resource				
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	8	LIKE	Partner name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 185. ERMCIPIE Resource Table

A CICSplex SM notification resource. Interest in this notification can be registered by issuing an API **LISTEN** command and naming this resource in the EVENT option.

CPSM notifications have no key fields and do not support object specific actions.

ERMCIPIE is emitted by a topology control object when a pipeline resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

32

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2650

Table 423. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 424. ERMCIPIE resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values	I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource					
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	8	LIKE	PIPELINE name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 186. ERMCPRGM Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMCPRGM is emitted by a Topology control object when a program resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

48

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2496

Table 425. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 426. ERMCPRGM resource table attributes							
Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action		9
ACTION Input/output valid values		I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource					
APPLTOKEN	BINARY	CPSM	8	MAX	Application Qualifier Token	E640 E650 E660 E670 E680	10
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name		5
NAME	CHAR	INQ	8	LIKE	Program name		6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name		4
REMOTENAME	CHAR	INQ	8	LIKE	Program name in remote system		7
REMOTESYSTEM	CHAR	INQ	4	LIKE	Remote system name		8

Chapter 187. ERMCPROF Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMCPROF is emitted by a Topology control object when a profile resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

32

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2562

Table 427. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 428. ERMCPROF resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values		I (INS) - Install Resource, D (DSC) - Discard Resource, U (UPD) - Update Resource				
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	8	LIKE	Profile name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 188. ERMCPRTY Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMCPRTY is emitted by a Topology control object when a process type resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

32

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2629

Table 429. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 430. ERMCPRTY resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values	I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource					
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	8	LIKE	Process type name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 189. ERMCRQMD Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMCRQMD is emitted by a Topology control object when a requests resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

32

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2626

Table 431. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 432. ERMCRQMD resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values	I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource					
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	8	LIKE	Request model name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 190. ERMCSDDMP Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMCSDDMP is emitted by a Topology control object when a system dump code resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

32

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2588

Table 433. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 434. ERMCSDDMP resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values	I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource					
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	8	LIKE	System dump code	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 191. ERMCTCPS Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMCTCPS is emitted by a Topology control object when a TCPIP Service resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

32

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2630

Table 435. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 436. ERMCTCPS resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values	I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource					
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	8	LIKE	TCP/IP service name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 192. ERMCTDMP Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMCTDMP is emitted by a Topology control object when a transaction dump code resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

24

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2589

Table 437. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 438. ERMCTDMP resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values	I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource					
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	4	LIKE	Transaction dump code	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 193. ERMCTDQ Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMCTDQ is emitted by a Topology control object when a transient data queue resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

40

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2497

Table 439. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 440. ERMCTDQ resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	10
ACTION Input/output valid values		I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource				
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	INQ	4	LIKE	TD queue name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4
REMOTENAME	CHAR	INQ	4	LIKE	TD queue name in remote system	8
REMOTESYSTEM	CHAR	INQ	4	LIKE	Remote system name	9
TDQTYPE	CVDAS	INQ	4	LIKE	TD queue type	7
TDQTYPE Output valid values		INTRA, EXTRA, REMOTE, INDIRECT				

Chapter 194. ERMCTERM Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMCTERM is emitted by a Topology control object when a terminal resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

24

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2498

Table 441. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 442. ERMCTERM resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values	I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource					
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	INQ	4	LIKE	Terminal name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 195. ERMCTRAN Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMCTRAN is emitted by a Topology control object when a transaction resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

40

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2499

Table 443. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 444. ERMCTRAN resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	10
ACTION Input/output valid values		I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource				
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	INQ	4	LIKE	Transaction ID	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4
REMOTENAME	CHAR	INQ	8	LIKE	Remote transaction ID	8
REMOTESYSTEM	CHAR	INQ	4	LIKE	Remote system name	9
TRANSTYPE	EYUDA	CPSM	4	LIKE	Transaction type	7
TRANSTYPE Output valid values		LTRAN, RTRAN				

Chapter 196. ERMCTTRUE Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMCTTRUE is emitted by a Topology control object when a task-related user exit resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

40

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2590

Table 445. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 446. ERMCTTRUE resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values	I (INS) - Install resource, D (DSC) - Discard resource, U (UPD) - Update resource					
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
ENTRYNME	CHAR	CPSM	8	LIKE	Entry Name	8
NAME	CHAR	CPSM	8	LIKE	Task-related user exit program name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 197. ERMCTSMD Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMCTSMD is emitted by a Topology control object when a temporary storage queue resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

32

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2624

Table 447. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 448. ERMCTSMD resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values		I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource				
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	8	LIKE	TS model name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 198. ERMCURIM Resource Table

A CICSplex SM notification table. You can register interest in this notification by issuing a **LISTEN** command and naming this resource in the EVENT option.

CICSplex SM notifications have no key fields and do not support object specific actions.

ERMCURIM is emitted by a Topology control object when a URIMAP resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

32

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2649

Table 449. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 450. ERMCURIM resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values		I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource				
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	8	LIKE	URIMAP name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 199. ERMWEBS Resource Table

A CICSplex SM notification table. You can register interest in this notification by issuing a **LISTEN** command and naming this resource in the EVENT option.

CICSplex SM notifications have no key fields and do not support object specific actions.

ERMWEBS is emitted by a Topology control object when a WEBSERVICE resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

56

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2648

Table 451. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 452. ERMWEBS resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values		I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource				
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	32	LIKE	WEBSERVICE name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 200. ERM CXMLT Resource Table

A CICSplex SM notification table. You can register interest in this notification by issuing a **LISTEN** command and naming this resource in the EVENT option.

CICSplex SM notifications have no key fields and do not support object specific actions.

ERM CXMLT is emitted by a Topology control object when a XMLTRANSFORM resource map is changed. The resource that caused the change and the action are described in the notification.

External resource name

Length

56

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2658

Table 453. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 454. ERM CXMLT resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	CHAR	CPSM	1	LIKE	Change action	7
ACTION Input/output valid values		I (INS) - install resource, D (DSC) - discard resource, U (UPD) - update resource				
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
NAME	CHAR	CPSM	32	LIKE	XML Transform name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 201. ERMMCONN Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMMCONN is emitted by a Topology control object when a connection resource map is changed to reflect Monitor or resource status facility status controls for one or more resources. The specific resource instances that were affected are not identified.

External resource name

Length

16

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2500

Table 455. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 456. ERMMCONN resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 202. ERMMFILE Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMMFILE is emitted by a Topology control object when a file resource map is changed to reflect Monitor or resource status facility status controls for one or more resources. The specific resource instances that were affected are not identified.

External resource name

Length

16

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2501

Table 457. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 458. ERMMFILE resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 203. ERMMJRNL Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMMJRNL is emitted by a Topology control object when a journal resource map is changed to reflect Monitor or resource status facility status controls for one or more resources. The specific resource instances that were affected are not identified.

External resource name

Length

16

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2502

Table 459. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 460. ERMMJRNL resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 204. ERMMPRGM Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMMPRGM is emitted by a Topology control object when a program resource map is changed to reflect Monitor or resource status facility status controls for one or more resources. The specific resource instances that were affected are not identified.

External resource name

Length

16

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2503

Table 461. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 462. ERMMPRGM resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 205. ERMTDQ Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMTDQ is emitted by a Topology control object when a transient data queue resource map is changed to reflect Monitor or resource status facility status controls for one or more resources. The specific resource instances that were affected are not identified.

External resource name

Length

16

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2504

Table 463. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 464. ERMTDQ resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 206. ERMETERM Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMETERM is emitted by a Topology control object when a terminal resource map is changed to reflect Monitor or resource status facility status controls for one or more resources. The specific resource instances that were affected are not identified.

External resource name

Length

16

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2505

Table 465. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 466. ERMETERM resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 207. ERMSTRAN Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ERMSTRAN is emitted by a Topology control object when a transaction resource map is changed to reflect Monitor or resource status facility status controls for one or more resources. The specific resource instances that were affected are not identified.

External resource name

Length

16

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2506

Table 467. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 468. ERMSTRAN resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	5
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 208. ESGRPCHG Resource Table

A CPSM Notification resource. Interest in this notification can be registered by issuing an API LISTEN command and naming this resource in the EVENT option.

CPSM Notifications have no key fields and do not support object specific actions.

ESGRPCHG is emitted by a Topology control object when a CICS system group definition is created or removed, or the associated linkage objects are updated. For associator changes, an instance of this notification is created for each CICS system processed.

External resource name

Length

32

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Notification

Copybook identifier

EYUt2479

Table 469. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 470. ESGRPCHG resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION	BINARY	CPSM	1	LIKE	Status	7
ACTION Input/output valid values	1 (CSYSADD) - CICS System Added, 2 (CSYSDEL) - CICS System Deleted, 3 (SGRPREM) - System Group Removed, 4 (SGRPADD) - System Group Added					
CSYSNAME	CHAR	CPSM	8	LIKE	CICS system name	6
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4
SGRPNAME	CHAR	CPSM	8	LIKE	System group name	5

Chapter 209. EVALDEF Resource Table

A CPSM Real Time Analysis Definition that describes the controls used to perform an evaluation of a CICS resource, or MAS, or EVENT object.

The **Primary** key field for this resource class is NAME.

External resource name

CICSRTAEvaluationDefinition

Length

1624

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt2808

Table 471. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
UPDATE		None	N/A
REMOVE		None	N/A

Table 472. EVALDEF FEEDBACK error codes

Value	Code	Description
1	EVALDEF_INV_DATA	Attribute data invalid
2	EVALDEF_REC_NOT_FOUND	Requested resource not found
3	EVALDEF_INV_TERM	Terminator missing from end of string
4	EVALDEF_REC_EXISTS	Resource already exists
6	EVALDEF_INV_RESTYPE	Invalid resource type
7	EVALDEF_INV_ATTR	Attribute does not exist or is not settable

Table 473. EVALDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
APPLICATION	CHAR	CPSM	64	No	DIFF	Application name			51
APPLMAJORVER	BINARY	CPSM	4	No	DIFF	Application major version			53
APPLMICROVER	BINARY	CPSM	4	No	DIFF	Application micro version			55
APPLMINORVER	BINARY	CPSM	4	No	DIFF	Application minor version			54
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			43
CHANGEAGENT Input/output valid values	DREPAPI								
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			46
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification			1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			45
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created			44
DESC	CHAR	CPSM	58	No	DIFF	Description			29
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999	40
EVALCOL	CHAR	CPSM	12	Yes	DIFF	Field being evaluated			27
EVALDATA	CHAR	CPSM	44	Yes	DIFF	Evaluation data value			33
EVALOPER	EYUDA	CPSM	4	Yes	LIKE	Evaluation logical operator	N_A		9
EVALOPER Input/output valid values	N_A, EQ, NE, LT, GT, LE, GE								
EVALTYPE	EYUDA	CPSM	4	Yes	LIKE	Evaluation type			7
EVALTYPE Input/output valid values	VALUE, THRESHOLD								
FILTER	CHAR	CPSM	80 0	No	DIFF	Filter string			37
GETPARMS	CHAR	CPSM	42	No	DIFF	Get parameters			42
HSDATA	CHAR	CPSM	12	Yes	DIFF	Lower bound of range for HS			21
HWDATA	CHAR	CPSM	12	Yes	DIFF	Lower bound of range for HW			19
INSTANCE	CHAR	CPSM	44	Yes	DIFF	Instance identifier of evaluated resource			31
LSDATA	CHAR	CPSM	12	Yes	DIFF	Upper bound of range for LS			15
LWDATA	CHAR	CPSM	12	Yes	DIFF	Upper bound of range for LW			17
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name			5
OPRSTRING	CHAR	CPSM	32 0	No	DIFF	Modification string			39
PLATFORM	CHAR	CPSM	64	No	DIFF	Platform name			49
SAMPLE	BINARY	CPSM	4	Yes	AVG	Sample interval	300	1-86400	6
SEPTASK	EYUDA	CPSM	4	Yes	LIKE	Separate task indicator	NO		4
SEPTASK Input/output valid values	YES, NO								
SETACTION	EYUDA	CPSM	4	Yes	LIKE	Method of evaluating results in result set			8
SETACTION Input/output valid values	ALL, ANY, SUM, MIN, MAX, AVG, CNT								
SEVERITY	EYUDA	CPSM	4	Yes	LIKE	Severity assigned when result meets criteria	N_A		11

Table 473. EVALDEF resource table attributes (continued)									
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
SEVERITY Input/output valid values	N_A, VLS, LS, LW, HW, HS, VHS								
TABLE	CHAR	CPSM	8	Yes	DIFF	Resource table			25
VHSDATA	CHAR	CPSM	12	Yes	DIFF	Lower bound of range for VHS			23
VIEW	CHAR	CPSM	8	No	DIFF	View that may provide extra information			24
VLSDATA	CHAR	CPSM	12	Yes	DIFF	Upper bound of range for VLS			13

Chapter 210. EVCSPEC Resource Table

This CICS resource object provides information about deployed capture specifications.

The EVCSPEC resource identifies multiple key attributes, but only the EVENTBINDING attribute can be specified in an EVALDEF INSTANCE attribute.

Note: The REFRESH API command is not supported for the EVCSPEC resource.

The **Primary** key field for this resource class is EVENTBINDING.

The **Secondary** key field for this resource class is CAPTURESPEC.

This resource class has no object-specific actions.

External resource name

CICSCaptureSpecification

Length

240

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0195

Table 474. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 475. EVCSPEC resource table attributes

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release		
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved		
CAPTUREPOINT	CHAR	INQ	25	DIFF	Capture point		6
CAPTURESPEC-2	CHAR	INQ	32	DIFF	Capture specification name		1
CAPTURETYPE	CVDAS	INQ	4	LIKE	Capture point type		3
CAPTURETYPE Output valid values	PRECOMMAND, POSTCOMMAND, PROGRAMINIT, SYSTEM						

Table 475. EVCSPEC resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
CURRPGM	CHAR	INQ	8	DIFF	Current program filter value	E640 E650 E660	9
CURRPGMOP	CVDAS	INQ	4	DIFF	Current program filter operator	E640 E650 E660	10
CURRPGMOP Output valid values	ALLVALUES, DOESNOTEQUAL, DOESNOTSTART, EQUALS, GREATERTHAN, ISNOTGREATER, ISNOTLESS, LESSTHAN, STARTSWITH						
CURRTRANID	CHAR	INQ	4	DIFF	Current transaction ID filter value	E640 E650 E660	11
CURRTRANIDOP	CVDAS	INQ	4	DIFF	Current transaction ID filter operator	E640 E650 E660	12
CURRTRANIDOP Output valid values	ALLVALUES, DOESNOTEQUAL, DOESNOTSTART, EQUALS, GREATERTHAN, ISNOTGREATER, ISNOTLESS, LESSTHAN, STARTSWITH						
CURRUSERID	CHAR	INQ	8	DIFF	Current user ID filter value	E640 E650 E660	13
CURRUSERIDOP	CVDAS	INQ	4	DIFF	Current user ID filter operator	E640 E650 E660	14
CURRUSERIDOP Output valid values	ALLVALUES, DOESNOTEQUAL, DOESNOTSTART, EQUALS, GREATERTHAN, ISNOTGREATER, ISNOTLESS, LESSTHAN, STARTSWITH						
EVENTBINDING-1	CHAR	INQ	32	DIFF	Event binding name		2
EVENTNAME	CHAR	INQ	32	DIFF	Event name		4
EVNTCAPFAIL	BINARY	STAT	4	DIFF	Capture failures	E640 E650 E660	8
EVNTCAPTURED	BINARY	STAT	8	SUM	Events captured		5
NUMDATAPRED	BINARY	INQ	4	SUM	Data predicate count	E640 E650 E660	19
NUMINFOSRCE	BINARY	INQ	4	SUM	Information source count	E640 E650 E660	20
NUMOPTPRED	BINARY	INQ	4	SUM	Option predicate count	E640 E650 E660	18
PRIMPRED	CHAR	INQ	32	DIFF	Primary predicate filter value	E640 E650 E660	15
PRIMPREDOP	CVDAS	INQ	4	DIFF	Primary predicate filter operator	E640 E650 E660	16
PRIMPREDOP Output valid values	ALLVALUES, DOESNOTEQUAL, DOESNOTSTART, EQUALS, GREATERTHAN, ISNOTGREATER, ISNOTLESS, LESSTHAN, STARTSWITH						
PRIMPREDTYPE	CVDAS	INQ	4	DIFF	Primary predicate type		17
PRIMPREDTYPE Output valid values	CONTAINER, CURRENTPGM, EVENT, FILE, MAP, MESSAGEID, NONE, PROGRAM, SERVICE, TDQUEUE, TRANCLASS, TRANSACTION, TSQUEUE						

Chapter 211. EVCSDATA Resource Table

This CICS resource object provides information about deployed data predicates.

The EVCSDATA resource identifies multiple key attributes, but only the EVENTBINDING attribute can be specified in an EVALDEF INSTANCE attribute.

The **Primary** key field for this resource class is EVENTBINDING.

The **Secondary** key field for this resource class is CAPTURESPEC.

The **Tertiary** key field for this resource class is SEQNUMBER.

This resource class has no object specific actions.

External resource name

CICSCaptureSpecificationDataPredicate

Length

496

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0202

Table 476. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 477. EVCSDATA resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
CAPTURESPEC-2	CHAR	INQ	32	DIFF	Capture specification name	1
CONTAINER	CHAR	INQ	16	DIFF	Container name	3
EVENTBINDING-1	CHAR	INQ	32	DIFF	Event binding name	2
FIELDLENGTH	BINARY	INQ	4	MAX	Field length	4
FIELDOFFSET	BINARY	INQ	4	MAX	The data offset within the data source	5
FILENAME	CHAR	INQ	32	DIFF	Language structure file name	6

Table 477. EVCSDATA resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
FILTERVALUE	CHAR	INQ	255	DIFF	Application data predicate value	14
LOCATION	CHAR	INQ	32	DIFF	Location of the data	8
OPERATOR	CVDAS	INQ	4	LIKE	Comparative operator for this predicate	12
OPERATOR Output valid values	DOESNOTEQUAL, DOESNOTEXIST, DOESNOTSTART, EQUALS, EXISTS, GREATERTHAN, ISNOTGREATER, ISNOTLESS, LESSTHAN, STARTSWITH					
SEQNUMBER-3	BINARY	CPSM	4	MAX	Browse sequence number	13
STRUCTNAME	CHAR	INQ	32	DIFF	Language structure name	10
VARIABLENAME	CHAR	INQ	32	DIFF	Language structure variable name	11

Chapter 212. EVCSINFO Resource Table

This CICS resource object provides information about deployed information sources.

The EVCSINFO resource identifies multiple key attributes, but only the EVENTBINDING attribute can be specified in an EVALDEF INSTANCE attribute.

The **Primary** key field for this resource class is EVENTBINDING.

The **Secondary** key field for this resource class is CAPTURESPEC.

The **Tertiary** key field for this resource class is SEQNUMBER.

This resource class has no object specific actions.

External resource name
CICSCaptureSpecificationInformationSource

Length
272

Usage
API or WUI or CICS Management Client Interface or EVALDEF

API view
Yes

CMAS context
No

SCOPE applies
Yes

Only query CMASs in workload
No

Object type
CICS Resource

Copybook identifier
EYUt0203

Table 478. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 479. EVCSINFO resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
CAPTURESPEC-2	CHAR	INQ	32	DIFF	Capture specification name	1
CONTAINER	CHAR	INQ	16	DIFF	Container name	3
EVENTBINDING-1	CHAR	INQ	32	DIFF	Event binding name	2
FIELDLENGTH	BINARY	INQ	4	MAX	Field length	4
FIELDOFFSET	BINARY	INQ	4	MAX	The data offset within the data source	5
FILENAME	CHAR	INQ	32	DIFF	Language structure file name	6

Table 479. EVCSINFO resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
ITEMNAME	CHAR	INQ	32	DIFF	Emitted business information name	12
LOCATION	CHAR	INQ	32	DIFF	Location of the data	8
SEQNUMBER-3	BINARY	CPSM	4	MAX	Browse sequence number	13
STRUCTNAME	CHAR	INQ	32	DIFF	Language structure name	10
VARIABLENAME	CHAR	INQ	32	DIFF	Language structure variable name	11

Chapter 213. EVCSOPT Resource Table

This CICS resource object provides information about deployed option predicates.

The EVCSOPT resource identifies multiple key attributes, but only the EVENTBINDING attribute can be specified in an EVALDEF INSTANCE attribute.

The **Primary** key field for this resource class is EVENTBINDING.

The **Secondary** key field for this resource class is CAPTURESPEC.

The **Tertiary** key field for this resource class is SEQNUMBER.

This resource class has no object specific actions.

External resource name

CICSCaptureSpecificationOptionPredicate

Length

376

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0201

Table 480. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 481. EVCSOPT resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
CAPTURESPEC-2	CHAR	INQ	32	DIFF	Capture specification name	1
EVENTBINDING-1	CHAR	INQ	32	DIFF	Event binding name	2
FILTERVALUE	CHAR	INQ	255	DIFF	Filter value	5
OPERATOR	CV DAS	INQ	4	DIFF	Comparative operator for this predicate	4
OPERATOR Output valid values	DOESNOTEQUAL, DOESNOTEXIST, DOESNOTSTART, EQUALS, EXISTS, GOHIGHERTHAN, GOLOWERTHAN, GREATERTHAN, ISNOTGREATER, ISNOTLESS, LESSTHAN, STARTSWITH					

Table 481. EVCSOPT resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
OPTIONNAME	CHAR		32	LIKE	Option name	0
SEQNUMBER-3	BINARY	CPSM	4	MAX	Browse sequence number	13

Chapter 214. EVENTDTL Resource Table

A CPSM Real Time Analysis Manager object that describes an evaluation that participated in the generation of an EVENT. Not all events have detail objects (refer to the DETAIL attribute of the EVENT resource table.) When present, an EVENTDTL instance is the runtime object built from an EVALDEF definition.

The **Primary** key field for this resource class is CONTEXT.

The **Secondary** key field for this resource class is EVENT.

The **Tertiary** key field for this resource class is TARGET.

The **Fourth** key field for this resource class is EVNTSEV.

The **Fifth** key field for this resource class is PRIORITY.

The **Sixth** key field for this resource class is SEQUENCE.

The **Seventh** key field for this resource class is NAME.

While the EVENT resource class identifies multiple key attributes, only the NAME attribute can be specified in an EVALDEF INSTANCE attribute.

There are no object specific actions for this resource class.

When EVENTDTL instances are requested using the API GET or REFRESH commands, the data values returned are the most current values used by the evaluation service. It is possible to see intermediate evaluation state transitions that occur before an analysis of the RTADEF that references the evaluation.

External resource name

CICSRTAEventDetail

Length

480

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2520

Table 482. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 483. EVENTDTL resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
CONTEXT-1	CHAR	CPSM	8	DIFF	Context	35
CURRDATA	TEXT	CPSM	44	DIFF	Actual data value at last evaluation	31
DATETIME	DATETIME	CPSM	8	MAX	Date and time when evaluation was last true	24
EDEFTIME	DATETIME	CPSM	8	MAX	Date and time when evaluation definition created	23
EVALCOL	CHAR	CPSM	12	DIFF	Name of field being evaluated	27
EVALDATA	TEXT	CPSM	44	DIFF	Evaluation data value	29
EVALOPER	EYUDA	CPSM	4	LIKE	Evaluation logical operator	10
EVALOPER Output valid values	EQ, NE, LT, GT, LE, GE					
EVALTYPE	EYUDA	CPSM	4	LIKE	Evaluation type	9
EVALTYPE Output valid values	VALUE, THRESHOLD					
EVENT-2	CHAR	CPSM	8	DIFF	Associated event name	5
EVNTSEV-4	EYUDA	CPSM	4	LIKE	Event severity	36
EVNTSEV-4 Output valid values	VLS, LS, LW, NM, HW, HS, VHS					
HSDATA	CHAR	CPSM	12	DIFF	Lower boundary for severity of HS	21
HWDATA	CHAR	CPSM	12	DIFF	Lower boundary for severity of HW	20
INSTANCE	CHAR	CPSM	44	DIFF	Name of resource being evaluated	26
KEY	CHAR	CPSM	134	DIFF	Identifier of specific resource that caused event	34
LSDATA	CHAR	CPSM	12	DIFF	Lower boundary for severity of LS	18
LWDATA	CHAR	CPSM	12	DIFF	Lower boundary for severity of LW	19
NAME-7	CHAR	CPSM	8	DIFF	Name of associated evaluation definition	4
PRIORITY-5	BINARY	CPSM	1	AVG	Event priority	37
RATE	BINARY	CPSM	4	AVG	Evaluation interval (seconds)	16
RESTYPE	CHAR	CPSM	8	DIFF	Resource type	33
SEQUENCE-6	BINARY	CPSM	4	AVG	Event sequence number	38
SETACTION	EYUDA	CPSM	4	LIKE	Result set evaluation type	15
SETACTION Output valid values	ALL, ANY, SUM, MIN, MAX, AVG, CNT					
SEVERITY	EYUDA	CPSM	4	LIKE	Current severity	8
SEVERITY Output valid values	VLS, LS, LW, NM, HW, HS, VHS					
STATE	EYUDA	CPSM	4	LIKE	Result of evaluation	7
STATE Output valid values	TRUE, FALSE					
TABLE	CHAR	CPSM	8	DIFF	Resource table name	25
TARGET-3	CHAR	CPSM	8	DIFF	Name of CICS system or group that is target of evaluation	6
VHSDATA	CHAR	CPSM	12	DIFF	Lower boundary for severity of VHS	22
VIEW	CHAR	CPSM	8	DIFF	Name of a view that may provide extra information	32
VLSDATA	CHAR	CPSM	12	DIFF	Lower boundary for severity of VLS	17

Chapter 215. EVENT Resource Table

A CPSM Real Time Analysis Manager object that describes an outstanding condition reported by an RTA service. The EVENT instance can be generated as a result of SAM, APM, or MRM processing. The type and mode of the condition are described in the instance.

For APM and MRM generated EVENTS, the name of the instance is the name of the RTADEF or STATDEF that was found to be TRUE.

The **Primary** key field for this resource class is EVENT.

The **Secondary** key field for this resource class is NAME.

The **Tertiary** key field for this resource class is TARGET.

The **Fourth** key field for this resource class is SEVERITY.

The **Fifth** key field for this resource class is PRIORITY.

The **Sixth** key field for this resource class is SEQUENCE.

While the EVENT resource class identifies multiple key attributes, only the NAME attribute can be specified in an EVALDEF INSTANCE attribute.

There are no object specific actions for this resource class.

The internal creation or updating of an EVENT object is always noted by an EACTNTFN notification. By registering interest in this notification, EVENT objects need not be polled to see if changes have occurred.

External resource name

CICSRTAEvent

Length

408

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2519

Table 484. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 485. EVENT resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ACTION	CHAR	CPSM	8	DIFF	Action name	39
CMAS	CHAR	CPSM	8	DIFF	CMAS in which event was raised	38
CONTEXT-1	CHAR	CPSM	8	DIFF	Name of context to which event applies	46
CURHSENTRY	BINARY	CPSM	4	AVG	Current HS true evaluation count	28
CURHSEXIT	BINARY	CPSM	4	AVG	Current HS false evaluation count	34
CURHWENTRY	BINARY	CPSM	4	AVG	Current HW true evaluation count	27
CURHWEXIT	BINARY	CPSM	4	AVG	Current HW false evaluation count	33
CURLSENTRY	BINARY	CPSM	4	AVG	Current LS true evaluation count	25
CURLSEXIT	BINARY	CPSM	4	AVG	Current LS false evaluation count	31
CURLWENTRY	BINARY	CPSM	4	AVG	Current LW true evaluation count	26
CURLWEXIT	BINARY	CPSM	4	AVG	Current LW false evaluation count	32
CURVHSENTRY	BINARY	CPSM	4	AVG	Current VHS true evaluation count	29
CURVHSEXIT	BINARY	CPSM	4	AVG	Current VHS false evaluation count	35
CURVLSSENTRY	BINARY	CPSM	4	AVG	Current VLS true evaluation count	24
CURVLSSEXIT	BINARY	CPSM	4	AVG	Current VLS false evaluation count	30
DATETIME	DATETIME	CPSM	8	MAX	Date and time when event was created	37
DESC	CHAR	CPSM	58	DIFF	Event description	42
DETAIL	EYUDA	CPSM	4	LIKE	Detailed information availability	8
DETAIL Output valid values	YES, NO					
EVALTYPE	EYUDA	CPSM	4	LIKE	Event type	7
EVALTYPE Output valid values	SAM, APM, MRM					
GENALERT	EYUDA	CPSM	4	LIKE	SNA generic alert generation	10
GENALERT Output valid values	YES, NO					
GENEXTMSG	EYUDA	CPSM	4	LIKE	External message generation	9
GENEXTMSG Output valid values	YES, NO					
HSENTRY	BINARY	CPSM	4	AVG	Evaluation count with HS true before event	16
HSEXIT	BINARY	CPSM	4	AVG	Evaluation count with HS false before resolution	22
HWENTRY	BINARY	CPSM	4	AVG	Evaluation count with HW true before event	15
HWEXIT	BINARY	CPSM	4	AVG	Evaluation count with HW false before resolution	21
KEY	CHAR	CPSM	134	DIFF	Name of specific resource that caused event	45
LSENTRY	BINARY	CPSM	4	AVG	Evaluation count with LS true before event	13
LSEXIT	BINARY	CPSM	4	AVG	Evaluation count with LS false before resolution	19
LWENTRY	BINARY	CPSM	4	AVG	Evaluation count with LW true before event	14
LWEXIT	BINARY	CPSM	4	AVG	Evaluation count with LW false before resolution	20
NAME-2	CHAR	CPSM	8	DIFF	Event name	4

Table 485. EVENT resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
NETVIEW	CHAR	CPSM	8	DIFF	CMAS to which Netview attached	36
PRIORITY-5	BINARY	CPSM	1	AVG	Event priority	41
RATE	BINARY	CPSM	4	AVG	Interval between evaluations	11
RESTYPE	CHAR	CPSM	8	DIFF	Resource type	44
SEQUENCE-6	BINARY	CPSM	4	AVG	Event sequence number	43
SEVERITY-4	EYUDA	CPSM	4	LIKE	Event severity	6
SEVERITY-4 Output valid values	VLS, LS, LW, HW, HS, VHS					
TARGET-3	CHAR	CPSM	8	DIFF	Current event target	5
VHSENTRY	BINARY	CPSM	4	AVG	Evaluation count with VHS true before event	17
VHSEXIT	BINARY	CPSM	4	AVG	Evaluation count with VHS false before resolution	23
VIEW	CHAR	CPSM	8	DIFF	Associated user data	40
VLSENTRY	BINARY	CPSM	4	AVG	Evaluation count with VLS true before event	12
VLSEXIT	BINARY	CPSM	4	AVG	Evaluation count with VLS false before resolution	18

Chapter 216. EVNTBIND Resource Table

This CICS resource object provides information about event bindings.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

ENABLE

The event binding is enabled. Capture of events matching capture specifications in this event binding starts immediately.

DISABLE

The event binding is disabled. Capture of events matching capture specifications in this event binding is stopped immediately. Any events already captured are emitted.

External resource name

CICSEventBinding

Length

200

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0192

Table 486. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM	ENABLE	None	N/A
SET	DISABLE	None	N/A
	DISCARD	None	N/A

Table 487. EVNTBIND resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release		

Table 487. EVNTBIND resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved		4
BUNDLE	CHAR	INQ	8	DIFF	No	Bundle name		
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent		6
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, CREATESPI, NOTAPPLIC							
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release		7
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time		14
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID		8
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition		9
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time		13
ENABLESTATUS	CVDAS	CPSM	4	LIKE	Yes	Enabled status		2
ENABLESTATUS Input/output valid values	ENABLED, DISABLED							
EPADAPTER	CHAR	INQ	32	DIFF	No	Event processing adapter	E640 E650 E660	16
EPADAPTERRES	CVDAS	INQ	4	DIFF	No	Event processing adapter resource type	E640 E650 E660 E670	18
EPADAPTERRES Input/output valid values	EPADAPTER, EPADAPTERSET							
EPADAPTERSET	CHAR	INQ	32	DIFF	No	Event processing adapter set	E640 E650 E660 E670	17
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent		10
INSTALLAGENT Input/output valid values	BUNDLE							
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time		15
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID		11
NAME-1	CHAR	INQ	32	DIFF	No	Name		1
USERTAG	CHAR	INQ	8	DIFF	No	User tag		3

Chapter 217. EVNTGBL Resource Table

This CICS resource object provides information about event processing.

A particular CICS region has only one instance of the resource.

The following actions are supported:

START

The EVENTPROCESS state is changed to STARTED. For inflight transactions, the capture of nontransactional events starts immediately and the capture of transactional events starts at the next sync point.

DRAIN

The EVENTPROCESS state is changed to DRAIN, and event capture is stopped immediately. Any transactional events on the dispatcher queue are deleted. Transactional events are not considered captured until a sync point occurs and a sync point event will not now be captured. Any nontransactional events are emitted. When the last event on the queue is emitted, the EVENTPROCESS state changes to STOPPED.

STOP

The EVENTPROCESS state is changed to STOPPED, and event capture is stopped immediately. All events on the dispatcher queue are deleted.

External resource name

CICSEventProcessing

Length

176

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0193

Table 488. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM	START	None	N/A
SET	DRAIN	None	N/A

Table 488. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
	STOP	None	N/A

Table 489. EVNTGBL resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release		
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved		
EPSTATUS	CVDAS	CPSM	4	LIKE	Yes	Event processing status		1
EPSTATUS Input/output valid values	STARTED, STOPPED, DRAIN							
EVNTBACKOUT	BINARY	STAT	4	MAX	No	Commit backward events		7
EVNTCAPOPSF	BINARY	STAT	4	MAX	No	Capture operations failed		26
EVNTCOMMIT	BINARY	STAT	4	MAX	No	Commit forward events		6
EVNTCURDSP	BINARY	STAT	4	MAX	No	Current dispatcher tasks		17
EVNTCURREVQ	BINARY	STAT	4	MAX	No	Current event capture queue		8
EVNTCURRTRQ	BINARY	STAT	4	MAX	No	Current transactional queue		10
EVNTCUSTAD	BINARY	STAT	4	MAX	No	Events to Custom EP adapter		22
EVNTDISABLE	BINARY	STAT	4	MAX	No	Events with disabled EVENTBINDING		4
EVNTDOMSTID	BINARY	STAT	2	MAX	No	EP domain statistics ID		24
EVNTDSPFAILC	BINARY	STAT	4	MAX	No	Events lost (dispatcher) - config		29
EVNTDSPFAILO	BINARY	STAT	4	MAX	No	Events lost (dispatcher) - other		30
EVNTFILTCAP	BINARY	STAT	8	MAX	No	Events captured		3
EVNTFILTOPS	BINARY	STAT	8	MAX	No	Event filtering operations		2
EVNTFILTOPSF	BINARY	STAT	4	MAX	No	Filter operations failed		25
EVNTHHTPCNT	BINARY	STAT	4	MAX	No	Events to HTTP EP adapter	E640 E650	33
EVNTLOSTAU	BINARY	STAT	4	MAX	No	Events lost - adapter unavailable	E640 E650 E660	35
EVNTLOSTCO	BINARY	STAT	4	MAX	No	Events lost (adapter) - config		27
EVNTLOSTOT	BINARY	STAT	4	MAX	No	Events lost (adapter) - other		28
EVNTMQADAPT	BINARY	STAT	4	MAX	No	Events to Websphere MQ EP adapter		19
EVNTNORM	BINARY	STAT	4	MAX	No	Async normal events		12
EVNTPEAKDSP	BINARY	STAT	4	MAX	No	Peak dispatcher tasks		18
EVNTPEAKEVQ	BINARY	STAT	4	MAX	No	Peak event capture queue		9
EVNTPEAKTRQ	BINARY	STAT	4	MAX	No	Peak transactional queue		11
EVNTPRIO	BINARY	STAT	4	MAX	No	Async priority events		13
EVNTPUT	BINARY	STAT	4	MAX	No	Put events		5
EVNTSYNCCAP	BINARY	STAT	4	MAX	No	Synchronous events	E640 E650 E660	31
EVNTSYNCFAIL	BINARY	STAT	4	MAX	No	Synchronous events failed	E640 E650 E660	32

Table 489. EVNTGBL resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
EVNTSYSCAP	BINARY	STAT	8	MAX	No	Total system events captured	E640 E650 E660	36
EVNTTDQSTAT	BINARY	STAT	4	MAX	No	Events to Tdqueue EP adapter	E640 E650 E660 E670 E680 E690 E700	37
EVNTTRAN	BINARY	STAT	4	MAX	No	Transactional events		14
EVNTTRANATT	BINARY	STAT	4	MAX	No	Dispatcher tasks attached		16
EVNTTRANDIS	BINARY	STAT	4	MAX	No	Transactional events discarded		15
EVNTTRANSAD	BINARY	STAT	4	MAX	No	Events to Transaction EP adapter		21
EVNTTSQSTAT	BINARY	STAT	4	MAX	No	Events to Tsqueue EP adapter		20
SCHEMALEVEL	CHAR	STAT	4	MAX	No	Highest schema level supported	E640 E650 E660	34

Chapter 218. EXCI Resource Table

A CICS Resource that describes information about tasks that originated from client programs using the external CICS interface API

The **Primary** key field for this resource class is LUWID.

The **Secondary** key field for this resource class is TASK.

There are no object specific actions for this resource class.

External resource name

CICSEXCIRequest

Length

80

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0168

Table 490. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 491. EXCI resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
LUWID-1	CHAR	INQ	35	DIFF	EXCI client identifier	2
MVSSYSID	CHAR	CPSM	4	DIFF	EXCI client MVS system ID	5
RRMSURID	HEX	CPSM	16	DIFF	RRMS/MVS Unit of Recovery Identifier	3
TASK-2	BINARY	INQ	4	DIFF	Task Number	1

Chapter 219. EXITGLUE Resource Table

A CICS Resource that describes a global user exit in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is PROGRAM.

The **Secondary** key field for this resource class is EXITPOINT.

While the EXITGLUE resource class identifies multiple key attributes, only the PROGRAM attribute can be specified in an EVALDEF INSTANCE attribute.

There are no object specific actions for this resource class.

External resource name

CICSGlobalUserExit

Length

64

Usage

API or WUI or CICS Management Client Interface

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0056

Table 492. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 493. EXITGLUE resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ENTRY	ADDRESS	INQ	4	MAX	Entry address of global user exit	9
ENTRYNAME	CHAR	INQ	8	DIFF	Entry name	3
EXITPOINT-2	CHAR	INQ	8	DIFF	Exit name	2
GAENTRYNAME	CHAR	INQ	8	DIFF	Name of exit which owns global work area	4
GALENGTH	BINARY	INQ	2	AVG	Length of global work area	7
GAUSECOUNT	BINARY	INQ	4	AVG	Number of global work area users	6

Table 493. EXITGLUE resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
NUMEXITS	BINARY	INQ	2	AVG	Number of global exit points where exit is enabled	8
PROGRAM-1	CHAR	INQ	8	DIFF	Program name	1
STARTSTATUS	CVDAS	INQ	4	LIKE	Exit program availability status	5
STARTSTATUS Output valid values	STARTED, STOPPED					

Chapter 220. EXITTRUE Resource Table

A CICS Resource that describes a task related user exit in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is PROGRAM.

The **Secondary** key field for this resource class is ENTRYNAME.

There are no object specific actions for this resource class.

External resource name

CICSTaskRelatedExit

Length

104

Usage

API or WUI or CICS Management Client Interface

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0055

Table 494. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 495. EXITTRUE resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	17
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
APIST	CVDAS	INQ	4	LIKE	Open API status	
APIST Output valid values	OPENAPI, BASEAPI, NOTAPPLIC					
CONCURRENTST	CVDAS	INQ	4	LIKE	Concurrency type	16
CONCURRENTST Output valid values	QUASIRENT, THREADSAFE, REQUIRED, NOTAPPLIC					
CONNECTST	CVDAS	INQ	4	LIKE	Connect status	12
CONNECTST Output valid values	CONNECTED, NOTCONNECTED, UNKNOWN, NOTAPPLIC					
ENTRY	ADDRESS	INQ	4	MAX	Entry-point address of task related user exit	11
ENTRYNAME-2	CHAR	INQ	8	DIFF	Entry name	2

Table 495. EXITTRUE resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
FORMATEDFST	CVDAS	INQ	4	LIKE	Format execution diagnostic facility (EDF) status	4
FORMATEDFST Output valid values	FORMATEDF, NOFORMATEDF, NOTAPPLIC					
GAENTRYNAME	CHAR	INQ	8	DIFF	Name of exit owning global work area	3
GALENGTH	BINARY	INQ	2	AVG	Length of global work area	9
GAUSECOUNT	BINARY	INQ	4	AVG	Number of work area users	8
INDOUBTST	CVDAS	INQ	4	LIKE	INDOUBTWAIT enabled status	13
INDOUBTST Output valid values	WAIT, NOWAIT, NOTAPPLIC					
PROGRAM-1	CHAR	INQ	8	DIFF	Program name	1
PURGEABLEST	CVDAS	INQ	4	LIKE	Purgeable status	18
PURGEABLEST Output valid values	PURGEABLE, NOTPURGEABLE, NOTAPPLIC					
QUALIFIER	CHAR	INQ	8	DIFF	SPI qualifier	14
SHUTDOWNST	CVDAS	INQ	4	LIKE	Exit CICS shutdown status	5
SHUTDOWNST Output valid values	SHUTDOWN, NOSHUTDOWN, NOTAPPLIC					
SPIST	CVDAS	INQ	4	LIKE	Exit-enabled-for-(SPI) calls option	15
SPIST Output valid values	SPI, NOSPI, NOTAPPLIC					
STARTSTATUS	CVDAS	INQ	4	LIKE	Exit program availability status	6
STARTSTATUS Output valid values	STARTED, STOPPED					
TALENGTH	BINARY	INQ	2	AVG	Length of local work area	10
TASKSTART	CVDAS	INQ	4	LIKE	Start and end of task invocation status	7
TASKSTART Output valid values	TASKSTART, NOTASKSTART, NOTAPPLIC					

Chapter 221. EXTGLORD Resource Table

A CICS Resource that describes a global user exit in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is EXITPOINT.

The **Secondary** key field for this resource class is EXITPOSITION.

The **Tertiary** key field for this resource class is PROGRAM.

The EXITPOSITION key field shows the time order in which the exits were enabled for the EXITPOINT.

There are no object specific actions for this resource class.

External resource name

Length

80

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0140

Table 496. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 497. EXTGLORD resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	12
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
CONCURRENTST	CVDAS	INQ	4	LIKE	Concurrency status	
CONCURRENTST Output valid values		QUASIRENT, THREADSAFE				
ENTRY	ADDRESS	INQ	4	MAX	Entry address of global user exit	10
ENTRYNAME	CHAR	INQ	8	DIFF	Entry name	4
EXITPOINT-1	CHAR	INQ	8	DIFF	Exit name	1
EXITPOSITION-2	BINARY	CPSM	4	AVG	Exit position	2

Table 497. EXTGLORD resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
GAENTRYNAME	CHAR	INQ	8	DIFF	Name of exit which owns global work area	5
GALENGTH	BINARY	INQ	2	AVG	Length of global work area	8
GAUSECOUNT	BINARY	INQ	4	AVG	Number of global work area users	7
NUMEXITS	BINARY	INQ	2	AVG	Number of global exit points where exit is enabled	9
PROGRAM-3	CHAR	INQ	8	DIFF	Program name	3
STARTSTATUS	CVDAS	INQ	4	LIKE	Exit program availability status	6
STARTSTATUS Output valid values	STARTED, STOPPED					
USECOUNT	BINARY	INQ	4	AVG	Program use count	11

Chapter 222. EXTRATDQ Resource Table

A CICS Resource that describes an extrapartition transient data queue in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is TDQUEUE.

The following actions are supported:

CLOSE

Close the destination data set.

DISABLE

Disable the destination.

DISCARD

Discard a disabled and closed destination.

ENABLE

Enable the destination.

OPEN

Open the destination data set.

These actions require no unique parameter data.

External resource name

CICSExtrapartitionTDQueue

Length

208

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0026

Table 498. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	DISCARD	None	N/A
	CLOSE	None	N/A
	DISABLE	None	N/A

Table 498. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
	ENABLE	None	N/A
	OPEN	None	N/A

Table 499. EXTRATDQ resource table attributes									
Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0	E640 E650	30
BLOCKFORMAT	CVDAS	INQ	4	LIKE	No	Block format			2
BLOCKFORMAT Output valid values	BLOCKED, UNBLOCKED, NOTAPPLIC								
BLOCKSIZE	BINARY	INQ	4	AVG	No	Block length (bytes)			16
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent		E640 E650	21
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, SYSTEM, CREATESPI, NOTAPPLIC								
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release		E640 E650	23
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time		E640 E650	25
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID		E640 E650	22
DATABUFFERS	BINARY	INQ	4	AVG	No	Number of data buffers to be used			17
DDNAME	CHAR	INQ	8	DIFF	No	DD name on JCL statement defining data set			11
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition		E640 E650	26
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time		E640 E650	27
DISPOSITION	CVDAS	INQ	4	LIKE	No	Data set disposition			13
DISPOSITION Output valid values	MOD, OLD, SHARE, NOTAPPLIC								
DSNAME	CHAR	INQ	44	DIFF	No	Name of data set			12
EMPTYSTATUS	CVDAS	INQ	4	LIKE	No	Empty status			3
EMPTYSTATUS Output valid values	FULL, EMPTY, NOTEMPTY, NOTAPPLIC								
ENABLESTATUS	CVDAS	INQ	4	LIKE	Yes	Enabled status			4
ENABLESTATUS Input/output valid values	ENABLED, DISABLED								
ENABLESTATUS Output valid values	NOTAPPLIC								
ERROROPTION	CVDAS	INQ	4	LIKE	No	CICS action for I/O error			14
ERROROPTION Output valid values	IGNORERR, SKIP, NOTAPPLIC								
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent		E640 E650	24

Table 499. EXTRATDQ resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, GRPLIST, SYSTEM								
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time		E640 E650	29
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID		E640 E650	28
IOTYPE	CVDAS	INQ	4	LIKE	No	I/O type			5
IOTYPE Output valid values	INPUT, OUTPUT, RDBACK, NOTAPPLIC								
MEMBER	CHAR	INQ	8	DIFF	No	Member name			19
OPENSTATUS	CVDAS	INQ	4	LIKE	Yes	Open status			6
OPENSTATUS Input/output valid values	OPEN, CLOSED								
OPENSTATUS Output valid values	OPENING, CLOSING, SWITCHING, NOTAPPLIC								
OUTCNT	BINARY	STAT	4	AVG	No	Number of READ and WRITE requests			10
PRINTCONTROL	CVDAS	INQ	4	LIKE	No	Print control type			7
PRINTCONTROL Output valid values	ASACTL, MCHCTL, NOCTL, NOTAPPLIC								
RECORDFORMAT	CVDAS	INQ	4	LIKE	No	Record format			8
RECORDFORMAT Output valid values	FIXED, VARIABLE, NOTAPPLIC								
RECORDLENGTH	CNUMERIC	INQ	4	AVG	No	Record length (bytes)			9
REWIND	CVDAS	INQ	4	LIKE	No	Rewind action when data set on tape closed			15
REWIND Output valid values	LEAVE, REREAD, NOTAPPLIC								
SYSOUTCLASS	CHAR	INQ	1	DIFF	No	SYSOUT class if spool file			18
TDQUEUE-1	CHAR	INQ	4	DIFF	No	Queue ID			1

Chapter 223. FEEDBACK Resource Table

A MetaData resource that provides extended diagnostic data for an API command that encountered an error.

There is no key field for this resource class.

There are no object specific actions for this resource class.

External resource name

Length

248

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Metadata

Copybook identifier

EYUt2601

Table 500. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 501. FEEDBACK resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ATTRDATAVAL	CHAR	CPSM	1	LIKE	Attribute data available	5
ATTRDATAVAL Input/output valid values	Y (YES) - Attribute Ids valid, N (NO) - No Attribute Id data					
ATTR_DTYP1	BINARY	CPSM	1	LIKE	Attribute datatype	18
ATTR_DTYP1 Input/output valid values	0 (COMP) - Component Identifier, 4 (BIN) - Binary Numeric, 8 (RATE) - Binary Derived Rate, 12 (PER) - Binary Derived Percent, 16 (SUM) - Binary Derived Sum, 20 (RATO) - Binary Derived Ratio, 24 (AVG) - Binary Derived Average, 28 (TSTP) - System/390 Timestamp, 32 (BIT) - Bit, 36 (TEXT) - Text Unknown Length, 40 (CHAR) - Character, 44 (EYUD) - EYUDA, 48 (CVDS) - CVDA Standard, 52 (CVDT) - CVDA Terminal, 56 (REST) - Resource Type, 60 (PACK) - Packed Decimal, 64 (DATE) - Date, 68 (ILBL) - Internal Label Field, 72 (HHMM) - Binary HHMM, 76 (SCLK) - Interval Store Clock, 80 (IUSC) - Interval Microseconds, 84 (IMSC) - Interval Milliseconds, 88 (16US) - Interval 16 Microseconds, 92 (ISEC) - Interval Seconds, 96 (IUSS) - Interval Store Clock Delta, 100 (DTGP) - Date Time Group, 104 (DECT) - Packed Decimal Timestamp, 108 (ADDR) - Address, 112 (CNUM) - Coded Numeric, 116 (HCHR) - Non Display Character, 120 (HEX) - Hexadecimal, 124 (TBLV) - Table version, 128 (RAT3) - Binary derived rate 3DP, 132 (PER3) - Binary derived percent 3DP, 136 (SUM3) - Binary derived sum 3DP, 140 (AVG3) - Binary derived average 3DP, 144 (DECS) - Packed Decimal Time - No Tenths, 152 (SC12) - Interval Store Clock Length 12					
ATTR_DTYP2	BINARY	CPSM	1	LIKE	Attribute datatype	23
ATTR_DTYP3	BINARY	CPSM	1	LIKE	Attribute datatype	28
ATTR_DTYP4	BINARY	CPSM	1	LIKE	Attribute datatype	33

Table 501. FEEDBACK resource table attributes (continued)						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ATTR_DTYP5	BINARY	CPSM	1	LIKE	Attribute datatype	38
ATTR_DTYP6	BINARY	CPSM	1	LIKE	Attribute datatype	50
ATTR_LEN1	BINARY	CPSM	2	LIKE	Attribute length	20
ATTR_LEN2	BINARY	CPSM	2	LIKE	Attribute length	25
ATTR_LEN3	BINARY	CPSM	2	LIKE	Attribute length	30
ATTR_LEN4	BINARY	CPSM	2	LIKE	Attribute length	35
ATTR_LEN5	BINARY	CPSM	2	LIKE	Attribute length	40
ATTR_LEN6	BINARY	CPSM	2	LIKE	Attribute length	52
ATTR_NM1	CHAR	CPSM	12	LIKE	Attribute name	16
ATTR_NM2	CHAR	CPSM	12	LIKE	Attribute name	21
ATTR_NM3	CHAR	CPSM	12	LIKE	Attribute name	26
ATTR_NM4	CHAR	CPSM	12	LIKE	Attribute name	31
ATTR_NM5	CHAR	CPSM	12	LIKE	Attribute name	36
ATTR_NM6	CHAR	CPSM	12	LIKE	Attribute name	48
ATTR_OFF1	BINARY	CPSM	2	LIKE	Attribute offset	17
ATTR_OFF2	BINARY	CPSM	2	LIKE	Attribute offset	22
ATTR_OFF3	BINARY	CPSM	2	LIKE	Attribute offset	27
ATTR_OFF4	BINARY	CPSM	2	LIKE	Attribute offset	32
ATTR_OFF5	BINARY	CPSM	2	LIKE	Attribute offset	37
ATTR_OFF6	BINARY	CPSM	2	LIKE	Attribute offset	49
ATTR_RID1	BINARY	CPSM	1	LIKE	Attribute relative ID	19
ATTR_RID2	BINARY	CPSM	1	LIKE	Attribute relative ID	24
ATTR_RID3	BINARY	CPSM	1	LIKE	Attribute relative ID	29
ATTR_RID4	BINARY	CPSM	1	LIKE	Attribute relative ID	34
ATTR_RID5	BINARY	CPSM	1	LIKE	Attribute relative ID	39
ATTR_RID6	BINARY	CPSM	1	LIKE	Attribute relative ID	51
CEIBDATAVAL	CHAR	CPSM	1	LIKE	EIB data available	6
CEIBDATAVAL Input/output valid values	Y (YES) - EIB data valid, N (NO) - No EIB data					
CEIBFN	HEX	CPSM	4	MIN	EIBFN response from CICS	13
CEIBRESP	BINARY	CPSM	4	LIKE	RESP response from CICS	11
CEIBRESP1	BINARY	CPSM	4	LIKE	RESP2 response from CICS	12
COMMAND	BINARY	CPSM	1	LIKE	Command code	4
COMMAND Input/output valid values	1 (NOOP) - NOOP, 2 (CANCEL) - Cancel, 3 (CONNECT) - Connect, 4 (COPY) - Copy, 5 (CREATE) - Create, 6 (DELETE) - Delete, 7 (DISCARD) - Discard, 8 (DISCONN) - Disconnect, 9 (FETCH) - Fetch, 10 (GET) - Get, 11 (LOCATE) - Locate, 12 (MARK) - Mark, 13 (ORDER) - Order by, 14 (PERFSET) - Perform Set, 15 (PERFOBJ) - Perform Object, 16 (QUALIFY) - Qualify, 17 (QUERY) - Query, 18 (RECEIVE) - Receive, 19 (REMOVE) - Remove, 20 (FILTER) - Specify Filter, 21 (UNMARK) - Unmark, 22 (ADDRESS) - Address, 23 (GETDEF) - Getdef, 24 (LISTEN) - Listen, 25 (REFRESH) - Refresh, 26 (SET) - Set, 27 (VIEW) - Specify View, 28 (TERM) - Terminate, 29 (TRANS) - Translate, 30 (GROUP) - Group by, 31 (UPDATE) - Update, 32 (FEEDBACK) - Feedback, 33 (EXPAND) - Expand					
CSDAPI	CHAR	CPSM	1	LIKE	CSD API	53
CSDAPI Input/output valid values	Y (YES) - CSD API related request, N (NO) - non-CSD API related request					
DIAGNOSTIC	BINARY	CPSM	32	LIKE	Internal diagnostic data	43
ERRCODEVAL	CHAR	CPSM	1	LIKE	Error code value available	7
ERRCODEVAL Input/output valid values	Y (YES) - Error Code valid, N (NO) - No Error Code Data					
ERROR_CODE	BINARY	CPSM	4	LIKE	Error code	10

Table 501. FEEDBACK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
ERR_COUNT	BINARY	CPSM	4	LIKE	Error result count	45
ERR_OBJECT	CHAR	CPSM	8	LIKE	Feedback error object name	47
ERR_RESULT	BINARY	CPSM	4	LIKE	Error result token	44
EXPANSION	CHAR	CPSM	33	LIKE	Reserved for expansion	46
OBJECT	CHAR	CPSM	8	LIKE	Name of object	14
OBJECT_ACT	CHAR	CPSM	12	LIKE	Action performed	15
REASON	BINARY	CPSM	4	LIKE	Command reason	9
RESPONSE	BINARY	CPSM	4	LIKE	Command response	8
RSLTRECID	BINARY	CPSM	4	LIKE	Result set record ID	42
RSRVED01	BINARY	CPSM	2	LIKE	Reserved Area	41

Chapter 224. FENODDEF Resource Table

A CICS Definition that describes a FEPI Node.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The following actions are supported:

INSTALL

Install a FEPI Node Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionFEPINode

Length

1168

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3829

Table 502. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		RESGROUP(value)	No
CREATE		RESGROUP(value)	No
UPDATE		None	N/A
REMOVE		None	N/A
PERFORM SET	INSTALL	FORCEINS(YES, NO)	No
		MODE(value)	No
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No

Table 502. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
	ADDTGRP	RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
		RESGROUP(value)	Yes

Table 503. FENODDEF FEEDBACK error codes		
Value	Code	Description
1	FENODDEF_INV_DATA	Attribute data invalid
2	FENODDEF_REC_NOT_FOUND	Requested resource not found
4	FENODDEF_REC_EXISTS	Resource already exists
5	FENODDEF_REC_CHANGED	Resource definition already changed
6	FENODDEF_INV_RESTYPE	Invalid resource type
7	FENODDEF_INV_VER	Invalid resource version
11	FENODDEF_NON_MP	Maintenance point CMAS not available
12	FENODDEF_INV_CONTEXT	Context not found
13	FENODDEF_INCONSISTENT_SET	Inconsistent set condition
14	FENODDEF_INV_RESGROUP	Resource group not found
21	FENODDEF_INV_ACTION	Invalid action
22	FENODDEF_INV_RECADDR	Invalid record address
23	FENODDEF_INV_RECLEN	Invalid record length
24	FENODDEF_DIFF_VERSION	Different version
25	FENODDEF_EARLY_NAMELIST_END	Early name list end
26	FENODDEF_INV_NAMELIST	Invalid name list
27	FENODDEF_INV_NAME	Invalid name
28	FENODDEF_INV_MINNAME	Invalid minor name
29	FENODDEF_NOTIFY	Notify
30	FENODDEF_PARTIAL_INSTALL	Partial install
31	FENODDEF_NOTHING_INSTALLED	Nothing installed
32	FENODDEF_NO_TARGETS	No targets
33	FENODDEF_NO_RELATED	No related systems
34	FENODDEF_INV_TSCOPE	Invalid target scope
35	FENODDEF_INV_RSCOPE	Invalid related scope
36	FENODDEF_INV_USAGE	Invalid usage
37	FENODDEF_INV_MODE	Invalid mode
38	FENODDEF_INV_STATECHK	Invalid state check

Table 503. FENODDEF FEEDBACK error codes (continued)

Value	Code	Description
39	FENODDEF_INV_FORCEINS	Invalid force install
40	FENODDEF_INV_NOTIFY	Invalid notify
41	FENODDEF_INV_OVERTYPE	Invalid over type
42	FENODDEF_INV_OVRBLOCK	Invalid override block
43	FENODDEF_INV_ORSTRING	Invalid override string
44	FENODDEF_INV_STRNGTERM	Invalid string terminator
45	FENODDEF_INV_EMBEDTERM	Invalid embedded terminator
46	FENODDEF_INV_ATTRIBUTE	Invalid attribute
47	FENODDEF_INV_LITERAL	Invalid literal
48	FENODDEF_INV_ORSTGNA	Invalid override string
49	FENODDEF_SCOPE_REQUIRED	Scope required
50	FENODDEF_USAGE_CONFLICT	Usage conflict
51	FENODDEF_NODEFS_SELECTED	No definitions selected
52	FENODDEF_MORE_THAN_1_RELSYS	More than one related system
53	FENODDEF_MISSING_RELSYSID	Missing related system identifier
54	FENODDEF_SCOPE_CONFLICT	Scope conflict

Table 504. FENODDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
ACQSTATUS	CVDAS	CPSM	4	Yes	LIKE	Acquired status	ACQUIRED			15
ACQSTATUS Input/output valid values	ACQUIRED, RELEASED									
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	20
CHANGEAGENT Input/output valid values	DREPAI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	22
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	21
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				9
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		19
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				13
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
NODELIST	CHAR	CPSM	51 2	No	DIFF	Node list				18
PASSWORDS	CHAR	CPSM	51 2	No	DIFF	Password list				17
SERVSTATUS	CVDAS	CPSM	4	Yes	LIKE	Node service status	INSERVICE			16

Table 504. FENODDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
SERVSTATUS Input/output valid values	INSERVICE, OUTSERVICE									
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				10
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				11
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				12

Chapter 225. FEPICONN Resource Table

A CICS Resource that describes a FEPI connection in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is TARGETNAME.

The **Secondary** key field for this resource class is NODENAME.

The following actions are supported:

ACQUIRE

Acquire the FEPI connection.

INSERVICE

Place the FEPI connection in service.

OUTSERVICE

Place the FEPI connection out of service.

RELEASE

Release the FEPI connection.

These actions require no unique parameter data.

External resource name

CICSFEPIConnection

Length

160

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0057

Table 505. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM	ACQUIRE	None	N/A
SET	INSERVICE	None	N/A
	OUTSERVICE	None	N/A

Table 505. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
	RELEASE	None	N/A

Table 506. FEPICNN resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved	
ACQSTATUS	CVDAS	INQ	4	LIKE	Yes	Acquired status	11
ACQSTATUS Input/output valid values	ACQUIRED, RELEASED						
ACQSTATUS Output valid values	ACQUIRING, RELEASING						
ACQUIRES	BINARY	STAT	4	AVG	No	Number of acquires	4
CHARSRECD	BINARY	STAT	4	AVG	No	Number of characters received	8
CHARSENT	BINARY	STAT	4	AVG	No	Number of characters sent	7
CONVERSATNS	BINARY	STAT	4	AVG	No	Number of conversations	5
ERRORS	BINARY	STAT	4	AVG	No	Number of error conditions	10
INSTLSTATUS	CVDAS	INQ	4	LIKE	No	Connections install status	12
INSTLSTATUS Output valid values	INSTALLED, NOTINSTALLED						
LASTACQCODE	BINARY	INQ	4	AVG	No	Sense code from last REQSESS request	13
NODENAME-2	CHAR	INQ	8	DIFF	No	Node name	2
POOLNAME	CHAR	STAT	8	DIFF	No	Pool name	3
RECVTIMEOUT	BINARY	STAT	4	AVG	No	Number of receive timeouts	9
SERVSTATUS	CVDAS	INQ	4	LIKE	Yes	Connection service status	14
SERVSTATUS Input/output valid values	INSERVICE, OUTSERVICE						
SERVSTATUS Output valid values	GOINGOUT						
STATE	CVDAS	INQ	4	LIKE	No	Conversation status	15
STATE Output valid values	NOCONV, PENDSTSN, STSN, PENDBEGIN, BEGINSESSION, APPLICATION, PENDDATA, PENDSTART, PENDFREE, FREE, PENDRELEASE, RELEASE, PENDUNSOL, UNSOLDATA, PENDPASS						
TARGETNAME-1	CHAR	INQ	8	DIFF	No	Target name	1
UNSOLICINP	BINARY	STAT	4	AVG	No	Number of unsolicited inputs	6
USERDATA	CHAR	INQ	64	MIN	Yes	User data for connection	17
WAITCONVNUM	BINARY	INQ	4	AVG	No	Number of conversations waiting for connection	16

Chapter 226. FEPINODE Resource Table

A CICS Resource that describes a FEPI node in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is NODENAME.

The following actions are supported:

ACQUIRE

Acquire the FEPI node.

DISCARD

Discard the FEPI node.

INSERVICE

Place the FEPI node in service.

OUTSERVICE

Place the FEPI node out of service.

RELEASE

Release the FEPI node.

External resource name

CICSFEPINode

Length

112

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0061

Table 507. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	ACQUIRE	None	N/A
	DISCARD	None	N/A
	INSERVICE	None	N/A
	OUTSERVICE	None	N/A

Table 507. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
	RELEASE	None	N/A

Table 508. FEPINODE resource table attributes							
Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved	
ACQNUM	BINARY	INQ	4	AVG	No	Number of node acquires	2
ACQSTATUS	CVDAS	INQ	4	LIKE	Yes	Acquired status	3
ACQSTATUS Input/output valid values	ACQUIRED, RELEASED						
ACQSTATUS Output valid values	ACQUIRING, RELEASING						
INSTLSTATUS	CVDAS	INQ	4	LIKE	No	Node install status	4
INSTLSTATUS Output valid values	INSTALLED, NOTINSTALLED						
LASTACQCODE	BINARY	INQ	4	AVG	No	Sense code from last REQSESS request	5
NODENAME-1	CHAR	INQ	8	DIFF	No	Node name	1
SERVSTATUS	CVDAS	INQ	4	LIKE	Yes	Node service status	6
SERVSTATUS Input/output valid values	INSERVICE, OUTSERVICE						
SERVSTATUS Output valid values	GOINGOUT						
USERDATA	CHAR	INQ	64	DIFF	Yes	User data for node	7

Chapter 227. FEPIPOOL Resource Table

A CICS Resource that describes a FEPI pool in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is POOLNAME.

The following actions are supported:

ADD

Add nodes and targets to a FEPI pool.

The parameter data for the ADD action is:

```
PARM('NODES(node,...) TARGETS(trgt,...)
      [ACQSTATUS(cvda1)] [SERVSTATUS(cvda2)]'.')
```

where:

- *node* is required and must be one or more 1- to 8-character FEPI node names.
- *trgt* is required and must be one or more 1- to 8-character FEPI target names.
- *cvda1* is one of the following valid CVDA values for FEPI acquire status:

ACQUIRED
RELEASED

- *cvda2* is one of the following valid CVDA values for FEPI service status:

INSERVICE
OUTSERVICE

Note: The number of values for the NODES() and TARGETS() parameters must be the same.

DELETE

Delete nodes and targets from a FEPI pool.

The parameter data for the DELETE action is:

```
PARM('NODES(node,...) TARGETS(trgt,...)
      [POOL(pool)]'.')
```

where:

node = (Required) One or more 1- to 8-character
FEPI node names.
trgt = (Required) One or more 1- to 8-character
FEPI target names.
pool = 1- to 8-character FEPI pool name.

Note: The number of values for the NODES() and TARGETS() parameters must be the same.

DISCARD

Discard a FEPI pool.

INSERVICE

Place a FEPI pool in service.

OUTSERVICE

Place a FEPI pool out of service.

External resource name

CICSFEPIPooL

Length

208

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0058

Table 509. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM	ADD	ACQSTATUS(ACQUIRED, RELEASED)	No
SET		NODES	Yes
		SERVSTATUS(INSERVICE, OUTSERVICE)	No
		TARGETS	Yes
	DELETE	NODES	Yes
		POOL(value)	No
		TARGETS	Yes
	DISCARD	None	N/A
	INSERVICE	None	N/A
	INSTALL	ACQSTATUS(ACQUIRED, RELEASED)	No
		NODES	Yes
		POOL(value)	No
		PROPERTY(value)	No
		SERVSTATUS(INSERVICE, OUTSERVICE)	No
		TARGETS	Yes
	OUTSERVICE	None	N/A

Table 510. FEPIPOOL resource table attributes							
Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved	
BEGINSESSION	CHAR	INQ	4	DIFF	No	Begin-session transaction	12
CONNECTIONS	BINARY	STAT	4	AVG	No	Number of connections	4

Table 510. FEIPOOL resource table attributes (continued)							
Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
CONTENTION	CVDAS	INQ	4	LIKE	No	Begin-bracket contention resolution	13
CONTENTION Output valid values	LOSE, WIN						
CURALLCS	BINARY	STAT	4	AVG	No	Current number of allocates	6
CURALLCWAIT	BINARY	STAT	4	AVG	No	Current number of allocates waiting	8
DEVICE	CVDAS	INQ	4	LIKE	No	Device type	14
DEVICE Output valid values	T3278M2, T3278M3, T3278M4, T3278M5, T3279M2, T3279M3, T3279M4, T3279M5, TPS55M2, TPS55M3, TPS55M4, LUP						
ENDSESSION	CHAR	INQ	4	DIFF	No	End-session transaction	15
EXCEPTIONQ	CHAR	INQ	4	DIFF	No	TDQ queue holding exceptions	16
FJOURNALNAME	CHAR	INQ	8	DIFF	No	Journal name	30
FJOURNALNUM	BINARY	INQ	4	AVG	No	Journal number	17
FORMAT	CVDAS	INQ	4	LIKE	No	Data format option	18
FORMAT Output valid values	FORMATTED, DATASTREAM, NOTAPPLIC						
INITIALDATA	CVDAS	INQ	4	LIKE	No	Initial inbound data status	19
INITIALDATA Output valid values	INBOUND, NOTINBOUND						
INSTLSTATUS	CVDAS	INQ	4	LIKE	No	Pool install status	20
INSTLSTATUS Output valid values	INSTALLED, NOTINSTALLED						
MAXLENGTH	BINARY	INQ	4	AVG	No	Maximum length of returned data	21
MSGJRNL	CVDAS	INQ	4	LIKE	No	Message journalling status	22
MSGJRNL Output valid values	NOMSGJRNL, INPUT, OUTPUT, INOUT						
NODES	BINARY	STAT	4	AVG	No	Number of nodes	3
PEAKALLCS	BINARY	STAT	4	AVG	No	Peak number of concurrent allocates	7
PEAKALLCWAIT	BINARY	STAT	4	AVG	No	Peak number of allocates waiting	9
PEAKCONNS	BINARY	STAT	4	AVG	No	Peak number of connections	5
POOLNAME-1	CHAR	INQ	8	DIFF	No	Pool name	1
PROPERTYSET	CHAR	INQ	8	DIFF	No	Property set name	23
SERVSTATUS	CVDAS	INQ	4	LIKE	Yes	Pool service status	24
SERVSTATUS Input/output valid values	INSERVICE, OUTSERVICE						
SERVSTATUS Output valid values	GOINGOUT						
STSN	CHAR	INQ	4	DIFF	No	Set and test sequence-number (STSN) transaction	25
TARGETS	BINARY	STAT	4	AVG	No	Number of targets	2
TOTALLOCTOUT	BINARY	STAT	4	AVG	No	Total number of allocates that timed out	11
TOTALLOCWAIT	BINARY	STAT	4	AVG	No	Total number of allocates that waited	10
UNSOLDATA	CHAR	INQ	4	DIFF	No	Unsolicited data transaction	26
UNSOLDATAACK	CVDAS	INQ	4	LIKE	No	Unsolicited-data bid-acknowledgement	27
UNSOLDATAACK Output valid values	NEGATIVE, POSITIVE, NOTAPPLIC						
USERDATA	CHAR	INQ	64	DIFF	Yes	Pool user data	29
WAITCONVNUM	BINARY	INQ	4	AVG	No	Number of conversations waiting	28

Chapter 228. FEPIPROP Resource Table

A CICS Resource that describes a FEPI property set in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is PROPERTYSET.

The following actions are supported:

DISCARD

Discard the FEPI property set.

External resource name

CICSFEPIPropertySet

Length

88

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0062

Table 511. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM SET	DISCARD	None	N/A

Table 512. FEPIPROP resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
BEGINSESSION	CHAR	INQ	4	DIFF	Begin-session transaction	2
CONTENTION	CVDAS	INQ	4	LIKE	Contention resolution result	3
CONTENTION Input/output valid values	LOSE, WIN					
DEVICE	CVDAS	INQ	4	LIKE	Device type	4
DEVICE Input/output valid values	T3278M2, T3278M3, T3278M4, T3278M5, T3279M2, T3279M3, T3279M4, T3279M5, TPS55M2, TPS55M3, TPS55M4, LUP					

Table 512. FEIPROP resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
ENDSESSION	CHAR	INQ	4	DIFF	End-session transaction	5
EXCEPTIONQ	CHAR	INQ	4	DIFF	TDQ queue holding exceptions	6
FJOURNALNAME	CHAR	INQ	8	DIFF	Journal name	15
FJOURNALNUM	CNUMERIC	INQ	4	AVG	Journal number	7
FORMAT	CVDAS	INQ	4	LIKE	Data format	8
FORMAT Input/output valid values	FORMATTED, DATASTREAM, NOTAPPLIC					
INITIALDATA	CVDAS	INQ	4	LIKE	Initial-inbound-data option	9
INITIALDATA Input/output valid values	INBOUND, NOTINBOUND					
MAXLENGTH	BINARY	INQ	4	AVG	Maximum length of returned data	10
MSGJRNL	CVDAS	INQ	4	LIKE	Journal status	11
MSGJRNL Input/output valid values	NOMSGJRNL, INPUT, OUTPUT, INOUT					
PROPERTYSET-1	CHAR	INQ	8	DIFF	Property set name	1
STSN	CHAR	INQ	4	DIFF	Set and test sequence numbers (STSN) transaction	12
UNSOLDATA	CHAR	INQ	4	DIFF	Unsolicited data transaction	13
UNSOLDATAK	CVDAS	INQ	4	LIKE	Unsolicited data response	14
UNSOLDATAK Input/output valid values	NEGATIVE, POSITIVE, NOTAPPLIC					

Chapter 229. FEPITRGT Resource Table

A CICS Resource that describes a FEPI target in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is TARGETNAME.

The **Secondary** key field for this resource class is POOLNAME.

The following actions are supported:

DISCARD

Discard a FEPI target.

INSERVICE

Place a FEPI target in service.

OUTSERVICE

Place a FEPI target out of service.

External resource name

CICSFEPITarget

Length

136

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0059

Table 513. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	DISCARD	None	N/A
	INSERVICE	None	N/A
	OUTSERVICE	None	N/A

Table 514. FEPITRGT resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name	

Table 514. FEPITRGT resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release	5
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved	
ALLOCATES	BINARY	STAT	4	AVG	No	Total number of allocates	
APPLID	CHAR	STAT	8	DIFF	No	VTAM applid of back end system	3
CURALLCWAIT	BINARY	STAT	4	AVG	No	Current number of allocates waiting	7
INSTLSTATUS	CVDAS	INQ	4	LIKE	No	Install status	10
INSTLSTATUS Output valid values	INSTALLED, NOTINSTALLED						
NODES	BINARY	STAT	4	AVG	No	Number of nodes	4
PEAKALLCWAIT	BINARY	STAT	4	AVG	No	Peak number of allocates waiting	8
POOLNAME-2	CHAR	STAT	8	DIFF	No	Pool name	2
SERVSTATUS	CVDAS	INQ	4	LIKE	Yes	Service status	11
SERVSTATUS Input/output valid values	INSERVICE, OUTSERVICE						
SERVSTATUS Output valid values	GOINGOUT						
TARGETNAME-1	CHAR	INQ	8	DIFF	No	Target name	1
TOTALLOCTOUT	BINARY	STAT	4	AVG	No	Total number of allocates that timed out	9
TOTALLOCWAIT	BINARY	STAT	4	AVG	No	Total number of allocates that waited	6
USERDATA	CHAR	INQ	64	DIFF	Yes	Target user data	12

Chapter 230. FEPOODEF Resource Table

A CICS Definition that describes a FEPI Pool.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The following actions are supported:

INSTALL

Install a FEPI Pool Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionFEPIPool

Length

1432

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3827

Table 515. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		RESGROUP(value)	No
CREATE		RESGROUP(value)	No
UPDATE		None	N/A
REMOVE		None	N/A
PERFORM	INSTALL SET	FORCEINS(YES, NO)	No
		MODE(value)	No
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No

Table 515. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
	ADDTOGRP	RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
		RESGROUP(value)	Yes

Table 516. FEPOODEF FEEDBACK error codes		
Value	Code	Description
1	FEPOODEF_INV_DATA	Attribute data invalid
2	FEPOODEF_REC_NOT_FOUND	Requested resource not found
4	FEPOODEF_REC_EXISTS	Resource already exists
5	FEPOODEF_REC_CHANGED	Resource definition already changed
6	FEPOODEF_INV_RESTYPE	Invalid resource type
7	FEPOODEF_INV_VER	Invalid resource version
11	FEPOODEF_NON_MP	Maintenance point CMAS not available
12	FEPOODEF_INV_CONTEXT	Context not found
13	FEPOODEF_INCONSISTENT_SET	Inconsistent set condition
14	FEPOODEF_INV_RESGROUP	Resource group not found
21	FEPOODEF_INV_ACTION	Invalid action
22	FEPOODEF_INV_RECADDR	Invalid record address
23	FEPOODEF_INV_RECLEN	Invalid record length
24	FEPOODEF_DIFF_VERSION	Different version
25	FEPOODEF_EARLY_NAMELIST_END	Early name list end
26	FEPOODEF_INV_NAMELIST	Invalid name list
27	FEPOODEF_INV_NAME	Invalid name
28	FEPOODEF_INV_MINNAME	Invalid minor name
29	FEPOODEF_NOTIFY	Notify
30	FEPOODEF_PARTIAL_INSTALL	Partial install
31	FEPOODEF_NOTHING_INSTALLED	Nothing installed
32	FEPOODEF_NO_TARGETS	No targets
33	FEPOODEF_NO_RELATED	No related systems
34	FEPOODEF_INV_TSCOPE	Invalid target scope
35	FEPOODEF_INV_RSCOPE	Invalid related scope
36	FEPOODEF_INV_USAGE	Invalid usage
37	FEPOODEF_INV_MODE	Invalid mode
38	FEPOODEF_INV_STATECHK	Invalid state check

Table 516. FEPOODEF FEEDBACK error codes (continued)

Value	Code	Description
39	FEPOODEF_INV_FORCEINS	Invalid force install
40	FEPOODEF_INV_NOTIFY	Invalid notify
41	FEPOODEF_INV_OVERTYPE	Invalid over type
42	FEPOODEF_INV_OVRBLOCK	Invalid override block
43	FEPOODEF_INV_ORSTRING	Invalid override string
44	FEPOODEF_INV_STRNGTERM	Invalid string terminator
45	FEPOODEF_INV_EMBEDTERM	Invalid embedded terminator
46	FEPOODEF_INV_ATTRIBUTE	Invalid attribute
47	FEPOODEF_INV_LITERAL	Invalid literal
48	FEPOODEF_INV_ORSTGNA	Invalid override string
49	FEPOODEF_SCOPE_REQUIRED	Scope required
50	FEPOODEF_USAGE_CONFLICT	Usage conflict
51	FEPOODEF_NODEFS_SELECTED	No definitions selected
52	FEPOODEF_MORE_THAN_1_RELSYS	More than one related system
53	FEPOODEF_MISSING_RELSYSID	Missing related system identifier
54	FEPOODEF_SCOPE_CONFLICT	Scope conflict

Table 517. FEPOODEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
ACQSTATUS	CVDAS	CPSM	4	No	LIKE	Pool acquire status	ACQUIRED			17
ACQSTATUS Input/output valid values	ACQUIRED, RELEASED									
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	21
CHANGEAGENT Input/output valid values	DREPAI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	23
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	22
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				9
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		20
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				13
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
NODELIST	CHAR	CPSM	10 24	No	DIFF	Node list				18
PROPERTYSET	CHAR	CPSM	8	Yes	DIFF	Property set name				15
SERVSTATUS	CVDAS	CPSM	4	No	LIKE	Pool service status	INSERVICE			16
SERVSTATUS Input/output valid values	INSERVICE, OUTSERVICE									

Table 517. FEPOODEF resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
TARGETLIST	CHAR	CPSM	256	No	DIFF	Target region list				19
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				10
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				11
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				12

Chapter 231. FEPRODEF Resource Table

A CICS Definition that describes a FEPI Property Set.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The following actions are supported:

INSTALL

Install a FEPI Property Set Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionFEPIPropertySet

Length

200

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3830

Table 518. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		RESGROUP(value)	No
CREATE		RESGROUP(value)	No
UPDATE		None	N/A
REMOVE		None	N/A
PERFORM SET	INSTALL	FORCEINS(YES, NO)	No
		MODE(value)	No
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No

Table 518. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
	ADDTGRP	RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
		RESGROUP(value)	Yes

Table 519. FEPRODEF FEEDBACK error codes		
Value	Code	Description
1	FEPRODEF_INV_DATA	Attribute data invalid
2	FEPRODEF_REC_NOT_FOUND	Requested resource not found
4	FEPRODEF_REC_EXISTS	Resource already exists
5	FEPRODEF_REC_CHANGED	Resource definition already changed
6	FEPRODEF_INV_RESTYPE	Invalid resource type
7	FEPRODEF_INV_VER	Invalid resource version
11	FEPRODEF_NON_MP	Maintenance point CMAS not available
12	FEPRODEF_INV_CONTEXT	Context not found
13	FEPRODEF_INCONSISTENT_SET	Inconsistent set condition
14	FEPRODEF_INV_RESGROUP	Resource group not found
21	FEPRODEF_INV_ACTION	Invalid action
22	FEPRODEF_INV_RECADDR	Invalid record address
23	FEPRODEF_INV_RECLEN	Invalid record length
24	FEPRODEF_DIFF_VERSION	Different version
25	FEPRODEF_EARLY_NAMELIST_END	Early name list end
26	FEPRODEF_INV_NAMELIST	Invalid name list
27	FEPRODEF_INV_NAME	Invalid name
28	FEPRODEF_INV_MINNAME	Invalid minor name
29	FEPRODEF_NOTIFY	Notify
30	FEPRODEF_PARTIAL_INSTALL	Partial install
31	FEPRODEF_NOTHING_INSTALLED	Nothing installed
32	FEPRODEF_NO_TARGETS	No targets
33	FEPRODEF_NO_RELATED	No related systems
34	FEPRODEF_INV_TSCOPE	Invalid target scope
35	FEPRODEF_INV_RSCOPE	Invalid related scope
36	FEPRODEF_INV_USAGE	Invalid usage
37	FEPRODEF_INV_MODE	Invalid mode
38	FEPRODEF_INV_STATECHK	Invalid state check

Table 519. FEPRODEF FEEDBACK error codes (continued)

Value	Code	Description
39	FEPRODEF_INV_FORCEINS	Invalid force install
40	FEPRODEF_INV_NOTIFY	Invalid notify
41	FEPRODEF_INV_OVERTYPE	Invalid over type
42	FEPRODEF_INV_OVRBLOCK	Invalid override block
43	FEPRODEF_INV_ORSTRING	Invalid override string
44	FEPRODEF_INV_STRNGTERM	Invalid string terminator
45	FEPRODEF_INV_EMBEDTERM	Invalid embedded terminator
46	FEPRODEF_INV_ATTRIBUTE	Invalid attribute
47	FEPRODEF_INV_LITERAL	Invalid literal
48	FEPRODEF_INV_ORSTGNA	Invalid override string
49	FEPRODEF_SCOPE_REQUIRED	Scope required
50	FEPRODEF_USAGE_CONFLICT	Usage conflict
51	FEPRODEF_NODEFS_SELECTED	No definitions selected
52	FEPRODEF_MORE_THAN_1_RELSYS	More than one related system
53	FEPRODEF_MISSING_RELSYSID	Missing related system identifier
54	FEPRODEF_SCOPE_CONFLICT	Scope conflict

Table 520. FEPRODEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
BEGINSESSION	CHAR	CPSM	4	No	DIFF	Begin-session transaction				15
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	30
CHANGEAGENT Input/ output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	32
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	31
CONTENTION	CVDAS	CPSM	4	No	LIKE	Contention resolution result	LOSE			16
CONTENTION Input/ output valid values	LOSE, WIN									
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				9
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		29
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				13
DEVICE	CVDAS	CPSM	4	No	LIKE	Device type	T3278M2			17
DEVICE Input/output valid values	T3278M2, T3278M3, T3278M4, T3278M5, T3279M2, T3279M3, T3279M4, T3279M5, TPS55M2, TPS55M3, TPS55M4, LUP									
ENDSESSION	CHAR	CPSM	4	No	DIFF	End-session transaction				18

Table 520. FEPRODEF resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
EXCEPTIONQ	CHAR	CPSM	4	No	DIFF	TDQ queue holding exceptions				19
FJOURNALNAME	CHAR	CPSM	8	No	DIFF	Journal name				28
FJOURNALNUM	CHAR	CPSM	4	No	DIFF	Journal number	0	0-99		20
FORMAT	CVDAS	CPSM	4	No	LIKE	Data format	FORMATTED			21
FORMAT Input/output valid values	FORMATTED, DATASTREAM, NOTAPPLIC									
INITIALDATA	CVDAS	CPSM	4	No	LIKE	Initial-inbound-data option	NOTINBOUND			22
INITIALDATA Input/output valid values	INBOUND, NOTINBOUND									
MAXLENGTH	CHAR	CPSM	8	No	DIFF	Maximum length of returned data	4096	128-1048576		23
MSGJRN	CVDAS	CPSM	4	No	LIKE	Journal status	NOMSGJRN			24
MSGJRN Input/output valid values	NOMSGJRN, INPUT, OUTPUT, INOUT									
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
STSN	CHAR	CPSM	4	No	DIFF	Set and test sequence numbers (STSN) transaction				25
UNSOLDATA	CHAR	CPSM	4	No	DIFF	Unsolicited data transaction				26
UNSOLDATAACK	CVDAS	CPSM	4	No	LIKE	Unsolicited data response	NEGATIVE			27
UNSOLDATAACK Input/output valid values	NEGATIVE, POSITIVE, NOTAPPLIC									
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				10
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				11
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				12

Chapter 232. FETRGDEF Resource Table

A CICS Definition that describes a FEPI Target.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The following actions are supported:

INSTALL

Install a FEPI Target Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionFEPITarget

Length

1160

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3828

Table 521. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		RESGROUP(value)	No
CREATE		RESGROUP(value)	No
UPDATE		None	N/A
REMOVE		None	N/A
PERFORM SET	INSTALL	FORCEINS(YES, NO)	No
		MODE(value)	No
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No

Table 521. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes

Table 522. FETRGDEF FEEDBACK error codes		
Value	Code	Description
1	FETRGDEF_INV_DATA	Attribute data invalid
2	FETRGDEF_REC_NOT_FOUND	Requested resource not found
4	FETRGDEF_REC_EXISTS	Resource already exists
5	FETRGDEF_REC_CHANGED	Resource definition already changed
6	FETRGDEF_INV_RESTYPE	Invalid resource type
7	FETRGDEF_INV_VER	Invalid resource version
11	FETRGDEF_NON_MP	Maintenance point CMAS not available
12	FETRGDEF_INV_CONTEXT	Context not found
13	FETRGDEF_INCONSISTENT_SET	Inconsistent set condition
14	FETRGDEF_INV_RESGROUP	Resource group not found
21	FETRGDEF_INV_ACTION	Invalid action
22	FETRGDEF_INV_RECADDR	Invalid record address
23	FETRGDEF_INV_RECLEN	Invalid record length
24	FETRGDEF_DIFF_VERSION	Different version
25	FETRGDEF_EARLY_NAMELIST_END	Early name list end
26	FETRGDEF_INV_NAMELIST	Invalid name list
27	FETRGDEF_INV_NAME	Invalid name
28	FETRGDEF_INV_MINNAME	Invalid minor name
29	FETRGDEF_NOTIFY	Notify
30	FETRGDEF_PARTIAL_INSTALL	Partial install
31	FETRGDEF_NOTHING_INSTALLED	Nothing installed
32	FETRGDEF_NO_TARGETS	No targets
33	FETRGDEF_NO_RELATED	No related systems
34	FETRGDEF_INV_TSCOPE	Invalid target scope
35	FETRGDEF_INV_RSCOPE	Invalid related scope
36	FETRGDEF_INV_USAGE	Invalid usage
37	FETRGDEF_INV_MODE	Invalid mode
38	FETRGDEF_INV_STATECHK	Invalid state check

Table 522. FETRGDEF FEEDBACK error codes (continued)

Value	Code	Description
39	FETRGDEF_INV_FORCEINS	Invalid force install
40	FETRGDEF_INV_NOTIFY	Invalid notify
41	FETRGDEF_INV_OVERTYPE	Invalid over type
42	FETRGDEF_INV_OVRBLOCK	Invalid override block
43	FETRGDEF_INV_ORSTRING	Invalid override string
44	FETRGDEF_INV_STRNGTERM	Invalid string terminator
45	FETRGDEF_INV_EMBEDTERM	Invalid embedded terminator
46	FETRGDEF_INV_ATTRIBUTE	Invalid attribute
47	FETRGDEF_INV_LITERAL	Invalid literal
48	FETRGDEF_INV_ORSTGNA	Invalid override string
49	FETRGDEF_SCOPE_REQUIRED	Scope required
50	FETRGDEF_USAGE_CONFLICT	Usage conflict
51	FETRGDEF_NODEFS_SELECTED	No definitions selected
52	FETRGDEF_MORE_THAN_1_RELSYS	More than one related system
53	FETRGDEF_MISSING_RELSYSID	Missing related system identifier
54	FETRGDEF_SCOPE_CONFLICT	Scope conflict

Table 523. FETRGDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
APPLLIST	CHAR	CPSM	512	No	DIFF	VTAM application IDs of back end systems				16
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	19
CHANGEAGENT Input/output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	21
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	20
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				9
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		18
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				13
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
SERVSTATUS	CVDAS	CPSM	4	No	LIKE	Service status	INSERVICE			15
SERVSTATUS Input/output valid values	INSERVICE, OUTSERVICE									
TARGETLIST	CHAR	CPSM	512	No	DIFF	Target list				17
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				10
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				11

Table 523. FETRGDEF resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				12

Chapter 233. FILEDEF Resource Table

A CICS Definition that describes the physical and operational characteristics of a file.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install a File Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionFile

Length

440

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3801

Table 524. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM	INSTALL SET	FORCEINS(YES, NO)	No
SET		MODE(value)	No

Table 524. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL, REMOTE)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 525. FILEDEF FEEDBACK error codes

Value	Code	Description
1	FILEDEF_INV_DATA	Attribute data invalid
2	FILEDEF_REC_NOT_FOUND	Requested resource not found
4	FILEDEF_REC_EXISTS	Resource already exists
5	FILEDEF_REC_CHANGED	Resource definition already changed
6	FILEDEF_INV_RESTYPE	Invalid resource type
7	FILEDEF_INV_VER	Invalid resource version
11	FILEDEF_NON_MP	Maintenance point CMAS not available
12	FILEDEF_INV_CONTEXT	Context not found
13	FILEDEF_INCONSISTENT_SET	Inconsistent set condition
14	FILEDEF_INV_RESGROUP	Resource group not found
21	FILEDEF_INV_ACTION	Invalid action
22	FILEDEF_INV_RECADDR	Invalid record address
23	FILEDEF_INV_RECLEN	Invalid record length
24	FILEDEF_DIFF_VERSION	Different version
25	FILEDEF_EARLY_NAMELIST_END	Early name list end
26	FILEDEF_INV_NAMELIST	Invalid name list
27	FILEDEF_INV_NAME	Invalid name
28	FILEDEF_INV_MINNAME	Invalid minor name
29	FILEDEF_NOTIFY	Notify
30	FILEDEF_PARTIAL_INSTALL	Partial install
31	FILEDEF_NOTHING_INSTALLED	Nothing installed

Table 525. FILEDEF FEEDBACK error codes (continued)

Value	Code	Description
32	FILEDEF_NO_TARGETS	No targets
33	FILEDEF_NO_RELATED	No related systems
34	FILEDEF_INV_TSCOPE	Invalid target scope
35	FILEDEF_INV_RSCOPE	Invalid related scope
36	FILEDEF_INV_USAGE	Invalid usage
37	FILEDEF_INV_MODE	Invalid mode
38	FILEDEF_INV_STATECHK	Invalid state check
39	FILEDEF_INV_FORCEINS	Invalid force install
40	FILEDEF_INV_NOTIFY	Invalid notify
41	FILEDEF_INV_OVERTYPE	Invalid override type
42	FILEDEF_INV_OVRBLOCK	Invalid override block
43	FILEDEF_INV_ORSTRING	Invalid override string
44	FILEDEF_INV_STRNGTERM	Invalid string term
45	FILEDEF_INV_EMBEDTERM	Invalid embedded terminator
46	FILEDEF_INV_ATTRIBUTE	Invalid attribute
47	FILEDEF_INV_LITERAL	Invalid literal
48	FILEDEF_INV_ORSTGNA	Invalid override string
49	FILEDEF_SCOPE_REQUIRED	Scope required
50	FILEDEF_USAGE_CONFLICT	Usage conflict
51	FILEDEF_NODEFS_SELECTED	No definitions selected
52	FILEDEF_MORE_THAN_1_RELSYS	More than one related system
53	FILEDEF_MISSING_RELSYSID	Missing related system identifier
54	FILEDEF_SCOPE_CONFLICT	Scope conflict
55	FILEDEF_INV_CSDGROUP	Invalid CSD group
56	FILEDEF_REC_NOT_REMOVED	Record not removed
57	FILEDEF_INV_RESOURCE	Invalid resource
58	FILEDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	FILEDEF_PARTIAL_ACTION	Partial action
60	FILEDEF_NOTHING_ACTIONED	Nothing actioned
61	FILEDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	FILEDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	FILEDEF_CSD_ERROR	CSD access error

Table 526. FILEDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
ACCESSMETH	CVDAS	CPSM	4	Yes	LIKE	File access method	VSAM		E330 +	47
ACCESSMETH Input/output valid values	ESDS, KSIDS, RRDS, KEYED, BDAM, VSAM, NOTAPPLIC									
ADD	EYUDA	CPSM	4	Yes	LIKE	Add option	NO			8
ADD Input/output valid values	YES, NO									
BACKUPTYPE	CVDAS	CPSM	4	Yes	LIKE	CICS VSAM file backup type	STATIC			13
BACKUPTYPE Input/output valid values	STATIC, DYNAMIC									
BASENAME	CHAR	CPSM	8	No	DIFF	Base data set name			E330 +	43
BROWSE	EYUDA	CPSM	4	Yes	LIKE	Browse option	NO			9
BROWSE Input/output valid values	YES, NO									
CATNAME	CHAR	CPSM	7	No	DIFF	VSAM catalog name			EALL	70
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	74
CHANGEAGENT Input/output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	76
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	75
CNTLINTRVAL	CHAR	CPSM	4	No	DIFF	Control interval size		512-4096	EALL	45
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				52
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	78
DATABUFFERS	CHAR	CPSM	8	No	DIFF	Number of data buffers	2	2-32767		14
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DELETE	EYUDA	CPSM	4	Yes	LIKE	Delete option	NO			10
DELETE Input/output valid values	YES, NO									
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		73
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				56
DISPOSITION	CVDAS	CPSM	4	Yes	LIKE	Disposition of file	SHARE			15
DISPOSITION Input/output valid values	SHARE, OLD									
DSNAME	CHAR	CPSM	44	No	DIFF	Data set name				51
DSNSHARING	EYUDA	CPSM	4	Yes	LIKE	VSAM data set name sharing	ALLREQS			16
DSNSHARING Input/output valid values	ALLREQS, MODIFYREQS									
EXTFILEMGR	CHAR	CPSM	4	No	DIFF	Use external file manager	N		EALL	63
EXTFILEMGR Input/output valid values	N, Y									
FILEACCESS	CHAR	CPSM	1	No	DIFF	Access method	R		EALL	60

Table 526. FILEDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
FILEACCESS Input/output valid values	O, R, U									
FILEENABLED	CHAR	CPSM	1	No	DIFF	File enabled status	Y		EALL	58
FILEENABLED Input/output valid values	N, Y, U									
FILEOPEN	CHAR	CPSM	1	No	DIFF	File open status	Y		EALL	57
FILEOPEN Input/output valid values	N, Y									
FILETYPE	CHAR	CPSM	1	No	DIFF	Data set type	K		EALL	59
FILETYPE Input/output valid values	A, E, K, R									
FSEGDEFNAME	CHAR	CPSM	8	No	DIFF	File segment definition name			EALL	64
FSEGDEFVER	CHAR	CPSM	2	No	DIFF	File segment definition version		1-15	EALL	65
FWDRECOVLOG	CHAR	CPSM	4	No	DIFF	Journal number used for forward recovery	NO	1-99		17
FWDRECOVLOG Input/output valid values	NO									
INDEXBUFFERS	CHAR	CPSM	8	No	DIFF	Number of index buffers	1	1-32767		18
JNLADD	EYUDA	CPSM	4	Yes	LIKE	Add operations recorded on journal	NONE			19
JNLADD Input/output valid values	NONE, AFTER, ALL, BEFORE									
JNLREAD	EYUDA	CPSM	4	Yes	LIKE	Read operations recorded on journal	NONE			20
JNLREAD Input/output valid values	NONE, ALL, READONLY, UPDATEONLY									
JNLSYNCREAD	EYUDA	CPSM	4	Yes	LIKE	Synchronous auto journaling for input	NO			21
JNLSYNCREAD Input/output valid values	YES, NO									
JNLSYNCWRITE	EYUDA	CPSM	4	Yes	LIKE	Synchronous auto journaling for output	YES			22
JNLSYNCWRITE Input/output valid values	YES, NO									
JNLUPDATE	EYUDA	CPSM	4	Yes	LIKE	Rewrite/delete operations recorded on journal	NO			23
JNLUPDATE Input/output valid values	YES, NO									
JOURNAL	CHAR	CPSM	4	No	DIFF	Journal number	NO	1-99		25
JOURNAL Input/output valid values	NO									
KEYLENGTH	CHAR	CPSM	4	No	DIFF	Key length		1-255		26
KEYNUMBER	CHAR	CPSM	2	No	DIFF	Key number		1-99	EALL	62
LOADTYPE	EYUDA	CPSM	4	No	LIKE	Load type	NO			69
LOADTYPE Input/output valid values	YES, NO									
LOG	EYUDA	CPSM	4	Yes	LIKE	Automatic logging	NO		E330 +	50
LOG Input/output valid values	YES, NO									

Table 526. FILEDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
LSRPOOLID	CHAR	CPSM	4	No	DIFF	LSR Pool number	1	1-255		27
LSRPOOLID Input/output valid values	NONE									
MAXNUMRECS	CHAR	CPSM	8	No	DIFF	Maximum number of records in data table	NOLIMIT	1-99999999		28
MAXNUMRECS Input/output valid values	NOLIMIT									
MAXRECORDLEN	CHAR	CPSM	6	No	DIFF	Maximum record length		1-32767	EALL	61
MINRECORDLEN	CHAR	CPSM	4	No	DIFF	Minimum record length		1-4090	EALL	44
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
NSRGROUP	CHAR	CPSM	8	No	DIFF	Non-shared resources (NSR) group name				29
OPENTIME	EYUDA	CPSM	4	Yes	LIKE	File open time	FIRSTREF			30
OPENTIME Input/output valid values	FIRSTREF, STARTUP									
PASSWORD	HIDCHAR	CPSM	8	No	DIFF	User access password				31
POOLNAME	CHAR	CPSM	8	No	DIFF	Coupling facility data table (CFDT) pool name				66
READ	EYUDA	CPSM	4	Yes	LIKE	Read option	YES			11
READ Input/output valid values	YES, NO									
READINTEG	CVDAS	CPSM	4	Yes	LIKE	Default level of read integrity	UNCOMMITTED			32
READINTEG Input/output valid values	UNCOMMITTED, CONSISTENT, REPEATABLE									
RECORDFORMAT	CVDAS	CPSM	4	Yes	LIKE	Record format	VARIABLE			33
RECORDFORMAT Input/output valid values	VARIABLE, FIXED									
RECORDSIZE	CHAR	CPSM	8	No	DIFF	Record size		1-32767		34
RECOVERY	EYUDA	CPSM	4	Yes	LIKE	Type of recovery	NONE			35
RECOVERY Input/output valid values	NONE, ALL, BACKOUTONLY									
REMOTENAME	CHAR	CPSM	8	No	DIFF	Remote file name				36
REMOTESYSTEM	CHAR	CPSM	4	No	DIFF	Remote system name				37
RLSACCESS	EYUDA	CPSM	4	Yes	LIKE	Record level sharing (RLS) file access mode	NO			38
RLSACCESS Input/output valid values	YES, NO									
RSL	CHAR	CPSM	8	No	DIFF	Resource security value	0	0-24	E330 +	46
RSL Input/output valid values	PUBLIC									
SHR4ACCESS	EYUDA	CPSM	4	No	LIKE	VSAM share access	KEY		EALL	72
SHR4ACCESS Input/output valid values	KEY, RBA									
STATUS	CVDAS	CPSM	4	Yes	LIKE	Initial status	ENABLED			39
STATUS Input/output valid values	ENABLED, DISABLED, UNENABLED									
STRINGS	CHAR	CPSM	4	No	DIFF	Maximum concurrent requests against file	1	1-255		40

Table 526. FILEDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
TABLE	EYUDA	CPSM	4	Yes	LIKE	Data table type	NO			41
TABLE Input/output valid values	NO, CICS, USER, CF									
TABlename	CHAR	CPSM	8	No	DIFF	Table name				67
UPDATE	EYUDA	CPSM	4	Yes	LIKE	Update option	NO			12
UPDATE Input/output valid values	YES, NO									
UPdatEMODEL	CVDAS	CPSM	4	No	LIKE	Update model	LOCKING			68
UPdatEMODEL Input/output valid values	LOCKING, CONTENTION									
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				53
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				54
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				55

Chapter 234. FILINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a file definition (FILEDEF) in a resource group (RESGROUP). A FILEDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is FILEGROUP.

The **Secondary** key field for this resource class is FILENAME.

The **Tertiary** key field for this resource class is FILEVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6146

Table 527. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 528. FILINGRP FEEDBACK error codes		
Value	Code	Description
1	FILINGRP_INV_DATA	Attribute data invalid
2	FILINGRP_REC_NOT_FOUND	Requested resource not found
4	FILINGRP_REC_EXISTS	Resource already exists
6	FILINGRP_INV_RESTYPE	Invalid resource type
7	FILINGRP_INV_VER	Invalid resource version
11	FILINGRP_NON_MP	Maintenance point CMAS not available
12	FILINGRP_INV_CONTEXT	Context not found

Table 528. *FILINGRP FEEDBACK* error codes (continued)

Value	Code	Description
21	FILINGRP_INCONSISTENT_SET	Inconsistent set
22	FILINGRP_DIFF_VERSION	Different version
23	FILINGRP_INV_NAME	Invalid name
24	FILINGRP_INV_MINNAME	Invalid minor name

Table 529. *FILINGRP* resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
FILEGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
FILENAME-2	CHAR	CPSM	8	Yes	DIFF	File definition name	6
FILEVER-3	BINARY	CPSM	1	Yes	AVG	File definition version	7

Chapter 235. FNOINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a FEPI Node definition (FENODDEF) in a resource group (RESGROUP). A FENODDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is FNOGROUP.

The **Secondary** key field for this resource class is FNONAME.

The **Tertiary** key field for this resource class is FNOVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6174

Table 530. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 531. FNOINGRP FEEDBACK error codes		
Value	Code	Description
1	FNOINGRP_INV_DATA	Attribute data invalid
2	FNOINGRP_REC_NOT_FOUND	Requested resource not found
4	FNOINGRP_REC_EXISTS	Resource already exists
6	FNOINGRP_INV_RESTYPE	Invalid resource type
7	FNOINGRP_INV_VER	Invalid resource version
11	FNOINGRP_NON_MP	Maintenance point CMAS not available
12	FNOINGRP_INV_CONTEXT	Context not found

Table 531. FNOINGRP FEEDBACK error codes (continued)

Value	Code	Description
21	FNOINGRP_INCONSISTENT_SET	Inconsistent set
22	FNOINGRP_DIFF_VERSION	Different version
23	FNOINGRP_INV_NAME	Invalid name
24	FNOINGRP_INV_MINNAME	Invalid minor name

Table 532. FNOINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
FNOGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
FNONAME-2	CHAR	CPSM	8	Yes	DIFF	FEPI node definition name	6
FNOVER-3	BINARY	CPSM	1	Yes	AVG	FEPI node definition version	7

Chapter 236. FPOINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a FEPI Pool definition (FEPOODEF) in a resource group (RESGROUP). A FEPOODEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is FPOGROUP.

The **Secondary** key field for this resource class is FPONAME.

The **Tertiary** key field for this resource class is FPOVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6172

Table 533. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 534. FPOINGRP FEEDBACK error codes		
Value	Code	Description
1	FPOINGRP_INV_DATA	Attribute data invalid
2	FPOINGRP_REC_NOT_FOUND	Requested resource not found
4	FPOINGRP_REC_EXISTS	Resource already exists
6	FPOINGRP_INV_RESTYPE	Invalid resource type
7	FPOINGRP_INV_VER	Invalid resource version
11	FPOINGRP_NON_MP	Maintenance point CMAS not available
12	FPOINGRP_INV_CONTEXT	Context not found

Table 534. FPOINGRP FEEDBACK error codes (continued)

Value	Code	Description
21	FPOINGRP_INCONSISTENT_SET	Inconsistent set
22	FPOINGRP_DIFF_VERSION	Different version
23	FPOINGRP_INV_NAME	Invalid name
24	FPOINGRP_INV_MINNAME	Invalid minor name

Table 535. FPOINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
FPOGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
FPONAME-2	CHAR	CPSM	8	Yes	DIFF	FEPI pool definition name	6
FPOVER-3	BINARY	CPSM	1	Yes	AVG	FEPI pool definition version	7

Chapter 237. FPRINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a FEPI Property Set definition (FEPRODEF) in a resource group (RESGROUP). A FEPRODEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is FPRGROUP.

The **Secondary** key field for this resource class is FPRNAME.

The **Tertiary** key field for this resource class is FPRVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6175

Table 536. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 537. FPRINGRP FEEDBACK error codes

Value	Code	Description
1	FPRINGRP_INV_DATA	Attribute data invalid
2	FPRINGRP_REC_NOT_FOUND	Requested resource not found
4	FPRINGRP_REC_EXISTS	Resource already exists
6	FPRINGRP_INV_RESTYPE	Invalid resource type
7	FPRINGRP_INV_VER	Invalid resource version
11	FPRINGRP_NON_MP	Maintenance point CMAS not available

Table 537. FPRINGRP FEEDBACK error codes (continued)

Value	Code	Description
12	FPRINGRP_INV_CONTEXT	Context not found
21	FPRINGRP_INCONSISTENT_SET	Inconsistent set
22	FPRINGRP_DIFF_VERSION	Different version
23	FPRINGRP_INV_NAME	Invalid name
24	FPRINGRP_INV_MINNAME	Invalid minor name

Table 538. FPRINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
FPRGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
FPRNAME-2	CHAR	CPSM	8	Yes	DIFF	FEPI property set definition name	6
FPRVER-3	BINARY	CPSM	1	Yes	AVG	FEPI property set definition version	7

Chapter 238. FSEGDEF Resource Table

A CICS Definition that describes the key segments associated with a CICS for OS/2 file.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DFVER.

External resource name

Length

568

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3820

Table 539. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		RESGROUP(value)	No
CREATE		RESGROUP(value)	No
UPDATE		None	N/A
REMOVE		None	N/A
PERFORM	ADDTGRP	RESGROUP(value)	Yes
SET			

Table 540. FSEGDEF FEEDBACK error codes

Value	Code	Description
1	FSEGDEF_INV_DATA	Attribute data invalid
2	FSEGDEF_REC_NOT_FOUND	Requested resource not found
4	FSEGDEF_REC_EXISTS	Resource already exists
5	FSEGDEF_REC_CHANGED	Resource definition already changed
6	FSEGDEF_INV_RESTYPE	Invalid resource type
7	FSEGDEF_INV_VER	Invalid resource version

Table 540. FSEGDEF FEEDBACK error codes (continued)

Value	Code	Description
11	FSEGDEF_NON_MP	Maintenance point CMAS not available
12	FSEGDEF_INV_CONTEXT	Context not found
13	FSEGDEF_INCONSISTENT_SET	Inconsistent set condition
14	FSEGDEF_INV_RESGROUP	Resource group not found
21	FSEGDEF_INV_ACTION	Invalid action
22	FSEGDEF_INV_RECADDR	Invalid record address
23	FSEGDEF_INV_RECLEN	Invalid record length
24	FSEGDEF_DIFF_VERSION	Different version
25	FSEGDEF_EARLY_NAMELIST_END	Early name list end
26	FSEGDEF_INV_NAMELIST	Invalid name list
27	FSEGDEF_INV_NAME	Invalid name
28	FSEGDEF_INV_MINNAME	Invalid minor name

Table 541. FSEGDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
ALTKEY01	CHAR	CPSM	1	No	DIFF	Key segment 01 uses EBCDIC sort sequence			EALL	15
ALTKEY01 Input/output valid values	N, Y									
ALTKEY02	CHAR	CPSM	1	No	DIFF	Key segment 02 uses EBCDIC sort sequence			EALL	25
ALTKEY02 Input/output valid values	N, Y									
ALTKEY03	CHAR	CPSM	1	No	DIFF	Key segment 03 uses EBCDIC sort sequence			EALL	35
ALTKEY03 Input/output valid values	N, Y									
ALTKEY04	CHAR	CPSM	1	No	DIFF	Key segment 04 uses EBCDIC sort sequence			EALL	45
ALTKEY04 Input/output valid values	N, Y									
ALTKEY05	CHAR	CPSM	1	No	DIFF	Key segment 05 uses EBCDIC sort sequence			EALL	55
ALTKEY05 Input/output valid values	N, Y									
ALTKEY06	CHAR	CPSM	1	No	DIFF	Key segment 06 uses EBCDIC sort sequence			EALL	65
ALTKEY06 Input/output valid values	N, Y									
ALTKEY07	CHAR	CPSM	1	No	DIFF	Key segment 07 uses EBCDIC sort sequence			EALL	75
ALTKEY07 Input/output valid values	N, Y									
ALTKEY08	CHAR	CPSM	1	No	DIFF	Key segment 08 uses EBCDIC sort sequence			EALL	85
ALTKEY08 Input/output valid values	N, Y									

Table 541. FSEGDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
ALTKEY09	CHAR	CPSM	1	No	DIFF	Key segment 09 uses EBCDIC sort sequence			EALL	95
ALTKEY09 Input/output valid values	N, Y									
ALTKEY10	CHAR	CPSM	1	No	DIFF	Key segment 10 uses EBCDIC sort sequence			EALL	105
ALTKEY10 Input/output valid values	N, Y									
ALTKEY11	CHAR	CPSM	1	No	DIFF	Key segment 11 uses EBCDIC sort sequence			EALL	115
ALTKEY11 Input/output valid values	N, Y									
ALTKEY12	CHAR	CPSM	1	No	DIFF	Key segment 12 uses EBCDIC sort sequence			EALL	125
ALTKEY12 Input/output valid values	N, Y									
ALTKEY13	CHAR	CPSM	1	No	DIFF	Key segment 13 uses EBCDIC sort sequence			EALL	135
ALTKEY13 Input/output valid values	N, Y									
ALTKEY14	CHAR	CPSM	1	No	DIFF	Key segment 14 uses EBCDIC sort sequence			EALL	145
ALTKEY14 Input/output valid values	N, Y									
ALTKEY15	CHAR	CPSM	1	No	DIFF	Key segment 15 uses EBCDIC sort sequence			EALL	155
ALTKEY15 Input/output valid values	N, Y									
ALTKEY16	CHAR	CPSM	1	No	DIFF	Key segment 16 uses EBCDIC sort sequence			EALL	165
ALTKEY16 Input/output valid values	N, Y									
ALTKEY17	CHAR	CPSM	1	No	DIFF	Key segment 17 uses EBCDIC sort sequence			EALL	175
ALTKEY17 Input/output valid values	N, Y									
ALTKEY18	CHAR	CPSM	1	No	DIFF	Key segment 18 uses EBCDIC sort sequence			EALL	185
ALTKEY18 Input/output valid values	N, Y									
ALTKEY19	CHAR	CPSM	1	No	DIFF	Key segment 19 uses EBCDIC sort sequence			EALL	195
ALTKEY19 Input/output valid values	N, Y									
ALTKEY20	CHAR	CPSM	1	No	DIFF	Key segment 20 uses EBCDIC sort sequence			EALL	205
ALTKEY20 Input/output valid values	N, Y									
ALTKEY21	CHAR	CPSM	1	No	DIFF	Key segment 21 uses EBCDIC sort sequence			EALL	215
ALTKEY21 Input/output valid values	N, Y									
ALTKEY22	CHAR	CPSM	1	No	DIFF	Key segment 22 uses EBCDIC sort sequence			EALL	225

Table 541. FSEGDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
ALTKEY22 Input/output valid values	N, Y									
ALTKEY23	CHAR	CPSM	1	No	DIFF	Key segment 23 uses EBCDIC sort sequence			EALL	235
ALTKEY23 Input/output valid values	N, Y									
ALTKEY24	CHAR	CPSM	1	No	DIFF	Key segment 24 uses EBCDIC sort sequence			EALL	245
ALTKEY24 Input/output valid values	N, Y									
BINKEY01	CHAR	CPSM	1	No	DIFF	Key segment 01 is binary			EALL	12
BINKEY01 Input/output valid values	N, Y									
BINKEY02	CHAR	CPSM	1	No	DIFF	Key segment 02 is binary			EALL	22
BINKEY02 Input/output valid values	N, Y									
BINKEY03	CHAR	CPSM	1	No	DIFF	Key segment 03 is binary			EALL	32
BINKEY03 Input/output valid values	N, Y									
BINKEY04	CHAR	CPSM	1	No	DIFF	Key segment 04 is binary			EALL	42
BINKEY04 Input/output valid values	N, Y									
BINKEY05	CHAR	CPSM	1	No	DIFF	Key segment 05 is binary			EALL	52
BINKEY05 Input/output valid values	N, Y									
BINKEY06	CHAR	CPSM	1	No	DIFF	Key segment 06 is binary			EALL	62
BINKEY06 Input/output valid values	N, Y									
BINKEY07	CHAR	CPSM	1	No	DIFF	Key segment 07 is binary			EALL	72
BINKEY07 Input/output valid values	N, Y									
BINKEY08	CHAR	CPSM	1	No	DIFF	Key segment 08 is binary			EALL	82
BINKEY08 Input/output valid values	N, Y									
BINKEY09	CHAR	CPSM	1	No	DIFF	Key segment 09 is binary			EALL	92
BINKEY09 Input/output valid values	N, Y									
BINKEY10	CHAR	CPSM	1	No	DIFF	Key segment 10 is binary			EALL	102
BINKEY10 Input/output valid values	N, Y									
BINKEY11	CHAR	CPSM	1	No	DIFF	Key segment 11 is binary			EALL	112
BINKEY11 Input/output valid values	N, Y									
BINKEY12	CHAR	CPSM	1	No	DIFF	Key segment 12 is binary			EALL	122
BINKEY12 Input/output valid values	N, Y									
BINKEY13	CHAR	CPSM	1	No	DIFF	Key segment 13 is binary			EALL	132
BINKEY13 Input/output valid values	N, Y									
BINKEY14	CHAR	CPSM	1	No	DIFF	Key segment 14 is binary			EALL	142

Table 541. FSEGDEF resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
BINKEY14 Input/output valid values	N, Y									
BINKEY15	CHAR	CPSM	1	No	DIFF	Key segment 15 is binary			EALL	152
BINKEY15 Input/output valid values	N, Y									
BINKEY16	CHAR	CPSM	1	No	DIFF	Key segment 16 is binary			EALL	162
BINKEY16 Input/output valid values	N, Y									
BINKEY17	CHAR	CPSM	1	No	DIFF	Key segment 17 is binary			EALL	172
BINKEY17 Input/output valid values	N, Y									
BINKEY18	CHAR	CPSM	1	No	DIFF	Key segment 18 is binary			EALL	182
BINKEY18 Input/output valid values	N, Y									
BINKEY19	CHAR	CPSM	1	No	DIFF	Key segment 19 is binary			EALL	192
BINKEY19 Input/output valid values	N, Y									
BINKEY20	CHAR	CPSM	1	No	DIFF	Key segment 20 is binary			EALL	202
BINKEY20 Input/output valid values	N, Y									
BINKEY21	CHAR	CPSM	1	No	DIFF	Key segment 21 is binary			EALL	212
BINKEY21 Input/output valid values	N, Y									
BINKEY22	CHAR	CPSM	1	No	DIFF	Key segment 22 is binary			EALL	222
BINKEY22 Input/output valid values	N, Y									
BINKEY23	CHAR	CPSM	1	No	DIFF	Key segment 23 is binary			EALL	232
BINKEY23 Input/output valid values	N, Y									
BINKEY24	CHAR	CPSM	1	No	DIFF	Key segment 24 is binary			EALL	242
BINKEY24 Input/output valid values	N, Y									
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	254
CHANGEAGENT Input/output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	256
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	255
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Definition create time				248
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Definition version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		253
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Definition description				252
DUPKEY01	CHAR	CPSM	1	No	DIFF	Key segment 01 allows duplicate keys			EALL	10
DUPKEY01 Input/output valid values	N, Y									

Table 541. FSEGDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
DUPKEY02	CHAR	CPSM	1	No	DIFF	Key segment 02 allows duplicate keys			EALL	20
DUPKEY02 Input/output valid values	N, Y									
DUPKEY03	CHAR	CPSM	1	No	DIFF	Key segment 03 allows duplicate keys			EALL	30
DUPKEY03 Input/output valid values	N, Y									
DUPKEY04	CHAR	CPSM	1	No	DIFF	Key segment 04 allows duplicate keys			EALL	40
DUPKEY04 Input/output valid values	N, Y									
DUPKEY05	CHAR	CPSM	1	No	DIFF	Key segment 05 allows duplicate keys			EALL	50
DUPKEY05 Input/output valid values	N, Y									
DUPKEY06	CHAR	CPSM	1	No	DIFF	Key segment 06 allows duplicate keys			EALL	60
DUPKEY06 Input/output valid values	N, Y									
DUPKEY07	CHAR	CPSM	1	No	DIFF	Key segment 07 allows duplicate keys			EALL	70
DUPKEY07 Input/output valid values	N, Y									
DUPKEY08	CHAR	CPSM	1	No	DIFF	Key segment 08 allows duplicate keys			EALL	80
DUPKEY08 Input/output valid values	N, Y									
DUPKEY09	CHAR	CPSM	1	No	DIFF	Key segment 09 allows duplicate keys			EALL	90
DUPKEY09 Input/output valid values	N, Y									
DUPKEY10	CHAR	CPSM	1	No	DIFF	Key segment 10 allows duplicate keys			EALL	100
DUPKEY10 Input/output valid values	N, Y									
DUPKEY11	CHAR	CPSM	1	No	DIFF	Key segment 11 allows duplicate keys			EALL	110
DUPKEY11 Input/output valid values	N, Y									
DUPKEY12	CHAR	CPSM	1	No	DIFF	Key segment 12 allows duplicate keys			EALL	120
DUPKEY12 Input/output valid values	N, Y									
DUPKEY13	CHAR	CPSM	1	No	DIFF	Key segment 13 allows duplicate keys			EALL	130
DUPKEY13 Input/output valid values	N, Y									
DUPKEY14	CHAR	CPSM	1	No	DIFF	Key segment 14 allows duplicate keys			EALL	140
DUPKEY14 Input/output valid values	N, Y									
DUPKEY15	CHAR	CPSM	1	No	DIFF	Key segment 15 allows duplicate keys			EALL	150

Table 541. FSEGDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
DUPKEY15 Input/output valid values	N, Y									
DUPKEY16	CHAR	CPSM	1	No	DIFF	Key segment 16 allows duplicate keys			EALL	160
DUPKEY16 Input/output valid values	N, Y									
DUPKEY17	CHAR	CPSM	1	No	DIFF	Key segment 17 allows duplicate keys			EALL	170
DUPKEY17 Input/output valid values	N, Y									
DUPKEY18	CHAR	CPSM	1	No	DIFF	Key segment 18 allows duplicate keys			EALL	180
DUPKEY18 Input/output valid values	N, Y									
DUPKEY19	CHAR	CPSM	1	No	DIFF	Key segment 19 allows duplicate keys			EALL	190
DUPKEY19 Input/output valid values	N, Y									
DUPKEY20	CHAR	CPSM	1	No	DIFF	Key segment 20 allows duplicate keys			EALL	200
DUPKEY20 Input/output valid values	N, Y									
DUPKEY21	CHAR	CPSM	1	No	DIFF	Key segment 21 allows duplicate keys			EALL	210
DUPKEY21 Input/output valid values	N, Y									
DUPKEY22	CHAR	CPSM	1	No	DIFF	Key segment 22 allows duplicate keys			EALL	220
DUPKEY22 Input/output valid values	N, Y									
DUPKEY23	CHAR	CPSM	1	No	DIFF	Key segment 23 allows duplicate keys			EALL	230
DUPKEY23 Input/output valid values	N, Y									
DUPKEY24	CHAR	CPSM	1	No	DIFF	Key segment 24 allows duplicate keys			EALL	240
DUPKEY24 Input/output valid values	N, Y									
LENKEY01	CHAR	CPSM	4	No	DIFF	Key segment 01 length		0-999	EALL	9
LENKEY02	CHAR	CPSM	4	No	DIFF	Key segment 02 length		0-999	EALL	19
LENKEY03	CHAR	CPSM	4	No	DIFF	Key segment 03 length		0-999	EALL	29
LENKEY04	CHAR	CPSM	4	No	DIFF	Key segment 04 length		0-999	EALL	39
LENKEY05	CHAR	CPSM	4	No	DIFF	Key segment 05 length		0-999	EALL	49
LENKEY06	CHAR	CPSM	4	No	DIFF	Key segment 06 length		0-999	EALL	59
LENKEY07	CHAR	CPSM	4	No	DIFF	Key segment 07 length		0-999	EALL	69
LENKEY08	CHAR	CPSM	4	No	DIFF	Key segment 08 length		0-999	EALL	79
LENKEY09	CHAR	CPSM	4	No	DIFF	Key segment 09 length		0-999	EALL	89
LENKEY10	CHAR	CPSM	4	No	DIFF	Key segment 10 length		0-999	EALL	99
LENKEY11	CHAR	CPSM	4	No	DIFF	Key segment 11 length		0-999	EALL	109
LENKEY12	CHAR	CPSM	4	No	DIFF	Key segment 12 length		0-999	EALL	119

Table 541. FSEGDEF resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
LENKEY13	CHAR	CPSM	4	No	DIFF	Key segment 13 length		0-999	EALL	129
LENKEY14	CHAR	CPSM	4	No	DIFF	Key segment 14 length		0-999	EALL	139
LENKEY15	CHAR	CPSM	4	No	DIFF	Key segment 15 length		0-999	EALL	149
LENKEY16	CHAR	CPSM	4	No	DIFF	Key segment 16 length		0-999	EALL	159
LENKEY17	CHAR	CPSM	4	No	DIFF	Key segment 17 length		0-999	EALL	169
LENKEY18	CHAR	CPSM	4	No	DIFF	Key segment 18 length		0-999	EALL	179
LENKEY19	CHAR	CPSM	4	No	DIFF	Key segment 19 length		0-999	EALL	189
LENKEY20	CHAR	CPSM	4	No	DIFF	Key segment 20 length		0-999	EALL	199
LENKEY21	CHAR	CPSM	4	No	DIFF	Key segment 21 length		0-999	EALL	209
LENKEY22	CHAR	CPSM	4	No	DIFF	Key segment 22 length		0-999	EALL	219
LENKEY23	CHAR	CPSM	4	No	DIFF	Key segment 23 length		0-999	EALL	229
LENKEY24	CHAR	CPSM	4	No	DIFF	Key segment 24 length		0-999	EALL	239
MODKEY01	CHAR	CPSM	1	No	DIFF	Key segment 01 modifiable			EALL	11
MODKEY01 Input/output valid values	N, Y									
MODKEY02	CHAR	CPSM	1	No	DIFF	Key segment 02 modifiable			EALL	21
MODKEY02 Input/output valid values	N, Y									
MODKEY03	CHAR	CPSM	1	No	DIFF	Key segment 03 modifiable			EALL	31
MODKEY03 Input/output valid values	N, Y									
MODKEY04	CHAR	CPSM	1	No	DIFF	Key segment 04 modifiable			EALL	41
MODKEY04 Input/output valid values	N, Y									
MODKEY05	CHAR	CPSM	1	No	DIFF	Key segment 05 modifiable			EALL	51
MODKEY05 Input/output valid values	N, Y									
MODKEY06	CHAR	CPSM	1	No	DIFF	Key segment 06 modifiable			EALL	61
MODKEY06 Input/output valid values	N, Y									
MODKEY07	CHAR	CPSM	1	No	DIFF	Key segment 07 modifiable			EALL	71
MODKEY07 Input/output valid values	N, Y									
MODKEY08	CHAR	CPSM	1	No	DIFF	Key segment 08 modifiable			EALL	81
MODKEY08 Input/output valid values	N, Y									
MODKEY09	CHAR	CPSM	1	No	DIFF	Key segment 09 modifiable			EALL	91
MODKEY09 Input/output valid values	N, Y									
MODKEY10	CHAR	CPSM	1	No	DIFF	Key segment 10 modifiable			EALL	101

Table 541. FSEGDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
MODKEY10 Input/output valid values	N, Y									
MODKEY11	CHAR	CPSM	1	No	DIFF	Key segment 11 modifiable			EALL	111
MODKEY11 Input/output valid values	N, Y									
MODKEY12	CHAR	CPSM	1	No	DIFF	Key segment 12 modifiable			EALL	121
MODKEY12 Input/output valid values	N, Y									
MODKEY13	CHAR	CPSM	1	No	DIFF	Key segment 13 modifiable			EALL	131
MODKEY13 Input/output valid values	N, Y									
MODKEY14	CHAR	CPSM	1	No	DIFF	Key segment 14 modifiable			EALL	141
MODKEY14 Input/output valid values	N, Y									
MODKEY15	CHAR	CPSM	1	No	DIFF	Key segment 15 modifiable			EALL	151
MODKEY15 Input/output valid values	N, Y									
MODKEY16	CHAR	CPSM	1	No	DIFF	Key segment 16 modifiable			EALL	161
MODKEY16 Input/output valid values	N, Y									
MODKEY17	CHAR	CPSM	1	No	DIFF	Key segment 17 modifiable			EALL	171
MODKEY17 Input/output valid values	N, Y									
MODKEY18	CHAR	CPSM	1	No	DIFF	Key segment 18 modifiable			EALL	181
MODKEY18 Input/output valid values	N, Y									
MODKEY19	CHAR	CPSM	1	No	DIFF	Key segment 19 modifiable			EALL	191
MODKEY19 Input/output valid values	N, Y									
MODKEY20	CHAR	CPSM	1	No	DIFF	Key segment 20 modifiable			EALL	201
MODKEY20 Input/output valid values	N, Y									
MODKEY21	CHAR	CPSM	1	No	DIFF	Key segment 21 modifiable			EALL	211
MODKEY21 Input/output valid values	N, Y									
MODKEY22	CHAR	CPSM	1	No	DIFF	Key segment 22 modifiable			EALL	221
MODKEY22 Input/output valid values	N, Y									
MODKEY23	CHAR	CPSM	1	No	DIFF	Key segment 23 modifiable			EALL	231
MODKEY23 Input/output valid values	N, Y									

Table 541. FSEGDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
MODKEY24	CHAR	CPSM	1	No	DIFF	Key segment 24 modifiable			EALL	241
MODKEY24 Input/output valid values	N, Y									
NAME-1	CHAR	CPSM	8	Yes	DIFF	File key segment definition name				7
NULKEY01	CHAR	CPSM	1	No	DIFF	Key segment 01 allows null characters			EALL	13
NULKEY01 Input/output valid values	N, Y									
NULKEY02	CHAR	CPSM	1	No	DIFF	Key segment 02 allows null characters			EALL	23
NULKEY02 Input/output valid values	N, Y									
NULKEY03	CHAR	CPSM	1	No	DIFF	Key segment 03 allows null characters			EALL	33
NULKEY03 Input/output valid values	N, Y									
NULKEY04	CHAR	CPSM	1	No	DIFF	Key segment 04 allows null characters			EALL	43
NULKEY04 Input/output valid values	N, Y									
NULKEY05	CHAR	CPSM	1	No	DIFF	Key segment 05 allows null characters			EALL	53
NULKEY05 Input/output valid values	N, Y									
NULKEY06	CHAR	CPSM	1	No	DIFF	Key segment 06 allows null characters			EALL	63
NULKEY06 Input/output valid values	N, Y									
NULKEY07	CHAR	CPSM	1	No	DIFF	Key segment 07 allows null characters			EALL	73
NULKEY07 Input/output valid values	N, Y									
NULKEY08	CHAR	CPSM	1	No	DIFF	Key segment 08 allows null characters			EALL	83
NULKEY08 Input/output valid values	N, Y									
NULKEY09	CHAR	CPSM	1	No	DIFF	Key segment 09 allows null characters			EALL	93
NULKEY09 Input/output valid values	N, Y									
NULKEY10	CHAR	CPSM	1	No	DIFF	Key segment 10 allows null characters			EALL	103
NULKEY10 Input/output valid values	N, Y									
NULKEY11	CHAR	CPSM	1	No	DIFF	Key segment 11 allows null characters			EALL	113
NULKEY11 Input/output valid values	N, Y									
NULKEY12	CHAR	CPSM	1	No	DIFF	Key segment 12 allows null characters			EALL	123
NULKEY12 Input/output valid values	N, Y									

Table 541. FSEGDEF resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
NULKEY13	CHAR	CPSM	1	No	DIFF	Key segment 13 allows null characters			EALL	133
NULKEY13 Input/output valid values	N, Y									
NULKEY14	CHAR	CPSM	1	No	DIFF	Key segment 14 allows null characters			EALL	143
NULKEY14 Input/output valid values	N, Y									
NULKEY15	CHAR	CPSM	1	No	DIFF	Key segment 15 allows null characters			EALL	153
NULKEY15 Input/output valid values	N, Y									
NULKEY16	CHAR	CPSM	1	No	DIFF	Key segment 16 allows null characters			EALL	163
NULKEY16 Input/output valid values	N, Y									
NULKEY17	CHAR	CPSM	1	No	DIFF	Key segment 17 allows null characters			EALL	173
NULKEY17 Input/output valid values	N, Y									
NULKEY18	CHAR	CPSM	1	No	DIFF	Key segment 18 allows null characters			EALL	183
NULKEY18 Input/output valid values	N, Y									
NULKEY19	CHAR	CPSM	1	No	DIFF	Key segment 19 allows null characters			EALL	193
NULKEY19 Input/output valid values	N, Y									
NULKEY20	CHAR	CPSM	1	No	DIFF	Key segment 20 allows null characters			EALL	203
NULKEY20 Input/output valid values	N, Y									
NULKEY21	CHAR	CPSM	1	No	DIFF	Key segment 21 allows null characters			EALL	213
NULKEY21 Input/output valid values	N, Y									
NULKEY22	CHAR	CPSM	1	No	DIFF	Key segment 22 allows null characters			EALL	223
NULKEY22 Input/output valid values	N, Y									
NULKEY23	CHAR	CPSM	1	No	DIFF	Key segment 23 allows null characters			EALL	233
NULKEY23 Input/output valid values	N, Y									
NULKEY24	CHAR	CPSM	1	No	DIFF	Key segment 24 allows null characters			EALL	243
NULKEY24 Input/output valid values	N, Y									
NUMNLK01	CHAR	CPSM	4	No	DIFF	Key segment 01 null key number		0-255	EALL	16
NUMNLK02	CHAR	CPSM	4	No	DIFF	Key segment 02 null key number		0-255	EALL	26
NUMNLK03	CHAR	CPSM	4	No	DIFF	Key segment 03 null key number		0-255	EALL	36

Table 541. FSEGDEF resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
NUMNLK04	CHAR	CPSM	4	No	DIFF	Key segment 04 null key number		0-255	EALL	46
NUMNLK05	CHAR	CPSM	4	No	DIFF	Key segment 05 null key number		0-255	EALL	56
NUMNLK06	CHAR	CPSM	4	No	DIFF	Key segment 06 null key number		0-255	EALL	66
NUMNLK07	CHAR	CPSM	4	No	DIFF	Key segment 07 null key number		0-255	EALL	76
NUMNLK08	CHAR	CPSM	4	No	DIFF	Key segment 08 null key number		0-255	EALL	86
NUMNLK09	CHAR	CPSM	4	No	DIFF	Key segment 09 null key number		0-255	EALL	96
NUMNLK10	CHAR	CPSM	4	No	DIFF	Key segment 10 null key number		0-255	EALL	106
NUMNLK11	CHAR	CPSM	4	No	DIFF	Key segment 11 null key number		0-255	EALL	116
NUMNLK12	CHAR	CPSM	4	No	DIFF	Key segment 12 null key number		0-255	EALL	126
NUMNLK13	CHAR	CPSM	4	No	DIFF	Key segment 13 null key number		0-255	EALL	136
NUMNLK14	CHAR	CPSM	4	No	DIFF	Key segment 14 null key number		0-255	EALL	146
NUMNLK15	CHAR	CPSM	4	No	DIFF	Key segment 15 null key number		0-255	EALL	156
NUMNLK16	CHAR	CPSM	4	No	DIFF	Key segment 16 null key number		0-255	EALL	166
NUMNLK17	CHAR	CPSM	4	No	DIFF	Key segment 17 null key number		0-255	EALL	176
NUMNLK18	CHAR	CPSM	4	No	DIFF	Key segment 18 null key number		0-255	EALL	186
NUMNLK19	CHAR	CPSM	4	No	DIFF	Key segment 19 null key number		0-255	EALL	196
NUMNLK20	CHAR	CPSM	4	No	DIFF	Key segment 20 null key number		0-255	EALL	206
NUMNLK21	CHAR	CPSM	4	No	DIFF	Key segment 21 null key number		0-255	EALL	216
NUMNLK22	CHAR	CPSM	4	No	DIFF	Key segment 22 null key number		0-255	EALL	226
NUMNLK23	CHAR	CPSM	4	No	DIFF	Key segment 23 null key number		0-255	EALL	236
NUMNLK24	CHAR	CPSM	4	No	DIFF	Key segment 24 null key number		0-255	EALL	246
POSKEY01	CHAR	CPSM	4	No	DIFF	Key segment 01 position		0-4090	EALL	8
POSKEY02	CHAR	CPSM	4	No	DIFF	Key segment 02 position		0-4090	EALL	18
POSKEY03	CHAR	CPSM	4	No	DIFF	Key segment 03 position		0-4090	EALL	28
POSKEY04	CHAR	CPSM	4	No	DIFF	Key segment 04 position		0-4090	EALL	38
POSKEY05	CHAR	CPSM	4	No	DIFF	Key segment 05 position		0-4090	EALL	48
POSKEY06	CHAR	CPSM	4	No	DIFF	Key segment 06 position		0-4090	EALL	58
POSKEY07	CHAR	CPSM	4	No	DIFF	Key segment 07 position		0-4090	EALL	68
POSKEY08	CHAR	CPSM	4	No	DIFF	Key segment 08 position		0-4090	EALL	78
POSKEY09	CHAR	CPSM	4	No	DIFF	Key segment 09 position		0-4090	EALL	88

Table 541. FSEGDEF resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
POSKEY10	CHAR	CPSM	4	No	DIFF	Key segment 10 position		0-4090	EALL	98
POSKEY11	CHAR	CPSM	4	No	DIFF	Key segment 11 position		0-4090	EALL	108
POSKEY12	CHAR	CPSM	4	No	DIFF	Key segment 12 position		0-4090	EALL	118
POSKEY13	CHAR	CPSM	4	No	DIFF	Key segment 13 position		0-4090	EALL	128
POSKEY14	CHAR	CPSM	4	No	DIFF	Key segment 14 position		0-4090	EALL	138
POSKEY15	CHAR	CPSM	4	No	DIFF	Key segment 15 position		0-4090	EALL	148
POSKEY16	CHAR	CPSM	4	No	DIFF	Key segment 16 position		0-4090	EALL	158
POSKEY17	CHAR	CPSM	4	No	DIFF	Key segment 17 position		0-4090	EALL	168
POSKEY18	CHAR	CPSM	4	No	DIFF	Key segment 18 position		0-4090	EALL	178
POSKEY19	CHAR	CPSM	4	No	DIFF	Key segment 19 position		0-4090	EALL	188
POSKEY20	CHAR	CPSM	4	No	DIFF	Key segment 20 position		0-4090	EALL	198
POSKEY21	CHAR	CPSM	4	No	DIFF	Key segment 21 position		0-4090	EALL	208
POSKEY22	CHAR	CPSM	4	No	DIFF	Key segment 22 position		0-4090	EALL	218
POSKEY23	CHAR	CPSM	4	No	DIFF	Key segment 23 position		0-4090	EALL	228
POSKEY24	CHAR	CPSM	4	No	DIFF	Key segment 24 position		0-4090	EALL	238
SAMKEY01	CHAR	CPSM	1	No	DIFF	Key segment 01 part of next segment			EALL	14
SAMKEY01 Input/output valid values	N, Y									
SAMKEY02	CHAR	CPSM	1	No	DIFF	Key segment 02 part of next segment			EALL	24
SAMKEY02 Input/output valid values	N, Y									
SAMKEY03	CHAR	CPSM	1	No	DIFF	Key segment 03 part of next segment			EALL	34
SAMKEY03 Input/output valid values	N, Y									
SAMKEY04	CHAR	CPSM	1	No	DIFF	Key segment 04 part of next segment			EALL	44
SAMKEY04 Input/output valid values	N, Y									
SAMKEY05	CHAR	CPSM	1	No	DIFF	Key Seg 05 part of next segment			EALL	54
SAMKEY05 Input/output valid values	N, Y									
SAMKEY06	CHAR	CPSM	1	No	DIFF	Key segment 06 part of next segment			EALL	64
SAMKEY06 Input/output valid values	N, Y									
SAMKEY07	CHAR	CPSM	1	No	DIFF	Key segment 07 part of next segment			EALL	74
SAMKEY07 Input/output valid values	N, Y									
SAMKEY08	CHAR	CPSM	1	No	DIFF	Key segment 08 part of next segment			EALL	84
SAMKEY08 Input/output valid values	N, Y									
SAMKEY09	CHAR	CPSM	1	No	DIFF	Key segment 09 part of next segment			EALL	94

Table 541. FSEGDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
SAMKEY09 Input/output valid values	N, Y									
SAMKEY10	CHAR	CPSM	1	No	DIFF	Key segment 10 part of next segment			EALL	104
SAMKEY10 Input/output valid values	N, Y									
SAMKEY11	CHAR	CPSM	1	No	DIFF	Key segment 11 part of next segment			EALL	114
SAMKEY11 Input/output valid values	N, Y									
SAMKEY12	CHAR	CPSM	1	No	DIFF	Key segment 12 part of next segment			EALL	124
SAMKEY12 Input/output valid values	N, Y									
SAMKEY13	CHAR	CPSM	1	No	DIFF	Key segment 13 part of next segment			EALL	134
SAMKEY13 Input/output valid values	N, Y									
SAMKEY14	CHAR	CPSM	1	No	DIFF	Key segment 14 part of next segment			EALL	144
SAMKEY14 Input/output valid values	N, Y									
SAMKEY15	CHAR	CPSM	1	No	DIFF	Key segment 15 part of next segment			EALL	154
SAMKEY15 Input/output valid values	N, Y									
SAMKEY16	CHAR	CPSM	1	No	DIFF	Key segment 16 part of next segment			EALL	164
SAMKEY16 Input/output valid values	N, Y									
SAMKEY17	CHAR	CPSM	1	No	DIFF	Key segment 17 part of next segment			EALL	174
SAMKEY17 Input/output valid values	N, Y									
SAMKEY18	CHAR	CPSM	1	No	DIFF	Key segment 18 part of next segment			EALL	184
SAMKEY18 Input/output valid values	N, Y									
SAMKEY19	CHAR	CPSM	1	No	DIFF	Key segment 19 part of next segment			EALL	194
SAMKEY19 Input/output valid values	N, Y									
SAMKEY20	CHAR	CPSM	1	No	DIFF	Key segment 20 part of next segment			EALL	204
SAMKEY20 Input/output valid values	N, Y									
SAMKEY21	CHAR	CPSM	1	No	DIFF	Key segment 21 part of next segment			EALL	214
SAMKEY21 Input/output valid values	N, Y									
SAMKEY22	CHAR	CPSM	1	No	DIFF	Key segment 22 part of next segment			EALL	224
SAMKEY22 Input/output valid values	N, Y									

Table 541. FSEGDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
SAMKEY23	CHAR	CPSM	1	No	DIFF	Key segment 23 part of next segment			EALL	234
SAMKEY23 Input/output valid values	N, Y									
SAMKEY24	CHAR	CPSM	1	No	DIFF	Key segment 24 part of next segment			EALL	244
SAMKEY24 Input/output valid values	N, Y									
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				249
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				250
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				251

Chapter 239. FSGINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a file key segment definition (FSEGDEF) in a resource group (RESGROUP). An FSEGDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is FSEGGROUP.

The **Secondary** key field for this resource class is FSEGNAME.

The **Tertiary** key field for this resource class is FSEGVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6165

Table 542. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 543. FSGINGRP FEEDBACK error codes		
Value	Code	Description
1	FSGINGRP_INV_DATA	Attribute data invalid
2	FSGINGRP_REC_NOT_FOUND	Requested resource not found
4	FSGINGRP_REC_EXISTS	Resource already exists
6	FSGINGRP_INV_RESTYPE	Invalid resource type
7	FSGINGRP_INV_VER	Invalid resource version
11	FSGINGRP_NON_MP	Maintenance point CMAS not available

Table 543. FSGINGRP FEEDBACK error codes (continued)

Value	Code	Description
12	FSGINGRP_INV_CONTEXT	Context not found
21	FSGINGRP_INCONSISTENT_SET	Inconsistent set
22	FSGINGRP_DIFF_VERSION	Different version
23	FSGINGRP_INV_NAME	Invalid name
24	FSGINGRP_INV_MINNAME	Invalid minor name

Table 544. FSGINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
FSEGGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
FSEGNAME-2	CHAR	CPSM	8	Yes	DIFF	File key segment definition name	6
FSEGVER-3	BINARY	CPSM	1	Yes	AVG	File key segment definition version	7

Chapter 240. FTRINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a FEPI Target definition (FETRGDEF) in a resource group (RESGROUP). A FETRGDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is FTRGROUP.

The **Secondary** key field for this resource class is FTRNAME.

The **Tertiary** key field for this resource class is FTRVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6173

Table 545. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 546. FTRINGRP FEEDBACK error codes		
Value	Code	Description
1	FTRINGRP_INV_DATA	Attribute data invalid
2	FTRINGRP_REC_NOT_FOUND	Requested resource not found
4	FTRINGRP_REC_EXISTS	Resource already exists
6	FTRINGRP_INV_RESTYPE	Invalid resource type
7	FTRINGRP_INV_VER	Invalid resource version
11	FTRINGRP_NON_MP	Maintenance point CMAS not available

Table 546. FTRINGRP FEEDBACK error codes (continued)

Value	Code	Description
12	FTRINGRP_INV_CONTEXT	Context not found
21	FTRINGRP_INCONSISTENT_SET	Inconsistent set
22	FTRINGRP_DIFF_VERSION	Different version
23	FTRINGRP_INV_NAME	Invalid name
24	FTRINGRP_INV_MINNAME	Invalid minor name

Table 547. FTRINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
FTRGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
FTRNAME-2	CHAR	CPSM	8	Yes	DIFF	FEPI target definition name	6
FTRVER-3	BINARY	CPSM	1	Yes	AVG	FEPI target definition version	7

Chapter 241. HOST Resource Table

A CICS resource that retrieves information about virtual hosts in the local system.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is TCPIPSERVICE.

External resource name

CICSURIHost

Length

144

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0163

Table 548. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM	ENABLE	None	N/A
SET	DISABLE	None	N/A

Table 549. HOST resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name	3
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved	
ENABLESTATUS	CVDAS	INQ	4	LIKE	Yes	Status	
ENABLESTATUS Input/output valid values	ENABLED, DISABLED						
NAME-1	CHAR	INQ	116	DIFF	No	Name	1
TCPIPSERVICE-2	CHAR	INQ	8	DIFF	No	Inbound port TCP/IP service relating to this host	2

Chapter 242. HTASK Resource Table

This CICSplex SM resource provides information about a completed task; that is, a task that previously ran in a system managed by CICSplex SM, but has now been completed. While a task is active, information can be obtained about the task by the TASK resource. After the task completes, information can be obtained by the HTASK resource, provided that CICSplex SM history recording was activated for the task.

The **Primary** key field for this resource class is TIME, which represents the time when the task was completed in the form of an 8-byte store clock (STCK) value. This task completion STCK is always in Coordinated Universal Time (UTC). UTC is a universal time standard that is Greenwich mean time (GMT) without any adjustment for leap seconds. In the following discussion of parameters, all times are UTC, and, when considering UTC completion times near to midnight, note that UTC affects the date as well.

The following parameters are supported for the GET operation:

STARTDATE(mm/dd/yyyy)
STARTTIME(hh:mm:ss)
ENDDATE(mm/dd/yyyy)
ENDTIME(hh:mm:ss)
INTERVAL(value)
RECENT(value)

- If you use the RECENT parameter, you must not specify any other parameters.
- If you use the INTERVAL parameter, you must not specify the ENDDATE and ENDTIME parameters.

This resource class has no object-specific actions.

Note: The transaction number attribute (TASK) is normally a 4-byte packed decimal number. However, some CICS system tasks are identified by transaction numbers that comprise special characters, as follows:

- ' III' for system initialization task
- ' TCP' for terminal control.

These special identifiers are placed in bytes 2 through 4. Byte 1 is a blank (X'40') before the terminal control TCP identifier, and a null value (X'00') before the others. Because the TASK attribute is expected to contain a packed decimal value, it is not possible to specify the special values TASK=' III' or TASK=' TCP' in a filter. If you need to retrieve task history data for these tasks, you must use another attribute in your filter string, for example, TRANID='CSTP'.

External resource name

CICSTaskHistory

Length

3776

Usage

API or WUI or CICS Management Client Interface

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0154

Table 550. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		ENDDATE(value)	No
		ENDTIME(value)	No
		INTERVAL(value)	No
		RECENT(value)	No
		STARTDATE(value)	No
		STARTTIME(value)	No

Table 551. HTASK FEEDBACK error codes

Value	Code	Description
21	HTASK_INV_COMB_RECENT	RECENT parameter not unique
22	HTASK_INV_COMB_INTV_ET	Bad combination (INTERVAL+ENDTIME)
23	HTASK_INV_COMB_INTV_ED	Bad combination (INTERVAL+ENDDATE)
24	HTASK_INV_COMB_START_END	STARTDATE/TIME must precede ENDDATE/TIME
25	HTASK_INV_RECENT	Invalid RECENT value
26	HTASK_INV_INTERVAL	Invalid INTERVAL value

Table 552. HTASK resource table attributes

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release		
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved		
ABCODEC	CHAR	CMF	4	DIFF	Current ABEND code		18
ABCODEO	CHAR	CMF	4	DIFF	Original ABEND code		17
ACAPPLNAME	CHAR	CMF	64	LIKE	Initial Application Name	E640 E650 E660 E670	415
ACMAJORVER	BINARY	CMF	4	MAX	Initial Application Major Version	E640 E650 E660 E670	418
ACMICROVER	BINARY	CMF	4	MAX	Initial Application Micro Version	E640 E650 E660 E670	420

Table 552. HTASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
ACMINORVER	BINARY	CMF	4	MAX	Initial Application Minor Version	E640 E650 E660 E670	419
ACOPERNAME	CHAR	CMF	64	LIKE	Initial Application Operation	E640 E650 E660 E670	417
ACPLATNAME	CHAR	CMF	64	LIKE	Initial Platform	E640 E650 E660 E670	416
ACTVTYID	HEX	CMF	52	MIN	BTS activity ID		153
ACTVTYNM	CHAR	CMF	16	DIFF	BTS activity name		152
ALLOCATES	BINARY	CMF	4	AVG	Number of ALLOCATE requests		27
APPLNAMEPROG	CHAR	CMF	8	DIFF	Application naming - program name		327
APPLNAMETRAN	CHAR	CMF	4	DIFF	Application naming - transaction name		326
ASFREETCT	BINARY	CMF	4	MAX	Number of EXEC CICS FREE CHILD commands	E640 E650 E660 E670 E680 E690 E700	442
ASFTCHCT	BINARY	CMF	4	MAX	Number of EXEC CICS FETCH commands	E640 E650 E660 E670 E680 E690 E700	441
ASFTCHWT	SCLOCK12	CMF	12	MAX	EXEC CICS FETCH wait time	E640 E650 E660 E670 E680 E690 E700	443
ASRNATWT	SCLOCK12	CMF	12	MAX	EXEC CICS RUN TRANSID delayed time	E640 E650 E660 E670 E680 E690 E700	444
ASRUNCT	BINARY	CMF	4	MAX	Number of EXEC CICS RUN TRANSID commands	E640 E650 E660 E670 E680 E690 E700	440
ASTOTCT	BINARY	CMF	4	MAX	Number of asynchronous API commands	E640 E650 E660 E670 E680 E690 E700	439
BAACDCCT	BINARY	CMF	4	AVG	BTS activity data container requests		166
BAACQPCT	BINARY	CMF	4	AVG	BTS acquire requests		163
BADACTCT	BINARY	CMF	4	AVG	BTS define activity requests		158

Table 552. HTASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
BADCPACT	BINARY	CMF	4	AVG	BTS delete activity and cancel requests		162
BADFIECT	BINARY	CMF	4	AVG	BTS define input event requests		169
BADPROCT	BINARY	CMF	4	AVG	BTS define process requests		157
BALKPACT	BINARY	CMF	4	AVG	BTS link requests		156
BAPRDCCT	BINARY	CMF	4	AVG	BTS process data container requests		165
BARASYCT	BINARY	CMF	4	AVG	BTS run asynchronous requests		155
BARATECT	BINARY	CMF	4	AVG	BTS retrieve reattach event requests		168
BARMPACT	BINARY	CMF	4	AVG	BTS resume requests		161
BARSPACT	BINARY	CMF	4	AVG	BTS reset requests		159
BARSYNCT	BINARY	CMF	4	AVG	BTS run synchronous requests		154
BASUPACT	BINARY	CMF	4	AVG	BTS suspend requests		160
BATIAECT	BINARY	CMF	4	AVG	BTS timer associated event requests		170
BATOTCCT	BINARY	CMF	4	AVG	BTS total data container requests		167
BATOTECT	BINARY	CMF	4	AVG	BTS total event requests		171
BATOTPCT	BINARY	CMF	4	AVG	BTS total requests		164
BMSCOUNT	BINARY	CMF	4	AVG	Total number of BMS requests		67
BMSINCNT	BINARY	CMF	4	AVG	Number of BMS map in requests		65
BMSMAPCNT	BINARY	CMF	4	AVG	Number of BMS map requests		64
BMSOUTCNT	BINARY	CMF	4	AVG	Number of BMS map out requests		66
BRDGTRAN	EYUDA	CMF	4	LIKE	Transaction ID started by bridge		137
BRDGTRAN Output valid values	YES, NO						
BRIDGE	CHAR	CMF	4	DIFF	Bridge transaction ID		136
BTECOMP	EYUDA	CPSM	4	LIKE	Workload manager begin-to-end phase complete		264
BTECOMP Output valid values	YES, NO						
CDSAGETM	BINARY	CMF	4	AVG	Number of GETMAIN requests in CDSA		30
CDSAPSHWM	BINARY	CMF	4	AVG	Maximum program storage in CDSA		47
CDSASHWM	BINARY	CMF	4	AVG	Peak number of bytes used by task in CDSA		34
CDSASOCC	BINARY	CMF	8	AVG	Average CDSA storage usage		39
CECMCHTP	CHAR	CMF	4	DIFF	CEC machine type		404
CECMDLID	CHAR	CMF	16	DIFF	CEC model number		405
CFDTWAIT	SCLOCK12	CMF	12	MAX	CFDT wait time		147
CHARIN	BINARY	CMF	4	AVG	Number of primary TC characters received		20
CHARINSEC	BINARY	CMF	4	AVG	Number of secondary TC characters received		24
CHAROUT	BINARY	CMF	4	AVG	Number of primary TC characters sent		22
CHAROUTSEC	BINARY	CMF	4	AVG	Number of secondary TC characters sent		26
CHMODECT	BINARY	CMF	4	AVG	Number of CICS dispatcher change modes	E640+	202
CICSWAIT	SCLOCK12	CMF	12	MAX	CICS event wait time		140

Table 552. HTASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
CLIPADDR	CHAR	CMF	40	DIFF	Client IP address		208
CONTROLWAIT	SCLOCK12	CMF	12	MAX	Give-up-control wait time		142
CORREUOW	HEX	CPSM	23	MIN	Correlation UOW ID		274
CPUTIME	SCLOCK12	CMF	12	MAX	User task CPU time		76
CPUTONCP	SCLOCK12	CMF	12	MAX	Total CPU time on a CP	E640 E650 E660 E670	421
CURTASKS	BINARY	CMF	4	AVG	Current tasks		403
DB2CONWT	SCLOCK12	CMF	12	MAX	DB2 connection(TCB) wait time		189
DB2RDYQW	SCLOCK12	CMF	12	MAX	DB2 ready queue wait time		188
DB2REQCT	BINARY	CMF	4	AVG	Total number of DB2 requests		201
DB2WAIT	SCLOCK12	CMF	12	MAX	DB2 request wait time	E680+	190
DETTRANYPE	EYUDA	CPSM	4	LIKE	Transaction type details		263
DETTRANYPE Output valid values	NONE, SYSTEM, MIRROR, DPL, ONCRPC, WEB, BRIDGE, CICSPTS						
DHCRECT	BINARY	CMF	4	AVG	Number of DOCUMENT CREATE requests		181
DHINSCT	BINARY	CMF	4	AVG	Number of DOCUMENT INSERT requests		182
DHRETCT	BINARY	CMF	4	AVG	Number of DOCUMENT RETRIEVE requests		184
DHSETCT	BINARY	CMF	4	AVG	Number of DOCUMENT SET requests		183
DHTOTCT	BINARY	CMF	4	AVG	Total number of document requests		185
DHTOTDCL	BINARY	CMF	4	AVG	Total length of documents created		186
DISPTIME	SCLOCK12	CMF	12	MAX	User task dispatch time		75
DSAPHTWT	SCLOCK12	STAT	12	AVG	Dispatcher allocate pthread wait time	E640 E650 E660 E670 E680 E690	434
DSPDELAY	SCLOCK12	CMF	12	MAX	First dispatch delay time		108
ECDSAGETM	BINARY	CMF	4	AVG	Number of GETMAIN requests in ECDSA		31
ECDSAPSHWM	BINARY	CMF	4	AVG	Maximum program storage in ECDSA		46
ECDSASHWM	BINARY	CMF	4	AVG	Peak number of bytes used by task in ECDSA		35
ECDSASOCC	BINARY	CMF	8	AVG	Average ECDSA storage usage		40
ENQDELAY	SCLOCK12	CMF	12	MAX	Local enqueue delay time		111
EXECOMP	EYUDA	CPSM	4	LIKE	Workload manager execution phase complete		265
EXECOMP Output valid values	YES, NO						
EXTERNWAIT	SCLOCK12	CMF	12	MAX	External wait time		139
EXWAIT	SCLOCK12	CMF	12	MAX	Exception wait time		79
FACILITY	CHAR	CMF	4	DIFF	Principal facility		12
FACILITYTYPE	EYUDA	CMF	4	LIKE	Facility type		13
FACILITYTYPE Output valid values	TERMINAL, TDQUEUE, START						
FCADDCNT	BINARY	CMF	4	AVG	Number of file control ADD requests		52

Table 552. HTASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
FCAMCNT	BINARY	CMF	4	AVG	Number of file control access method requests		55
FCBRWCNT	BINARY	CMF	4	AVG	Number of file control BROWSE requests		51
FCCOUNT	BINARY	CMF	4	AVG	Total number of file control requests		54
FCDELCNT	BINARY	CMF	4	AVG	Number of file control DELETE requests		53
FCGETCNT	BINARY	CMF	4	AVG	Number of file control READ requests		49
FCIOTIME	SCLOCK12	CMF	12	MAX	File control I/O wait time		81
FCPUTCNT	BINARY	CMF	4	AVG	Number of file control WRITE requests		50
FCVSWTT	SCLOCK12	CMF	12	MAX	File control VSAM string wait time	E640 E650 E660 E670	414
FCXCWTT	SCLOCK12	CMF	12	MAX	File control exclusive control wait time	E640 E650 E660 E670	413
FIRSTPRGM	CHAR	CMF	8	DIFF	First program name		7
GCDSAGETM	BINARY	CMF	4	AVG	Number of GETMAIN requests in GCDSA	E640 E650 E660 E670	406
GCDSASHWM	BINARY	CMF	4	AVG	Peak number of bytes used by task in GCDSA expressed in 4k pages	E640 E650 E660 E670	407
GNQDELAY	SCLOCK12	CMF	12	MAX	Global enqueue delay time		204
GUDSAGETM	BINARY	CMF	4	AVG	Number of GETMAIN requests in GUDSA	E640 E650 E660 E670	408
GUDSASHWM	BINARY	CMF	4	AVG	Peak number of bytes used by task in GUDSA expressed in 4k pages	E640 E650 E660 E670	409
ICCOUNT	BINARY	CMF	4	AVG	Number of Interval Control requests		72
IMSREQCT	BINARY	CMF	4	AVG	Total number of IMS requests		200
IMSWAIT	SCLOCK12	CMF	12	MAX	IMS request wait time		187
INDOUBT	EYUDA	CMF	4	LIKE	Transaction indoubt option		134
INDOUBT Output valid values	BACKWARD, FORWARD						
INDOUBTFAIL	EYUDA	CPSM	4	LIKE	Recovery manager UOW indoubt failure		271
INDOUBTFAIL Output valid values	YES, NO						
INDOUBTWAIT	EYUDA	CMF	4	LIKE	Indoubt wait time		135
INDOUBTWAIT Output valid values	YES, NO						
INTVLC	BINARY	CMF	4	AVG	Interval control count		145
INTVLWAIT	SCLOCK12	CMF	12	MAX	Interval control delay time		141
IRIOTIME	SCLOCK12	CMF	12	MAX	Interregion communication (MRO) I/O wait time		84
ISALWTT	SCLOCK12	STAT	12	AVG	Delay time waiting for IPIC session allocation		400

Table 552. HTASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
ISOLATEST	EYUDA	CMF	4	LIKE	Data isolation type		87
ISOLATEST Output valid values	NO, YES						
J8CPUT	SCLOCK12	CMF	12	MAX	J8 TCB mode CPU time	E680+	198
JCIOTIME	SCLOCK12	CMF	12	MAX	Journal control I/O wait time		82
JCUSRWCNT	BINARY	CMF	4	AVG	Number of journal output requests		71
JRNLWRITREQ	BINARY	CMF	4	AVG	Number of journal write requests		128
JVMSUSP	SCLOCK12	CMF	12	MAX	Total JVM suspend time		214
JVMTIME	SCLOCK12	CMF	12	MAX	Total JVM elapsed time		213
L8CPUT	SCLOCK12	CMF	12	MAX	L8 TCB mode CPU time		197
LOCKMGRWAIT	SCLOCK12	CMF	12	MAX	Lock manager wait time		138
LOGGRWRITREQ	BINARY	CMF	4	AVG	Number of CICS logger write requests		129
LPARNAME	CHAR	CMF	8	DIFF	Logical partition name	E640 E650 E660 E670 E680 E690 E700	447
LU61WTT	SCLOCK12	CMF	12	MAX	LU61 I/O wait time		112
LU62WTT	SCLOCK12	CMF	12	MAX	LU62 I/O wait time		113
LUNAME	CHAR	CMF	8	DIFF	VTAM LU name		8
MAXTASKS	BINARY	CMF	4	AVG	Maximum tasks		402
MPPRTXCD	BINARY	CMF	4	MAX	Number of actions triggered by policy task rules		423
MPSRACT	BINARY	CMF	4	AVG	Number of actions triggered by policy system rules	E640 E650 E660 E670 E680 E690 E700	446
MPSRECT	BINARY	CMF	4	AVG	Number of times policy system rules evaluated	E640 E650 E660 E670 E680 E690 E700	445
MSCPUT	SCLOCK12	CMF	12	MAX	Other TCB mode CPU time		196
MSDISPT	SCLOCK12	CMF	12	MAX	Other TCB mode dispatch time		195
MSGIN	BINARY	CMF	4	AVG	Number of primary TC messages received		19
MSGINSEC	BINARY	CMF	4	AVG	Number of secondary TC messages received		23
MSGOUT	BINARY	CMF	4	AVG	Number of primary TC messages sent		21
MSGOUTSEC	BINARY	CMF	4	AVG	Number of secondary TC messages sent		25
MXTDELAY	SCLOCK12	CMF	12	MAX	First dispatch delay time caused by MXT		110
MXTOTDLY	SCLOCK12	CMF	12	MAX	Maximum open TCB delay time		191

Table 552. HTASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
NCGETCNT	BINARY	CMF	4	AVG	Number of named counter get requests	E640 E650 E660 E670 E680 E690	431
NETNAME	CHAR	CMF	20	DIFF	LU 6.2 network-wide UOW netname		11
NETUOWID	HEX	CMF	27	MIN	LU6.2 network-wide UOW ID		262
OADATA1	CHAR	CMF	64	DIFF	Originating adapter data 1	E640 E650 E660	385
OADATA2	CHAR	CMF	64	DIFF	Originating adapter data 2	E640 E650 E660	386
OADATA3	CHAR	CMF	64	DIFF	Originating adapter data 3	E640 E650 E660	387
OADID	CHAR	CMF	64	DIFF	Originating adapter ID	E640 E650 E660	384
OAPPLID	CHAR	CMF	8	MAX	Originating Application ID	E640	339
OCLIPADR	CHAR	CMF	40	MAX	Originating client IP address	E640	347
OCLIPORT	BINARY	CMF	4	MAX	Originating client port number	E640	348
OFCTYNME	CHAR	CMF	8	MAX	Originating facility name	E640	350
OFFLCPUT	SCLOCK12	CMF	12	MAX	Offload eligible on standard CP	E640 E650 E660 E670	422
ONETWKID	CHAR	CMF	8	MAX	Originating network ID	E640	338
OPORTNUM	BINARY	CMF	4	MAX	Originating portnumber	E640	346
ORIGINTYPE	EYUDA	CPSM	4	LIKE	Transaction origin type		267
ORIGINTYPE Output valid values	NONE, TERMINAL, TDQUEUE, START, TERMSTART, SCHEDULED, XMRUN, BRIDGE, SOCKET, WEB, IIOP, RRS, LU61, LU62, MRO, ECI, IIRQRECV, RZSTTRPT						
OSTART	TIMESTP	CMF	8	MAX	Originating task start time	E640	340
OTCPSVCE	CHAR	CMF	8	MAX	Originating TCPIP SERVICE	E640	345
OTRAN	CHAR	CMF	4	MAX	Originating transaction ID	E640	342
OTRANFLG	HEX	CMF	8	MAX	Originating transaction flags	E640	349
OTRANNUM	DECIMAL	CMF	4	MAX	Originating task ID	E640	341
OUSERCOR	CHAR	CMF	64	MAX	Originating user correlation data	E640	344
OUSERID	CHAR	CMF	8	MAX	Originating user ID	E640	343
PC24RHWM	BINARY	CMF	4	AVG	Maximum read-only program storage on RDSA		95
PC24SHWM	BINARY	CMF	4	AVG	Maximum shared program storage in SDSA		97
PC31SHWM	BINARY	CMF	4	AVG	Maximum shared program storage in ESDSA		96
PCDPLCT	BINARY	CMF	4	AVG	Distributed program link (DPL) request count		209
PCLINKCNT	BINARY	CMF	4	AVG	Number of program LINK requests		68
PCLOADCNT	BINARY	CMF	4	AVG	Number of program LOAD requests		70
PCLOADTM	SCLOCK12	CMF	12	MAX	Program load time		86

Table 552. HTASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
PCLURMCT	BINARY	CMF	4	AVG	Number of user replaceable module link requests		146
PCXCTLCNT	BINARY	CMF	4	AVG	Number of program transfer control (XCTL) requests		69
PERFRECCNT	BINARY	CMF	4	AVG	Number of performance records		119
PGCSTHWM	BINARY	CMF	8	MAX	Maximum container storage allocated to task	E640	337
PHAPPLID	CHAR	CMF	8	MAX	Previous hop applid	E640 E650 E660	389
PHCOUNT	BINARY	CMF	4	MAX	Previous hop count	E640 E650 E660	394
PHNTWKID	CHAR	CMF	8	MAX	Previous hop network qualifier	E640 E650 E660	388
PHSTART	TIMESTP	CMF	8	MAX	Previous hop task start time	E640 E650 E660	391
PHTRAN	CHAR	CMF	4	MAX	Previous hop transaction ID	E640 E650 E660	393
PHTRANNO	DECIMAL	CMF	4	MAX	Previous hop task ID	E640 E650 E660	392
PRCSID	HEX	CMF	52	MIN	BTS process ID		150
PRCSNAME	CHAR	CMF	36	DIFF	BTS process name		149
PRCSTYPE	CHAR	CMF	8	DIFF	BTS process type		151
PRIORITY	BINARY	CMF	4	AVG	Task priority		14
PSTG24HWM	BINARY	CMF	4	AVG	Maximum program storage below 16MB		42
PSTG31HWM	BINARY	CMF	4	AVG	Maximum program storage above 16MB		43
PSTGHWM	BINARY	CMF	4	AVG	Maximum program storage across all DSAs		41
PTCOUNT	BINARY	CMF	4	MAX	Previous transaction count	E640 E650 E660 E670 E680 E690 E700	438
PTSTART	TIMESTP	CMF	8	MAX	Previous transaction task start time	E640 E650 E660 E670 E680 E690 E700	436
PTTRAN	CHAR	CMF	4	DIFF	Previous transaction transaction ID	E640 E650 E660 E670 E680 E690 E700	437

Table 552. HTASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
PTTRANNO	DECIMAL	CMF	4	MAX	Previous transaction task ID	E640 E650 E660 E670 E680 E690 E700	435
QRCPUT	SCLOCK12	CMF	12	MAX	CPU time used while running in QR TCB mode		194
QRDISPT	SCLOCK12	CMF	12	MAX	Dispatch time while running in QR TCB mode		193
QRMODDLY	SCLOCK12	CMF	12	MAX	QR TCB mode delay time		192
RECTYPE	CHAR	CMF	4	DIFF	Record type		15
RESOLVEACT	EYUDA	CPSM	4	LIKE	Recovery manager UOW resolved with indoubt action		268
RESOLVEACT Output valid values	YES, NO						
RESPTIME	INTTSTP	CPSM	8	MAX	Task response time		273
RLSCPUT	SCLOCK12	CMF	12	MAX	CPU time used by VSAM Record Level Sharing		144
RLSWAITTIME	SCLOCK12	CMF	12	MAX	VSAM Record Level Sharing wait time		132
RMICPSMTIME	SCLOCK12	CMF	12	MAX	CICSplex SM RMI elapsed time		334
RMIDB2TIME	SCLOCK12	CMF	12	MAX	DB2 RMI elapsed time		330
RMIDBCTLTIME	SCLOCK12	CMF	12	MAX	DBCTL RMI elapsed time		331
RMIECEDLITM	SCLOCK12	CMF	12	MAX	DL/I RMI elapsed time		332
RMIMQSERIEST	SCLOCK12	CMF	12	MAX	WebSphere MQ RMI elapsed time		333
RMIOThERTIME	SCLOCK12	CMF	12	MAX	Total other RMI elapsed time		329
RMISUSP	SCLOCK12	CMF	12	MAX	Total RMI suspend time		115
RMITCPIPTIME	SCLOCK12	CMF	12	MAX	TCP/IP Sockets RMI elapsed time		335
RMITIME	SCLOCK12	CMF	12	MAX	Total RMI elapsed time		114
RMITOTALTIME	SCLOCK12	CMF	12	MAX	Total RMI elapsed time		328
ROFAIL	EYUDA	CPSM	4	LIKE	Recovery manager UOW resource owner failure		272
ROFAIL Output valid values	YES, NO						
ROMODDLY	SCLOCK12	STAT	12	AVG	RO TCB mode delay time		397
ROPS31HWM	BINARY	CMF	4	AVG	Maximum read-only program storage		48
RRMSURID	HEX	CMF	16	MIN	RRMS/MVS unit of recovery ID		207
RRMSWAIT	SCLOCK12	CMF	12	MAX	RRMS/MVS syncpoint coordination delay time		205
RSYSID	CHAR	CMF	4	DIFF	Remote system ID		90
RUNTRWTT	SCLOCK12	CMF	12	MAX	Run synchronous transaction wait time		173
S8CPUT	SCLOCK12	CMF	12	MAX	S8 TCB mode CPU time		199
SHAREDTSWAIT	SCLOCK12	CMF	12	MAX	Shared temporary storage I/O wait time		143
SHSTGBYTEFMA	BINARY	CMF	4	AVG	FREEMAIN byte count of shared storage above 16M		127
SHSTGBYTEFMB	BINARY	CMF	4	AVG	FREEMAIN byte count of shared storage below 16MB		124

Table 552. HTASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
SHSTGBYTEFMG	BINARY	CMF	4	AVG	The total number of FREEMAIN bytes of shared storage above the bar.	E640 E650 E660 E670	412
SHSTGBYTEGMA	BINARY	CMF	4	AVG	GETMAIN byte count of shared storage above 16MB		126
SHSTGBYTEGMB	BINARY	CMF	4	AVG	GETMAIN byte count of shared storage below 16MB		123
SHSTGBYTEGMG	BINARY	CMF	4	AVG	GETMAIN byte count of shared storage above the bar	E640 E650 E660 E670	411
SHSTGGMCA BV	BINARY	CMF	4	AVG	Shared storage GETMAIN request count above 16MB		125
SHSTGGMCBAR	BINARY	CMF	4	AVG	Shared storage GETMAIN request count above the bar	E640 E650 E660 E670	410
SHSTGGMCBEL	BINARY	CMF	4	AVG	Shared storage GETMAIN request count below 16MB		121
SHUNTED	EYUDA	CPSM	4	LIKE	Recovery manager UOW shunted		269
SHUNTED Output valid values	YES, NO						
SOBYDECT	BINARY	CMF	4	AVG	Number of socket bytes decrypted		211
SOBYENCT	BINARY	CMF	4	AVG	Number of socket bytes encrypted		210
SOCIPHER	HEX	CMF	4	DIFF	Cipher selected		401
SOIOWTT	SCLOCK12	CMF	12	MAX	Inbound TCP/IP sockets I/O wait time		206
SOMODDLY	SCLOCK12	STAT	12	AVG	SO TCB mode delay time		398
SRVSYWTT	SCLOCK12	CMF	12	MAX	CFDT syncpoint wait time		148
START	DATETIME	CMF	8	MAX	Task start time		2
STOP	DATETIME	CMF	8	MAX	Task stop time		3
SUBEXECOMP	EYUDA	CPSM	4	LIKE	WLM subset of execution phase complete		266
SUBEXECOMP Output valid values	YES, NO						
SUBTYPE	CHAR	CPSM	1	MIN	Task history subtype		357
SUSPTIME	SCLOCK12	CMF	12	MAX	Task suspend time		77
SYNCCOUNT	BINARY	CMF	4	AVG	Number of syncpoint requests		73
SYNCDLY	SCLOCK12	CMF	12	MAX	Waiting for parent syncpoint delay time		174
SYNCPWAITTM	SCLOCK12	CMF	12	MAX	Syncpoint wait time		131
SZALLCTO	BINARY	CMF	4	AVG	Number of FEPI ALLOCATE timeouts		104
SZALLOCT	BINARY	CMF	4	AVG	Number of FEPI ALLOCATE requests		98
SZCHRIN	BINARY	CMF	4	AVG	Number of FEPI characters received		103
SZCHROUT	BINARY	CMF	4	AVG	Number of FEPI characters sent		102
SZRCVCT	BINARY	CMF	4	AVG	Number of FEPI RECEIVE requests		99
SZRCVTO	BINARY	CMF	4	AVG	Number of FEPI RECEIVE timeouts		105
SZSENDCT	BINARY	CMF	4	AVG	Number of FEPI SEND requests		100
SZSTRTCT	BINARY	CMF	4	AVG	Number of FEPI START requests		101
SZTOTCT	BINARY	CMF	4	AVG	Total number of FEPI requests		106

Table 552. HTASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
SZWAIT	SCLOCK12	CMF	12	MAX	FEPI suspend time		107
TASK	DECIMAL	CMF	4	MAX	Task ID		218
TASKDATAKEY	EYUDA	CMF	4	LIKE	Data storage key		88
TASKDATAKEY Output valid values	CICS, USER						
TASKDATALOC	EYUDA	CMF	4	LIKE	Data location above/below 16MB		89
TASKDATALOC Output valid values	BELOW, ANY						
TASKFLAG	BINARY	CMF	4	AVG	Transaction error flags		16
TCALWTT	SCLOCK12	STAT	12	AVG	Delay time waiting for session allocation		399
TCBATTCT	BINARY	CMF	4	AVG	Number of CICS dispatcher TCB attaches		203
TCC62IN2	BINARY	CMF	4	AVG	Number of secondary LU62 TC characters received		92
TCC62OU2	BINARY	CMF	4	AVG	Number of secondary LU62 TC characters sent		94
TCIOTIME	SCLOCK12	CMF	12	MAX	Terminal control I/O wait time		80
TCLDELAY	SCLOCK12	CMF	12	MAX	First dispatch delay time caused by TCL		109
TCM62IN2	BINARY	CMF	4	AVG	Number of secondary LU62 TC messages received		91
TCM62OU2	BINARY	CMF	4	AVG	Number of secondary LU62 TC messages sent		93
TDCOUNT	BINARY	CMF	4	AVG	Total number of transient data requests		59
TDELWTT	SCLOCK12	STAT	12	AVG	TD extrapartition lock wait time		396
TDGETCNT	BINARY	CMF	4	AVG	Number of transient data GET requests		56
TDILWTT	SCLOCK12	STAT	12	AVG	TD intrapartition lock wait time		395
TDIOTIME	SCLOCK12	CMF	12	MAX	Transient data I/O wait time		85
TDPURCNT	BINARY	CMF	4	AVG	Number of transient data PURGE requests		58
TDPUTCNT	BINARY	CMF	4	AVG	Number of transient data PUT requests		57
TERMCONNAME	CHAR	CMF	4	DIFF	Terminal connection name		120
TERMID	CHAR	CMF	4	DIFF	Actual terminal ID or session ID		212
TERMNALINFO	HEX	CMF	4	MIN	Terminal information		130
TIME-1	HEX	CMF	8	MIN	Time key		1
TMRATMSN	CHAR	CMF	8	DIFF	Atom service name	E640 E650	372
TMRBFDGC	BINARY	CMF	4	MAX	Number of BIF DIGEST requests	E640 E650	377
TMRBFTC	BINARY	CMF	4	MAX	Total number BIF Requests	E640 E650	378
TMRCBRNM	CHAR	CMF	4	LIKE	CorbaServer name	E680+	276
TMRCFACT	BINARY	CMF	4	AVG	Number of OO class library API requests		225
TMRCIPOR	BINARY	CMF	4	MAX	Client IP Port	E640	353
TMRCMDLY	SCLOCK12	CMF	12	AVG	CICS TCB Change Mode delay time		314

Table 552. HTASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
TMRDHDLC	BINARY	CMF	4	AVG	Number of Document Delete requests	E640	336
TMRDSCWT	SCLOCK12	CMF	12	MAX	Dispatcher MVS storage constraint wait time		287
TMRDSMWT	SCLOCK12	CMF	12	MAX	Dispatcher TCB mismatch wait time		286
TMRDSTHW	BINARY	CMF	4	AVG	Peak number of CICS dispatcher TCBs		277
TMRECEVC	BINARY	CMF	4	MAX	Number of events captured	E640 E650	369
TMRECFOC	BINARY	CMF	4	MAX	Number of event filter commands	E640 E650	368
TMRECSEC	BINARY	CMF	4	MAX	Number of synchronous emission events captured	E640 E650 E660	383
TMRECSGE	BINARY	CMF	4	MAX	Number of SIGNAL EVENT requests	E640 E650	367
TMREICTC	BINARY	CMF	4	MAX	Total number of EXEC CICS requests	E640 E650	366
TMREJBAC	BINARY	CMF	4	AVG	Number of bean state activation requests	E680+	278
TMREJBCC	BINARY	CMF	4	AVG	Number of bean creation requests	E680+	280
TMREJBPC	BINARY	CMF	4	AVG	Number of bean state passivation requests	E680+	279
TMREJBRC	BINARY	CMF	4	AVG	Number of bean removal requests	E680+	281
TMREJBTC	BINARY	CMF	4	AVG	Total number of Enterprise bean requests	E680+	288
TMREJMCT	BINARY	CMF	4	AVG	Number of Enterprise bean method calls	E680+	282
TMRHTDLY	SCLOCK12	CMF	12	AVG	Maximum hot-pooling TCB delay time	E640+	251
TMRICSCC	BINARY	CMF	4	AVG	Total local interval control starts with channel		317
TMRICSCD	BINARY	CMF	4	AVG	Data length of all local IC starts with channel		318
TMRICSRC	BINARY	CMF	4	AVG	Total remote interval control starts with channel		319
TMRICSRD	BINARY	CMF	4	AVG	Data length of all remote IC starts with channel		320
TMRISACT	BINARY	CMF	4	MAX	Number of IPCONN allocate requests	E640	355
TMRISCNM	CHAR	CMF	8	MAX	IPCONN Name	E640	354
TMRISWT	SCLOCK12	CMF	12	MAX	IPCONN I/O wait time	E640	356
TMRJ9CPU	SCLOCK12	CMF	12	MAX	J9 TCB mode CPU time	E680+	285
TMRJSTWT	SCLOCK12	CMF	12	MAX	JVM server thread wait time	E640 E650	358
TMRJTDLY	SCLOCK12	CMF	12	AVG	Maximum JVM TCB delay time	E680+	250
TMRJVMIT	SCLOCK12	CMF	12	AVG	JVM elapsed time - initializing		256
TMRJVMRT	SCLOCK12	CMF	12	AVG	JVM elapsed time - resetting		257
TMRKY8CP	SCLOCK12	CMF	12	AVG	User task key 8 mode CPU time		249
TMRKY8DS	SCLOCK12	CMF	12	AVG	User task key 8 mode dispatch time		248
TMRKY9CP	SCLOCK12	STAT	12	AVG	User task key 9 mode CPU time		284

Table 552. HTASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
TMRKY9DS	SCLOCK12	STAT	12	AVG	User task key 9 mode dispatch time		283
TMRL9CPU	SCLOCK12	CMF	12	MAX	User task L9 mode CPU time		321
TMRMLCTM	SCLOCK12	CMF	12	MAX	XML System Services CPU time	E640 E650	380
TMRMLTDL	BINARY	CMF	4	MAX	Total document length	E640 E650	379
TMRMLXTC	BINARY	CMF	4	MAX	Number of EXEC CICS XML TRANSFORM requests	E640 E650	359
TMRMQAST	SCLOCK12	CMF	12	MAX	WebSphere MQ API SRB time	E640 E650	382
TMRMQGWT	SCLOCK12	CMF	12	MAX	WebSphere MQ Getwait wait time	E640	352
TMRNETID	CHAR	CMF	8	DIFF	Network ID		221
TMRNETSX	HEX	CMF	8	DIFF	LU6.2 network-wide UOW instance and sequence number		259
TMROIDWT	SCLOCK12	CMF	12	AVG	OTS indoubt wait time		255
TMROTSID	CHAR	CMF	128	DIFF	OTS transaction ID		224
TMRPCDCC	BINARY	CMF	4	AVG	Number of DPL program link requests with channel		293
TMRPCDLL	BINARY	CMF	4	AVG	Data length of all DPL program links with channel		289
TMRPCDRL	BINARY	CMF	4	AVG	Total data length of all DPL returns with channel		290
TMRPCLCC	BINARY	CMF	4	AVG	Number of program link requests with channel		291
TMRPCRCC	BINARY	CMF	4	AVG	Number of program return requests with channel		294
TMRPCRCL	BINARY	CMF	4	AVG	Data length of all program returns with channel		295
TMRPCXCC	BINARY	CMF	4	AVG	Number of program XCTL requests with channel		292
TMRPGBCC	BINARY	CMF	4	AVG	Number of browse container channel requests		297
TMRPGCCC	BINARY	CMF	4	AVG	Number of containers created for channel containers		324
TMRPGCTC	BINARY	CMF	4	AVG	Total number of channel data container requests		296
TMRPGGCC	BINARY	CMF	4	AVG	Number of get container channel requests		298
TMRPGGCL	BINARY	CMF	8	AVG	Data length of all get container channel requests		301
TMRPGMCC	BINARY	CMF	4	AVG	Number of move container channel requests		300
TMRPGPCC	BINARY	CMF	4	AVG	Number of put container channel requests		299
TMRPGPCL	BINARY	CMF	8	AVG	Data length of all put container channel requests		302
TMRPIPLN	CHAR	CMF	8	DIFF	Pipeline name	E640 E650	371
TMRPORTN	BINARY	CMF	4	AVG	TCP/IP service port number		223
TMRPTPWT	SCLOCK12	CMF	12	AVG	Partner wait time		258
TMRRLUNM	CHAR	CMF	8	DIFF	Real LU name		222
TMRROCPU	SCLOCK12	CMF	12	AVG	User task read-only mode CPU time		247

Table 552. HTASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
TMRRODSP	SCLOCK12	CMF	12	AVG	User task read-only mode dispatch time		246
TMRRQPWT	SCLOCK12	CMF	12	AVG	Request processor wait time		254
TMRRQRWT	SCLOCK12	CMF	12	AVG	Request receiver wait time		253
TMRSOCIN	BINARY	CMF	4	AVG	Number of characters received		237
TMRSOCNS	BINARY	CMF	4	AVG	Number of CREATE non-persistent socket requests		232
TMRSOCOT	BINARY	CMF	4	AVG	Number of characters sent		239
TMRSOCPS	BINARY	CMF	4	AVG	Number of CREATE persistent socket requests		233
TMRSOERC	BINARY	CMF	4	AVG	EXTRACT TCPIP and EXTRACT CERTIFICATE request count		231
TMRSOI1C	BINARY	CMF	4	AVG	Number of inbound socket characters received		242
TMRSOIMC	BINARY	CMF	4	AVG	Number of inbound socket receive requests		241
TMRSONHW	BINARY	CMF	4	AVG	Peak number of non-persistent sockets		234
TMRSO01C	BINARY	CMF	4	AVG	Number of inbound socket characters sent		244
TMRSOOMC	BINARY	CMF	4	AVG	Number of inbound socket send requests		243
TMRSOOWT	SCLOCK12	CMF	12	AVG	Outbound TCP/IP sockets I/O wait time		252
TMR SOPHW	BINARY	CMF	4	AVG	Peak number of persistent sockets		235
TMRSORCT	BINARY	CMF	4	AVG	Number of socket receive requests		236
TMR SOSCT	BINARY	CMF	4	AVG	Number of socket send requests		238
TMR SOTC	BINARY	CMF	4	AVG	Total number of socket requests		240
TMRSTDLY	SCLOCK12	CMF	12	AVG	Maximum CICS SSL TCB delay time		312
TMRT8CPU	SCLOCK12	CMF	12	MAX	User task T8 mode cpu time	E640 E650	364
TMRTCPV	CHAR	CMF	8	DIFF	TCP/IP Service name		260
TMRTGPID	HEX	CMF	28	DIFF	Transaction group ID		219
TMRTIATC	BINARY	CMF	4	MAX	Number of EXEC CICS ASKTIME requests	E640 E650	375
TMRTITC	BINARY	CMF	4	MAX	Total number of EXEC xxxTIME Requests	E640 E650	376
TMRTDLY	SCLOCK12	CMF	12	MAX	Maximum thread TCB delay time	E640 E650	365
TMRURIMN	CHAR	CMF	8	DIFF	URI map name	E640 E650	370
TMRWBBOC	BINARY	CMF	4	AVG	Number of web browse requests		311
TMRWB BRC	BINARY	CMF	4	AVG	Number of WEB BROWSE requests		228
TMRWB ERC	BINARY	CMF	4	AVG	Number of WEB EXTRACT requests		227
TMRWB11C	BINARY	CMF	4	AVG	Number of bytes received by web requests		307
TMRWBIRC	BINARY	CMF	4	AVG	Number of web receive requests		306
TMRWB IWC	BINARY	CMF	4	AVG	Number of invoke web service requests		303

Table 552. HTASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
TMRWBO1C	BINARY	CMF	4	AVG	Number of bytes sent by web send requests		309
TMRWBOSC	BINARY	CMF	4	AVG	Number of web send requests		308
TMRWBPRC	BINARY	CMF	4	AVG	Number of web parse requests		310
TMRWBRDL	BINARY	CMF	4	AVG	Data length of data read from the repository		322
TMRWBROC	BINARY	CMF	4	AVG	Number of web read requests		304
TMRWBRPR	BINARY	CMF	4	AVG	Number of repository reads		226
TMRWBRRC	BINARY	CMF	4	AVG	Number of WEB READ requests		229
TMRWBWDL	BINARY	CMF	4	AVG	Data length of data written to the repository		323
TMRWBWOC	BINARY	CMF	4	AVG	Number of web write requests		305
TMRWBWRC	BINARY	CMF	4	AVG	Number of WEB WRITE requests		230
TMRWMQRC	BINARY	CMF	4	MAX	Total number WebSphere MQ requests	E640	351
TMRWPBMN	CHAR	CMF	8	DIFF	Program name	E640 E650	374
TMRWSATC	BINARY	CMF	4	MAX	Total number of WS Addressing requests	E640 E650	363
TMRWSCBC	BINARY	CMF	4	MAX	Number of WSACONTEXT BUILD requests	E640 E650	360
TMRWSCGC	BINARY	CMF	4	MAX	Number of WSACONTEXT GET requests	E640 E650	361
TMRWSEPC	BINARY	CMF	4	MAX	Number of WSAEPR CREATE requests	E640 E650	362
TMRWSOPN	CHAR	CMF	64	DIFF	Web Services operation name	E640 E650	381
TMRWSVCN	CHAR	CMF	32	DIFF	Webservice name	E640 E650	373
TMRX8CPU	SCLOCK12	CMF	12	AVG	User task X8 mode CPU time		315
TMRX9CPU	SCLOCK12	CMF	12	AVG	User task X9 mode CPU time		316
TMRXTDLY	SCLOCK12	CMF	12	AVG	Maximum CICS XPLink TCB delay time		313
TRANCLASS	CHAR	CMF	8	DIFF	Transaction class		6
TRANFLAGS	HEX	CMF	8	MIN	Transaction flags		118
TRANID	CHAR	CMF	4	DIFF	Transaction ID		9
TRANYPE	CHAR	CMF	4	DIFF	Transaction type		10
TSCOUNT	BINARY	CMF	4	AVG	Total number of TS requests		63
TSGETCNT	BINARY	CMF	4	AVG	Number of temporary storage GET requests		60
TSGETSCNT	BINARY	CMF	4	AVG	Number of TS GET requests to shared storage	E640 E650 E660 E670 E680 E690	429
TSIOTIME	SCLOCK12	CMF	12	MAX	TS I/O wait time		83
TSPUTACNT	BINARY	CMF	4	AVG	Number of TS PUT requests to auxiliary storage		61
TSPUTMCNT	BINARY	CMF	4	AVG	Number of TS PUT requests to main storage		62

Table 552. HTASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
TSPUTCNT	BINARY	CMF	4	AVG	Number of TS PUT requests to shared storage	E640 E650 E660 E670 E680 E690	430
UNSHUNTED	EYUDA	CPSM	4	LIKE	Recovery manager UOW unshunted		270
UNSHUNTED Output valid values	YES, NO						
UOWID	HEX	CMF	8	MIN	Local unit of work (UOW) ID		4
UOWINSTSEQ	HEX	CMF	8	MIN	LU6.2 network-wide UOW instance and sequence number		133
USERID	CHAR	CMF	8	DIFF	User ID		5
USRPS24HWM	BINARY	CMF	4	AVG	Maximum program storage in UDSA		45
USRPS31HWM	BINARY	CMF	4	AVG	Maximum program storage in EUDSA		44
USTG24CNT	BINARY	CMF	4	AVG	Number of user storage GETMAIN requests below 16MB		28
USTG24HWM	BINARY	CMF	4	AVG	Peak number of bytes used by task in UDSA		32
USTG24OCC	BINARY	CMF	8	AVG	Average storage usage below 16MB		37
USTG31CNT	BINARY	CMF	4	AVG	Number of user storage GETMAIN requests above 16MB		29
USTG31HWM	BINARY	CMF	4	AVG	Peak number of bytes used by task in EUDSA		33
USTG31OCC	BINARY	CMF	8	AVG	Average storage usage above 16MB		38
WAITTIME	SCLOCK12	CMF	12	MAX	Dispatch wait time		78
WBCHRIN	BINARY	CMF	4	AVG	Number of Web characters received		176
WBCHROUT	BINARY	CMF	4	AVG	Number of Web characters sent		178
WBISSFCT	BINARY	CMF	4	MAX	INVOKE SOAP service faults	E640 E650	426
WBJSNRPL	BINARY	CMF	4	AVG	JSON response body length	E640 E650 E660 E670 E680 E690	433
WBJSNRQL	BINARY	CMF	4	AVG	JSON request body length	E640 E650 E660 E670 E680 E690	432
WBRCVCT	BINARY	CMF	4	AVG	Number of WEB RECEIVE requests		175
WBREPWCT	BINARY	CMF	4	AVG	Number of Web repository writes		180
WSENDCT	BINARY	CMF	4	AVG	Number of WEB SEND requests		177
WBSFCRCT	BINARY	CMF	4	MAX	SOAPFAULT CREATE requests	E640 E650	424
WBSFTOCT	BINARY	CMF	4	MAX	Total SOAPFAULT CREATE requests	E640 E650	425
WBSREQBL	BINARY	CMF	4	MAX	SOAP request body length	E640 E650	427
WBSRSPBL	BINARY	CMF	4	MAX	SOAP response body length	E640 E650	428
WBTOTCT	BINARY	CMF	4	AVG	Total number of Web requests		179

Table 552. HTASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
WLMRPTRCNAME	CHAR	CMF	8	DIFF	Workload manager report class name		117
WLMSRVCNAME	CHAR	CMF	8	DIFF	Workload manager service class name		116

Chapter 243. INDTDQ Resource Table

A CICS Resource that describes an indirect transient data queue in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is TDQUEUE.

The following action is supported:

DISCARD

Discard the destination.

The DISCARD action requires no unique parameter data.

External resource name

CICSIndirectTDQueue

Length

96

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0028

Table 553. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET			

Table 554. INDTDQ resource table attributes								
Name	Datatype	Source	Len	Sum	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved			
BASDEFINEVER	BINARY	CPSM	1	AVG	BAS resource definition version	0	E640 E650	14
CHANGEAGENT	CVDAS	INQ	4	LIKE	Last modification agent		E640 E650	5

Table 554. INDTDQ resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Default	Get Invalid	Attr ID
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, SYSTEM, CREATESPI, NOTAPPLIC							
CHANGEAGREL	CHAR	INQ	4	DIFF	Last modification agent release		E640 E650	7
CHANGETIME	DATETIME	INQ	8	MAX	Last modification time		E640 E650	8
CHANGEUSRID	CHAR	INQ	8	DIFF	Last modification user ID		E640 E650	6
DEFINESOURCE	CHAR	INQ	8	DIFF	Source of the resource definition		E640 E650	9
DEFINETIME	DATETIME	INQ	8	MAX	Creation time		E640 E650	10
INDIRECTNAME	CHAR	INQ	4	DIFF	Indirect name			2
INDIRECTTYPE	CVDAS	INQ	4	LIKE	Indirect destination type			3
INDIRECTTYPE Output valid values	INTRA, EXTRA, INDIRECT, REMOTE							
INSTALLAGENT	CVDAS	INQ	4	LIKE	Installation agent		E640 E650	13
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, GRPLIST, SYSTEM							
INSTALLTIME	DATETIME	INQ	8	MAX	Installation time		E640 E650	12
INSTALLUSRID	CHAR	INQ	8	DIFF	Installation user ID		E640 E650	11
OUTCNT	BINARY	STAT	4	AVG	Number of I/O requests			4
TDQUEUE-1	CHAR	INQ	4	DIFF	Queue ID			1

Chapter 244. INTRATDQ Resource Table

A CICS Resource that describes an intrapartition transient data queue in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is TDQUEUE.

The following actions are supported:

DISABLE

Disable the destination.

DISCARD

Discard a disabled destination.

ENABLE

Enable the destination.

These actions require no unique parameter data.

External resource name

CICSIntrapartitionTDQueue

Length

136

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0027

Table 555. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	DISCARD	None	N/A
	DISABLE	None	N/A
	ENABLE	None	N/A

Table 556. INTRATDQ resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
ATIFACILITY	CVDAS	INQ	4	LIKE	Yes	ATI facility type			2
ATIFACILITY Input/output valid values	TERMINAL, NOTERMINAL								
ATIFACILITY Output valid values	NOTAPPLIC								
ATITERMID	CHAR	INQ	4	DIFF	Yes	ATI terminal ID			3
ATITRANID	CHAR	INQ	4	DIFF	Yes	ATI transaction ID			4
ATIUSERID	CHAR	INQ	8	DIFF	Yes	ATI User ID			10
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0	E640 E650	22
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent		E640 E650	13
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, SYSTEM, CREATESPI, NOTAPPLIC								
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release		E640 E650	15
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time		E640 E650	17
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID		E640 E650	14
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition		E640 E650	18
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time		E640 E650	19
INDOUBT	CVDAS	INQ	4	LIKE	No	In-doubt wait action			11
INDOUBT Output valid values	QUEUE, REJECT, NOTAPPLIC								
INDOUBTWAIT	CVDAS	INQ	4	LIKE	No	In-doubt wait option			12
INDOUBTWAIT Output valid values	WAIT, NOWAIT, NOTAPPLIC								
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent		E640 E650	16
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, GRPLIST, SYSTEM								
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time		E640 E650	21
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID		E640 E650	20
NUMITEMS	BINARY	INQ	4	AVG	No	Number of items			6
OUTCNT	BINARY	STAT	4	AVG	No	Number of I/O requests			9
RECOVSTATUS	CVDAS	INQ	4	LIKE	No	Recovery status			7
RECOVSTATUS Output valid values	PHYSICAL, LOGICAL, NOTRECOVABLE, NOTAPPLIC								
STATUS	CVDAS	INQ	4	LIKE	Yes	Enabled status			5
STATUS Input/output valid values	ENABLED, DISABLED								
STATUS Output valid values	NOTAPPLIC								
TDQUEUE-1	CHAR	INQ	4	DIFF	No	Queue ID			1

Table 556. INTRATDQ resource table attributes (continued)									
Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
TRIGGERLEVEL	BINARY	INQ	4	AVG	Yes	Trigger level			8

Chapter 245. IPCINGRP Resource Table

The IPCINGRP views display information about the membership of an IPIC connection definition (IPCONDEF) in a resource group (RESGROUP).

The **Primary** key field for this resource class is IPCGROUP.

The **Secondary** key field for this resource class is IPCNAME.

The **Tertiary** key field for this resource class is IPCVER.

The following actions are supported:

Get

View an association between an IPIC connection definition and a resource group.

Create

Create an association between an IPIC connection definition and a resource group.

Remove

Remove an association between an IPIC connection definition and a resource group from the data repository.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6181

Table 557. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 558. IPCINGRP FEEDBACK error codes		
Value	Code	Description
1	IPCINGRP_INV_DATA	Attribute data invalid
2	IPCINGRP_REC_NOT_FOUND	Requested resource not found

Table 558. IPCINGRP FEEDBACK error codes (continued)

Value	Code	Description
4	IPCINGRP_REC_EXISTS	Resource already exists
6	IPCINGRP_INV_RESTYPE	Invalid resource type
7	IPCINGRP_INV_VER	Invalid resource version
11	IPCINGRP_NON_MP	Maintenance point CMAS not available
12	IPCINGRP_INV_CONTEXT	Context not found
21	IPCINGRP_INCONSISTENT_SET	Inconsistent set
22	IPCINGRP_DIFF_VERSION	Different version
23	IPCINGRP_INV_NAME	Invalid name
24	IPCINGRP_INV_MINNAME	Invalid minor name

Table 559. IPCINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
IPCGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
IPCNAME-2	CHAR	CPSM	8	Yes	DIFF	Connection definition name	6
IPCVER-3	BINARY	CPSM	1	Yes	AVG	Connection definition version	7

Chapter 246. IPCONDEF Resource Table

A CICS Definition that describes an IPIC connection between CICS and a remote system.

The **Primary** key field for this resource class is NAME. Note that a connection name can be only 4 characters long. The remainder of the 8-character NAME field should be padded with blank spaces.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install a Connection Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionIPICConnection

Length

448

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3836

Table 560. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM SET	INSTALL	FORCEINS(YES, NO)	No

Table 560. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		MODE(value)	No
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 561. IPCONDEF FEEDBACK error codes

Value	Code	Description
1	IPCONDEF_INV_DATA	Attribute data invalid
2	IPCONDEF_REC_NOT_FOUND	Requested resource not found
4	IPCONDEF_REC_EXISTS	Resource already exists
5	IPCONDEF_REC_CHANGED	Resource definition already changed
6	IPCONDEF_INV_RESTYPE	Invalid resource type
7	IPCONDEF_INV_VER	Invalid resource version
11	IPCONDEF_NON_MP	Maintenance point CMAS not available
12	IPCONDEF_INV_CONTEXT	Context not found
13	IPCONDEF_INCONSISTENT_SET	Inconsistent set condition
14	IPCONDEF_INV_RESGROUP	Resource group not found
21	IPCONDEF_INV_ACTION	Invalid action
22	IPCONDEF_INV_RECADDR	Invalid record address
23	IPCONDEF_INV_RECLEN	Invalid record length
24	IPCONDEF_DIFF_VERSION	Different version
25	IPCONDEF_EARLY_NAMELIST_END	Early name list end
26	IPCONDEF_INV_NAMELIST	Invalid name list
27	IPCONDEF_INV_NAME	Invalid name
28	IPCONDEF_INV_MINNAME	Invalid minor name
29	IPCONDEF_NOTIFY	Notify
30	IPCONDEF_PARTIAL_INSTALL	Partial install

Table 561. IPCONDEF FEEDBACK error codes (continued)

Value	Code	Description
31	IPCONDEF_NOTHING_INSTALLED	Nothing installed
32	IPCONDEF_NO_TARGETS	No targets
33	IPCONDEF_NO_RELATED	No related systems
34	IPCONDEF_INV_TSCOPE	Invalid target scope
35	IPCONDEF_INV_RSCOPE	Invalid related scope
36	IPCONDEF_INV_USAGE	Invalid usage
37	IPCONDEF_INV_MODE	Invalid mode
38	IPCONDEF_INV_STATECHK	Invalid state check
39	IPCONDEF_INV_FORCEINS	Invalid force install
40	IPCONDEF_INV_NOTIFY	Invalid notify
41	IPCONDEF_INV_OVERTYPE	Invalid over type
42	IPCONDEF_INV_OVRBLOCK	Invalid override block
43	IPCONDEF_INV_ORSTRING	Invalid override string
44	IPCONDEF_INV_STRNGTERM	Invalid string term
45	IPCONDEF_INV_EMBEDTERM	Invalid embedded terminator
46	IPCONDEF_INV_ATTRIBUTE	Invalid attribute
47	IPCONDEF_INV_LITERAL	Invalid literal
48	IPCONDEF_INV_ORSTGNA	Invalid override string
49	IPCONDEF_SCOPE_REQUIRED	Scope required
50	IPCONDEF_USAGE_CONFLICT	Usage conflict
51	IPCONDEF_NODEFS_SELECTED	No definitions selected
52	IPCONDEF_MORE_THAN_1_RELSYS	More than one related system
53	IPCONDEF_MISSING_RELSYSID	Missing related system identifier
54	IPCONDEF_SCOPE_CONFLICT	Scope conflict
55	IPCONDEF_INV_CSDGROUP	Invalid CSD group
56	IPCONDEF_REC_NOT_REMOVED	Record not removed
57	IPCONDEF_INV_RESOURCE	Invalid resource
58	IPCONDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	IPCONDEF_PARTIAL_ACTION	Partial action
60	IPCONDEF_NOTHING_ACTIONED	Nothing actioned
61	IPCONDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	IPCONDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	IPCONDEF_CSD_ERROR	CSD access error

Table 562. IPCONDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
APPLID	CHAR	CPSM	8	Yes	DIFF	Remote application ID				16
AUTOCONNECT	EYUDA	CPSM	4	Yes	LIKE	Autoconnect sessions for IPIC connections	NO			8
AUTOCONNECT Input/output valid values	NO, YES									
CERTIFICATE	CHAR	CPSM	32	No	DIFF	Certificate				28
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	33
CHANGEAGENT Input/output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	35
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	34
CIPHERS	CHAR	CPSM	56	No	LIKE	SSL cipher suite codes				29
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				19
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	38
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		24
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				23
HA	EYUDA	CPSM	4	Yes	LIKE	High availability	NO		E640 E650 E660 E670 E680	40
HA Input/output valid values	NO, YES									
HOST	CHAR	CPSM	11 6	Yes	DIFF	Remote host name				25
IDPROP	CVDAS	CPSM	4	Yes	LIKE	Identity propagation	NOTALLOWED		E640 E650	37
IDPROP Input/output valid values	NOTALLOWED, OPTIONAL, REQUIRED									
INSERVICE	EYUDA	CPSM	4	Yes	LIKE	Connection status	YES			9
INSERVICE Input/output valid values	NO, YES									
LINKAUTH	CVDAS	CPSM	4	No	LIKE	Link security	SECUSER			32
LINKAUTH Input/output valid values	SECUSER, CERTUSER									
MAXQTIME	CHAR	CPSM	8	No	DIFF	Maximum queue time	NO	0-9999		18
MAXQTIME Input/output valid values	NO									
MIRRORLIFE	CVDAS	INQ	4	No	DIFF	Minimum mirror lifetime	REQUEST		E640 E650 E660	39
MIRRORLIFE Input/output valid values	REQUEST, TASK, UOW									
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
NETWORKID	CHAR	CPSM	8	No	DIFF	Remote network ID				15

Table 562. IPCONDEF resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
PORT	CHAR	CPSM	5	Yes	DIFF	Port number	NO	1-65535		13
PORT Input/output valid values	NO									
QUEUELIMIT	CHAR	CPSM	8	No	DIFF	Queue limit	NO	0-9999		17
QUEUELIMIT Input/output valid values	NO									
RECEIVECOUNT	CHAR	CPSM	3	Yes	DIFF	Receive count		1-999		26
SECURITYNAME	CHAR	CPSM	8	No	LIKE	Security name of the remote system				30
SENDcount	CHAR	CPSM	3	Yes	DIFF	Send count		0-999		27
SSL	EYUDA	CPSM	4	Yes	LIKE	Secure sockets layer (SSL) type	NO			11
SSL Input/output valid values	YES, NO									
TCPIPService	CHAR	CPSM	8	Yes	DIFF	TCP/IP service				14
USERAUTH	CVDAS	CPSM	4	Yes	LIKE	Attach-time user security level	LOCAL			12
USERAUTH Input/output valid values	DEFAULTUSER, LOCAL, VERIFY, IDENTIFY									
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				20
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				21
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				22
XLNACTION	EYUDA	CPSM	4	Yes	LIKE	Exchange log names (XLN) action	KEEP			10
XLNACTION Input/output valid values	KEEP, FORCE									

Chapter 247. IPCONN Resource Table

A CICS Resource that describes an IPIC connection in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

ACQUIRE

Acquire the connection.

BACKOUT

Back out shunted units of work associated with the connection.

CANCEL

Cancel the connection.

COMMIT

Commit shunted units of work associated with the connection.

DISCARD

Discard the connection.

FORCE

Force shunted units of work associated with the connection to commit or back out.

FORCECANCEL

Cancel all AIDs, including system AIDs, queuing for the connection.

FORCEPURGE

Force purge all transactions running on sessions on the connected system.

INSERVICE

Place the connection in service.

KILL

Kill all transactions running on sessions on the connected system.

Note: Kill can lead to unpredictable results and should be used only in exceptional circumstances.

NORECOVDATA

Override the normal resynchronization process.

NOTPENDING

Set the connection not pending.

OUTSERVICE

Place the connection out of service.

PURGE

Purge the connection.

RELEASE

Release the connection.

RESYNC

Resynchronize shunted units of work associated with the connection.

These actions require no unique parameter data.

Some of these actions may be valid only for particular types of CICS connections. Refer to the appropriate CICS documentation for details.

Note: The value returned by CICS conflicts with CVDA values in other CICS environments. In order to retain the attribute's uniqueness, CICSplex SM adds either 8000 or 9000 to the value returned by CICS. For more information about translating CVDA values, see [TRANSLATE command](#).

External resource name

CICSIPICConnection

Length

768

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0167

Table 563. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	DISCARD	None	N/A
	ACQUIRE	None	N/A
	BACKOUT	None	N/A
	COMMIT	None	N/A
	CANCEL	None	N/A
	FORCE	None	N/A
	FORCECANCEL	None	N/A
	FORCEPURGE	None	N/A
	INSERVICE	None	N/A
	KILL	None	N/A
	NORECOVDATA	None	N/A
	NOTPENDING	None	N/A
	OUTSERVICE	None	N/A
	PURGE	None	N/A
	RELEASE	None	N/A
	RESYNC	None	N/A

Table 564. IPCONN resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			

Table 564. IPCONN resource table attributes (continued)									
Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			32
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
ALLCFAILLINK	BINARY	STAT	4	DIFF	No	Number of allocations failed on link			
ALLCFAILOTH	BINARY	STAT	4	DIFF	No	Number of allocations failed for other reasons			33
APPLID	CHAR	INQ	8	DIFF	No	Remote application ID			2
AUTOCONNECT	CVDAS	INQ	4	LIKE	No	Autoconnect option			3
AUTOCONNECT Input/output valid values	AUTOCONN, NONAUTOCONN								
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0	E640 E650	58
CERTIFICATE	CHAR	INQ	32	DIFF	No	Certificate			44
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent		E640 E650	49
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, AUTOINSTALL, CREATESPI, NOTAPPLIC								
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release		E640 E650	51
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time		E640 E650	52
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID		E640 E650	50
CIPHERS	CHAR	INQ	56	LIKE	No	SSL cipher suite codes			46
CLIENTLOC	CHAR	INQ	32	DIFF	No	Most diverse route to partner system		E640 E650	59
CONNSTATUS	CVDAS	INQ	4	LIKE	Yes	Connection status			4
CONNSTATUS Input/output valid values	ACQUIRED, RELEASED								
CONNSTATUS Output valid values	FREEING, OBTAINING								
CRECVSESS	BINARY	STAT	4	DIFF	No	Number of receive sessions in use			27
CSENDSSESS	BINARY	STAT	4	DIFF	No	Number of send sessions in use			25
CURRQUEUED	BINARY	STAT	4	DIFF	No	Current number of allocates queued			30
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition		E640 E650	53
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time		E640 E650	54
EXITALLCPUR	BINARY	STAT	4	DIFF	No	Number of XISQUE allocates purged			39
EXITALLCQPUR	BINARY	STAT	4	DIFF	No	Number of XISQUE allocation queue purges			38
EXITALLCREJ	BINARY	STAT	4	DIFF	No	Number of XISQUE allocate rejections			37
FSFCBYTERECD	BINARY	STAT	8	AVG	No	Number of FC function shipped bytes received		E640 E650 E660	75
FSFCBYTESENT	BINARY	STAT	8	AVG	No	Number of FC function shipped bytes sent		E640 E650 E660	74

Table 564. IPCONN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
FSFCREQS	BINARY	STAT	4	AVG	No	Number of FC function shipped requests		E640 E650 E660	73
FSICBYTERECD	BINARY	STAT	8	AVG	No	Number of IC function shipped bytes received		E640 E650	69
FSICBYTESENT	BINARY	STAT	8	AVG	No	Number of IC function shipped bytes sent		E640 E650	68
FSICREQS	BINARY	STAT	4	DIFF	No	Number of IC function shipped requests		E640 E650	67
FSPCBYTERECD	BINARY	STAT	8	DIFF	No	Number of PC function shipped bytes received			20
FSPCBYTESENT	BINARY	STAT	8	DIFF	No	Number of PC function shipped bytes sent			19
FSPGREQS	BINARY	STAT	4	DIFF	No	Number of PC function shipped requests			41
FSTDBYTERECD	BINARY	STAT	8	AVG	No	Number of TD function shipped bytes received		E640 E650 E660	78
FSTDBYTESENT	BINARY	STAT	8	AVG	No	Number of TD function shipped bytes sent		E640 E650 E660	77
FSTDREQS	BINARY	STAT	4	AVG	No	Number of TD function shipped requests		E640 E650 E660	76
FSTSBYTERECD	BINARY	STAT	8	AVG	No	Number of TS function shipped bytes received		E640 E650 E660	81
FSTSBYTESENT	BINARY	STAT	8	AVG	No	Number of TS function shipped bytes sent		E640 E650 E660	80
FSTSREQS	BINARY	STAT	4	AVG	No	Number of TS function shipped requests		E640 E650 E660	79
GMTCTIME	TIMESTP	STAT	8	MAX	No	GMT connection create time			23
GMTDIME	TIMESTP	STAT	8	MAX	No	GMT connection delete time			24
HA	CVDAS	INQ	4	LIKE	No	High availability status		E640 E650 E660 E670 E680	83
HA Output valid values	REQUIRED, NOTREQUIRED								
HOST	CHAR	INQ	116	DIFF	No	Remote host name			5
HOSTTYPE	CVDAS	INQ	4	LIKE	No	Host name's address format		E640 E650	63
HOSTTYPE Output valid values	HOSTNAME, IPV4, IPV6, NOTAPPLIC								
IDPROP	CVDAS	INQ	4	LIKE	No	Identity propagation		E640 E650	70
IDPROP Output valid values	NOTALLOWED, OPTIONAL, REQUIRED								
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent		E640 E650	57
INSTALLAGENT Input/output valid values	CSDAPI, CREATSPI, AUTOINSTALL, GRPLIST								
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time		E640 E650	56

Table 564. IPCONN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID		E640 E650	55
IPFAMILY	CVDAS	INQ	4	LIKE	No	The format of the resolved IP address		E640 E650	62
IPFAMILY Output valid values	IPv4, IPv6, UNKNOWN								
IPRESOLVED	CHAR	INQ	39	DIFF	No	Remote host's IP address		E640 E650	61
LINKAUTH	CVDAS	INQ	4	LIKE	No	Link security			16
LINKAUTH Output valid values	SECUSER, CERTUSER								
LOCETIME	TIMESTP	STAT	8	MAX	No	Local connection create time			21
LOCETIME	TIMESTP	STAT	8	MAX	No	Local connection delete time			22
MAXQTIME	BINARY	INQ	4	DIFF	No	Maximum queue time	NO		6
MIRRORLIFE	CVDAS	INQ	4	DIFF	No	Minimum mirror lifetime		E640 E650 E660	72
MIRRORLIFE Input/output valid values	REQUEST, TASK, UOW								
MQTALLPURG	BINARY	STAT	4	DIFF	No	Number of queue time allocates purged			36
MQTALLQPURG	BINARY	STAT	4	DIFF	No	Number of queue time allocation queue purges			35
NAME-1	CHAR	INQ	8	DIFF	No	IPIC connection ID			1
NETWORKID	CHAR	INQ	8	DIFF	No	Remote network ID			15
NUMCIPHERS	BINARY	INQ	2	LIKE	No	Number of SSL cipher suite codes			45
PARTNER	CHAR	INQ	64	DIFF	No	Product token of partner system		E640 E650	60
PEAKQUEUED	BINARY	STAT	4	DIFF	No	Number of peak queued session allocations			31
PENDSTATUS	CVDAS	INQ	4	LIKE	Yes	Pending status			7
PENDSTATUS Input/output valid values	PENDING, NOTPENDING								
PORT	BINARY	INQ	4	DIFF	No	Port number			8
PRECVSESS	BINARY	STAT	4	DIFF	No	Maximum number of receive sessions used			28
PSENDSESS	BINARY	STAT	4	DIFF	No	Maximum number of send sessions used			26
PURGETYPE	CVDAS	INQ	4	LIKE	Yes	Purge type			17
PURGETYPE Input/output valid values	CANCEL, FORCECANCEL, FORCEPURGE, KILL, PURGE, N_A								
QLIMALLOCREJ	BINARY	STAT	4	DIFF	No	Number of queue limit allocate rejections			34
QUEUELIMIT	BINARY	INQ	4	DIFF	No	Queue limit			9
RECEIVECOUNT	BINARY	INQ	4	DIFF	No	Receive count			10
RECOVSTATUS	CVDAS	INQ	4	LIKE	Yes	Recovery status			11
RECOVSTATUS Input/output valid values	NORECOVDATA, NRS, RECOVDATA								
REMTRMSTRT	BINARY	STAT	4	AVG	No	Remote terminal starts		E640 E650	71
SECURITYNAME	CHAR	CPSM	8	DIFF	No	Security name of the remote system			47

Table 564. IPCONN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
SENDCOUNT	BINARY	INQ	4	DIFF	No	Send count			12
SERVSTATUS	CVDAS	INQ	4	LIKE	Yes	Service status			13
SERVSTATUS Input/output valid values	INSERVICE, OUTSERVICE								
SSLTYPE	CVDAS	INQ	4	LIKE	No	Secure sockets layer (SSL) type			42
SSLTYPE Output valid values	SSL, NOSSL								
TCPIPSERVICE	CHAR	INQ	8	DIFF	No	TCP/IP service			14
TOTALLOC	BINARY	STAT	4	DIFF	No	Total number of session allocations			29
TRANSATTCH	BINARY	STAT	4	DIFF	No	Number of transactions attached			40
TRBYTERECD	BINARY	STAT	8	AVG	No	Number of TR function shipped bytes received		E640 E650	66
TRBYTESENT	BINARY	STAT	8	AVG	No	Number of TR function shipped bytes sent		E640 E650	65
TRREQS	BINARY	STAT	4	AVG	No	Number of TR function shipped requests		E640 E650	64
UNSUPREQS	BINARY	STAT	4	AVG	No	Number of unsupported requests		E640 E650 E660	82
UOWACTION	CVDAS	INQ	4	LIKE	Yes	UOW Action			18
UOWACTION Input/output valid values	BACKOUT, COMMIT, FORCE, RESYNC, N_A								
USERAUTH	CVDAS	INQ	4	LIKE	No	Attach-time user security level			43
USERAUTH Output valid values	DEFAULTUSER, LOCAL, VERIFY, IDENTIFY								

Chapter 248. IPFACIL Resource Table

The IPFACIL views show the associations between active CICS tasks and the IPIC connections in use by those tasks.

The **Primary** key field for this resource class is TASKID.

The **Secondary** key field for this resource class is TOKEN.

The following actions are supported:

Get

View an association between an IPIC connection definition and an active CICS task.

External resource name

CICSIPFacility

Length

40

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0171

Table 565. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 566. IPFACIL resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
IPCONN	CHAR	INQ	8	DIFF	IP connection id	3
IPFACILTYPE	CVDAS	INQ	4	LIKE	IP facility type	4
IPFACILTYPE Input/output valid values		PRINCIPAL, ALTERNATE				
TASKID-1	DECIMAL	INQ	4	MIN	Associated task id	1
TOKEN-2	HEX	INQ	4	MIN	IP facility token	2

Chapter 249. JMSINGRP Resource Table

A CPSM Business Application Services definition that describes the membership of a JVMSERVER definition (JVMSVDEF) in a resource group (RESGROUP). A JVMSVDEF resource object can be a member of multiple RESGROUPS.

The **Primary** key field for this resource class is JMSGROUP.

The **Secondary** key field for this resource class is JMSNAME.

The **Tertiary** key field for this resource class is JMSVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6186

Table 567. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 568. JMSINGRP FEEDBACK error codes		
Value	Code	Description
1	JMSINGRP_INV_DATA	Attribute data invalid
2	JMSINGRP_REC_NOT_FOUND	Requested resource not found
4	JMSINGRP_REC_EXISTS	Resource already exists
6	JMSINGRP_INV_RESTYPE	Invalid resource type
7	JMSINGRP_INV_VER	Invalid resource version
11	JMSINGRP_NON_MP	Maintenance point CMAS not available

Table 568. JMSINGRP FEEDBACK error codes (continued)

Value	Code	Description
12	JMSINGRP_INV_CONTEXT	Context not found
21	JMSINGRP_INCONSISTENT_SET	Inconsistent set
22	JMSINGRP_DIFF_VERSION	Different version
23	JMSINGRP_INV_NAME	Invalid name
24	JMSINGRP_INV_MINNAME	Invalid minor name

Table 569. JMSINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	4
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	7
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	6
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	5
JMSGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	10
JMSNAME-2	CHAR	CPSM	8	Yes	DIFF	JVM server definition name	11
JMSVER-3	BINARY	CPSM	1	Yes	AVG	JVM server definition version	12

Chapter 250. JRMINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a journal model definition (JRNMDEF) in a resource group (RESGROUP). A JRNMDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is JRNMGROUP.

The **Secondary** key field for this resource class is JRNNAME.

The **Tertiary** key field for this resource class is JRNMDVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6148

Table 570. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 571. JRMINGRP FEEDBACK error codes		
Value	Code	Description
1	JRMINGRP_INV_DATA	Attribute data invalid
2	JRMINGRP_REC_NOT_FOUND	Requested resource not found
4	JRMINGRP_REC_EXISTS	Resource already exists
6	JRMINGRP_INV_RESTYPE	Invalid resource type
7	JRMINGRP_INV_VER	Invalid resource version
11	JRMINGRP_NON_MP	Maintenance point CMAS not available

Table 571. JRMINGRP FEEDBACK error codes (continued)

Value	Code	Description
12	JRMINGRP_INV_CONTEXT	Context not found
21	JRMINGRP_INCONSISTENT_SET	Inconsistent set
22	JRMINGRP_DIFF_VERSION	Different version
23	JRMINGRP_INV_NAME	Invalid name
24	JRMINGRP_INV_MINNAME	Invalid minor name

Table 572. JRMINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
JRNMDVER-3	BINARY	CPSM	1	Yes	AVG	Journal model definition version	7
JRNMGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
JRNNAME-2	CHAR	CPSM	8	Yes	DIFF	Journal model definition name	6

Chapter 251. JRNINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a journal definition (JRNLDEF) in a resource group (RESGROUP). A JRNLDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is JRNLGROUP.

The **Secondary** key field for this resource class is JRNLNAME.

The **Tertiary** key field for this resource class is JRNLVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

Batch Utility

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6147

Table 573. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 574. JRNINGRP FEEDBACK error codes		
Value	Code	Description
1	JRNINGRP_INV_DATA	Attribute data invalid
2	JRNINGRP_REC_NOT_FOUND	Requested resource not found
4	JRNINGRP_REC_EXISTS	Resource already exists
6	JRNINGRP_INV_RESTYPE	Invalid resource type
7	JRNINGRP_INV_VER	Invalid resource version
11	JRNINGRP_NON_MP	Maintenance point CMAS not available
12	JRNINGRP_INV_CONTEXT	Context not found

Table 574. JRNINGRP FEEDBACK error codes (continued)

Value	Code	Description
21	JRNINGRP_INCONSISTENT_SET	Inconsistent set
22	JRNINGRP_DIFF_VERSION	Different version
23	JRNINGRP_INV_NAME	Invalid name
24	JRNINGRP_INV_MINNAME	Invalid minor name

Table 575. JRNINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
JRNLGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
JRNLNAME-2	CHAR	CPSM	8	Yes	DIFF	Journal definition name	6
JRNLVER-3	BINARY	CPSM	1	Yes	AVG	Journal definition version	7

Chapter 252. JRNLDEF Resource Table

A CICS Definition that describes a CICS system log or user journal.

The **Primary** key field for this resource class is NAME. Note that a journal ID can be only 2 characters long. The remainder of the 8-character NAME field should be padded with blank spaces.

The **Secondary** key field for this resource class is DEFVER.

External resource name

Length

192

Usage

Batch Utility

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3802

Table 576. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		RESGROUP(value)	No
CREATE		RESGROUP(value)	No
UPDATE		None	N/A
REMOVE		None	N/A
PERFORM	ADDTGRP	RESGROUP(value)	Yes
SET			

Table 577. JRNLDEF FEEDBACK error codes		
Value	Code	Description
1	JRNLDEF_INV_DATA	Attribute data invalid
2	JRNLDEF_REC_NOT_FOUND	Requested resource not found
4	JRNLDEF_REC_EXISTS	Resource already exists
5	JRNLDEF_REC_CHANGED	Resource definition already changed
6	JRNLDEF_INV_RESTYPE	Invalid resource type

Table 577. JRNLDEF FEEDBACK error codes (continued)

Value	Code	Description
7	JRNLDEF_INV_VER	Invalid resource version
11	JRNLDEF_NON_MP	Maintenance point CMAS not available
12	JRNLDEF_INV_CONTEXT	Context not found
13	JRNLDEF_INCONSISTENT_SET	Inconsistent set condition
14	JRNLDEF_INV_RESGROUP	Resource group not found
21	JRNLDEF_INV_ACTION	Invalid action
22	JRNLDEF_INV_RECADDR	Invalid record address
23	JRNLDEF_INV_RECLEN	Invalid record length
24	JRNLDEF_DIFF_VERSION	Different version
25	JRNLDEF_EARLY_NAMELIST_END	Early name list end
26	JRNLDEF_INV_NAMELIST	Invalid name list
27	JRNLDEF_INV_NAME	Invalid name
28	JRNLDEF_INV_MINNAME	Invalid minor name

Table 578. JRNLDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
ARCHSTATUS	CVDAS	CPSM	4	Yes	LIKE	Automatic archiving status	NOAUTOARCH		16
ARCHSTATUS Input/output valid values	AUTOARCH, NOAUTOARCH, REVERTED								
BUFFERSIZE	CHAR	CPSM	8	Yes	DIFF	I/O buffer size		512-32760	10
BUFSUV	CHAR	CPSM	8	No	DIFF	Buffer shiftup value	NO	1-32760	24
BUFSUV Input/output valid values	NO								
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed			1
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Definition create time			26
CRUCIAL	EYUDA	CPSM	4	Yes	LIKE	Perform action when I/O error occurs	NO		17
CRUCIAL Input/output valid values	YES, NO								
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Definition version	0	0-15	5
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Definition description			30
DEVADDR	CHAR	CPSM	4	No	DIFF	Device address	NO	0-255	23
DEVADDR Input/output valid values	NO								
EMRGNCYRSTRT	EYUDA	CPSM	4	Yes	LIKE	Emergency restart data set	LRU		21
EMRGNCYRSTRT Input/output valid values	LRU, EXTA								
INPUT	EYUDA	CPSM	4	Yes	LIKE	Input allowed	NO		20
INPUT Input/output valid values	YES, NO								
JOURNALTYPE	CVDAS	CPSM	4	Yes	LIKE	Journal type	DISK1		9

Table 578. JRNLDEF resource table attributes (continued)									
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
JOURNALTYPE Input/output valid values	SMF, TAPE1, TAPE2, DISK1, DISK2								
LABEL	EYUDA	CPSM	4	Yes	LIKE	Use standard user label tapes	NO		11
LABEL Input/output valid values	NO, STANDARD								
LAYOUT	EYUDA	CPSM	4	Yes	LIKE	Journal structure type	LINEAR		12
LAYOUT Input/output valid values	LINEAR, CYCLIC								
NAME-1	CHAR	CPSM	8	Yes	DIFF	Journal definition name			7
OPEN	EYUDA	CPSM	4	Yes	LIKE	Open time	INITIAL		13
OPEN Input/output valid values	INITIAL, DEFERRED								
OPENSTATUS	CVDAS	CPSM	4	Yes	LIKE	Open status	CLOSED		22
OPENSTATUS Input/output valid values	OPEN, CLOSED								
PAUSE	EYUDA	CPSM	4	Yes	LIKE	Operator authorization required	NO		19
PAUSE Input/output valid values	YES, NO								
RETRY	EYUDA	CPSM	4	Yes	LIKE	Retry I/O errors	NO		18
RETRY Input/output valid values	YES, NO								
RSL	CHAR	CPSM	4	No	DIFF	Resource security value	NO	1-24	25
RSL Input/output valid values	NO								
SYSWAIT	EYUDA	CPSM	4	Yes	LIKE	I/O initiate time	STARTIO		14
SYSWAIT Input/output valid values	STARTIO, ASIS								
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1			27
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2			28
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3			29
VOLCNT	CHAR	CPSM	4	No	DIFF	Number of tape volumes	2	2-255	15

Chapter 253. JRNLMODL Resource Table

A CICS Resource that describes a journal model in an active system running the CICS TS for z/OS and being managed by CICSplex SM.

The **Primary** key field for this resource class is JOURNALMODEL.

The following action is supported:

DISCARD

Discard the journal model.

The DISCARD action requires no unique parameter data.

External resource name

CICSJournalModel

Length

128

Usage

API or WUI or CICS Management Client Interface

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0076

Table 579. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET			

Table 580. JRNLMODL resource table attributes

Name	Datatype	Source	Len	Sum	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved			
BASDEFINEVER	BINARY	CPSM	1	AVG	BAS resource definition version	0	E640 E650	15
CHANGEAGENT	CVDAS	INQ	4	LIKE	Last modification agent		E640 E650	6

Table 580. JRNLMODL resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Default	Get Invalid	Attr ID
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, CREATESPI, NOTAPPLIC							
CHANGEAGREL	CHAR	INQ	4	DIFF	Last modification agent release		E640 E650	8
CHANGETIME	DATETIME	INQ	8	MAX	Last modification time		E640 E650	9
CHANGEUSRID	CHAR	INQ	8	DIFF	Last modification user ID		E640 E650	7
DEFINESOURCE	CHAR	INQ	8	DIFF	Source of the resource definition		E640 E650	10
DEFINETIME	DATETIME	INQ	8	MAX	Creation time		E640 E650	11
INSTALLAGENT	CVDAS	INQ	4	LIKE	Installation agent		E640 E650	14
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, GRPLIST							
INSTALLTIME	DATETIME	INQ	8	MAX	Installation time		E640 E650	13
INSTALLUSRID	CHAR	INQ	8	DIFF	Installation user ID		E640 E650	12
JOURNALMODEL-1	CHAR	INQ	8	DIFF	Journal model name			1
JOURNALNAME	CHAR	INQ	8	DIFF	Journal name			2
STREAMNAME	CHAR	INQ	26	DIFF	MVS log stream name			4
TYPE	CVDAS	INQ	4	LIKE	Log stream type			3
TYPE Output valid values	MVS, SMF, DUMMY							

Chapter 254. JRNLNAME Resource Table

A CICS Resource that describes a journal in an active system running the CICS TS for z/OS and being managed by CICSplex SM.

The **Primary** key field for this resource class is JOURNALNAME.

The following actions are supported:

DISCARD

Discard the journal name.

FLUSH

Write the log buffers out to the log stream.

RESET

Disconnect the journal from the log stream.

These actions require no unique parameter data.

External resource name

CICSJournalName

Length

80

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0077

Table 581. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	FLUSH	None	N/A
	RESET	None	N/A
	DISCARD	None	N/A

Table 582. JRNLNAME resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved	
JOURNALNAME-1	CHAR	INQ	8	DIFF	No	Journal name	1
NUMBUFLUSH	BINARY	STAT	4	SUM	No	Number of buffer flush requests	8
NUMBYTES	BINARY	STAT	8	AVG	No	Total number of bytes written	7
NUMWRITES	BINARY	STAT	4	SUM	No	Number of journal writes	6
STATUS	CVDAS	INQ	4	LIKE	Yes	Journal status	2
STATUS Input/output valid values	ENABLED, DISABLED						
STATUS Output valid values	FAILED						
STREAMNAME	CHAR	INQ	26	DIFF	No	MVS log stream name	4
TYPE	CVDAS	INQ	4	LIKE	No	Log stream type	3
TYPE Output valid values	MVS, SMF, DUMMY						

Chapter 255. JRNMDEF Resource Table

A CICS Definition that describes a journal model, which is the association between a CICS journal name and the MVS™ system log streams or the SMF log.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install a Journal Model Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionJournalModel

Length

184

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3803

Table 583. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM SET	INSTALL	FORCEINS(YES, NO)	No

Table 583. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		MODE(value)	No
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 584. JRNMDEF FEEDBACK error codes

Value	Code	Description
1	JRNMDEF_INV_DATA	Attribute data invalid
2	JRNMDEF_REC_NOT_FOUND	Requested resource not found
4	JRNMDEF_REC_EXISTS	Resource already exists
5	JRNMDEF_REC_CHANGED	Resource definition already changed
6	JRNMDEF_INV_RESTYPE	Invalid resource type
7	JRNMDEF_INV_VER	Invalid resource version
11	JRNMDEF_NON_MP	Maintenance point CMAS not available
12	JRNMDEF_INV_CONTEXT	Context not found
13	JRNMDEF_INCONSISTENT_SET	Inconsistent set condition
14	JRNMDEF_INV_RESGROUP	Resource group not found
21	JRNMDEF_INV_ACTION	Invalid action
22	JRNMDEF_INV_RECADDR	Invalid record address
23	JRNMDEF_INV_RECLN	Invalid record length
24	JRNMDEF_DIFF_VERSION	Different version
25	JRNMDEF_EARLY_NAMELIST_END	Early name list end
26	JRNMDEF_INV_NAMELIST	Invalid name list
27	JRNMDEF_INV_NAME	Invalid name
28	JRNMDEF_INV_MINNAME	Invalid minor name
29	JRNMDEF_NOTIFY	Notify
30	JRNMDEF_PARTIAL_INSTALL	Partial install

Table 584. JRNMDEF FEEDBACK error codes (continued)

Value	Code	Description
31	JRNMDEF_NOTHING_INSTALLED	Nothing installed
32	JRNMDEF_NO_TARGETS	No targets
33	JRNMDEF_NO_RELATED	No related systems
34	JRNMDEF_INV_TSCOPE	Invalid target scope
35	JRNMDEF_INV_RSCOPE	Invalid related scope
36	JRNMDEF_INV_USAGE	Invalid usage
37	JRNMDEF_INV_MODE	Invalid mode
38	JRNMDEF_INV_STATECHK	Invalid state check
39	JRNMDEF_INV_FORCEINS	Invalid force install
40	JRNMDEF_INV_NOTIFY	Invalid notify
41	JRNMDEF_INV_OVERTYPE	Invalid over type
42	JRNMDEF_INV_OVRBLOCK	Invalid override block
43	JRNMDEF_INV_ORSTRING	Invalid override string
44	JRNMDEF_INV_STRNGTERM	Invalid string term
45	JRNMDEF_INV_EMBEDTERM	Invalid embedded terminator
46	JRNMDEF_INV_ATTRIBUTE	Invalid attribute
47	JRNMDEF_INV_LITERAL	Invalid literal
48	JRNMDEF_INV_ORSTGNA	Invalid override string
49	JRNMDEF_SCOPE_REQUIRED	Scope required
50	JRNMDEF_USAGE_CONFLICT	Usage conflict
51	JRNMDEF_NODEFS_SELECTED	No definitions selected
52	JRNMDEF_MORE_THAN_1_RELSYS	More than one related system
53	JRNMDEF_MISSING_RELSYSID	Missing related system identifier
54	JRNMDEF_SCOPE_CONFLICT	Scope conflict
55	JRNMDEF_INV_CSDGROUP	Invalid CSD group
56	JRNMDEF_REC_NOT_REMOVED	Record not removed
57	JRNMDEF_INV_RESOURCE	Invalid resource
58	JRNMDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	JRNMDEF_PARTIAL_ACTION	Partial action
60	JRNMDEF_NOTHING_ACTIONED	Nothing actioned
61	JRNMDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	JRNMDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	JRNMDEF_CSD_ERROR	CSD access error

Table 585. JRNMDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	17
CHANGEAGENT Input/ output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	19
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	18
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				11
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	21
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		16
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				15
JOURNALNAME	CHAR	CPSM	8	No	DIFF	Journal name				8
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
STREAMNAME	CHAR	CPSM	26	No	DIFF	MVS log stream name				10
STREAMTYPE	CVDAS	CPSM	4	Yes	LIKE	Log stream type	MVS			9
STREAMTYPE Input/ output valid values	MVS, SMF, DUMMY									
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				12
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				13
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				14

Chapter 256. JVM Resource Table

A CICS Resource that provides information about a JVM. This resource is not supported in CICS TS for z/OS, Version 5.1 and later versions.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSJVM

Length

56

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0137

Table 586. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 587. JVM resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	3
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
AGE	BINARY	INQ	4	AVG	Number of seconds since the pooled JVM was initialised	6
ALLOCGE	BINARY	INQ	4	AVG	Number of seconds pooled JVM has been allocated to task	7
CLASSCACHEST	CVDAS	INQ	4	LIKE	Class cache status	7
CLASSCACHEST Output valid values	CLASSCACHE, NOCLASSCACHE					
EXECKEY	CVDAS	INQ	4	LIKE	Execution key of the pooled JVM	4
EXECKEY Output valid values	CICSEXECKEY, USEREXECKEY					
NAME-1	BINARY	INQ	4	MAX	Java Virtual Machine	1
PHASINGOUTST	CVDAS	INQ	4	LIKE	Phasing out status	8
PHASINGOUTST Output valid values	PHASEOUT, NOPHASEOUT					

Table 587. JVM resource table attributes (continued)						
Name	Datatype	Source	Len	Sum	Description	Attr ID
PROFILE	CHAR	INQ	8	DIFF	Profile used to initialise the pooled JVM	2
REUSEST	CVDAS	INQ	4	LIKE	JVM reuse status	9
REUSEST Output valid values	REUSE, NOREUSE, RESET					
TASK	DECIMAL	INQ	4	AVG	Task to which the pooled JVM is allocated	5

Chapter 257. JVMPOOL Resource Table

A CICS Resource that provides information about the pool of JVMs in the CICS address space. This resource is not supported in CICS TS for z/OS, Version 5.1 and later versions.

The following actions are supported:

- SET**
Set a CICS system attribute according to the new value you specify in an overtype field.
- DISABLE**
Set the pool status to disabled.
- ENABLE**
Set the pool status to enabled.
- FORCE**
Terminate all tasks using JVMs in the pool by the CICS SET TASK FORCEPURGE mechanism.
- PHASEOUT**
Mark JVMs for deletion.
- PURGE**
Terminate all tasks using JVMs in the pool by the CICS SET TASK PURGE mechanism.
- START**
Start one or more JVMs using the specified JVM profile and execution key.

- External resource name**
CICSJVMPool
- Length**
1272
- Usage**
API or WUI or CICS Management Client Interface or EVALDEF
- API view**
Yes
- CMAS context**
No
- SCOPE applies**
Yes
- Only query CMASs in workload**
No
- Object type**
CICS Resource
- Copybook identifier**
EYUt0114

Table 588. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	ENABLE	None	N/A

Table 588. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
	DISABLE	None	N/A
	PHASEOUT	JVMPROFILE(value)	No
	PURGE	JVMPROFILE(value)	No
	FORCEPURGE	JVMPROFILE(value)	No
	START	EXECKEY(CICSEXECKEY, USEREXECKEY)	Yes
		JVMCOUNT(value)	Yes
		JVMPROFILE(value)	Yes

Table 589. JVMPOOL resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release		
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved		
JVMLVL0TRACE	CHAR	INQ	240	DIFF	Yes	JVM LVL0 Trace control		15
JVMLVL1TRACE	CHAR	INQ	240	DIFF	Yes	JVM LVL1 Trace control		16
JVMLVL2TRACE	CHAR	INQ	240	DIFF	Yes	JVM LVL2 Trace control		17
JVMUSERTRACE	CHAR	INQ	240	DIFF	Yes	JVM USER Trace control		18
PHASINGOUT	BINARY	INQ	4	AVG	No	Number of Java virtual machines (JVM) for removal		1
PROFILEDIR	CHAR	INQ	240	DIFF	No	JVM profile directory	E640 E650	23
SJGCURRCACHE	BINARY	STAT	4	AVG	No	Current pooled (class cache) JVMs		19
SJGCURRJVMs	BINARY	STAT	4	AVG	No	Number of current JVMs		8
SJGPEAKCACHE	BINARY	STAT	4	AVG	No	Peak pooled (class cache) JVMs		20
SJGPEAKJVMs	BINARY	STAT	4	AVG	No	Peak number of JVMs		9
SJGREQSCACHE	BINARY	STAT	4	AVG	No	JVM requests - class cache		21
SJGREQSINIT	BINARY	STAT	4	AVG	No	Number of JVM requests with JVM initialised		12
SJGREQSMISMA	BINARY	STAT	4	AVG	No	Number of JVM requests with JVM mismatch		13
SJGREQSRESET	BINARY	STAT	4	AVG	No	Number of JVM requests with JVM reset	E650+	22
SJGREQSREUSE	BINARY	STAT	4	AVG	No	Number of JVM requests with JVM reuse		11
SJGREQSTERMI	BINARY	STAT	4	AVG	No	Number of JVM requests with JVM terminated		14
SJGREQSTOTAL	BINARY	STAT	4	AVG	No	Total number of JVM program requests		10
STATUS	CVDAS	INQ	4	LIKE	Yes	Status of Java virtual machine (JVM) pool		2
STATUS Input/output valid values	ENABLED, DISABLED							
TOTAL	BINARY	INQ	4	AVG	No	Number of pre-initialized Java virtual machines		3

Chapter 258. JVMPROF Resource Table

A CICS Resource that provides information about a JVM profile. This resource is not supported in CICS TS for z/OS, Version 5.1 and later versions.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSJVMProfile

Length

384

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0138

Table 590. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 591. JVMPROF resource table attributes							
Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release		11
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved		
CCURPROFUSE	BINARY	STAT	4	AVG	Current JVM profile CICS key use count		
CJVMDESTRSOS	BINARY	STAT	4	AVG	Times JVMs CICS key destroyed by 'SOS' action		27
CJVMHEAPHWM	BINARY	STAT	4	AVG	Heap peak for CICS key JVMs		25
CJVMUNRESET	BINARY	STAT	4	AVG	Number of CICS key JVMs not resettable	E650+	17
CLASSCACHEST	CVDAS	INQ	4	LIKE	Class cache status		4
CLASSCACHEST Output valid values		CLASSCACHE, NOCLASSCACHE					
CLEHEAPHWM	BINARY	STAT	4	AVG	Peak Language Environment heap used (CICS key)		23

Table 591. JVMPROF resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
CMISMAVICTIM	BINARY	STAT	4	AVG	Number of times CICS key mismatch victim		21
CMISMSTEALER	BINARY	STAT	4	AVG	Number of times CICS key mismatch stealer		19
CNEWJVMSCRT	BINARY	STAT	4	AVG	New CICS key JVMs created		15
CPEAKPROFUSE	BINARY	STAT	4	AVG	Peak JVM profile CICS key use count		13
CPROFILEREQS	BINARY	STAT	4	AVG	JVM profile CICS key request count		9
CPROFXMXVALU	CHAR	STAT	8	DIFF	JVM profile CICS -Xmx value		29
HFSNAME	CHAR	INQ	255	DIFF	Full path name of the zFS file		2
NAME-1	CHAR	INQ	8	DIFF	Name as used in a program definition		1
REUSEST	CVDAS	INQ	4	LIKE	JVM reuse status		5
REUSEST Output valid values	REUSE, NOREUSE, RESET						
UCURPROFUSE	BINARY	STAT	4	AVG	Current JVM profile USER key use count		12
UJVMDESTRSOS	BINARY	STAT	4	AVG	Times JVMs USER key destroyed by 'SOS' action		28
UJVMHEAPHWM	BINARY	STAT	4	AVG	Heap peak for user key JVMs		26
UJVMSUNRESET	BINARY	STAT	4	AVG	Number of USER key JVMs not resettable	E650+	18
ULEHEAPHWM	BINARY	STAT	4	AVG	Peak Language Environment heap used (USER key)		24
UMISMAVICTIM	BINARY	STAT	4	AVG	Number of times USER key mismatch victim		22
UMISMSTEALER	BINARY	STAT	4	AVG	Number of times USER key mismatch stealer		20
UNEWJVMSCRT	BINARY	STAT	4	AVG	New USER key JVMs created		16
UPEAKPROFUSE	BINARY	STAT	4	AVG	Peak JVM profile USER key use count		14
UPROFILEREQS	BINARY	STAT	4	AVG	JVM profile USER key request count		10
UPROFXMXVALU	CHAR	STAT	8	DIFF	JVM profile USER -Xmx value		30

Chapter 259. JVMSERV Resource Table

A CICS resource that provides information about an installed JVM server.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

DISABLE

Disable the JVMSERVER resource to stop the JVM server runtime environment.

DISCARD

Discard the JVMSERVER resource definition. The resource must be disabled.

ENABLE

Enable the JVMSERVER resource to start the JVM server runtime environment.

SET

Set a CICS system attribute according to the new value you specify in an overtype field.

External resource name

CICSJVMServer

Length

536

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0194

Table 592. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM	ENABLE	None	N/A
SET	DISABLE	PURGETYPE(PHASEOUT, PURGE, FORCEPURGE, KILL)	No
	DISCARD	None	N/A

Table 593. JVMSEVR resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0		12
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent			5
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, CREATESPI, NOTAPPLIC								
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release			6
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time			7
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID			4
CURRENTHEAP	BINARY	INQ	8	MAX	No	Current Heap size		E640 E650 E660	24
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition			8
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time			9
ENABLESTATUS	CVDAS	CPSM	4	LIKE	Yes	Enable status			2
ENABLESTATUS Input/output valid values	ENABLED, DISABLED								
ENABLESTATUS Output valid values	ENABLING, DISABLING, DISCARDING								
GCPOLICY	CHAR	INQ	32	MIN	No	The garbage collection policy		E640 E650 E660	25
INITHEAP	BINARY	INQ	8	MIN	No	Initial Heap size		E640 E650 E660	26
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent		E640 E650	3
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, GRPLIST, BUNDLE								
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time			11
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID			10
JVMPROFILE	CHAR	INQ	8	MIN	No	JVM profile name			14
LERUNOPTS	CHAR	INQ	8	MIN	No	LE runtime options program			15
MAXHEAP	BINARY	INQ	8	MAX	No	Maximum Heap size		E640 E650 E660	27
NAME-1	CHAR	INQ	8	DIFF	No	JVM server name			1
OCCUPANCY	BINARY	INQ	8	MAX	No	Heap occupancy		E640 E650 E660	28
PEAKHEAP	BINARY	STAT	8	MAX	No	Peak Heap size		E640 E650 E660	37
PID	BINARY	INQ	4	MIN	No	JVM process id		E640 E650 E660	29
PROFILEDIR	CHAR	INQ	240	DIFF	No	JVM profile directory		E640 E650 E660 E670	46

Table 593. JVMSErv resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
SRVCRTTMEGMT	DATETIME	STAT	8	MIN	No	JVM creation time (GMT)		E640 E650 E660	35
SRVCRTTMELCL	DATETIME	STAT	8	MIN	No	JVM creation time (Local time)		E640 E650 E660	36
SRVGCMJRCNT	BINARY	STAT	4	MAX	No	Number of major garbage collection events		E640 E650 E660	38
SRVGCMJRCPU	BINARY	STAT	8	MAX	No	Total CPU used by major garbage collection		E640 E650 E660	39
SRVGCMJRFRD	BINARY	STAT	8	MAX	No	Heap freed by major garbage collection		E640 E650 E660	40
SRVGCMNRCNT	BINARY	STAT	4	MAX	No	Number of minor garbage collection events		E640 E650 E660	41
SRVGCMNRCPU	BINARY	STAT	8	MAX	No	Total CPU used by minor garbage collection		E640 E650 E660	42
SRVGCMNRFRD	BINARY	STAT	8	MAX	No	Heap freed by minor garbage collection		E640 E650 E660	43
SRVSYSTHCNT	BINARY	STAT	4	MAX	No	JVM server system thread use count		E640 E650 E660	30
SRVSYSTHDWT	BINARY	STAT	4	MAX	No	Number of system thread waits		E640 E650 E660	31
SRVSYSTHNWT	BINARY	STAT	4	MAX	No	Number of tasks waiting for a system thread		E640 E650 E660	33
SRVSYSTHPWT	BINARY	STAT	4	MAX	No	Peak number of waiting system threads		E640 E650 E660	34
SRVSYSTHWTT	BINARY	STAT	4	MAX	No	Total system thread waiting time		E640 E650 E660	32
SRVTHRCURR	BINARY	STAT	4	AVG	No	Current number of threads			18
SRVTHRHWMM	BINARY	STAT	4	AVG	No	Peak number of threads			19
SRVTHRWAITS	BINARY	STAT	4	AVG	No	Number of thread waits			20
SRVTHRWCURR	BINARY	STAT	4	AVG	No	Current number of waiting threads			22
SRVTHRWHWM	BINARY	STAT	4	AVG	No	Peak number of waiting threads			23
SRVTHRWTIME	SCLOCK	STAT	8	AVG	No	Total thread waiting time			21
SRVUSECOUNT	BINARY	STAT	4	SUM	No	JVM server task count			17
THREADLIMIT	BINARY	INQ	4	MAX	Yes	Maximum number of threads			16

Chapter 260. JVMSVDEF Resource Table

A CICS definition that describes a JVM server.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported.

CREATE

Create a JVMSERVER resource that represents the JVM server in CICS.

INSTALL

Install a JVMSERVER resource so that the JVM server is available in CICS.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionJVMServer

Length

168

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3841

Table 594. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No

Table 594. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
PERFORM SET	INSTALL	FORCEINS(YES, NO)	No
		MODE(value)	No
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 595. JVMSVDEF FEEDBACK error codes

Value	Code	Description
1	JVMSVDEF_INV_DATA	Attribute data invalid
2	JVMSVDEF_REC_NOT_FOUND	Requested resource not found
4	JVMSVDEF_REC_EXISTS	Resource already exists
5	JVMSVDEF_REC_CHANGED	Resource definition already changed
6	JVMSVDEF_INV_RESTYPE	Invalid resource type
7	JVMSVDEF_INV_VER	Invalid resource version
11	JVMSVDEF_NON_MP	Maintenance point CMAS not available
12	JVMSVDEF_INV_CONTEXT	Context not found
13	JVMSVDEF_INCONSISTENT_SET	Inconsistent set condition
14	JVMSVDEF_INV_RESGROUP	Resource group not found
21	JVMSVDEF_INV_ACTION	Invalid action
22	JVMSVDEF_INV_RECADDR	Invalid record address
23	JVMSVDEF_INV_RECLLEN	Invalid record length
24	JVMSVDEF_DIFF_VERSION	Different version
25	JVMSVDEF_EARLY_NAMELIST_END	Early name list end
26	JVMSVDEF_INV_NAMELIST	Invalid name list
27	JVMSVDEF_INV_NAME	Invalid name
28	JVMSVDEF_INV_MINNAME	Invalid minor name

Table 595. JVMSVDEF FEEDBACK error codes (continued)

Value	Code	Description
29	JVMSVDEF_NOTIFY	Notify
30	JVMSVDEF_PARTIAL_INSTALL	Partial install
31	JVMSVDEF_NOTHING_INSTALLED	Nothing installed
32	JVMSVDEF_NO_TARGETS	No targets
33	JVMSVDEF_NO_RELATED	No related systems
34	JVMSVDEF_INV_TSCOPE	Invalid target scope
35	JVMSVDEF_INV_RSCOPE	Invalid related scope
36	JVMSVDEF_INV_USAGE	Invalid usage
37	JVMSVDEF_INV_MODE	Invalid mode
38	JVMSVDEF_INV_STATECHK	Invalid state check
39	JVMSVDEF_INV_FORCEINS	Invalid force install
40	JVMSVDEF_INV_NOTIFY	Invalid notify
41	JVMSVDEF_INV_OVERTYPE	Invalid over type
42	JVMSVDEF_INV_OVRBLOCK	Invalid override block
43	JVMSVDEF_INV_ORSTRING	Invalid override string
44	JVMSVDEF_INV_STRNGTERM	Invalid string term
45	JVMSVDEF_INV_EMBEDTERM	Invalid embedded terminator
46	JVMSVDEF_INV_ATTRIBUTE	Invalid attribute
47	JVMSVDEF_INV_LITERAL	Invalid literal
48	JVMSVDEF_INV_ORSTGNA	Invalid override string
49	JVMSVDEF_SCOPE_REQUIRED	Scope required
50	JVMSVDEF_USAGE_CONFLICT	Usage conflict
51	JVMSVDEF_NODEFS_SELECTED	No definitions selected
52	JVMSVDEF_MORE_THAN_1_RELSYS	More than one related system
53	JVMSVDEF_MISSING_RELSYSID	Missing related system identifier
54	JVMSVDEF_SCOPE_CONFLICT	Scope conflict
55	JVMSVDEF_INV_CSDGROUP	Invalid CSD group
56	JVMSVDEF_REC_NOT_REMOVED	Record not removed
57	JVMSVDEF_INV_RESOURCE	Invalid resource
58	JVMSVDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	JVMSVDEF_PARTIAL_ACTION	Partial action
60	JVMSVDEF_NOTHING_ACTIONED	Nothing actioned
61	JVMSVDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	JVMSVDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	JVMSVDEF_CSD_ERROR	CSD access error

Table 596. JVM SVDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	4
CHANGEAGENT Input/ output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	7
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	6
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				5
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	22
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		10
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		21
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				20
JVMPROFILE	CHAR	CPSM	8	Yes	DIFF	JVM profile name				16
LERUNOPTS	CHAR	CPSM	8	No	DIFF	LE runtime options program	DFHAXRO			18
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				12
STATUS	CVDAS	CPSM	4	Yes	LIKE	Enabled Status	ENABLED			17
STATUS Input/output valid values	ENABLED, DISABLED									
THREADLIMIT	CHAR	CPSM	3	No	DIFF	Maximum number of threads	15	1-256		19
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				13
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				14
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				15

Chapter 261. LIBDEF Resource Table

A CICS definition that describes a dynamic LIBRARY

The **Primary** key fields for this resource class are NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

ADDTOGRP

Add the LIBRARY to the resource group.

CREATE

Create a LIBRARY definition and add it to the data repository.

GET

Get the LIBRARY definition.

INSTALL

Install a LIBRARY definition in an active system.

REMOVE

Remove a LIBRARY definition from the data repository.

UPDATE

Update a LIBRARY definition and add it to the data repository.

External resource name

CICSDefinitionLIBRARY

Length

856

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3837

Table 597. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No

Table 597. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM SET	INSTALL	FORCEINS(YES, NO)	No
		MODE(value)	No
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 598. LIBDEF FEEDBACK error codes		
Value	Code	Description
1	LIBDEF_INV_DATA	Attribute data invalid
2	LIBDEF_REC_NOT_FOUND	Requested resource not found
4	LIBDEF_REC_EXISTS	Resource already exists
5	LIBDEF_REC_CHANGED	Resource definition already changed
6	LIBDEF_INV_RESTYPE	Invalid resource type
7	LIBDEF_INV_VER	Invalid resource version
11	LIBDEF_NON_MP	Maintenance point CMAS not available
12	LIBDEF_INV_CONTEXT	Context not found
13	LIBDEF_INCONSISTENT_SET	Inconsistent set condition
14	LIBDEF_INV_RESGROUP	Resource group not found
21	LIBDEF_INV_ACTION	Invalid action
22	LIBDEF_INV_RECADDR	Invalid record address
23	LIBDEF_INV_RECLN	Invalid record length
24	LIBDEF_DIFF_VERSION	Different version

Table 598. LIBDEF FEEDBACK error codes (continued)

Value	Code	Description
25	LIBDEF_EARLY_NAMELIST_END	Early name list end
26	LIBDEF_INV_NAMELIST	Invalid name list
27	LIBDEF_INV_NAME	Invalid name
28	LIBDEF_INV_MINNAME	Invalid minor name
29	LIBDEF_NOTIFY	Notify
30	LIBDEF_PARTIAL_INSTALL	Partial install
31	LIBDEF_NOTHING_INSTALLED	Nothing installed
32	LIBDEF_NO_TARGETS	No targets
33	LIBDEF_NO_RELATED	No related systems
34	LIBDEF_INV_TSCOPE	Invalid target scope
35	LIBDEF_INV_RSCOPE	Invalid related scope
36	LIBDEF_INV_USAGE	Invalid usage
37	LIBDEF_INV_MODE	Invalid mode
38	LIBDEF_INV_STATECHK	Invalid state check
39	LIBDEF_INV_FORCEINS	Invalid force install
40	LIBDEF_INV_NOTIFY	Invalid notify
41	LIBDEF_INV_OVERTYPE	Invalid over type
42	LIBDEF_INV_OVRBLOCK	Invalid override block
43	LIBDEF_INV_ORSTRING	Invalid override string
44	LIBDEF_INV_STRNGTERM	Invalid string term
45	LIBDEF_INV_EMBEDTERM	Invalid embedded terminator
46	LIBDEF_INV_ATTRIBUTE	Invalid attribute
47	LIBDEF_INV_LITERAL	Invalid literal
48	LIBDEF_INV_ORSTGNA	Invalid override string
49	LIBDEF_SCOPE_REQUIRED	Scope required
50	LIBDEF_USAGE_CONFLICT	Usage conflict
51	LIBDEF_NODEFS_SELECTED	No definitions selected
52	LIBDEF_MORE_THAN_1_RELSYS	More than one related system
53	LIBDEF_MISSING_RELSYSID	Missing related system identifier
54	LIBDEF_SCOPE_CONFLICT	Scope conflict
55	LIBDEF_INV_CSDGROUP	Invalid CSD group
56	LIBDEF_REC_NOT_REMOVED	Record not removed
57	LIBDEF_INV_RESOURCE	Invalid resource
58	LIBDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	LIBDEF_PARTIAL_ACTION	Partial action
60	LIBDEF_NOTHING_ACTIONED	Nothing actioned

Table 598. LIBDEF FEEDBACK error codes (continued)

Value	Code	Description
61	LIBDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	LIBDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	LIBDEF_CSD_ERROR	CSD access error

Table 599. LIBDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	33
CHANGEAGENT Input/output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	35
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	34
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				27
CRITICAL	EYUDA	CPSM	4	Yes	LIKE	Critical status	NO			8
CRITICAL Input/output valid values	YES, NO									
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	37
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		32
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				31
DSNAME01	CHAR	CPSM	44	No	DIFF	Data set name 01				11
DSNAME02	CHAR	CPSM	44	No	DIFF	Data set name 02				12
DSNAME03	CHAR	CPSM	44	No	DIFF	Data set name 03				13
DSNAME04	CHAR	CPSM	44	No	DIFF	Data set name 04				14
DSNAME05	CHAR	CPSM	44	No	DIFF	Data set name 05				15
DSNAME06	CHAR	CPSM	44	No	DIFF	Data set name 06				16
DSNAME07	CHAR	CPSM	44	No	DIFF	Data set name 07				17
DSNAME08	CHAR	CPSM	44	No	DIFF	Data set name 08				18
DSNAME09	CHAR	CPSM	44	No	DIFF	Data set name 09				19
DSNAME10	CHAR	CPSM	44	No	DIFF	Data set name 10				20
DSNAME11	CHAR	CPSM	44	No	DIFF	Data set name 11				21
DSNAME12	CHAR	CPSM	44	No	DIFF	Data set name 12				22
DSNAME13	CHAR	CPSM	44	No	DIFF	Data set name 13				23
DSNAME14	CHAR	CPSM	44	No	DIFF	Data set name 14				24
DSNAME15	CHAR	CPSM	44	No	DIFF	Data set name 15				25
DSNAME16	CHAR	CPSM	44	No	DIFF	Data set name 16				26
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
RANKING	CHAR	CPSM	2	Yes	MIN	Ranking	50	1-99		10

Table 599. LIBDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
STATUS	EYUDA	CPSM	4	Yes	LIKE	Enabled status	ENABLED			9
STATUS Input/output valid values	ENABLED, DISABLED									
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				28
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				29
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				30

Chapter 262. LIBDSN Resource Table

A CICS definition that describes the data sets that make up a LIBRARY concatenation.

The **Primary** key field for this resource class is LIBRARY.

The **Secondary** key field for this resource class is DSNUM.

Note: The PLATFORM, APPLICATION, APPLMAJORVER, APPLMINORVER, and APPLMICROVER parameters are all required when the GET operation is in the context of an application that is deployed on a platform.

External resource name

CICSLIBRARYDataSetName

Length

88

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0173

Table 600. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		APPLICATION(value)	No
		APPLMAJORVER(value)	No
		APPLMICROVER(value)	No
		APPLMINORVER(value)	No
		PLATFORM(value)	No

Table 601. LIBDSN resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	3
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
DSNAME	CHAR	INQ	44	DIFF	Data set name	6
DSNSEARCHPOS	CNUMERIC	CPSM	8	MAX	Data set search enumerator	2
DSNUM-2	BINARY	INQ	4	MAX	LIBRARY data set number	

Table 601. LIBDSN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
LIBRARY-1	CHAR	INQ	8	DIFF	LIBRARY name	1
SEARCHPOS	BINARY	INQ	4	MAX	Search position	7

Chapter 263. LIBINGRP Resource Table

A CPSM Business Application Services definition that describes the membership of a LIBRARY definition (LIBDEF) in a resource group (RESGROUP). A LIBDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is LIBGROUP.

The **Secondary** key field for this resource class is LIBNAME.

The **Tertiary** key field for this resource class is LIBVER.

The following actions are supported:

GET

Get the name of the LIBRARY.

CREATE

Create an association between a LIBRARY definition and a resource group.

REMOVE

Remove an association between a LIBRARY definition and a resource group, from the data repository

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6182

Table 602. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 603. LIBINGRP FEEDBACK error codes		
Value	Code	Description
1	LIBINGRP_INV_DATA	Attribute data invalid
2	LIBINGRP_REC_NOT_FOUND	Requested resource not found

Table 603. LIBINGRP FEEDBACK error codes (continued)

Value	Code	Description
4	LIBINGRP_REC_EXISTS	Resource already exists
6	LIBINGRP_INV_RESTYPE	Invalid resource type
7	LIBINGRP_INV_VER	Invalid resource version
11	LIBINGRP_NON_MP	Maintenance point CMAS not available
12	LIBINGRP_INV_CONTEXT	Context not found
21	LIBINGRP_INCONSISTENT_SET	Inconsistent set
22	LIBINGRP_DIFF_VERSION	Different version
23	LIBINGRP_INV_NAME	Invalid name
24	LIBINGRP_INV_MINNAME	Invalid minor name

Table 604. LIBINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
LIBGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
LIBNAME-2	CHAR	CPSM	8	Yes	DIFF	Connection definition name	6
LIBVER-3	BINARY	CPSM	1	Yes	AVG	Connection definition version	7

Chapter 264. LIBRARY Resource Table

A CICS resource that describes a LIBRARY in an active system being managed by CICSplex SM

The **Primary** key field for this resource class is NAME.

The following actions are supported:

DISABLE

Disable the LIBRARY.

DISCARD

Remove the installed LIBRARY.

ENABLE

Enable the LIBRARY.

These actions require no unique parameter data.

Note: The PLATFORM, APPLICATION, APPLMAJORVER, APPLMINORVER, and APPLMICROVER parameters are all required when the GET operation is in the context of an application that is deployed on a platform.

External resource name

CICSLIBRARY

Length

112

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0172

Table 605. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		APPLICATION(value)	No
		APPLMAJORVER(value)	No
		APPLMICROVER(value)	No
		APPLMINORVER(value)	No
		PLATFORM(value)	No
SET		None	N/A

Table 605. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
PERFORM SET	DISABLE	None	N/A
	ENABLE	None	N/A
	DISCARD	None	N/A

Table 606. LIBRARY resource table attributes									
Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0	E640 E650	17
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent		E640 E650	9
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, SYSTEM, CREATESPI, NOTAPPLIC								
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release		E640 E650	10
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time		E640 E650	11
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID		E640 E650	8
CRITSTATUS	CVDAS	INQ	4	LIKE	Yes	Critical status			3
CRITSTATUS Input/output valid values	CRITICAL, NONCRITICAL								
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition		E640 E650	12
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time		E640 E650	13
ENABLESTATUS	CVDAS	INQ	4	LIKE	Yes	Enable status			4
ENABLESTATUS Input/output valid values	DISABLED, ENABLED								
ENABLESTATUS Output valid values	DISABLING, ENABLING, DISCARDING								
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent		E640 E650	16
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, SYSTEM, GRPLIST, BUNDLE								
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time		E640 E650	15
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID		E640 E650	14
NAME-1	CHAR	INQ	8	DIFF	No	LIBRARY name			1
NUMDSNAMES	BINARY	INQ	4	SUM	No	Number of DSNAMES			5
PGMLOADCNT	BINARY	STAT	4	SUM	No	Program load count			7
RANKING	BINARY	INQ	4	MIN	Yes	Ranking			2
SEARCHPOS	BINARY	INQ	4	MAX	No	Search position			6

Chapter 265. LNKSMSCG Resource Table

A CPSM Topology Definition that describes the link between a CICS system group and a monitor specification (MONSPEC). LNKSMSCG objects are used to generate multiple implicit linkages of CICS systems that are members of the named system group to a MONSPEC.

The **Primary** key field for this resource class is SPEC.

The **Secondary** key field for this resource class is GROUP.

There are no object specific actions for this resource class.

From the batched repository-update facility, only CREATE and REMOVE commands are valid for this resource. Attempts to UPDATE the resource will cause an error.

External resource name

CICSMonitorSpecificationsToSystemGroup

Length

56

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt5633

Table 607. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		FORCE	No
		NONE	No
		NULL	No
REMOVE		KEEP	Yes
		NONE	Yes
PERFORM	CHGSPEC	FORCE	Yes
SET		KEEP	Yes
		NAME	Yes
		NEW_SPECNAME(value)	Yes

Table 607. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		NULL	Yes

Table 608. LNKSMSCG FEEDBACK error codes

Value	Code	Description
1	LNKSMSCG_INV_DATA	Attribute data invalid
2	LNKSMSCG_REC_NOT_FOUND	Requested resource not found
3	LNKSMSCG_INV_REFERENCE	Attribute references an invalid resource
4	LNKSMSCG_REC_EXISTS	Association already exists
6	LNKSMSCG_SPEC_NOT_FOUND	Specification name not found
7	LNKSMSCG_UNK_OLDSPEC	Unknown old specification name
8	LNKSMSCG_UNK_NEWSPEC	Unknown new specification name
9	LNKSMSCG_UNK_SPECNAME	Specification name does not exist
10	LNKSMSCG_INV_OLDSPEC	Invalid old specification name
11	LNKSMSCG_INV_NEWSPEC	Invalid new specification name
12	LNKSMSCG_MISSING_QUE	Missing queue
13	LNKSMSCG_LNKASSOC_EXISTS	Different association exists

Table 609. LNKSMSCG resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	7
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	10
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	9
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	8
GROUP-2	CHAR	CPSM	8	Yes	DIFF	System group	6
SPEC-1	CHAR	CPSM	8	Yes	DIFF	Monitor specification	5

Chapter 266. LNKSMSCS Resource Table

A CPSM Topology Definition that describes the link between a CICS system and a monitor specification (MONSPEC). LNKSMSCS objects can be created via an explicit reference to a CICS system or implicitly via a LNKSMSCG object.

The **Primary** key field for this resource class is SPEC.

The **Secondary** key field for this resource class is SYSTEM.

There are no object specific actions for this resource class.

From the batched repository-update facility, only CREATE and REMOVE commands are valid for this resource. Attempts to UPDATE the resource will cause an error.

For information about LNKsXSCS records, see [Special attribute and resource table considerations](#).

External resource name

CICSMonitorSpecificationsToSystem

Length

64

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt5634

Table 610. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A
PERFORM SET	CHGSPEC	NEW_SPECNAME(value)	Yes

Table 611. LNKSMSCS FEEDBACK error codes		
Value	Code	Description
1	LNKSMSCS_INV_DATA	Attribute data invalid
2	LNKSMSCS_REC_NOT_FOUND	Requested resource not found

Table 611. LNKSMSCS FEEDBACK error codes (continued)

Value	Code	Description
3	LNKSMSCS_INV_REFERENCE	Attribute references an invalid resource
4	LNKSMSCS_REC_EXISTS	Association already exists
6	LNKSMSCS_SPEC_NOT_FOUND	Specification name not found
7	LNKSMSCS_UNK_OLDSPEC	Unknown old specification name
8	LNKSMSCS_UNK_NEWSPEC	Unknown new specification name
9	LNKSMSCS_UNK_SPECNAME	Specification name does not exist
10	LNKSMSCS_INV_OLDSPEC	Invalid old specification name
11	LNKSMSCS_INV_NEWSPEC	Invalid new specification name
12	LNKSMSCS_MISSING_QUE	Missing queue
13	LNKSMSCS_LNKASSOC_EXISTS	Different association exists

Table 612. LNKSMSCS resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent		9
CHANGEAGENT Input/output valid values	DREPAPI							
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release		12
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification		1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID		11
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created		10
GROUP	CHAR	CPSM	8	No	DIFF	System group that MONSPEC was inherited from		8
LINK	EYUDA	CPSM	4	No	LIKE	Creation mode	EXPLICIT	7
LINK Input/output valid values	INHERIT, EXPLICIT							
SPEC-1	CHAR	CPSM	8	Yes	DIFF	Monitor specification		5
SYSTEM-2	CHAR	CPSM	8	Yes	DIFF	CICS system		6

Chapter 267. LNKSRSCG Resource Table

A CPSM Topology Definition that describes the link between a CICS system group and an analysis specification (RTASPEC). LNKSRSCG objects are used to generate multiple implicit linkages of CICS systems that are members of the named system group to an RTASPEC.

The **Primary** key field for this resource class is SPEC.

The **Secondary** key field for this resource class is GROUP.

There are no object specific actions for this resource class.

From the batched repository-update facility, only CREATE and REMOVE commands are valid for this resource. Attempts to UPDATE the resource will cause an error.

External resource name

CICSRTASpecificationsToSystemGroup

Length

56

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt5635

Table 613. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		FORCE	No
		NONE	No
		NULL	No
REMOVE		KEEP	Yes
		NONE	Yes
PERFORM	CHGSPEC	FORCE	Yes
SET		KEEP	Yes
		NAME	Yes
		NEW_SPECNAME(value)	Yes

Table 613. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
		NULL	Yes

Table 614. LNKSRS CG FEEDBACK error codes		
Value	Code	Description
1	LNKSRS CG_INV_DATA	Attribute data invalid
2	LNKSRS CG_REC_NOT_FOUND	Requested resource not found
3	LNKSRS CG_INV_REFERENCE	Attribute references an invalid resource
4	LNKSRS CG_REC_EXISTS	Association already exists
6	LNKSRS CG_SPEC_NOT_FOUND	Specification name not found
7	LNKSRS CG_UNK_OLDSPEC	Unknown old specification name
8	LNKSRS CG_UNK_NEWSPEC	Unknown new specification name
9	LNKSRS CG_UNK_SPECNAME	Specification name does not exist
10	LNKSRS CG_INV_OLDSPEC	Invalid old specification name
11	LNKSRS CG_INV_NEWSPEC	Invalid new specification name
12	LNKSRS CG_MISSING_QUE	Missing queue
13	LNKSRS CG_LNKASSOC_EXISTS	Different association exists

Table 615. LNKSRS CG resource table attributes							
Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	7
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	10
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	9
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	8
GROUP-2	CHAR	CPSM	8	Yes	DIFF	System group	6
SPEC-1	CHAR	CPSM	8	Yes	DIFF	RTA specification	5

Chapter 268. LNKSRSCS Resource Table

A CPSM Topology Definition that describes the link between a CICS system and an analysis specification (RTASPEC). LNKSRSCS objects can be created via an explicit reference to a CICS system or implicitly via a LNKSRSCG object.

The **Primary** key field for this resource class is SPEC.

The **Secondary** key field for this resource class is SYSTEM.

There are no object specific actions for this resource class.

From the batched repository-update facility, only CREATE and REMOVE commands are valid for this resource. Attempts to UPDATE the resource will cause an error.

For information about LNKSRSCS records, see [Special attribute and resource table considerations](#).

External resource name

CICSRTASpecificationsToSystem

Length

64

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt5636

Table 616. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A
PERFORM SET	CHGSPEC	NEW_SPECNAME(value)	Yes

Table 617. LNKSRSCS FEEDBACK error codes

Value	Code	Description
1	LNKSRSCS_INV_DATA	Attribute data invalid
2	LNKSRSCS_REC_NOT_FOUND	Requested resource not found

Table 617. LNKSRSRCS FEEDBACK error codes (continued)

Value	Code	Description
3	LNKSRSRCS_INV_REFERENCE	Attribute references an invalid resource
4	LNKSRSRCS_REC_EXISTS	Association already exists
6	LNKSRSRCS_SPEC_NOT_FOUND	Specification name not found
7	LNKSRSRCS_UNK_OLDSPEC	Unknown old specification name
8	LNKSRSRCS_UNK_NEWSPEC	Unknown new specification name
9	LNKSRSRCS_UNK_SPECNAME	Specification name does not exist
10	LNKSRSRCS_INV_OLDSPEC	Invalid old specification name
11	LNKSRSRCS_INV_NEWSPEC	Invalid new specification name
12	LNKSRSRCS_MISSING_QUE	Missing queue
13	LNKSRSRCS_LNKASSOC_EXISTS	Different association exists

Table 618. LNKSRSRCS resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent		9
CHANGEAGENT Input/output valid values	DREPAPI							
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release		12
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification		1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID		11
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created		10
GROUP	CHAR	CPSM	8	No	DIFF	System group RTA specification was inherited from		8
LINK	EYUDA	CPSM	4	No	LIKE	Creation mode	EXPLICIT	7
LINK Input/output valid values	INHERIT, EXPLICIT							
SPEC-1	CHAR	CPSM	8	Yes	DIFF	RTA specification		5
SYSTEM-2	CHAR	CPSM	8	Yes	DIFF	CICS system		6

Chapter 269. LNKSWSCG Resource Table

A CPSM Topology Definition that describes the link between a CICS system group and a workload specification (WLMSPEC). LNKSWSCG objects are used to generate multiple implicit linkages of CICS systems that are members of the named system group to a WLMSPEC. Only CICS systems that are to act as terminal owning regions (TORs) should be linked to a WLMSPEC.

The **Primary** key field for this resource class is SPEC.

The **Secondary** key field for this resource class is GROUP.

There are no object specific actions for this resource class.

From the batched repository-update facility, only CREATE and REMOVE commands are valid for this resource. Attempts to UPDATE the resource will cause an error.

External resource name

CICSWLMSpecificationsToSystemGroup

Length

56

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt5637

Table 619. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		FORCE	No
		NONE	No
		NULL	No
REMOVE		KEEP	Yes
		NONE	Yes
PERFORM	CHGSPEC	FORCE	Yes
SET		KEEP	Yes
		NAME	Yes

Table 619. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
		NEW_SPECNAME(value)	Yes
		NULL	Yes

Table 620. LNKSWSG FEEDBACK error codes		
Value	Code	Description
1	LNKSWSG_INV_DATA	Attribute data invalid
2	LNKSWSG_REC_NOT_FOUND	Requested resource not found
3	LNKSWSG_INV_REFERENCE	Attribute references an invalid resource
4	LNKSWSG_REC_EXISTS	Association already exists
6	LNKSWSG_SPEC_NOT_FOUND	Specification name not found
7	LNKSWSG_UNK_OLDSPEC	Unknown old specification name
8	LNKSWSG_UNK_NEWSPEC	Unknown new specification name
9	LNKSWSG_UNK_SPECNAME	Specification name does not exist
10	LNKSWSG_INV_OLDSPEC	Invalid old specification name
11	LNKSWSG_INV_NEWSPEC	Invalid new specification name
12	LNKSWSG_MISSING_QUE	Missing queue
13	LNKSWSG_LNKASSOC_EXISTS	Different association exists

Table 621. LNKSWSG resource table attributes							
Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	7
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	10
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	9
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	8
GROUP-2	CHAR	CPSM	8	Yes	DIFF	System group	6
SPEC-1	CHAR	CPSM	8	Yes	DIFF	WLM specification	5

Chapter 270. LNKSWSCS Resource Table

A CPSM Topology Definition that describes the link between a CICS system and a workload specification (WLMSPEC). LNKSWSCS objects can be created via an explicit reference to a CICS system or implicitly via a LNKSWSCG object. Only CICS systems that are to act as terminal owning regions (TORs) should be linked to a WLMSPEC.

The **Primary** key field for this resource class is SPEC.

The **Secondary** key field for this resource class is SYSTEM.

There are no object specific actions for this resource class.

From the batched repository-update facility, only CREATE and REMOVE commands are valid for this resource. Attempts to UPDATE the resource will cause an error.

For information about LNKSwSCS records, see [Special attribute and resource table considerations](#).

External resource name

CICSWLMSpecificationsToSystem

Length

64

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt5638

Table 622. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A
PERFORM SET	CHGSPEC	NEW_SPECNAME(value)	Yes

Table 623. LNKSWSCS FEEDBACK error codes

Value	Code	Description
1	LNKSWSCS_INV_DATA	Attribute data invalid
2	LNKSWSCS_REC_NOT_FOUND	Requested resource not found

Table 623. LNKSWSWCS FEEDBACK error codes (continued)

Value	Code	Description
3	LNKSWSWCS_INV_REFERENCE	Attribute references an invalid resource
4	LNKSWSWCS_REC_EXISTS	Association already exists
6	LNKSWSWCS_SPEC_NOT_FOUND	Specification name not found
7	LNKSWSWCS_UNK_OLDSPEC	Unknown old specification name
8	LNKSWSWCS_UNK_NEWSPEC	Unknown new specification name
9	LNKSWSWCS_UNK_SPECNAME	Specification name does not exist
10	LNKSWSWCS_INV_OLDSPEC	Invalid old specification name
11	LNKSWSWCS_INV_NEWSPEC	Invalid new specification name
12	LNKSWSWCS_MISSING_QUE	Missing queue
13	LNKSWSWCS_LNKASSOC_EXISTS	Different association exists

Table 624. LNKSWSWCS resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent		9
CHANGEAGENT Input/output valid values	DREPAPI							
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release		12
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification		1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID		11
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created		10
GROUP	CHAR	CPSM	8	No	DIFF	System group WLM specification was inherited from		8
LINK	EYUDA	CPSM	4	No	LIKE	Creation mode	EXPLICIT	7
LINK Input/output valid values	INHERIT, EXPLICIT							
SPEC-1	CHAR	CPSM	8	Yes	DIFF	WLM specification		5
SYSTEM-2	CHAR	CPSM	8	Yes	DIFF	CICS system		6

Chapter 271. LOADACT Resource Table

A CICS Resource that provides CICS loader activity by dynamic storage area in an active system being managed by CICSplex SM.

The **Primary** key field for this resource class is LDGDSAINDEX.

There are no object specific actions for this resource class.

External resource name

CICSLoaderByDSA

Length

136

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0128

Table 625. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 626. LOADACT resource table attributes							
Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release		
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved		
ALOADTIME	INT16US	CPSM	4	AVG	Average program load time		21
ALOADWAIT	INT16US	CPSM	4	AVG	Average waiting time for program loads		24
ANIUQDSA	INTTSTP	CPSM	8	AVG	Average age on DSA Not-In-Use (NIU) queue		30
LDGDPSCR	BINARY	STAT	4	AVG	Number of programs removed from DSA by compression		18
LDGDPSCT	INTTSTP	STAT	8	AVG	Total time for DSA programs on Not-In-Use queue		20
LDGDREBS	BINARY	STAT	4	AVG	Number of successful load retries		13
LDGDSAINDEX-1	CHAR	CPSM	8	DIFF	DSA index		5

Table 626. LOADACT resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
LDGHWMT	BINARY	STAT	4	AVG	Number of times loader waiting requests peaked		11
LDGLLR	BINARY	STAT	4	AVG	Number of library load requests		6
LDGLLRRO	BINARY	STAT	4	AVG	Number of library load requests on the RO TCB	E640 E650 E660 E670	39
LDGLLT	INT16US	STAT	4	AVG	Total time taken for all program loads		7
LDGLLTRO	INT16US	STAT	4	AVG	Time taken to load programs on the RO TCB	E640 E650 E660 E670	40
LDGPROGNIU	BINARY	STAT	4	AVG	Number of programs on Not-In-Use (NIU) queue		16
LDGPUSES	BINARY	STAT	4	AVG	Number of program uses		8
LDGRECNIU	BINARY	STAT	4	AVG	Number of DSA reclaims from Not-In-Use (NIU) queue		17
LDGSTGNIU	BINARY	STAT	4	AVG	Size of DSA occupied by Not-In-Use (NIU) programs		15
LDGTTW	INT16US	STAT	4	AVG	Total time spent waiting for loader		12
LDGWLR	BINARY	STAT	4	AVG	Number of loader requests waiting		9
LDGWLRHW	BINARY	STAT	4	AVG	Peak number of waiting loader requests		10
LDGWTDLR	BINARY	STAT	4	AVG	Number of loader requests that waited		14
LOADRATE	RATE3	CPSM	8	AVG	Rate of program loading		27
PDSANIU	PERCENT3	CPSM	4	AVG	Percentage of DSA held by Not-In-Use programs		28
PLOADWAIT	PERCENT3	CPSM	4	AVG	Percentage of waits to program uses		25
PSTGNIU	PERCENT3	CPSM	4	AVG	Percentage Not-In-Use of DSAs above/below 16MB		29
TLOADWAIT	BINARY	CPSM	4	AVG	Total waiting time for program loads		22

Chapter 272. LOADER Resource Table

A CICS Resource that provides CICS loader information in an active system being managed by CICSplex SM.

The LOADER resource class does not provide an explicit key attribute. The set of object instances returned is a function of the scope in effect when the request is made.

There are no object specific actions for this resource class.

External resource name

CICSLoader

Length

344

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0134

Table 627. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 628. LOADER resource table attributes							
Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release		
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved		
ALOADTIME	INT16US	CPSM	4	AVG	Average load time		45
ALOADWAIT	INT16US	CPSM	4	AVG	Average waiting time for program loads		48
ANIUQCDSA	INTTSTP	CPSM	8	AVG	Average age on CDSA Not-In-Use (NIU) queue		54
ANIUQECDSA	INTTSTP	CPSM	8	AVG	Average age on ECDSA Not-In-Use (NIU) queue		57
ANIUQERDSA	INTTSTP	CPSM	8	AVG	Average age on ERDSA Not-In-Use (NIU) queue		69
ANIUQESDSA	INTTSTP	CPSM	8	AVG	Average age on ESDSA Not-In-Use (NIU) queue		63

Table 628. LOADER resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
ANIUQRDSA	INTTSTP	CPSM	8	AVG	Average age on RDSA Not-In-Use (NIU) queue		66
ANIUQSDSA	INTTSTP	CPSM	8	AVG	Average age on SDSA Not-In-Use (NIU) queue		60
LDGDPSCRC	BINARY	STAT	4	AVG	Number of CDSA programs removed by compression		18
LDGDPSCREC	BINARY	STAT	4	AVG	Number of ECDSA programs removed by compression		23
LDGDPSCRER	BINARY	STAT	4	AVG	Number of ERDSA programs removed by compression		43
LDGDPSCRES	BINARY	STAT	4	AVG	Number of ESDSA programs removed by compression		33
LDGDPSCRR	BINARY	STAT	4	AVG	Number of RDSA programs removed by compression		38
LDGDPSCRS	BINARY	STAT	4	AVG	Number of SDSA programs removed by compression		28
LDGDPSCCTC	INTTSTP	STAT	8	AVG	Total time for CDSA programs on Not-In-Use queue		19
LDGDPSCTEC	INTTSTP	STAT	8	AVG	Total time for ECDSA programs on Not-In-Use queue		24
LDGDPSCTER	INTTSTP	STAT	8	AVG	Total time for ERDSA programs on Not-In-Use queue		44
LDGDPSCTES	INTTSTP	STAT	8	AVG	Total time for ESDSA programs on Not-In-Use queue		34
LDGDPSCTR	INTTSTP	STAT	8	AVG	Total time for RDSA programs on Not-In-Use queue		39
LDGDPSCTS	INTTSTP	STAT	8	AVG	Total time for SDSA programs on Not-In-Use queue		29
LDGDREBS	BINARY	STAT	4	AVG	Number of successful load retries		12
LDGHWMT	BINARY	STAT	4	AVG	Number of times waiting loader requests peaked		10
LDGLBSOU	BINARY	STAT	4	AVG	LIBRARY search order updates	E640	84
LDGLLR	BINARY	STAT	4	AVG	Number of LIBRARY load requests		5
LDGLLRRO	BINARY	STAT	4	AVG	Number of library load requests on the RO TCB	E640 E650 E660 E670	87
LDGLLT	INT16US	STAT	4	AVG	Total time for all loads		6
LDGLLTRO	INT16US	STAT	4	AVG	Time taken to load programs on the RO TCB	E640 E650 E660 E670	88
LDGLSORT	BINARY	STAT	4	AVG	LIBRARY search order update time	E640	86
LDGLWSOU	BINARY	STAT	4	AVG	Load requests waited due to search order update	E640	85
LDGPROGNIUC	BINARY	STAT	4	AVG	Number of CDSA programs on Not-In-Use (NIU) queue		16
LDGPROGNIUEC	BINARY	STAT	4	AVG	Number of ECDSA programs on Not-In-Use (NIU) queue		21
LDGPROGNIUER	BINARY	STAT	4	AVG	Number of ERDSA programs on Not-In-Use (NIU) queue		41
LDGPROGNIUES	BINARY	STAT	4	AVG	Number of ESDSA programs on Not-In-Use (NIU) queue		31

Table 628. LOADER resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
LDGPROGNIUR	BINARY	STAT	4	AVG	Number of RDSA programs on Not-In-Use (NIU) queue		36
LDGPROGNIUS	BINARY	STAT	4	AVG	Number of SDSA programs on Not-In-Use (NIU) queue		26
LDGPUSES	BINARY	STAT	4	AVG	Number of program uses		7
LDGRECNIUC	BINARY	STAT	4	AVG	Number of CDSA reclaims from Not-In-Use queue		17
LDGRECNIUEC	BINARY	STAT	4	AVG	Number of ECDSA reclaims from Not-In-Use queue		22
LDGRECNIUER	BINARY	STAT	4	AVG	Number of ERDSA reclaims from Not-In-Use queue		42
LDGRECNIUES	BINARY	STAT	4	AVG	Number of ESDSA reclaims from Not-In-Use queue		32
LDGRECNIUR	BINARY	STAT	4	AVG	Number of RDSA reclaims from Not-In-Use queue		37
LDGRECNIUS	BINARY	STAT	4	AVG	Number of SDSA reclaims from Not-In-Use queue		27
LDGSTGNIUC	BINARY	STAT	4	AVG	Size of CDSA occupied by Not-In-Use (NIU) programs		15
LDGSTGNIUEC	BINARY	STAT	4	AVG	Size of ECDSA occupied by Not-In-Use programs		20
LDGSTGNIUER	BINARY	STAT	4	AVG	Size of ERDSA occupied by Not-In-Use programs		40
LDGSTGNIUES	BINARY	STAT	4	AVG	Size of ESDSA occupied by Not-In-Use programs		30
LDGSTGNIUR	BINARY	STAT	4	AVG	Size of RDSA occupied by Not-In-Use (NIU) programs		35
LDGSTGNIUS	BINARY	STAT	4	AVG	Size of SDSA occupied by Not-In-Use (NIU) programs		25
LDGTTW	INT16US	STAT	4	AVG	Total time spent waiting for loader		11
LDGWLR	BINARY	STAT	4	AVG	Number of loader requests waiting		8
LDGWLRHW	BINARY	STAT	4	AVG	Peak number of waiting loader requests		9
LDGWTDLR	BINARY	STAT	4	AVG	Number of loader requests that waited		13
LOADRATE	RATE3	CPSM	8	AVG	Rate of program loading		51
PCDSANIU	PERCENT3	CPSM	4	AVG	Percentage of CDSA held by Not-In-Use programs		52
PECDSANIU	PERCENT3	CPSM	4	AVG	Percentage of ECDSA held by Not-In-Use programs		55
PERDSANIU	PERCENT3	CPSM	4	AVG	Percentage of ERDSA held by Not-In-Use programs		67
PESDSANIU	PERCENT3	CPSM	4	AVG	Percentage of ESDSA held by Not-In-Use programs		61
PLOADWAIT	PERCENT3	CPSM	4	AVG	Percentage of waits to program uses		49
PRDSANIU	PERCENT3	CPSM	4	AVG	Percentage of RDSA held by Not-In-Use programs		64
PSDSANIU	PERCENT3	CPSM	4	AVG	Percentage of SDSA held by Not-In-Use programs		58
PSTGNIUC	PERCENT3	CPSM	4	AVG	Percentage Not-In-Use of DSAs below 16MB in CDSA		53
PSTGNIUEC	PERCENT3	CPSM	4	AVG	Percent Not-In-Use of DSAs above 16MB in ECDSA		56

Table 628. *LOADER resource table attributes (continued)*

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
PSTGNIUER	PERCENT3	CPSM	4	AVG	Percentage Not-In-Use of DSAs above 16MB in ERDSA		68
PSTGNIUES	PERCENT3	CPSM	4	AVG	Percent Not-In-Use of DSAs above 16MB in ESDSA		62
PSTGNIUR	PERCENT3	CPSM	4	AVG	Percentage Not-In-Use of DSAs below 16MB in RDSA		65
PSTGNIUS	PERCENT3	CPSM	4	AVG	Percentage Not-In-Use of DSAs below 16MB in SDSA		59
TLOADWAIT	BINARY	CPSM	4	AVG	Total waiting time for program loads		46

Chapter 273. LOCFILE Resource Table

A CICS Resource that describes a local file in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is FILE.

The following actions are supported:

CLOSE

Close a local file.

The parameter data for the CLOSE action is:

```
PARM( ' BUSY(cvda) . ' )
```

where *cvda* is required and is one of the following valid CVDA values for the file busy condition:

WAIT
NOWAIT
FORCE

DISABLE

Disable a local file.

The parameter data for the DISABLE action is:

```
PARM( ' BUSY(cvda) . ' )
```

where *cvda* is required and is one of the following valid CVDA values for the file busy condition:

WAIT
NOWAIT
FORCE

DISCARD

Discard a local file.

ENABLE

Enable a local file.

OPEN

Open a local file.

External resource name

CICSLocalFile

Length

368

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0009

Table 629. Valid CPSM operations				
Operations	Actions	Parameters	Required	
GET		None	N/A	
SET		None	N/A	
PERFORM SET	CLOSE	BUSY(WAIT, NOWAIT, FORCE)	Yes	
	DISABLE	BUSY(WAIT, NOWAIT, FORCE)	Yes	
	DISCARD	None	N/A	
	ENABLE	None	N/A	
	OPEN	None	N/A	

Table 630. LOCFILE resource table attributes									
Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
ACCESSMETHOD	CVDAS	INQ	4	LIKE	No	Access method			2
ACCESSMETHOD Output valid values	VSAM, BDAM, DB2								
ADD	CVDAS	INQ	4	LIKE	Yes	Add option			3
ADD Input/output valid values	ADDABLE, NOTADDABLE								
ADDCNT	BINARY	STAT	4	AVG	No	Number of WRITE requests			33
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0	E640 E650	64
BASEDSNAME	CHAR	INQ	44	DIFF	No	Base data set name			4
BLOCKFORMAT	CVDAS	INQ	4	LIKE	No	Block format (BDAM only)			5
BLOCKFORMAT Output valid values	BLOCKED, UNBLOCKED								
BLOCKKEYLN	CNUMERIC	INQ	4	MAX	No	Block key length (BDAM only)			6
BLOCKSIZE	CNUMERIC	INQ	4	MAX	No	Block size (BDAM only)			7
BROWSE	CVDAS	INQ	4	LIKE	Yes	Browse option			8
BROWSE Input/output valid values	BROWSABLE, NOTBROWSABLE								
BROWSECNT	BINARY	STAT	4	AVG	No	The number of READNEXT and READPREV requests			32
BROWUPDCNT	BINARY	STAT	4	AVG	No	Number of browse for update requests			50
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent		E640 E650	56
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, TABLE, SYSTEM, CREATESPI, NOTAPPLIC								
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release		E640 E650	57

Table 630. LOCFILE resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time		E640 E650	58
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID		E640 E650	55
DATASETTYPE	CHAR	STAT	1	DIFF	No	Data set type			48
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition		E640 E650	59
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time		E640 E650	60
DELETE	CVDAS	INQ	4	LIKE	Yes	Delete option			9
DELETE Input/output valid values	DELETABLE, NOTDELETABLE								
DEXPCNT	BINARY	STAT	4	AVG	No	Number of I/O operations for data records			36
DISPOSITION	CVDAS	INQ	4	LIKE	Yes	Disposition of file			10
DISPOSITION Input/output valid values	OLD, SHARE								
DSNAME	CHAR	INQ	44	DIFF	Yes	Data set name			11
EMPTYSTATUS	CVDAS	INQ	4	LIKE	Yes	Empty status			12
EMPTYSTATUS Input/output valid values	EMPTYREQ, NOEMPTYREQ								
ENABLESTATUS	CVDAS	INQ	4	LIKE	Yes	Enablement status			13
ENABLESTATUS Input/output valid values	ENABLED, DISABLED								
ENABLESTATUS Output valid values	DISABLING, UNENABLED, UNENABLING								
EXCLUSIVE	CVDAS	INQ	4	LIKE	Yes	BDAM exclusive control status			14
EXCLUSIVE Input/output valid values	EXCTL, NOEXCTL, NOTAPPLIC								
FILE-1	CHAR	INQ	8	DIFF	No	File ID			1
FWDRECSTATUS	CVDAS	INQ	4	LIKE	No	Forward recovery option			15
FWDRECSTATUS Output valid values	FWDRECOVABLE, NOTFWDRCVBLE								
GETCNT	BINARY	STAT	4	AVG	No	Number of READ requests			30
GETUPDCNT	BINARY	STAT	4	AVG	No	Number of READ UPDATE requests			31
GMTFILECLS	TIMESTP	STAT	8	MAX	No	GMT file close time			46
GMTFILEOPN	TIMESTP	STAT	8	MAX	No	GMT file open time			45
IEXPCNT	BINARY	STAT	4	AVG	No	Number of I/O operations against index component			37
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent		E640 E650	63
INSTALLAGENT Input/output valid values	CSDAPI, CREATSPI, TABLE, SYSTEM, GRPLIST, BUNDLE								
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time		E640 E650	62
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID		E640 E650	61
JOURNALNUM	BINARY	INQ	2	AVG	No	Journal number			39
KEYLENGTH	BINARY	INQ	4	AVG	No	Key length			16

Table 630. LOCFILE resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
KEYPOSITION	BINARY	INQ	4	AVG	No	Key position			17
LOCDELCNT	BINARY	STAT	4	AVG	No	Number of DELETE requests			35
LSRPOOLID	BINARY	INQ	2	MAX	Yes	LSR Pool number			41
NUMACTSTRING	BINARY	STAT	2	AVG	No	Number of active strings			44
NUMDATBUFF	BINARY	STAT	2	AVG	No	Number of data buffers			42
NUMINDEXBUFF	BINARY	STAT	2	AVG	No	Number of index buffers			43
NUMSTRINGWT	BINARY	STAT	2	AVG	No	Current number of string waits			47
OBJECT	CVDAS	INQ	4	LIKE	No	Data set type (base or path)			18
OBJECT Output valid values	BASE, PATH								
OPENSTATUS	CVDAS	INQ	4	LIKE	Yes	Open status			19
OPENSTATUS Input/output valid values	OPEN, CLOSED								
OPENSTATUS Output valid values	OPENING, CLOSING, CLOSEREQUEST								
RBATYPE	CVDAS	INQ	4	LIKE	No	Type of VSAM extended addressing		E640	54
RBATYPE Output valid values	EXTENDED, NOTEXTENDED, NOTAPPLIC								
READ	CVDAS	INQ	4	LIKE	Yes	Read option			20
READ Input/output valid values	READABLE, NOTREADABLE								
READINTEG	CVDAS	INQ	4	LIKE	Yes	Default level of read integrity			51
READINTEG Input/output valid values	UNCOMMITTED, CONSISTENT, REPEATABLE								
READINTEG Output valid values	NOTAPPLIC								
RECORDFORMAT	CVDAS	INQ	4	LIKE	No	Record format			21
RECORDFORMAT Output valid values	FIXED, VARIABLE, UNDEFINED								
RECORDSIZE	BINARY	INQ	4	AVG	No	Record size			22
RECOVSTATUS	CVDAS	INQ	4	LIKE	No	Recovery status			23
RECOVSTATUS Output valid values	RECOVERABLE, NOTRECOVERABLE								
RELTYPE	CVDAS	INQ	4	LIKE	No	Relative addressing type (BDAM only)			24
RELTYPE Output valid values	HEX, DEC, BLK, NOTAPPLIC								
RLSACCESS	CVDAS	INQ	4	LIKE	Yes	Record level sharing (RLS) file access mode			52
RLSACCESS Input/output valid values	RLS, NOTRLS								
RLSACCESS Output valid values	NOTAPPLIC								
RLSREQWTO	BINARY	STAT	4	AVG	No	Record level sharing (RLS) request wait timeouts			53
STRINGS	CNUMERIC	INQ	4	MAX	Yes	Number of strings			25
TIMECLOSE	DECTSTP	STAT	4	MAX	No	Local time file was closed			29
TIMEOPEN	DECTSTP	STAT	4	MAX	No	Local time file was opened			28
UPDATE	CVDAS	INQ	4	LIKE	Yes	Update option			27
UPDATE Input/output valid values	UPDATABLE, NOTUPDATABLE								

Table 630. LOCFILE resource table attributes (continued)									
Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
UPDATECNT	BINARY	STAT	4	AVG	No	Number of REWRITE requests			34
VSAMTYPE	CVDAS	INQ	4	LIKE	No	Type of VSAM data set			26
VSAMTYPE Input/output valid values	NOTAPPLIC								
VSAMTYPE Output valid values	ESDS, KSDS, RRDS, VRRDS								
WSTRCCURCNT	BINARY	STAT	2	AVG	No	Peak number of tasks waiting for a string			40
WSTRCNT	BINARY	STAT	4	AVG	No	Total requests queued because all strings in use			38

Chapter 274. LOCTRAN Resource Table

A CICS Resource that describes a local transaction in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is TRANID.

The following actions are supported:

DISABLE

Disable a local transaction.

DISCARD

Discard a local transaction.

ENABLE

Enable a local transaction.

These actions require no unique parameter data.

External resource name

CICSLocalTransaction

Length

504

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0022

Table 631. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	DISABLE	None	N/A
	DISCARD	None	N/A
	ENABLE	None	N/A

Table 632. LOCTRAN FEEDBACK error codes

Value	Code	Description
1	LOCTRAN_INV_DATA	Attribute data invalid

Table 633. LOCTRAN resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
ACTMISMATS	BINARY	STAT	4	AVG	No	Number of indoubt action mismatches detected			43
APPLICATION	CHAR	INQ	64	DIFF	No	Application Name		E640 E650 E660 E670 E680 E690	59
APPLMAJORVER	BINARY	INQ	4	MAX	No	Major Version		E640 E650 E660 E670 E680 E690	62
APPLMICROVER	BINARY	INQ	4	MAX	No	Micro Version		E640 E650 E660 E670 E680 E690	64
APPLMINORVER	BINARY	INQ	4	MAX	No	Minor Version		E640 E650 E660 E670 E680 E690	63
AVAILSTATUS	CVDAS	INQ	4	LIKE	No	Availability status		E640 E650 E660 E670 E680 E690	65
AVAILSTATUS Output valid values	AVAILABLE, UNAVAILABLE, NONE								
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0	E640 E650	57
BREXIT	CHAR	INQ	8	DIFF	No	Bridge exit program name			45
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent		E640 E650	48
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, SYSTEM, CREATESPI, NOTAPPLIC								
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release		E640 E650	50
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time		E640 E650	52
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID		E640 E650	49
CMDSEC	CVDAS	INQ	4	LIKE	No	Command level security option			2
CMDSEC Output valid values	CMDSECNO, CMDSECYES								

Table 633. LOCTRAN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition		E640 E650	53
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time		E640 E650	54
DTB	CVDAS	INQ	4	LIKE	No	Dynamic transaction backout option		E510+	3
DTB Output valid values	WAIT, COMMIT, BACKOUT								
DTIMEOUT	BINARY	INQ	4	AVG	No	Deadlock timeout (seconds)			4
DUMPING	CVDAS	INQ	4	LIKE	Yes	Transaction dump option			5
DUMPING Input/output valid values	TRANDUMP, NOTRANDUMP								
FACILITYLIKE	CHAR	INQ	4	DIFF	No	Model for virtual terminal			44
FORACTINDTO	BINARY	STAT	4	AVG	No	Forced actions - in-doubt timeout value exceeded			39
FORACTNOWT	BINARY	STAT	4	AVG	No	Forced actions - wait not supported for resources			40
FORACTOPER	BINARY	STAT	4	AVG	No	Forced actions - operator cancelled wait			41
FORACTOTHER	BINARY	STAT	4	AVG	No	Forced actions - other reasons			42
FORACTTRNDF	BINARY	STAT	4	AVG	No	Forced actions - in-doubt waiting not supported			38
INDOUBT	CVDAS	INQ	4	LIKE	No	Transaction in-doubt option			35
INDOUBT Output valid values	BACKOUT, COMMIT								
INDOUBTMINS	BINARY	INQ	4	AVG	No	In-doubt time (minutes)			36
INDOUBTWAIT	CVDAS	INQ	4	LIKE	No	In-doubt wait option			34
INDOUBTWAIT Output valid values	WAIT, NOWAIT								
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent		E640 E650	51
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, SYSTEM, GRPLIST, BUNDLE								
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time		E640 E650	56
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID		E640 E650	55
ISOLATEST	CVDAS	INQ	4	LIKE	No	Transaction isolation type			25
ISOLATEST Output valid values	ISOLATE, NOISOLATE								
LOCALCNT	BINARY	STAT	4	SUM	No	Number of times transaction run locally by DTR			15
NUMINDOUBWT	BINARY	STAT	4	AVG	No	Number of in-doubt waits			37
OPERATION	CHAR	INQ	64	DIFF	No	Operation Name		E640 E650 E660 E670 E680 E690	61
OTSTIMEOUT	BINARY	INQ	4	AVG	No	Object transaction service (OTS) timeout (seconds)			47

Table 633. LOCTRAN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
PLATFORM	CHAR	INQ	64	DIFF	No	Platform Name		E640 E650 E660 E670 E680 E690	60
PRIORITY	BINARY	INQ	4	AVG	Yes	Transaction priority			6
PROFILE	CHAR	INQ	8	DIFF	No	Transaction profile			17
PROGRAM	CHAR	INQ	8	DIFF	No	First program name			7
PURGEABILITY	CVDAS	INQ	4	LIKE	Yes	Purgeability option			8
PURGEABILITY Input/output valid values	PURGEABLE, NOTPURGEABLE								
REMOSECNT	BINARY	STAT	4	SUM	No	Number of times transaction run remotely by DTR			23
REMOTENAME	CHAR	INQ	8	DIFF	No	Remote transaction name			31
REMOTESYSTEM	CHAR	INQ	4	DIFF	No	Remote system name			32
REMSTARTCNT	BINARY	STAT	4	SUM	No	Number of attempted starts on remote system			24
RESSEC	CVDAS	INQ	4	LIKE	No	Resource level security status			18
RESSEC Output valid values	RESSECNO, RESSECYES								
RESTARTCNT	BINARY	STAT	4	SUM	No	Number of times transaction restarted			22
ROUTESTATUS	CVDAS	INQ	4	LIKE	No	Route status			46
ROUTESTATUS Output valid values	ROUTABLE, NOTROUTABLE								
ROUTING	CVDAS	INQ	4	LIKE	No	Routing type			21
ROUTING Output valid values	DYNAMIC, STATIC								
RTIMEOUT	BINARY	INQ	4	AVG	No	Read timeout (seconds)			9
RUNAWAY	BINARY	INQ	4	AVG	Yes	Runaway time (milliseconds)			26
RUNAWAYTYPE	CVDAS	INQ	4	LIKE	Yes	Source of runaway timeout value			27
RUNAWAYTYPE Input/output valid values	SYSTEM, USER								
SCRNSIZE	CVDAS	INQ	4	LIKE	No	Screen size			10
SCRNSIZE Output valid values	DEFAULT, ALTERNATE								
SHUTDOWN	CVDAS	INQ	4	LIKE	Yes	Shutdown run status			28
SHUTDOWN Input/output valid values	SHUTDISABLED, SHUTENABLED								
STATUS	CVDAS	INQ	4	LIKE	Yes	Enabled status			11
STATUS Input/output valid values	ENABLED, DISABLED								
STGVCNT	BINARY	STAT	4	SUM	No	Number of storage violations			16
STORAGECLEAR	CVDAS	INQ	4	LIKE	No	Storage clearance status			29
STORAGECLEAR Output valid values	CLEAR, NOCLEAR								
TASKDATAKEY	CVDAS	INQ	4	LIKE	No	Task data key			20
TASKDATAKEY Output valid values	CICSDATAKEY, USERDATAKEY								
TASKDATALOC	CVDAS	INQ	4	LIKE	No	Task data location			19

Table 633. LOCTRAN resource table attributes (continued)									
Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
TASKDATALOC Output valid values	BELOW, ANY								
TRACING	CVDAS	INQ	4	LIKE	Yes	Tracing type			12
TRACING Input/output valid values	SPECTRACE, STANTRACE, SPRSTRACE								
TRANCLASS	CHAR	INQ	8	DIFF	Yes	Transaction class name			30
TRANID-1	CHAR	INQ	4	DIFF	No	Transaction ID			1
TRPROF	CHAR	INQ	8	DIFF	No	Transaction routing profile			33
TWASIZE	BINARY	INQ	4	AVG	No	Size in bytes of transaction work area (TWA)			13
USECOUNT	BINARY	STAT	4	SUM	No	Number of times transaction used			14

Chapter 275. LSRDEF Resource Table

A CICS Definition that describes a local shared resource (LSR) pool for use by CICS files.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install an LSR Pool Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionLSRPool

Length

464

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3804

Table 634. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM SET	INSTALL	FORCEINS(YES, NO)	No
		MODE(value)	No

Table 634. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 635. LSRDEF FEEDBACK error codes

Value	Code	Description
1	LSRDEF_INV_DATA	Attribute data invalid
2	LSRDEF_REC_NOT_FOUND	Requested resource not found
4	LSRDEF_REC_EXISTS	Resource already exists
5	LSRDEF_REC_CHANGED	Resource definition already changed
6	LSRDEF_INV_RESTYPE	Invalid resource type
7	LSRDEF_INV_VER	Invalid resource version
11	LSRDEF_NON_MP	Maintenance point CMAS not available
12	LSRDEF_INV_CONTEXT	Context not found
13	LSRDEF_INCONSISTENT_SET	Inconsistent set condition
14	LSRDEF_INV_RESGROUP	Resource group not found
21	LSRDEF_INV_ACTION	Invalid action
22	LSRDEF_INV_RECADDR	Invalid record address
23	LSRDEF_INV_RECLEN	Invalid record length
24	LSRDEF_DIFF_VERSION	Different version
25	LSRDEF_EARLY_NAMELIST_END	Early name list end
26	LSRDEF_INV_NAMELIST	Invalid name list
27	LSRDEF_INV_NAME	Invalid name
28	LSRDEF_INV_MINNAME	Invalid minor name
29	LSRDEF_NOTIFY	Notify
30	LSRDEF_PARTIAL_INSTALL	Partial install
31	LSRDEF_NOTHING_INSTALLED	Nothing installed

Table 635. LSRDEF FEEDBACK error codes (continued)

Value	Code	Description
32	LSRDEF_NO_TARGETS	No targets
33	LSRDEF_NO_RELATED	No related systems
34	LSRDEF_INV_TSCOPE	Invalid target scope
35	LSRDEF_INV_RSCOPE	Invalid related scope
36	LSRDEF_INV_USAGE	Invalid usage
37	LSRDEF_INV_MODE	Invalid mode
38	LSRDEF_INV_STATECHK	Invalid state check
39	LSRDEF_INV_FORCEINS	Invalid force install
40	LSRDEF_INV_NOTIFY	Invalid notify
41	LSRDEF_INV_OVERTYPE	Invalid over type
42	LSRDEF_INV_OVRBLOCK	Invalid override block
43	LSRDEF_INV_ORSTRING	Invalid override string
44	LSRDEF_INV_STRNGTERM	Invalid string term
45	LSRDEF_INV_EMBEDTERM	Invalid embedded terminator
46	LSRDEF_INV_ATTRIBUTE	Invalid attribute
47	LSRDEF_INV_LITERAL	Invalid literal
48	LSRDEF_INV_ORSTGNA	Invalid override string
49	LSRDEF_SCOPE_REQUIRED	Scope required
50	LSRDEF_USAGE_CONFLICT	Usage conflict
51	LSRDEF_NODEFS_SELECTED	No definitions selected
52	LSRDEF_MORE_THAN_1_RELSYS	More than one related system
53	LSRDEF_MISSING_RELSYSID	Missing related system identifier
54	LSRDEF_SCOPE_CONFLICT	Scope conflict
55	LSRDEF_INV_CSDGROUP	Invalid CSD group
56	LSRDEF_REC_NOT_REMOVED	Record not removed
57	LSRDEF_INV_RESOURCE	Invalid resource
58	LSRDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	LSRDEF_PARTIAL_ACTION	Partial action
60	LSRDEF_NOTHING_ACTIONED	Nothing actioned
61	LSRDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	LSRDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	LSRDEF_CSD_ERROR	CSD access error

Table 636. LSRDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	56
CHANGEAGENT Input/ output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	58
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	57
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				50
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	60
DATA12K	CHAR	CPSM	8	No	DIFF	Number of 12 KB data buffers		3-32767		17
DATA16K	CHAR	CPSM	8	No	DIFF	Number of 16 KB data buffers		3-32767		18
DATA1K	CHAR	CPSM	8	No	DIFF	Number of 1 KB data buffers		3-32767		13
DATA20K	CHAR	CPSM	8	No	DIFF	Number of 20 KB data buffers		3-32767		19
DATA24K	CHAR	CPSM	8	No	DIFF	Number of 24 KB data buffers		3-32767		20
DATA28K	CHAR	CPSM	8	No	DIFF	Number of 28 KB data buffers		3-32767		21
DATA2K	CHAR	CPSM	8	No	DIFF	Number of 2 KB data buffers		3-32767		14
DATA32K	CHAR	CPSM	8	No	DIFF	Number of 32 KB data buffers		3-32767		22
DATA4K	CHAR	CPSM	8	No	DIFF	Number of 4 KB data buffers		3-32767		15
DATA512	CHAR	CPSM	8	No	DIFF	Number of 512-byte data buffers		3-32767		12
DATA8K	CHAR	CPSM	8	No	DIFF	Number of 8 KB data buffers		3-32767		16
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		55
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				54
HSDATA12K	CHAR	CPSM	8	No	DIFF	Number of 12 KB Hiperspace data buffers		0-16777215		36
HSDATA16K	CHAR	CPSM	8	No	DIFF	Number of 16 KB Hiperspace data buffers		0-16777215		37
HSDATA20K	CHAR	CPSM	8	No	DIFF	Number of 20 KB Hiperspace data buffers		0-16777215		38
HSDATA24K	CHAR	CPSM	8	No	DIFF	Number of 24 KB Hiperspace data buffers		0-16777215		39
HSDATA28K	CHAR	CPSM	8	No	DIFF	Number of 28 KB Hiperspace data buffers		0-16777215		40
HSDATA32K	CHAR	CPSM	8	No	DIFF	Number of 32 KB Hiperspace data buffers		0-16777215		41
HSDATA4K	CHAR	CPSM	8	No	DIFF	Number of 4 KB Hiperspace data buffers		0-16777215		34
HSDATA8K	CHAR	CPSM	8	No	DIFF	Number of 8 KB Hiperspace data buffers		0-16777215		35

Table 636. LSRDEF resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
HSINDEX12K	CHAR	CPSM	8	No	DIFF	Number of 12 KB Hipspace index buffers		0-16777215		44
HSINDEX16K	CHAR	CPSM	8	No	DIFF	Number of 16 KB Hipspace index buffers		0-16777215		45
HSINDEX20K	CHAR	CPSM	8	No	DIFF	Number of 20 KB Hipspace index buffers		0-16777215		46
HSINDEX24K	CHAR	CPSM	8	No	DIFF	Number of 24 KB Hipspace index buffers		0-16777215		47
HSINDEX28K	CHAR	CPSM	8	No	DIFF	Number of 28 KB Hipspace index buffers		0-16777215		48
HSINDEX32K	CHAR	CPSM	8	No	DIFF	Number of 32 KB Hipspace index buffers		0-16777215		49
HSINDEX4K	CHAR	CPSM	8	No	DIFF	Number of 4 KB Hipspace index buffers		0-16777215		42
HSINDEX8K	CHAR	CPSM	8	No	DIFF	Number of 8 KB Hipspace index buffers		0-16777215		43
INDEX12K	CHAR	CPSM	8	No	DIFF	Number of 12 KB index buffers		3-32767		28
INDEX16K	CHAR	CPSM	8	No	DIFF	Number of 16 KB index buffers		3-32767		29
INDEX1K	CHAR	CPSM	8	No	DIFF	Number of 1 KB index buffers		3-32767		24
INDEX20K	CHAR	CPSM	8	No	DIFF	Number of 20 KB index buffers		3-32767		30
INDEX24K	CHAR	CPSM	8	No	DIFF	Number of 24 KB index buffers		3-32767		31
INDEX28K	CHAR	CPSM	8	No	DIFF	Number of 28 KB index buffers		3-32767		32
INDEX2K	CHAR	CPSM	8	No	DIFF	Number of 2 KB index buffers		3-32767		25
INDEX32K	CHAR	CPSM	8	No	DIFF	Number of 32 KB index buffers		3-32767		33
INDEX4K	CHAR	CPSM	8	No	DIFF	Number of 4 KB index buffers		3-32767		26
INDEX512	CHAR	CPSM	8	No	DIFF	Number of 512-byte index buffers		3-32767		23
INDEX8K	CHAR	CPSM	8	No	DIFF	Number of 8 KB index buffers		3-32767		27
LSRPOOLID	CHAR	CPSM	4	No	DIFF	LSR Pool number	1	1-255		8
MAXKEYLENGTH	CHAR	CPSM	4	No	DIFF	Maximum key length		0-255		9
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
SHARELIMIT	CHAR	CPSM	4	No	DIFF	Resource share limit	50	1-100		10
STRINGS	CHAR	CPSM	4	No	DIFF	Maximum number of file strings in pool		1-255		11
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				51
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				52
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				53

Chapter 276. LSRINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of an LSR pool definition (LSRDEF) in a resource group (RESGROUP). An LSRDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is LSRGROUP.

The **Secondary** key field for this resource class is LSRNAME.

The **Tertiary** key field for this resource class is LSRVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6149

Table 637. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 638. LSRINGRP FEEDBACK error codes		
Value	Code	Description
1	LSRINGRP_INV_DATA	Attribute data invalid
2	LSRINGRP_REC_NOT_FOUND	Requested resource not found
4	LSRINGRP_REC_EXISTS	Resource already exists
6	LSRINGRP_INV_RESTYPE	Invalid resource type
7	LSRINGRP_INV_VER	Invalid resource version
11	LSRINGRP_NON_MP	Maintenance point CMAS not available
12	LSRINGRP_INV_CONTEXT	Context not found

Table 638. LSRINGRP FEEDBACK error codes (continued)

Value	Code	Description
21	LSRINGRP_INCONSISTENT_SET	Inconsistent set
22	LSRINGRP_DIFF_VERSION	Different version
23	LSRINGRP_INV_NAME	Invalid name
24	LSRINGRP_INV_MINNAME	Invalid minor name

Table 639. LSRINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
LSRGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
LSRNAME-2	CHAR	CPSM	8	Yes	DIFF	LSR pool definition name	6
LSRVER-3	BINARY	CPSM	1	Yes	AVG	LSR pool definition version	7

Chapter 277. LSRPBUF Resource Table

A CICS Resource that describes a local shared resources buffer pool in an active CICS system being managed by CICSplex SM. An instance of LSRPBUF exists for each defined buffer size in the LSR pool.

The **Primary** key for this resource table is POOLSIZE TYPE. While the LSRPBUF resource class identifies multiple key attributes, only the pool number can be specified in an EVALDEF INSTANCE attribute.

There are no object specific actions for this resource class.

External resource name

CICSLSRPoolBuffer

Length

80

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0036

Table 640. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 641. LSRPBUF resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	11
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
COUNT	BINARY	STAT	2	AVG	Number of buffers	7
CREADS	BINARY	STAT	4	AVG	Number of successful CREAD requests	8
CWRITES	BINARY	STAT	4	AVG	Number of successful CWRITE requests	9
FAILCREADS	BINARY	STAT	4	AVG	Number of failed CREAD requests	10
FAILCWRITES	BINARY	STAT	4	AVG	Number of failed CWRITE requests	2
HIPERBUFF	BINARY	STAT	4	AVG	Number of Hiperspace buffers	3
LOOKASIDES	BINARY	STAT	4	AVG	Number of lookaside buffer reads	6
NONUWRITE	BINARY	STAT	4	AVG	Number of non user-initiated buffer writes	

Table 641. LSRPBUF resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
POOL	BINARY	STAT	1	MAX	Pool number	15
POOLSIZE-1	CHAR	STAT	9	DIFF	Pool number/buffer size/buffer type	1
READS	BINARY	STAT	4	AVG	Number of buffer reads	4
SIZE	BINARY	STAT	4	SUM	Buffer size	13
TYPE	EYUDA	INQ	4	LIKE	Buffer usage	14
TYPE Output valid values	DATA, INDEX, BOTH					
USERIWRITE	BINARY	STAT	4	AVG	Number of user-initiated buffer writes	5

Chapter 278. LSRPOOL Resource Table

A CICS Resource that describes a local shared resources pool in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is LSRPOOLID.

There are no object specific actions for this resource class.

External resource name

CICSLSRPool

Length

136

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0035

Table 642. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 643. LSRPOOL resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	1
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
CREATETIME	DECTSTP	STAT	4	MAX	Local create time	
DBLOOKASIDE	BINARY	STAT	4	AVG	Number of successful lookasides to data buffers	10
DBNUWRITE	BINARY	STAT	4	AVG	Number of non user-initiated data buffer writes	13
DBREAD	BINARY	STAT	4	AVG	Number of read I/Os to data buffers	11
DBUFFCNT	BINARY	STAT	4	AVG	Number of data buffers	8
DBUIWRITE	BINARY	STAT	4	AVG	Number of user-initiated data buffer writes	12
DCREAD	BINARY	STAT	4	AVG	Number of successful data buffer CREAD requests	14

Table 643. LSRPOOL resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
DCWRITE	BINARY	STAT	4	AVG	Number of successful data buffer CWRITE requests	15
DELETETIME	DECTSTP	STAT	4	MAX	Local delete time	2
DFAILCREAD	BINARY	STAT	4	AVG	Number of failed data buffer CREAD requests	16
DFAILCWRITE	BINARY	STAT	4	AVG	Number of failed data buffer CWRITE requests	17
DHIPERBUF	BINARY	STAT	4	AVG	Number of Hiperspace data buffers	9
GMTCRETIME	TIMESTP	STAT	8	MAX	GMT create time	31
GMTDELTIME	TIMESTP	STAT	8	MAX	GMT delete time	32
IBLOOKASIDE	BINARY	STAT	4	AVG	Number of lookaside index buffer reads	20
IBNUWRITE	BINARY	STAT	4	AVG	Number of non user-initiated index buffer writes	23
IBREADS	BINARY	STAT	4	AVG	Total number of index buffer reads	21
IBUFFCNT	BINARY	STAT	4	AVG	Number of index buffers	18
IBUIWRITE	BINARY	STAT	4	AVG	Number of user-initiated index buffer writes	22
ICREAD	BINARY	STAT	4	AVG	Number of successful index buffer CREAD requests	24
ICWRITE	BINARY	STAT	4	AVG	Number of successful index buffer CWRITE requests	25
IDHIPERBUF	BINARY	STAT	4	AVG	Number of Hiperspace index buffers	19
IDXDATFLG	BIT	STAT	1	LIKE	Separate data and index flag	29
IFAILCREAD	BINARY	STAT	4	AVG	Number of failed index buffer CREAD requests	26
IFAILCWRITE	BINARY	STAT	4	AVG	Number of failed index buffer CWRITE requests	27
LSRPOOLID-1	BINARY	STAT	2	MAX	LSR pool number	28
MAXCCURSTR	BINARY	STAT	2	AVG	Peak number of concurrent active strings	6
MAXKEYLEN	BINARY	STAT	2	AVG	Maximum key length	3
PEAKWAITREQ	BINARY	STAT	2	AVG	Peak number of requests waiting	5
TOTSTRINGS	BINARY	STAT	2	AVG	Total number of strings	4
TOTWAITREQ	BINARY	STAT	4	AVG	Total number of string waits	7

Chapter 279. MAPDEF Resource Table

A CICS Definition that describes a map set, which is a group of related screen layouts or maps.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install a Map Set Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionMapSet

Length

168

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3805

Table 644. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM SET	INSTALL	FORCEINS(YES, NO)	No
		MODE(value)	No

Table 644. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 645. MAPDEF FEEDBACK error codes

Value	Code	Description
1	MAPDEF_INV_DATA	Attribute data invalid
2	MAPDEF_REC_NOT_FOUND	Requested resource not found
4	MAPDEF_REC_EXISTS	Resource already exists
5	MAPDEF_REC_CHANGED	Resource definition already changed
6	MAPDEF_INV_RESTYPE	Invalid resource type
7	MAPDEF_INV_VER	Invalid resource version
11	MAPDEF_NON_MP	Maintenance point CMAS not available
12	MAPDEF_INV_CONTEXT	Context not found
13	MAPDEF_INCONSISTENT_SET	Inconsistent set condition
14	MAPDEF_INV_RESGROUP	Resource group not found
21	MAPDEF_INV_ACTION	Invalid action
22	MAPDEF_INV_RECADDR	Invalid record address
23	MAPDEF_INV_RECLEN	Invalid record length
24	MAPDEF_DIFF_VERSION	Different version
25	MAPDEF_EARLY_NAMELIST_END	Early name list end
26	MAPDEF_INV_NAMELIST	Invalid name list
27	MAPDEF_INV_NAME	Invalid name
28	MAPDEF_INV_MINNAME	Invalid minor name
29	MAPDEF_NOTIFY	Notify
30	MAPDEF_PARTIAL_INSTALL	Partial install
31	MAPDEF_NOTHING_INSTALLED	Nothing installed

Table 645. MAPDEF FEEDBACK error codes (continued)

Value	Code	Description
32	MAPDEF_NO_TARGETS	No targets
33	MAPDEF_NO_RELATED	No related systems
34	MAPDEF_INV_TSCOPE	Invalid target scope
35	MAPDEF_INV_RSCOPE	Invalid related scope
36	MAPDEF_INV_USAGE	Invalid usage
37	MAPDEF_INV_MODE	Invalid mode
38	MAPDEF_INV_STATECHK	Invalid state check
39	MAPDEF_INV_FORCEINS	Invalid force install
40	MAPDEF_INV_NOTIFY	Invalid notify
41	MAPDEF_INV_OVERTYPE	Invalid over type
42	MAPDEF_INV_OVRBLOCK	Invalid override block
43	MAPDEF_INV_ORSTRING	Invalid override string
44	MAPDEF_INV_STRNGTERM	Invalid string terminator
45	MAPDEF_INV_EMBEDTERM	Invalid embedded terminator
46	MAPDEF_INV_ATTRIBUTE	Invalid attribute
47	MAPDEF_INV_LITERAL	Invalid literal
48	MAPDEF_INV_ORSTGNA	Invalid override string
49	MAPDEF_SCOPE_REQUIRED	Scope required
50	MAPDEF_USAGE_CONFLICT	Usage conflict
51	MAPDEF_NODEFS_SELECTED	No definitions selected
52	MAPDEF_MORE_THAN_1_RELSYS	More than one related system
53	MAPDEF_MISSING_RELSYSID	Missing related system identifier
54	MAPDEF_SCOPE_CONFLICT	Scope conflict
55	MAPDEF_INV_CSDGROUP	Invalid CSD group
56	MAPDEF_REC_NOT_REMOVED	Record not removed
57	MAPDEF_INV_RESOURCE	Invalid resource
58	MAPDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	MAPDEF_PARTIAL_ACTION	Partial action
60	MAPDEF_NOTHING_ACTIONED	Nothing actioned
61	MAPDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	MAPDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	MAPDEF_CSD_ERROR	CSD access error

Table 646. MAPDEF resource table attributes										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	19
CHANGEAGENT Input/ output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	21
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	20
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				13
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	23
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		18
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				17
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
RESIDENT	EYUDA	CPSM	4	Yes	LIKE	Residence status	NO			8
RESIDENT Input/output valid values	YES, NO									
RSL	CHAR	CPSM	8	No	DIFF	Resource security value	0	0-24	E330 +	12
RSL Input/output valid values	PUBLIC									
STATUS	CVDAS	CPSM	4	Yes	LIKE	Map set status	ENABLED			9
STATUS Input/output valid values	ENABLED, DISABLED									
USAGE	EYUDA	CPSM	4	Yes	LIKE	Map set storage release	NORMAL			10
USAGE Input/output valid values	NORMAL, TRANSIENT									
USELPACOPY	EYUDA	CPSM	4	Yes	LIKE	Use map set from link pack area (LPA) option	NO			11
USELPACOPY Input/ output valid values	YES, NO									
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				14
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				15
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				16

Chapter 280. MAPINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a map set definition (MAPDEF) in a resource group (RESGROUP). A MAPDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is MAPGROUP.

The **Secondary** key field for this resource class is MAPNAME.

The **Tertiary** key field for this resource class is MAPVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6150

Table 647. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 648. MAPINGRP FEEDBACK error codes

Value	Code	Description
1	MAPINGRP_INV_DATA	Attribute data invalid
2	MAPINGRP_REC_NOT_FOUND	Requested resource not found
4	MAPINGRP_REC_EXISTS	Resource already exists
6	MAPINGRP_INV_RESTYPE	Invalid resource type
7	MAPINGRP_INV_VER	Invalid resource version
11	MAPINGRP_NON_MP	Maintenance point CMAS not available
12	MAPINGRP_INV_CONTEXT	Context not found

Table 648. MAPINGRP FEEDBACK error codes (continued)

Value	Code	Description
21	MAPINGRP_INCONSISTENT_SET	Inconsistent set
22	MAPINGRP_DIFF_VERSION	Different version
23	MAPINGRP_INV_NAME	Invalid name
24	MAPINGRP_INV_MINNAME	Invalid minor name

Table 649. MAPINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
MAPGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
MAPNAME-2	CHAR	CPSM	8	Yes	DIFF	Map set definition name	6
MAPVER-3	BINARY	CPSM	1	Yes	AVG	Map set definition version	7

Chapter 281. MAS Resource Table

A CPSM Topology Manager object that describes the attributes of a managed application system. A MAS is the run-time representation of a CICS system definition. MAS objects can be referenced even if the CICS system is not active.

The **Primary** key field for this resource class is CICSNAME.

The CICSNAME attribute key field is ignored when named in an EVALDEF. The object instances returned are a function of the current scope in effect when the request is made.

When the EVALDEF is used by MRM, the scope is that of the CICS system for which the RTADEF is being installed.

When the EVALDEF is used by APM, the scope is that established when the RTADEF was associated with the APSPEC.

The following action is supported:

STOP

Terminate the CICSplex SM MAS agent component.

The STOP action requires no unique parameter data.

External resource name

CICSManagedRegion

Length

472

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2443

Table 650. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM	STOP	None	N/A
SET			
	STOPUNCON	None	N/A
	FORCEDISCON	None	N/A

Table 650. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
	CPSMDUMP	BAS	No
		CHE	No
		COM	No
		DAT	No
		KNL	No
		MAS	No
		MON	No
		MSG	No
		QUE	No
		RTA	No
		SIM	No
		SLM	No
		SRV	No
		TOP	No
		TRC	No
		WLM	No

Table 651. MAS FEEDBACK error codes

Value	Code	Description
1	MAS_INV_DATA	Attribute data invalid
21	MAS_MONSPEC_MISSING	Monitor specification missing
22	MAS_RTASPEC_MISSING	RTA specification missing
23	MAS_WLMSPEC_MISSING	WLM specification missing
24	MAS_TOR_PARTICIPANT	TOR participant
25	STOPUNCON_REQUIRED	Issue StopUncon before ForceDiscon

Table 652. MAS resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
ACTVTIME	CHAR	CPSM	8	DIFF	Yes	Period definition name		51
AINSFAIL	EYUDA	CPSM	4	LIKE	Yes	Autoinstall failure action		58
AINSFAIL Input/output valid values	CONTINUE, PROMPT, SHUTDOWN, TERMINATE, N_A							
AUTOINST	EYUDA	CPSM	4	LIKE	Yes	Autoinstall request type		57
AUTOINST Input/output valid values	NEVER, ALWAYS, COLDONLY, WARMONLY, N_A							
BASTRACE	BITSTRIP	CPSM	4	AVG	Yes	Business Application Services (BAS) trace flags		34
BOTRSUPD	BINARY	CPSM	1	AVG	Yes	RS server bottom tier		66
CHETRACE	BITSTRIP	CPSM	4	AVG	Yes	Cache services trace flags		26

Table 652. MAS resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
CICSNAME-1	CHAR	CPSM	8	DIFF	No	CICS system name		4
CICSSAMP	BINARY	CPSM	4	AVG	Yes	Sample interval for CICS region monitoring		12
CICSSTATE	EYUDA	CPSM	4	LIKE	No	MAS status		7
CICSSTATE Output valid values	ACTIVE, INACTIVE, LOSTCON, LOSTCMAS, LOSTMAS							
CMASNAME	CHAR	CPSM	8	DIFF	No	CMAS name		5
COMTRACE	BITSTRIP	CPSM	4	AVG	Yes	Communications trace flags		28
CONNSAMP	BINARY	CPSM	4	AVG	Yes	Sample interval for connection monitoring		15
CPSMVER	CHAR	CPSM	4	DIFF	No	CPSM version of MAS		72
DATTRACE	BITSTRIP	CPSM	4	AVG	Yes	Data repository services trace flags		33
DAYLGHTSV	EYUDA	CPSM	4	LIKE	Yes	Daylight saving time in effect		55
DAYLGHTSV Input/output valid values	YES, NO, N_A							
DBXSAMP	BINARY	CPSM	4	AVG	Yes	Sample interval for DB2/DBCTRL monitoring		14
DESC	CHAR	CPSM	58	DIFF	No	CICS system description		52
FILESAMP	BINARY	CPSM	4	AVG	Yes	Sample interval for file monitoring		16
GLBLSAMP	BINARY	CPSM	4	AVG	Yes	Sample interval for global region monitoring		13
HOST	CHAR	CPSM	116	DIFF	No	Host Name	E640 E650	60
JRNLSAMP	BINARY	CPSM	4	AVG	Yes	Sample interval for journal monitoring		17
KNLTRACE	BITSTRIP	CPSM	4	AVG	Yes	Kernel linkage trace flags		22
MASTRACE	BITSTRIP	CPSM	4	AVG	Yes	MAS services trace flags		29
MASTYPE	EYUDA	CPSM	4	LIKE	No	MAS type		6
MASTYPE Output valid values	N_A, LOCAL, REMOTE							
MONSTATUS	EYUDA	CPSM	4	LIKE	Yes	Monitoring status		8
MONSTATUS Input/output valid values	YES, NO, FORCE, N_A							
MSGTRACE	BITSTRIP	CPSM	4	AVG	Yes	Message services trace flags		24
MXTACTION	CHAR	CPSM	8	DIFF	Yes	Action for CICS-at-maximum-tasks event		48
MXTSEV	EYUDA	CPSM	4	LIKE	Yes	Severity for CICS-at-maximum-tasks event		42
MXTSEV Input/output valid values	VLS, LS, LW, HW, HS, VHS, N_A							
NETWORKID	CHAR	CPSM	8	DIFF	No	Network ID	E640 E650	61
NRMACTION	CHAR	CPSM	8	DIFF	Yes	Action for Non-responsive-MAS event		71
NRMSEV	EYUDA	CPSM	4	LIKE	Yes	Severity for Non-responsive-MAS event		70
NRMSEV Input/output valid values	VLS, LS, LW, HW, HS, VHS, N_A							
PORT	CHAR	CPSM	8	DIFF	No	Port number	E640 E650	62
PRICMAS	CHAR	CPSM	8	DIFF	Yes	Primary CMAS name		50

Table 652. MAS resource table attributes (continued)								
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
PROGSAMP	BINARY	CPSM	4	AVG	Yes	Sample interval for program monitoring		18
QUETRACE	BITSTRIP	CPSM	4	AVG	Yes	Queue services trace flags		27
READRS	BINARY	CPSM	2	DIFF	Yes	RS server read interval		63
RETENTION	BINARY	CPSM	4	AVG	Yes	Monitoring data retention period		11
RTASTATUS	EYUDA	CPSM	4	LIKE	Yes	Real time analysis status		9
RTASTATUS Input/output valid values	YES, NO, SAM, MRM, N_A							
RTATRACE	BITSTRIP	CPSM	4	AVG	Yes	Real time analysis (RTA) trace flags		32
SAMACTION	CHAR	CPSM	8	DIFF	Yes	Action for system availability monitoring event		44
SAMSEV	EYUDA	CPSM	4	LIKE	Yes	Severity for system availability monitoring event		38
SAMSEV Input/output valid values	VLS, LS, LW, HW, HS, VHS, N_A							
SDMACTION	CHAR	CPSM	8	DIFF	Yes	Action for system dump event		46
SDMSEV	EYUDA	CPSM	4	LIKE	Yes	Severity for system dump event		40
SDMSEV Input/output valid values	VLS, LS, LW, HW, HS, VHS, N_A							
SECBYPASS	EYUDA	CPSM	4	LIKE	Yes	Simulated security exemption check		37
SECBYPASS Input/output valid values	YES, NO, N_A							
SECCMDCHK	EYUDA	CPSM	4	LIKE	Yes	Simulated security command check		35
SECCMDCHK Input/output valid values	YES, NO, N_A							
SECRESCHK	EYUDA	CPSM	4	LIKE	Yes	Simulated security resource check		36
SECRESCHK Input/output valid values	YES, NO, N_A							
SOSACTION	CHAR	CPSM	8	DIFF	Yes	Action for short on storage (SOS) event		45
SOSSEV	EYUDA	CPSM	4	LIKE	Yes	Severity for short on storage (SOS) event		39
SOSSEV Input/output valid values	VLS, LS, LW, HW, HS, VHS, N_A							
SRVTRACE	BITSTRIP	CPSM	4	AVG	Yes	Common services trace flags		25
STLACTION	CHAR	CPSM	8	DIFF	Yes	Action for CICS-stalled event		49
STLSEV	EYUDA	CPSM	4	LIKE	Yes	Severity for CICS-stalled event		43
STLSEV Input/output valid values	VLS, LS, LW, HW, HS, VHS, N_A							
TDMACTION	CHAR	CPSM	8	DIFF	Yes	Action for transaction dump event		47
TDMSEV	EYUDA	CPSM	4	LIKE	Yes	Severity for transaction dump event		41
TDMSEV Input/output valid values	VLS, LS, LW, HW, HS, VHS, N_A							
TDQSAMP	BINARY	CPSM	4	AVG	Yes	Sample interval for TDQ monitoring		20
TERMSAMP	BINARY	CPSM	4	AVG	Yes	Sample interval for terminal monitoring		19
TMEZONE	CHAR	CPSM	1	DIFF	Yes	Time zone		54
TMEZONEO	BINARY	CPSM	1	AVG	Yes	Time zone offset		53
TOPRSUPD	BINARY	CPSM	1	AVG	Yes	RS server top tier		65

Table 652. MAS resource table attributes (continued)								
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
TOPTRACE	BITSTRIP	CPSM	4	AVG	Yes	Topology trace flags		31
TRANSAMP	BINARY	CPSM	4	AVG	Yes	Sample interval for transaction monitoring		21
TRATRACE	BITSTRIP	CPSM	4	AVG	Yes	Trace services trace flags		23
UPDATERS	BINARY	CPSM	1	AVG	Yes	RS server update frequency		64
WLMOPTEN	EYUDA	CPSM	4	LIKE	Yes	WLM optimization enablement		69
WLMOPTEN Input/output valid values	ENABLED, DISABLED, N_A							
WLMQMODE	EYUDA	CPSM	4	DIFF	Yes	Task load queue mode		68
WLMQMODE Input/output valid values	ALL, MAXTASK, N_A							
WLMSTATUS	EYUDA	CPSM	4	LIKE	Yes	Workload manager status		10
WLMSTATUS Input valid values	YES							
WLMSTATUS Output valid values	YES, NO, N_A							
WLMTHRS	BINARY	CPSM	1	AVG	Yes	Task load health threshold		67
WLMTRACE	BITSTRIP	CPSM	4	AVG	Yes	Workload management trace flags		30

Chapter 282. MASHIST Resource Table

A CICSplex SM Operations Resource that describes the state of CICSplex SM history recording for a MAS.

The MASHIST resource does not provide an explicit key attribute. The set of object instances returned is a function of the scope in effect when the request is made.

External resource name

CICSTaskHistoryCollection

Length

64

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0153

Table 653. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	SUSPEND	None	N/A
SET	RESUME	None	N/A

Table 654. MASHIST FEEDBACK error codes

Value	Code	Description
1	INVALID_CPSM_RELEASE	Action not supported for CPSM release
2	MASHIST_STATUS_INACTV	Action not supported for an inactive history collector

Table 655. MASHIST resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	6
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
CDSSUF	CHAR	CPSM	1	DIFF	Current data set suffix	

Table 655. MASHIST resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
CRECCNT	BINARY	CPSM	8	MAX	Number of records on current data set	3
CWRAPCNT	BINARY	CPSM	4	MAX	Number of times current data set has wrapped	4
HDSCOUNT	BINARY	CPSM	2	MAX	Number of History data sets	5
REASON	EYUDA	CPSM	4	LIKE	History reason code	2
REASON Output valid values	OK, NOTAVAILABLE, INVALIDFILE, IOERROR					
RESERVED1	CHAR	CPSM	1	LIKE	Reserved area for expansion	8
RESERVED2	BINARY	CPSM	4	LIKE	Reserved area for expansion	9
RESERVED3	BINARY	CPSM	4	LIKE	Reserved area for expansion	10
RESERVED4	BINARY	CPSM	4	LIKE	Reserved area for expansion	11
RESERVED5	BINARY	CPSM	4	LIKE	Reserved area for expansion	12
RESERVED6	BINARY	CPSM	4	LIKE	Reserved area for expansion	13
STATUS	EYUDA	CPSM	4	LIKE	History recorder status	1
STATUS Output valid values	ACTIVE, INACTIVE, SUSPEND, SUSPENDING, RESUMING					
TASKNO	DECIMAL	CPSM	4	MAX	Task ID of Current Recorder	7

Chapter 283. MASQRYER Resource Table

This CICS resource object provides information about CMASes and MASes which failed to respond to a GET, PERFORM OBJECT, PERFORM SET, REFRESH, or SET command targeting a CICS operate resource table.

The **Primary** key field for this resource class is CICSTYPE.

The **Secondary** key field for this resource class is CICSNAME.

This resource class has no object specific actions.

External resource name

Length

24

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Metadata

Copybook identifier

EYUt2639

Table 656. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 657. MASQRYER resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
CICSNAME-2	CHAR	CPSM	8	LIKE	CICS system name	5
CICSTYPE-1	CHAR	CPSM	1	LIKE	CICS region type	7
CICSTYPE-1 Input/output valid values	C, M					
ERRORTYPE	EYUDA	CPSM	4	LIKE	Error type	6
ERRORTYPE Output valid values	MODBNOTACTIVE, PRIVATEMETHOD, METHODLOCKED, ENVIRONTIMEOUT, ENVIRONCANCEL, STARTFAILED, STACKTOOLARGE, OVERFLOWOSSBFAIL, BADMALTRANSFER, TRANSMITTIMEOUT, EXECUTETIMEOUT, TRANSMITFAILED, TARGETUNAVAIL, SECVIOLATION, MALRETURNFAILED, MAXHISTORYRECS, REQNOTPROCED, NOTAUTHORIZED, SECINTERFACEFAIL					
PLEXNAME	CHAR	CPSM	8	LIKE	CICSplex name	4

Chapter 284. MASSTAT Resource Table

A CICSplex SM Operations Resource that displays information about the join status of CICS systems in each CMAS in a CICSplex.

The **Primary** key field for this resource class is CICSNAME.

The **Secondary** key field for this resource class is RPTCMAS.

There are no object specific actions for this resource class.

External resource name
CICSManagedRegionStatus

Length
96

Usage
API or WUI or CICS Management Client Interface

API view
Yes

CMAS context
No

SCOPE applies
Yes

Only query CMASs in workload
No

Object type
CICSplex SM Manager

Copybook identifier
EYUt2640

Table 658. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 659. MASSTAT resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
CICSNAME-1	CHAR	CPSM	8	DIFF	CICS system name	4
CICSSTATE	EYUDA	CPSM	4	LIKE	MAS status	7
CICSSTATE Output valid values		ACTIVE, INACTIVE, LOSTCON, LOSTCMAS, LOSTMAS				
CMASNAME	CHAR	CPSM	8	DIFF	CMAS name	5
DESC	CHAR	CPSM	58	DIFF	CICS system description	9
MASTYPE	EYUDA	CPSM	4	LIKE	MAS type	6
MASTYPE Output valid values		N_A, LOCAL, REMOTE				
RPTCMAS-2	CHAR	CPSM	8	DIFF	Reporting CMAS name	8

Chapter 285. MCICSDSA Resource Table

A CICS Monitored resource that describes a subset of the dynamic storage are attributes sampled by the CICSplex SM MAS Monitor agents.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

DISCARD

Remove the Monitored resource instance.

RESET

Reset all Monitoring instance attributes.

These actions require no unique parameter data.

External resource name

Length

208

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Monitored

Copybook identifier

EYUt1367

Table 660. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET	RESET	None	N/A

Table 661. MCICSDSA FEEDBACK error codes

Value	Code	Description
9	MCICSDSA_NO_MON_DATA	No data for monitored resource
10	MCICSDSA_MON_SYSDEF_REQ	Monitored resource required by Real Time Analysis (RTA)

Table 662. MCICSDSA resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ACCESSTYPE	EYUDA	STAT	4	LIKE	Storage key	25
ACCESSTYPE Output valid values	CICS, USER, READONLY					
ASUBTOTL	CNUMERIC	STAT	4	AVG	Number of Add Subpool requests	8
CUMCMNSSUSRS	CNUMERIC	STAT	4	AVG	Cumulative number of common subspace users	39
CUMUNQSSUSRS	CNUMERIC	STAT	4	AVG	Cumulative number of unique subspace users	36
CURCMNSSUSRS	CNUMERIC	STAT	4	AVG	Current number of common subspace users	38
CURFRESTG	PERCENT	CPSM	4	AVG	Free storage for current sample (%)	20
CURRALLOC	CNUMERIC	STAT	4	AVG	Current DSA allocated above/below 16M line	41
CURUNQSSUSRS	CNUMERIC	STAT	4	AVG	Current tasks allocated a unique subspace	35
CUSHION	BINARY	STAT	4	MAX	Cushion size	4
DSUBTOTL	CNUMERIC	STAT	4	AVG	Number of Delete Subpool requests	9
FREMTOTL	BINARY	STAT	4	AVG	Number of FREEMAIN requests	7
GETMTOTL	BINARY	STAT	4	AVG	Number of GETMAIN requests	6
HWMALLOC	CNUMERIC	STAT	4	AVG	Peak DSA allocated above/below 16M line	42
HWCMCMNSSUSRS	CNUMERIC	STAT	4	AVG	Peak number of common subspace users	40
HWMFREE	CNUMERIC	CPSM	4	AVG	Peak amount of free storage available	33
HWMUNQSSUSRS	CNUMERIC	STAT	4	AVG	Peak number of unique subspace users	37
INTERVALID	TIMESTP	CPSM	8	LIKE	Interval ID	1
INTFRESTG	PERCENT	CPSM	4	AVG	Free storage for monitor interval (%)	21
LIMIT	CNUMERIC	STAT	4	AVG	Maximum size of DSA	27
LOCATION	EYUDA	STAT	4	LIKE	Dynamic storage area (DSA) location	24
LOCATION Output valid values	ABOVE, BELOW, NOTAPPLIC					
LWMFREE	CNUMERIC	CPSM	4	AVG	Smallest amount of free storage available	34
NAME-1	CHAR	STAT	8	DIFF	Dynamic storage area (DSA)	2
NSTGTOTL	CNUMERIC	STAT	4	AVG	Number of times NOSTORAGE returned	10
NSTGTSUSP	BINARY	STAT	4	AVG	Number of current suspended storage requests	13
PCTFREE	PERCENT	CPSM	4	AVG	Percentage of available total storage	29
PGMONIU	CNUMERIC	STAT	4	AVG	Storage occupied by not-in-use programs	5
POOLPCTFREE	PERCENT	CPSM	4	AVG	Percentage of available pool storage	28
REQSWAITMVS	BINARY	STAT	4	AVG	Number of requests for MVS storage causing wait	43
RNTPGPROTECT	CVDAS	STAT	4	LIKE	Reentrant program protection status	31
RNTPGPROTECT Output valid values	REENTPROT, NOREENTPROT					
SIZE	BINARY	STAT	4	MAX	DSA Size	3
STGCRELC	BINARY	STAT	4	AVG	Number of times cushion released	15

Table 662. MCICSDSA resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
STGFSIZE	BINARY	STAT	4	MAX	Free storage size	18
STGHWMM	BINARY	STAT	4	AVG	Peak size of DSA	26
STGLSIZE	CNUMERIC	STAT	4	AVG	Largest free area size	22
STGNSUBP	BINARY	STAT	4	AVG	Number of current subpools	17
STGPROTECT	CV DAS	STAT	4	LIKE	Storage protection active	30
STGPROTECT Output valid values	ACTIVE, INACTIVE					
STGPWCNT	CNUMERIC	STAT	4	AVG	Number of tasks purged while waiting	14
STGSHWM	BINARY	STAT	4	AVG	Peak number of suspended storage requests	12
STGSOSC	CNUMERIC	STAT	4	SUM	Short on storage count	16
STGSOST	INTTSTP	STAT	8	SUM	Total time CICS was short on storage	19
STGSTOTL	BINARY	STAT	4	AVG	Number of times requests were suspended	11
STGVTOTL	CNUMERIC	STAT	4	AVG	Number of storage violations	23
TIMEWAITMVS	INTTSTP	STAT	8	AVG	Total time waiting for MVS storage	44
TRNISOLATION	CV DAS	STAT	4	LIKE	Transaction isolation status	32
TRNISOLATION Output valid values	ACTIVE, INACTIVE					

Chapter 286. MCICSRGN Resource Table

A CICS Monitored resource that describes a subset of the CICS region attributes sampled by the CICSplex SM MAS Monitor agents.

The MCICSRGN resource class does not provide an explicit key attribute. The set of object instances returned is a function of the current scope in effect when the request is made.

The following actions are supported:

DISCARD

Remove the Monitored resource instance.

RESET

Reset all Monitoring instance attributes.

These actions require no unique parameter data.

External resource name

Length

440

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Monitored

Copybook identifier

EYUt1366

Table 663. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM SET	DISCARD	None	N/A
	RESET	None	N/A

Table 664. MCICSRGN FEEDBACK error codes

Value	Code	Description
9	MCICSRGN_NO_MON_DATA	No data for monitored resource
10	MCICSRGN_MON_SYSDEF_REQ	Monitored resource required by Real Time Analysis (RTA)

Table 665. MCICSRGN resource table attributes

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release		
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved		
AINSCREQ	CNUMERIC	INQ	4	AVG	Number of current autoinstall requests		10
AINSMREQ	CNUMERIC	INQ	4	AVG	Maximum number of autoinstall requests		11
AINSSTAT	CVDAS	INQ	4	LIKE	Autoinstall enabled status		12
AINSSTAT Output valid values	ENABLED, DISABLED						
AMAXTASKS	BINARY	INQ	4	SUM	Maximum number of active tasks	E410+	4
CICSSTATUS	CVDAS	INQ	4	LIKE	CICS status		6
CICSSTATUS Output valid values	STARTUP, ACTIVE, FIRSTQUIESCE, FINALQUIESCE						
CPUTIME	INTUSEC	CPSM	8	AVG	Total CPU time used		48
CTSLEVEL	CHAR	INQ	6	DIFF	CICS Transaction Server level		101
CURACTVUSRTR	CNUMERIC	STAT	4	AVG	Current number of active user transactions		76
CURAMAXRATE	RATE	CPSM	4	AVG	AMAX rate for current sample	E410+	22
CURCPUPER	PERCENT	CPSM	4	AVG	CPU usage during last sample period		49
CURPAMAXRATE	RATE	CPSM	4	AVG	Peak AMAX rate for current sample	E410+	24
CURPGIRATE	RATE	CPSM	4	AVG	Page-in rate for current sample		52
CURPGORATE	RATE	CPSM	4	AVG	Page-out rate for current sample		55
CURPTSKRATE	RATE	CPSM	4	AVG	Peak task rate for current sample		18
CURQUEDUSRTR	CNUMERIC	STAT	4	AVG	Current number of queued user transactions		77
CURQUETIME	INTTSTP	STAT	8	AVG	Time currently queued transactions waiting		83
CURRAMAX	CNUMERIC	STAT	2	AVG	Current number of user tasks eligible for dispatch	E410+	21
CURRTASKS	BINARY	INQ	4	SUM	Current number of tasks		74
CURSIORATE	RATE	CPSM	4	AVG	Start I/O rate for current sample		59
CURTASKRATE	RATE	CPSM	4	AVG	Task rate for current sample		16
CUTCBCNT	CNUMERIC	STAT	2	SUM	Number of MVS task control blocks (TCBs)		15
DSGTOTMT	INTTSTP	STAT	8	AVG	Total MVS storage wait time		103
DSGTOTMW	BINARY	STAT	4	AVG	Total number of MVS storage waiters		104
EXTSEC	CVDAS	INQ	4	LIKE	External security manager option		8
EXTSEC Output valid values	EXTSECURITY, NOSECURITY						
INTAMAXRATE	RATE	CPSM	4	AVG	AMAX rate for interval	E410+	23
INTCPUPER	PERCENT	CPSM	4	AVG	Average CPU usage over monitor interval		50
INTERVALID	TIMESTP	CPSM	8	LIKE	Interval ID		1
INTPAMAXRATE	RATE	CPSM	4	AVG	Peak AMAX rate for interval	E410+	25
INTPGIRATE	RATE	CPSM	4	AVG	Page-in rate for monitor interval		53
INTPGORATE	RATE	CPSM	4	AVG	Page-out rate for monitor interval		56
INTPTSKRATE	RATE	CPSM	4	AVG	Peak task rate for interval		19
INTSIORATE	RATE	CPSM	4	AVG	Start I/O rate for monitor interval		60

Table 665. MCICSRGN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
INTTASKRATE	RATE	CPSM	4	AVG	Task rate for interval		17
INTVTRANS	CNUMERIC	STAT	4	AVG	Transactions run since last CPSM statistics reset		98
IRCSTAT	CVDAS	INQ	4	LIKE	Interregion communication (IRC) status		13
IRCSTAT Output valid values	OPEN, CLOSED, CLOSING, IMMCLOSING						
JOBNAME	CHAR	INQ	8	DIFF	Job name		2
LASTRESET	TIMESTP	STAT	8	MAX	Last statistics reset time		29
LOADHWMC	CNUMERIC	STAT	4	AVG	Number of times peak suspended tasks reached		35
LOADHWMW	CNUMERIC	STAT	4	AVG	Peak number of tasks waiting for load requests		34
LOADPNIU	CNUMERIC	STAT	4	AVG	Number of programs on not-in-use queue		40
LOADREQS	CNUMERIC	STAT	4	AVG	Number of load requests		28
LOADRNIU	CNUMERIC	STAT	4	AVG	Number of reclaims from not-in-use queue		41
LOADTIME	INT16US	STAT	4	AVG	Total loading time		30
LOADTNIU	INTTSTP	STAT	8	AVG	Total time to remove not-in-use programs		39
LOADWAIT	INT16US	STAT	4	AVG	Total load waiting time		36
LOADWCNT	CNUMERIC	STAT	4	AVG	Number of tasks that have waited for load requests		33
LUCURR	CNUMERIC	STAT	4	AVG	Number of LUs currently logged on		67
LUHWM	CNUMERIC	STAT	4	AVG	Highest number of LUs logged on at any one time		68
MAXTASKS	BINARY	INQ	4	AVG	Maximum number of active and suspended tasks		5
MAXTRCNT	BINARY	STAT	4	AVG	Number of times MAXTASK limit reached		75
MROBATCH	BINARY	INQ	4	AVG	Number of MRO requests to be batched		9
MVSSYSID	CHAR	CPSM	4	DIFF	MVS system ID		3
OSLEVEL	CHAR	INQ	6	DIFF	z/OS level		102
PAGEIN	BINARY	CPSM	4	AVG	Number of page-in requests		51
PAGEOUT	BINARY	CPSM	4	AVG	Number of page-out requests		54
PEAKAMAX	CNUMERIC	STAT	2	AVG	Peak number of user tasks eligible for dispatch	E410+	26
PEAKTASKS	BINARY	STAT	2	AVG	Peak number of tasks in system		20
PEKACTVUSRTR	CNUMERIC	STAT	4	AVG	Peak number of active user transaction		78
PEKQUEDUSRTR	CNUMERIC	STAT	4	AVG	Peak number of queued user transactions		79
PLASTRESET	DECTIME	STAT	4	AVG	Last reset time		100
PRGMRCMP	CNUMERIC	STAT	4	AVG	Number of programs removed by compression		38
PRGMUCNT	CNUMERIC	STAT	4	AVG	Number of uses of any program by the CICS system		31
PRGMWAIT	CNUMERIC	STAT	4	AVG	Current number of waiting loader requests		32

Table 665. MCICSRGN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
PROGAUTOATTM	CNUMERIC	STAT	4	AVG	Number of program autoinstall attempts		84
PROGAUTOFAIL	CNUMERIC	STAT	4	AVG	Number of failed program autoinstall attempts		86
PROGAUTOXREJ	CNUMERIC	STAT	4	AVG	Number of times autoinstall prog request rejected		85
PRSSERRORCNT	CNUMERIC	STAT	4	AVG	Persistent sessions error count		73
PRSSINQCNT	CNUMERIC	STAT	4	AVG	Number of CICS persistent-session inquiries		69
PRSSNIBCNT	CNUMERIC	STAT	4	AVG	Number of VTAM sessions that persisted		70
PRSSOPNCNT	CNUMERIC	STAT	4	AVG	Number of persistent sessions successfully restored		71
PRSSUNBNDCNT	CNUMERIC	STAT	4	AVG	Number of persistent sessions that were terminated		72
RDEBRBLD	CNUMERIC	STAT	4	AVG	Number of times DFHRPL reopened and load retried		37
REALSTG	CNUMERIC	CPSM	4	AVG	Real storage in use		57
RELEASE	CHAR	INQ	4	DIFF	CICS Release		97
SDMPSUPP	CNUMERIC	STAT	4	AVG	Number of system dumps suppressed		43
SDMPTOTL	CNUMERIC	STAT	4	AVG	Number of system dumps taken		42
SIORREQ	BINARY	CPSM	8	AVG	Number of I/O requests		58
STRTTIME	TIMESTP	CPSM	8	MAX	CICS start time		47
SYSDUMP	CVDAS	INQ	4	LIKE	System dump status		7
SYSDUMP Output valid values	SYSDUMP, NOSYSDUMP						
SYSID	CHAR	CPSM	4	DIFF	CICS system ID		46
TDMPSUPP	CNUMERIC	STAT	4	AVG	Number of transaction dumps suppressed		45
TDMPTOTL	BINARY	STAT	4	AVG	Number of transaction dumps taken		44
TOTACTVUSRTR	CNUMERIC	STAT	4	AVG	Total number of active user transactions		80
TOTDELYUSRTR	CNUMERIC	STAT	4	AVG	Total number of queued user transactions		81
TOTLTASKS	BINARY	STAT	8	AVG	Total number of tasks		99
TOTQUETIME	INTTSTP	STAT	8	AVG	Total time queued transactions waited		82
VTMACBDOPE	CNUMERIC	STAT	2	AVG	Number of times VTAM ACB dynamically opened		65
VTMRPLMAX	DECIMAL	STAT	4	AVG	Number of times RPL maximum value was reached		62
VTMRPLPOST	DECIMAL	STAT	2	AVG	Maximum number of VTAM RPLs posted		63
VTMSOSCNT	CNUMERIC	STAT	2	AVG	Number of times VTAM had short-on-storage status		64
VTMSTATUS	CVDAS	INQ	4	LIKE	CICS-VTAM connection status		61
VTMSTATUS Output valid values	OPEN, CLOSED, CLOSING, IMMCLOSING, FORCECLOSING, NOTAPPLIC						

Chapter 287. MCMDT Resource Table

A CICS Monitored resource that describes a subset of the data table attributes sampled by the CICSplex SM MAS Monitor agents.

The **Primary** key field for this resource class is FILE.

The following actions are supported:

DISCARD

Remove the Monitored resource instance.

RESET

Reset all Monitoring instance attributes.

These actions require no unique parameter data.

External resource name

Length

312

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Monitored

Copybook identifier

EYUt1399

Table 666. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET	RESET	None	N/A

Table 667. MCMDT FEEDBACK error codes

Value	Code	Description
9	MCMDT_NO_MON_DATA	No data for monitored resource
10	MCMDT_MON_SYSDEF_REQ	Monitored resource required by Real Time Analysis (RTA)

Table 668. MCMDDT resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ADDCNT	BINARY	STAT	4	AVG	Number of add requests	16
ADDFRREAD	CNUMERIC	STAT	4	AVG	Add requests resulting from reads	34
ADDREJ	CNUMERIC	STAT	4	AVG	Add requests rejected by exit	36
ADDREQ	CNUMERIC	STAT	4	AVG	Total add requests	35
ADDTFULL	CNUMERIC	STAT	4	AVG	Total add requests when table full	37
BROWSECNT	BINARY	STAT	4	AVG	Number of browse requests	15
CONTENTION	CNUMERIC	STAT	4	AVG	CFDT contention count	62
CURCOUNT	CNUMERIC	STAT	4	AVG	Current record count	44
CURDEXCPRATE	RATE	CPSM	4	AVG	VSAM data EXCP rate current sample	24
CURIEXCPRATE	RATE	CPSM	4	AVG	VSAM index EXCP rate current sample	26
CURMRQRATE	RATE	CPSM	4	AVG	MDT request rate for current sample	42
CURREADRATE	RATE	CPSM	4	AVG	Successful read rate current sample	31
CURREQRATE	RATE	CPSM	4	AVG	Request rate for current sample	20
DELETEREQ	CNUMERIC	STAT	4	AVG	Total delete requests	39
DEXPCNT	BINARY	STAT	4	AVG	VSAM EXCP count data component	22
DSNAME	CHAR	INQ	44	DIFF	Data set name	4
ENABLESTATUS	CVDAS	INQ	4	LIKE	Enabled status	5
ENABLESTATUS Output valid values	ENABLED, DISABLED, UNENABLED, DISABLING, UNENABLING					
FILE-1	CHAR	INQ	8	DIFF	File identifier	2
GETCNT	BINARY	STAT	4	AVG	Number of get requests	13
GETUPDCNT	BINARY	STAT	4	AVG	Number of get update requests	14
IEXPCNT	BINARY	STAT	4	AVG	VSAM EXCP count INDX component	23
INTDEXCPRATE	RATE	CPSM	4	AVG	VSAM data EXCP rate for interval	25
INTERVALID	TIMESTP	CPSM	8	LIKE	Interval identifier	1
INTIEXCPRATE	RATE	CPSM	4	AVG	VSAM index EXCP rate for interval	27
INTMRQRATE	RATE	CPSM	4	AVG	MDT request rate for interval	43
INTREADRATE	RATE	CPSM	4	AVG	Successful read rate for interval	32
INTREQRATE	RATE	CPSM	4	AVG	Request rate for interval	21
LOCDELNT	BINARY	STAT	4	AVG	Number of local delete requests	18
LSRPOOLID	BINARY	INQ	2	MAX	LSR Pool number	54
MAXNUMRECS	BINARY	INQ	4	AVG	Maximum records table can hold	6
MAXTSIZE	CNUMERIC	STAT	4	AVG	Highest table size	40
NUMACTSTRING	CNUMERIC	STAT	2	AVG	Number of active strings	57
NUMDATBUFF	CNUMERIC	STAT	2	AVG	Number of data buffers	55
NUMINDEXBUFF	CNUMERIC	STAT	2	AVG	Number of index buffers	56
NUMSTRINGWT	CNUMERIC	STAT	2	AVG	Number of active string waits	58
OPENSTATUS	CVDAS	INQ	4	LIKE	Open status	7
OPENSTATUS Output valid values	OPEN, CLOSED, OPENING, CLOSING, CLOSEREQUEST					
POOLNAME	CHAR	INQ	8	DIFF	CFDT pool name	59
READRETRY	CNUMERIC	STAT	4	AVG	Read retries	45

Table 668. MCMDT resource table attributes (continued)						
Name	Datatype	Source	Len	Sum	Description	Attr ID
READS	CNUMERIC	STAT	4	AVG	Successful reads	30
RECNOTFND	CNUMERIC	STAT	4	AVG	Total records not found in table	33
RECORDSIZE	BINARY	INQ	4	AVG	Record size	8
REWRITE	CNUMERIC	STAT	4	AVG	Total rewrite requests	38
STGALCINU	CNUMERIC	STAT	4	AVG	Total storage in use	47
STGALCTOT	CNUMERIC	STAT	4	AVG	Total storage allocated	46
STGDTAINU	CNUMERIC	STAT	4	AVG	Data storage in use	53
STGDTATOT	CNUMERIC	STAT	4	AVG	Data storage allocated	52
STGENTINU	CNUMERIC	STAT	4	AVG	Entries storage in use	49
STGENTTOT	CNUMERIC	STAT	4	AVG	Entries storage allocated	48
STGIDXINU	CNUMERIC	STAT	4	AVG	Index storage in use	51
STGIDXTOT	CNUMERIC	STAT	4	AVG	Index storage allocated	50
STRINGS	BINARY	INQ	4	AVG	Strings	9
TABLE	CVDAS	INQ	4	LIKE	Data table indicator	10
TABLE Output valid values	CICSTABLE, USERTABLE, CFTABLE, NOTTABLE					
TABLENAME	CHAR	INQ	8	DIFF	CFDT table name	60
TIMECLOSE	DECTSTP	STAT	4	MAX	Time closed	11
TIMEOPEN	DECTSTP	STAT	4	MAX	Time opened	12
TOTLREQCNT	SUM	STAT	4	AVG	Sum of all requests	19
TOTMREQCNT	SUM	STAT	4	AVG	Sum of all MDT requests	41
UPDATECNT	BINARY	STAT	4	AVG	Number of update requests	17
VSAMTYPE	CVDAS	INQ	4	LIKE	VSAM file type	3
VSAMTYPE Output valid values	ESDS, KSDS, RRDS					
WSTRCCURCNT	BINARY	STAT	4	AVG	Wait on string maximum concurrent count	29
WSTRCNT	BINARY	STAT	4	AVG	Wait on string total count	28

Chapter 288. MCONNECT Resource Table

A CICS Monitored resource that describes a subset of the connection attributes sampled by the CICSplex SM MAS Monitor agents.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

DISCARD

Remove the Monitored resource instance.

RESET

Reset all Monitoring instance attributes.

These actions require no unique parameter data.

External resource name

Length

216

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Monitored

Copybook identifier

EYUt1370

Table 669. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET	RESET	None	N/A

Table 670. MCONNECT FEEDBACK error codes

Value	Code	Description
9	MCONNECT_NO_MON_DATA	No data for monitored resource
10	MCONNECT_MON_SYSDEF_REQ	Monitored resource required by Real Time Analysis (RTA)

Table 671. MCONNECT resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ACCESSMETHOD	CVDAS	INQ	4	LIKE	Access method	7
ACCESSMETHOD Output valid values	VTAM, IRC, INDIRECT, XM					
AIDS	BINARY	STAT	2	AVG	Number of automatic initiate descriptors (AIDs)	9
ALLOCATES	BINARY	STAT	4	AVG	Total number of allocate requests	16
ALLOCQLIMIT	CNUMERIC	STAT	2	AVG	Allocate queue limit (QUEUELIMIT)	36
ATISBPRI	BINARY	STAT	4	AVG	Number of ATIs satisfied by primary sessions	11
ATISBSEC	BINARY	STAT	4	AVG	Number of ATIs satisfied by secondary sessions	13
BIDSENT	BINARY	STAT	4	AVG	Total number of bids sent	15
CONCURBIDS	BINARY	STAT	2	AVG	Number of bids currently in progress	28
CONNCREATIME	TIMESTP	STAT	8	MAX	Local connection create time	45
CONNDELETIME	TIMESTP	STAT	8	MAX	Local connection delete time	47
CONNSTATUS	CVDAS	INQ	4	LIKE	Connection status	6
CONNSTATUS Output valid values	RELEASED, OBTAINING, ACQUIRED, FREEING, AVAILABLE					
CURFCFSRATE	RATE	CPSM	4	AVG	File Control ship rate for current sample	29
DLIFUNCSHIP	BINARY	STAT	4	AVG	Number of DL/I function ships	25
DPLFUNCSHIP	BINARY	STAT	4	AVG	Number of Distributed Program Link function ships	52
EXIT_REJALLC	CNUMERIC	STAT	4	AVG	Allocates rejected because QUEUELIMIT reached	31
FAILEDOTHERS	BINARY	STAT	4	AVG	Number of allocate requests with other failure	20
FAILINKALLOC	BINARY	STAT	4	AVG	Number of allocate requests with link failure	19
FCFUNCSHIP	BINARY	STAT	4	AVG	Number of File Control function ships	21
GMTCREATIME	TIMESTP	STAT	8	MAX	GMT connection create time	44
GMTDELETIME	TIMESTP	STAT	8	MAX	GMT connection delete time	46
ICFUNCSHIP	BINARY	STAT	4	AVG	Number of Interval Control function ships	22
INTERVALID	TIMESTP	CPSM	8	LIKE	Interval ID	1
INTFCFSRATE	RATE	CPSM	4	AVG	File Control ship rate for interval	30
MAXBIDS	BINARY	STAT	4	AVG	Maximum number of concurrent bids	14
MAXPRIMARIES	CNUMERIC	STAT	2	AVG	Peak number of primary sessions in use	27
MAXQTALLCPRG	CNUMERIC	STAT	2	AVG	Number of allocates purged when MAXQTIME exceeded	41
MAXQTIME	CNUMERIC	STAT	2	AVG	Maximum queue time	35
MAXQTPURGCNT	CNUMERIC	STAT	2	AVG	Number of allocate queue purges due to MAXQTIME value	34
MAXSECOND	BINARY	STAT	4	AVG	Peak number of secondaries in use at one time	12
NAME-1	CHAR	INQ	4	DIFF	Connection ID	2
NETNAME	CHAR	INQ	8	DIFF	Net name	3
NONSPECAID	BINARY	STAT	2	AVG	Number of AIDs waiting for a session	10

Table 671. MCONNECT resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
OUTSALLOC	BINARY	STAT	4	AVG	Peak number of outstanding allocate requests	17
PRICURRUSED	CNUMERIC	STAT	2	AVG	Number of primaries currently in use	50
PROTOCOL	CV DAS	INQ	4	LIKE	Connection protocol	4
PROTOCOL Output valid values	LU61, APPC, NOTAPPLIC					
QUEDALLOCATE	BINARY	STAT	4	AVG	Number of queued allocate requests	18
RECEIVECOUNT	CNUMERIC	INQ	4	AVG	Number of defined receive sessions	32
SECCURRUSED	CNUMERIC	STAT	2	AVG	Number of secondaries currently in use	51
SENDCOUNT	CNUMERIC	INQ	4	AVG	Number of defined send sessions	33
SERVSTATUS	CV DAS	INQ	4	LIKE	Service status	8
SERVSTATUS Output valid values	INSERVICE, OUTSERVICE, GOINGOUT					
TDFUNCSHIP	BINARY	STAT	4	AVG	Number of Transient Data function ships	23
TERMSHAREREQ	BINARY	STAT	4	AVG	Number of terminal sharing requests	26
TOTFUNCSHIP	SUM	STAT	4	AVG	Total number of function ships	43
TSFUNCSHIP	BINARY	STAT	4	AVG	Number of Temporary Storage function ships	24
TYPE	EYUDA	CPSM	4	LIKE	Connection type	5
TYPE Output valid values	LU61, LU62, INDIRECT, MRO					
XZIQALLCPRG	CNUMERIC	STAT	2	AVG	Number of allocates purged by XZIQUE exit	40
XZIQPRGCNT	CNUMERIC	STAT	2	AVG	Number of queue purges requested by XZIQUE exit	39
XZIQREJS	CNUMERIC	STAT	4	AVG	Number of allocates rejected by XZIQUE exit	38

Chapter 289. MDB2THRD Resource Table

A CICS Monitored resource that describes a subset of the DB2 thread attributes sampled by the CICSplex SM MAS Monitor agents.

The **Primary** key field for this resource class is INITTRAN.

The following actions are supported:

DISCARD

Remove the Monitored resource instance.

RESET

Reset all Monitoring instance attributes.

These actions require no unique parameter data.

External resource name

Length

112

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Monitored

Copybook identifier

EYUt1389

Table 672. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET	RESET	None	N/A

Table 673. MDB2THRD FEEDBACK error codes		
Value	Code	Description
9	MDB2THRD_NO_MON_DATA	No data for monitored resource
10	MDB2THRD_MON_SYSDEF_REQ	Monitored resource required by Real Time Analysis (RTA)

Table 674. MDB2THRD resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ABORTCNT	BINARY	CPSM	4	AVG	Number of abortions	17
AUTHCNT	BINARY	CPSM	4	SUM	Number of authorizations done	12
AUTHTYPE	EYUDA	CPSM	4	LIKE	Authorization type	3
AUTHTYPE Output valid values	USER, TERMID, TRANID, SIGNID, CHARSTR, USERID, RACFGID, NULL					
CURTHREADS	BINARY	CPSM	2	AVG	Current number of threads	7
CURUSERATE	RATE	CPSM	4	AVG	Usage rate for current sample	14
DPMODE	EYUDA	CPSM	4	LIKE	Dispatching mode	4
DPMODE Output valid values	HIGH, LOW, EQ					
INITTRAN-1	CHAR	CPSM	4	DIFF	Initial transaction	2
INTERVALID	TIMESTP	CPSM	8	LIKE	Interval identifier	1
INTUSERATE	RATE	CPSM	4	AVG	Usage rate for interval	15
MAXTHREADS	BINARY	CPSM	2	AVG	Maximum number of threads	6
NAME	CHAR	CPSM	4	DIFF	DB2 subsystem	21
OTHERIDS	BINARY	CPSM	4	AVG	Number of transactions in group	19
PLANNAME	CHAR	CPSM	8	DIFF	Plan name if not dynamic allocation	11
PLANPRGM	CHAR	CPSM	8	DIFF	Dynamic plan allocation exit program	10
READCOMMIT	BINARY	CPSM	4	AVG	Number of read only commits	18
ROLLBACKOPT	EYUDA	CPSM	4	LIKE	Rollback option	5
ROLLBACKOPT Output valid values	YES, NO					
RSVTHREADS	BINARY	CPSM	4	AVG	Reserved threads	8
THREADHWM	BINARY	CPSM	2	MAX	Peak number of threads in use	20
THREADWAIT	BINARY	CPSM	4	SUM	Number of thread waits	16
THREADWOPT	EYUDA	CPSM	4	LIKE	Thread wait option	9
THREADWOPT Output valid values	TWAIT, NOTWAIT, POOL, YES, NO, NA					
USECOUNT	BINARY	CPSM	4	SUM	Number of times plan used	13

Chapter 290. METADESC Resource Table

A CPSM MetaData resource that describes the basic structure and layout of an attribute in the resource table instance data structure.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

Length

24

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Metadata

Copybook identifier

EYUt2546

<i>Table 675. Valid CPSM operations</i>			
Operations	Actions	Parameters	Required
Not applicable			

<i>Table 676. METADESC resource table attributes</i>						
Name	Datatype	Source	Len	Sum	Description	Attr ID
DATATYPE	BINARY	CPSM	1	AVG	Data type	7
DATATYPE Input/output valid values	0 (COMP) - Component Identifier, 4 (BIN) - Binary Numeric, 8 (RATE) - Binary Derived Rate, 12 (PER) - Binary Derived Percent, 16 (SUM) - Binary Derived Sum, 20 (RATO) - Binary Derived Ratio, 24 (AVG) - Binary Derived Average, 28 (TSTP) - System/370 Timestamp, 32 (BIT) - Bit, 36 (TEXT) - Text, 40 (CHAR) - Character, 44 (EYUD) - EYUDA, 48 (CVDS) - CVDA Standard, 52 (CVDT) - CVDA Terminal, 56 (REST) - Resource Type, 60 (PACK) - Packed Decimal, 64 (DATE) - Date, 68 (ILBL) - Internal Label Field, 72 (HHMM) - Binary HHMM, 76 (SCLK) - Interval Store Clock, 80 (IUSC) - Interval Microseconds, 84 (IMSC) - Interval Milliseconds, 88 (16US) - Interval 16 Microseconds, 92 (ISEC) - Interval Seconds, 96 (IUSS) - Interval Store Clock delta, 100 (DTGP) - Date Time Group, 104 (DECT) - Packed Decimal Timestamp, 108 (ADDR) - Address, 112 (CNUM) - Coded Numeric, 116 (HCHR) - Non Display Character, 120 (HEX) - Hexadecimal, 124 (TBLV) - Table version, 128 (RAT3) - Binary derived rate 3DP, 132 (PER3) - Binary derived percent 3DP, 136 (SUM3) - Binary derived sum 3DP, 140 (AVG3) - Binary derived average 3DP, 144 (DECS) - Packed Decimal Time - No Tenths, 152 (SC12) - Interval Store Clock Length 12, 156 (BITS) - String of bit flags					
INHERIT	CHAR	CPSM	1	DIFF	Inherit value	9
INHERIT Input/output valid values	N (NO) - Attribute not Inheritable, Y (YES) - Attribute is Inheritable					
LENGTH	BINARY	CPSM	2	AVG	Attribute length	5
NAME-1	CHAR	CPSM	12	DIFF	Attribute name	4
OFFSET	BINARY	CPSM	2	AVG	Attribute offset in table	6

Chapter 291. METANAME Resource Table

A CPSM MetaData resource that provides information about CVDASs, CVDATs and EYUDAs.

The **Primary** key field for this resource class is NAMETYPE.

The **Secondary** key field for this resource class is VALUE.

There are no object specific actions for this resource class.

External resource name

Length

40

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Metadata

Copybook identifier

EYUt2634

Table 677. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 678. METANAME resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
DESCRIPTION	CHAR	CPSM	16	DIFF	Short description	8
NAME	CHAR	CPSM	12	DIFF	Name of CVDA or EYUDA	7
NAMETYPE-1	BINARY	CPSM	1	DIFF	Type of data	4
NAMETYPE-1 Input/output valid values	1 (CVDAS) - Standard CVDA, 2 (CVDAT) - Terminal CVDA, 3 (EYUDA) - EYUDA					
VALUE-2	BINARY	CPSM	4	DIFF	Numeric value of CVDA or EYUDA	6

Chapter 292. METAPARM Resource Table

A CPSM MetaData resource that provides information about a parameter for an action.

The **Primary** key field for this resource class is TABLE.

The **Secondary** key field for this resource class is ACTION.

The **Tertiary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

Length

112

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Metadata

Copybook identifier

EYUt2633

Table 679. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 680. METAPARM resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION-2	CHAR	CPSM	12	DIFF	Action name	5
CICSVALAVAIL	CHAR	CPSM	1	DIFF	CICS validity data available	20
CICSVALAVAIL Input/output valid values	Y (YES) - CICS Validity active, N (NO) - No CICS Validity data					
DATE	CHAR	CPSM	1	DIFF	Parameter represents a date	29
DATE Input/output valid values	N (NO) - Parameter does not represent a date, Y (YES) - Parameter does represent a date					
DESCRIPTION	CHAR	CPSM	50	DIFF	Description	19
GROUP_ID	BINARY	CPSM	1	AVG	Parameter token	8
ID	BINARY	CPSM	4	AVG	Parameter number	7
MODE	BINARY	CPSM	1	DIFF	Mode of application of parameter	18
MODE Input/output valid values	1 (COPY) - Copy from base table, 2 (LIST) - Array of values, 3 (FLAG) - Bit setting, 4 (KEYWORD) - Keyword in API parm string, 5 (FILTER) - Filter string, 6 (INPUT) - API keyword with value, 7 (MODFLAG) - Base table field with existence bit, 8 (OVERRIDE) - Base table field with existence bit					

Table 680. METAPARM resource table attributes (continued)						
Name	Datatype	Source	Len	Sum	Description	Attr ID
NAME-3	CHAR	CPSM	12	DIFF	Parameter literal in API parameter string	6
PICKLIST	CHAR	CPSM	1	DIFF	Picklist supported	31
PICKLIST Input/output valid values	N (NO) - Picklist not supported, Y (YES) - Picklist supported					
REQUIRED	CHAR	CPSM	1	DIFF	Parameter required	9
REQUIRED Input/output valid values	N (NO) - Parameter is mandatory, Y (YES) - Parameter is optional					
TABLE-1	CHAR	CPSM	8	DIFF	Base table name	4
TIME	CHAR	CPSM	1	DIFF	Parameter represents a time	30
TIME Input/output valid values	N (NO) - Parameter does not represent a time, Y (YES) - Parameter does represent a time					
VALCICES2	BIT	CPSM	1	LIKE	Not valid in CICS Transaction Server for z/OS byte 2	27
VALCICES2 Input/output valid values	128 (E630) - CICS Transaction Server for z/OS, Version 2 Release 3, 64 (E640) - CICS Transaction Server for z/OS, Version 3 Release 1, 32 (E650) - CICS Transaction Server for z/OS, Version 3 Release 2, 16 (E660) - CICS Transaction Server for z/OS, Version 4 Release 1, 8 (E670) - CICS Transaction Server for z/OS, Version 4 Release 2, 4 (E680) - CICS Transaction Server for z/OS, Version 5 Release 1, 2 (E690) - CICS Transaction Server for z/OS, Version 5 Release 2, 1 (E700) - CICS Transaction Server for z/OS, Version 5 Release 3					
VALCICES3	BIT	CPSM	1	LIKE	Not valid in CICS Transaction Server for z/OS byte 3	28
VALCICES3 Input/output valid values	128 (E710) - CICS Transaction Server for z/OS, Version 5 Release 4					
VALCICESA	BIT	CPSM	1	LIKE	Not valid in CICS/ESA	21
VALCICESA Input/output valid values	128 (M212) - CICS/MVS 212, 64 (E330) - CICS/ESA 330, 32 (E410) - CICS/ESA 410, 16 (E510) - CICS Transaction Server for OS/390, Release 1, 8 (E520) - CICS Transaction Server for OS/390, Release 2, 4 (E530) - CICS Transaction Server for OS/390, Release 3, 2 (E610) - CICS Transaction Server for z/OS, Version 2 Release 1, 1 (E620) - CICS Transaction Server for z/OS, Version 2 Release 2					
VALCICSOS2	BIT	CPSM	1	LIKE	Not valid in CICS/OS2	23
VALCICSOS2 Input/output valid values	128 (O201) - CICS OS/2 201, 64 (O300) - CICS OS/2 300, 32 (O311) - CICS OS/2 310					
VALCICSVSE	BIT	CPSM	1	LIKE	Not valid in CICS/VSE	22
VALCICSVSE Input/output valid values	128 (V220) - CICS/VSE 220, 64 (V230) - CICS/VSE 230, 32 (V410) - CICS/VSE 410					
VALCICSWNT	BIT	CPSM	1	LIKE	Not valid in CICS for Windows	26
VALCICSWNT Input/output valid values	128 (N430) - CICS for Windows 430, 64 (N500) - CICS for Windows 500					
VALUE	BINARY	CPSM	4	AVG	Parameter value	12
WLMOWNER	CHAR	CPSM	1	DIFF	Workload owner parameter required	11
WLMOWNER Input/output valid values	N (NO) - Parameter is mandatory, Y (YES) - Parameter is optional					
WORKLOAD	CHAR	CPSM	1	DIFF	Workload parameter required	10
WORKLOAD Input/output valid values	N (NO) - Parameter is mandatory, Y (YES) - Parameter is optional					

Chapter 293. MFEPICON Resource Table

A CICS Monitored resource that describes a subset of the FEPI connection attributes sampled by the CICSplex SM MAS Monitor agents.

The **Primary** key field for this resource class is TARGETNAME.

The **Secondary** key field for this resource class is NODENAME.

While the MFEPICON resource class identifies multiple key attributes, only the TARGETNAME attribute can be specified in an EVALDEF INSTANCE attribute.

The following actions are supported:

DISCARD

Remove the Monitored resource instance.

RESET

Reset all Monitoring instance attributes.

These actions require no unique parameter data.

External resource name

Length

104

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Monitored

Copybook identifier

EYUt1401

Table 681. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM SET	DISCARD	None	N/A
	RESET	None	N/A

Table 682. MFEPICON FEEDBACK error codes

Value	Code	Description
9	MFEPICON_NO_MON_DATA	No data for monitored resource

Table 682. MFEPICON FEEDBACK error codes (continued)

Value	Code	Description
10	MFEPICON_MON_SYSDEF_REQ	Monitored resource required by Real Time Analysis (RTA)

Table 683. MFEPICON resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ACQSTATUS	CV DAS	INQ	4	LIKE	Acquired status	14
ACQSTATUS Output valid values	ACQUIRED, ACQUIRING, RELEASED, RELEASING, INSTALLED, NOTINSTALLED					
ACQUIRES	BINARY	STAT	4	AVG	Number of acquires	5
CHARSRECD	CNUMERIC	STAT	4	AVG	Number of characters received	11
CHARSENT	CNUMERIC	STAT	4	AVG	Number of characters sent	10
CONVERSATNS	CNUMERIC	STAT	4	AVG	Number of conversations	8
CSACQRATE	RATE	CPSM	4	AVG	Acquire rate for current sample	6
ERRORS	CNUMERIC	STAT	4	AVG	Number of error conditions	13
INTERVALID	TIMESTP	CPSM	8	LIKE	Interval ID	1
MIACQRATE	RATE	CPSM	4	AVG	Acquire rate for monitor interval	7
NODENAME-2	CHAR	INQ	8	DIFF	Node name	3
POOLNAME	CHAR	STAT	8	DIFF	Pool name	4
RECVTIMEOUT	CNUMERIC	STAT	4	AVG	Number of receive timeouts	12
SERVSTATUS	CV DAS	INQ	4	LIKE	Connection service state	15
SERVSTATUS Output valid values	INSERVICE, OUTSERVICE, GOINGOUT					
STATE	CV DAS	INQ	4	LIKE	Conversation status	16
STATE Output valid values	NOCONV, PENDSTSN, STSN, PENDBEGIN, BEGINSSESSION, APPLICATION, PENDDATA, PENDSTART, PENDFREE, FREE, PENDRELEASE, RELEASE, PENDUNSOL, UNSOLDATA, PENDPASS					
TARGETNAME-1	CHAR	INQ	8	DIFF	Target name	2
UNSOLICINP	CNUMERIC	STAT	4	AVG	Number of unsolicited inputs	9
WAITCONVNUM	BINARY	INQ	4	AVG	Number of conversations waiting for connection	17

Chapter 294. MGMTPART Resource Table

A management part for an application or platform. The management part associates the application or platform with the CICS bundles that they are managing in the CICS regions.

The **Primary** key field for this resource class is ID.

The following actions are supported:

GET

Retrieve information about a management part.

External resource name

CICSManagementPart

Length

360

Usage

API or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt3528

Table 684. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 685. MGMTPART FEEDBACK error codes

Value	Code	Description
1	MGMTPART_REC_NOT_FOUND	Management part not found

Table 686. MGMTPART resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
APPLDEF	CHAR	CPSM	8	DIFF	Application definition	9
APPLICATION	CHAR	CPSM	64	DIFF	Application	8
APPLMAJORVER	BINARY	CPSM	4	MAX	Application major version number	10
APPLMICROVER	BINARY	CPSM	4	MAX	Application micro version number	12
APPLMINORVER	BINARY	CPSM	4	MAX	Application minor version number	11
AVAILSTATUS	EYUDA	CPSM	4	LIKE	Management part bundle availability status	22

Table 686. MGMTPART resource table attributes (continued)						
Name	Datatype	Source	Len	Sum	Description	Attr ID
AVAILSTATUS Output valid values	AVAILABLE, UNAVAILABLE, SOMEAVAIL, NONE					
BUNDLE	CHAR	CPSM	64	DIFF	Bundle ID	15
BUNDMAJORVER	BINARY	CPSM	4	MAX	Bundle major version number	16
BUNDMICROVER	BINARY	CPSM	4	MAX	Bundle micro version number	18
BUNDMINORVER	BINARY	CPSM	4	MAX	Bundle minor version number	17
CHANGEAGENT	CV DAS	CPSM	4	LIKE	Last modification agent	127
CHANGEAGENT Input/output valid values	DREPAPI					
CHANGEAGREL	CHAR	CPSM	4	DIFF	Last modification agent release	130
CHANGETIME	DATETIME	CPSM	8	MAX	Last modification	1
CHANGEUSRID	CHAR	CPSM	8	DIFF	Last modification user ID	129
CREATETIME	DATETIME	CPSM	8	MAX	Time created	128
ENABLESTATUS	EYUDA	CPSM	4	LIKE	Management part bundle enable status	19
ENABLESTATUS Output valid values	ENABLED, DISABLED, ENABLING, DISABLING, EMPTY, INVALIDSCOPE, SOMEDISABLED, IMPORTONLY, INCOMPLETE, INSTALLING, DISCARDING					
ID-1	HEX	CPSM	8	MIN	ID	5
INSTALLSCOPE	CHAR	CPSM	8	DIFF	Bundle install request scope	14
PLATDEF	CHAR	CPSM	8	DIFF	Platform definition	7
PLATFORM	CHAR	CPSM	64	DIFF	Platform	6
REGIONTYPE	CHAR	CPSM	64	DIFF	Region type	13

Chapter 295. MINDTDQ Resource Table

A CICS Monitored resource that describes a subset of the indirect transient data queue attributes sampled by the CICSplex SM MAS Monitor agents.

The **Primary** key field for this resource class is TDQUEUE.

The following actions are supported:

DISCARD

Remove the Monitored resource instance.

RESET

Reset all Monitoring instance attributes.

These actions require no unique parameter data.

External resource name

Length

48

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Monitored

Copybook identifier

EYUt1386

Table 687. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET	RESET	None	N/A

Table 688. MINDTDQ FEEDBACK error codes

Value	Code	Description
9	MINDTDQ_NO_MON_DATA	No data for monitored resource
10	MINDTDQ_MON_SYSDEF_REQ	Monitored resource required by Real Time Analysis (RTA)

Table 689. MINDTDQ resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	6
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
CUROUTQRATE	RATE	CPSM	4	AVG	Output rate for current sample	
INDIRECTNAME	CHAR	INQ	4	DIFF	Indirect queue name	3
INDIRECTTYPE	CVDAS	INQ	4	LIKE	Indirect queue type	4
INDIRECTTYPE Output valid values	INTRA, EXTRA, INDIRECT, REMOTE					
INTERVALID	TIMESTP	CPSM	8	LIKE	Interval identifier	1
INTOUTQRATE	RATE	CPSM	4	AVG	Output rate for interval	7
OUTCNT	BINARY	STAT	4	SUM	Number of I/O requests	5
TDQUEUE-1	CHAR	INQ	4	DIFF	Queue identifier	2

Chapter 296. MJOURNAL Resource Table

A CICS Monitored resource that describes a subset of the journal attributes sampled by the CICSplex SM MAS Monitor agents.

The **Primary** key field for this resource class is JOURNALNUM.

The following actions are supported:

DISCARD

Remove the Monitored resource instance.

RESET

Reset all Monitoring instance attributes.

These actions require no unique parameter data.

External resource name

Length

88

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Monitored

Copybook identifier

EYUt1375

Table 690. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET	RESET	None	N/A

Table 691. MJOURNAL FEEDBACK error codes

Value	Code	Description
9	MJOURNAL_NO_MON_DATA	No data for monitored resource
10	MJOURNAL_MON_SYSDEF_REQ	Monitored resource required by Real Time Analysis (RTA)

Table 692. MJOURNAL resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ARCHSUBCNT	CNUMERIC	STAT	4	AVG	Number of archives submitted (DISK2 journal only)	10
ARCHWCNT	CNUMERIC	STAT	4	AVG	Number of archive waits (DISK2 journal only)	11
AVGSIZE	BINARY	STAT	2	AVG	Average block size	15
BLKWRCNT	DECIMAL	STAT	4	SUM	Number of blocks written	9
BUFULLCNT	DECIMAL	STAT	3	SUM	Number of times buffer full	18
CURFULLPER	PERCENT	CPSM	4	AVG	Percentage of time buffer full - current sample	13
CURVOLUME	CHAR	INQ	6	DIFF	Current volume (tape journal only)	5
DSOPENCNT	CNUMERIC	STAT	4	AVG	Number of data sets opened (DISK2 journal only)	12
INTERVALID	TIMESTP	CPSM	8	LIKE	Interval ID	1
INTFULLPER	PERCENT	CPSM	4	AVG	Percentage of time buffer full - monitor interval	14
JOURNALNUM-1	BINARY	INQ	2	AVG	Journal number	16
JTYPE	CVDAS	INQ	4	LIKE	Journal type	3
JTYPE Output valid values	TAPE1, TAPE2, DISK1, DISK2, DISK2PAUSE, SMF					
LASTVOL	CHAR	STAT	6	DIFF	Last volume written (tape journal only)	6
OLDPART	CNUMERIC	INQ	4	AVG	Oldest part (tape journal only)	4
OPENSTATUS	CVDAS	INQ	4	LIKE	Open status	2
OPENSTATUS Output valid values	OPENOUTPUT, CLOSED					
RECWCNT	DECIMAL	STAT	5	SUM	Number of records written	17
TAPESLFT	CNUMERIC	STAT	2	AVG	Number of tapes left	8
TAPESOPEN	CNUMERIC	STAT	2	AVG	Number of tapes opened	7

Chapter 297. MJRNLNAM Resource Table

A CICS Monitored resource that describes a subset of the journal name attributes sampled by the CICSplex SM MAS Monitor agents.

Instances of this resource are only presented when monitoring MJRNL class definitions are installed in systems running the CICS TS for z/OS.

The **Primary** key field for this resource class is JOURNALNAME.

The following actions are supported:

DISCARD

Remove the Monitored resource instance.

RESET

Reset all Monitoring instance attributes.

These actions require no unique parameter data.

External resource name

Length

80

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Monitored

Copybook identifier

EYUt1402

Table 693. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET	RESET	None	N/A

Table 694. MJRNLNAM FEEDBACK error codes

Value	Code	Description
9	MJRNLNAM_NO_MON_DATA	No data for monitored resource
10	MJRNLNAM_MON_SYSDEF_REQ	Monitored resource required by Real Time Analysis (RTA)

Table 695. MJRNLNAM resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
INTERVALID	TIMESTP	CPSM	8	LIKE	Interval ID	1
JOURNALNAME-1	CHAR	INQ	8	DIFF	Journal name	2
NUMBUFLUSH	CNUMERIC	STAT	4	AVG	Number of buffer flush requests	6
NUMBYTES	BINARY	STAT	8	AVG	Total number of bytes written	5
NUMWRITES	CNUMERIC	STAT	4	AVG	Number of journal writes	4
STREAMNAME	CHAR	INQ	26	DIFF	MVS log stream	7
TYPE	CVDAS	INQ	4	LIKE	Log stream destination	3
TYPE Output valid values	MVS, SMF, DUMMY					

Chapter 298. MLOCFILE Resource Table

A CICS Monitored resource that describes a subset of the local file attributes sampled by the CICSplex SM MAS Monitor agents.

The **Primary** key field for this resource class is FILE.

The following actions are supported:

DISCARD

Remove the Monitored resource instance.

RESET

Reset all Monitoring instance attributes.

These actions require no unique parameter data.

External resource name

Length

208

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Monitored

Copybook identifier

EYUt1372

Table 696. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM SET	DISCARD	None	N/A
	RESET	None	N/A

Table 697. MLOCFILE FEEDBACK error codes

Value	Code	Description
9	MLOCFILE_NO_MON_DATA	No data for monitored resource
10	MLOCFILE_MON_SYSDEF_REQ	Monitored resource required by Real Time Analysis (RTA)

Table 698. MLOCFILE resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	4
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ACCESSMETHOD	CVDAS	INQ	4	LIKE	Access method	
ACCESSMETHOD Output valid values	VSAM, BDAM					
ADDCNT	BINARY	STAT	4	AVG	Number of WRITE requests	17
BLOCKSIZE	CNUMERIC	INQ	4	AVG	Block size (BDAM only)	5
BROWSECNT	BINARY	STAT	4	AVG	The number of READNEXT and READPREV requests	16
BROWUPDCNT	CNUMERIC	STAT	4	AVG	Number of browse for update requests	38
CURDEXCPRATE	RATE	CPSM	4	AVG	Rate of data I/O operations for current sample	25
CURIEXCPRATE	RATE	CPSM	4	AVG	Rate of index I/O operations for current sample	27
CURREQRATE	RATE	CPSM	4	AVG	Request rate for current sample	21
DEXPCNT	BINARY	STAT	4	AVG	Number of I/O operations for data records	23
DSNAME	CHAR	INQ	44	DIFF	Data set name	6
ENABLESTATUS	CVDAS	INQ	4	LIKE	Enabled status	7
ENABLESTATUS Output valid values	ENABLED, DISABLED, UNENABLED, DISABLING					
FILE-1	CHAR	INQ	8	DIFF	File ID	2
GETCNT	BINARY	STAT	4	AVG	Number of READ requests	14
GETUPDCNT	BINARY	STAT	4	AVG	Number of READ UPDATE requests	15
IEXPCNT	BINARY	STAT	4	AVG	Number of I/O operations against index component	24
INTDEXCPRATE	RATE	CPSM	4	AVG	Rate of data I/O operations for monitor interval	26
INTERVALID	TIMESTP	CPSM	8	LIKE	Interval ID	1
INTIEXCPRATE	RATE	CPSM	4	AVG	Rate of index I/O operations for monitor interval	28
INTREQRATE	RATE	CPSM	4	AVG	Request rate for monitor interval	22
LOCDELNT	BINARY	STAT	4	AVG	Number of DELETE requests	19
LSRPOOLID	BINARY	INQ	2	MAX	LSR Pool number	31
NUMACTSTRING	CNUMERIC	STAT	2	AVG	Number of active strings	34
NUMDATBUFF	CNUMERIC	STAT	2	AVG	Number of data buffers	32
NUMINDEXBUFF	CNUMERIC	STAT	2	AVG	Number of index buffers	33
NUMSTRINGWT	CNUMERIC	STAT	2	AVG	Current number of string waits	35
OBJECT	CVDAS	INQ	4	LIKE	Data set type (base or path)	8
OBJECT Output valid values	BASE, PATH					
OPENSTATUS	CVDAS	INQ	4	LIKE	Open status	9
OPENSTATUS Output valid values	OPEN, CLOSED, OPENING, CLOSING, CLOSEREQUEST					
RECORDSIZE	BINARY	INQ	4	AVG	Record size	10
RLSREQWTO	CNUMERIC	STAT	4	AVG	Record level sharing (RLS) request wait timeouts	39
STRINGS	BINARY	INQ	4	AVG	Number of strings	11
TIMECLOSE	DECTSTP	STAT	4	MAX	Local time file was closed	12

Table 698. MLOCFILE resource table attributes (continued)						
Name	Datatype	Source	Len	Sum	Description	Attr ID
TIMEOPEN	DECTSTP	STAT	4	MAX	Local time file was opened	13
TOTLREQCNT	BINARY	STAT	4	AVG	Total number of all requests	20
UPDATECNT	BINARY	STAT	4	AVG	Number of REWRITE requests	18
VSAMTYPE	CV DAS	INQ	4	LIKE	VSAM file type	3
VSAMTYPE Output valid values	ESDS, KSDS, RRDS					
WSTRCCURCNT	BINARY	STAT	4	AVG	Peak number of tasks waiting for a string	30
WSTRCNT	BINARY	STAT	4	AVG	Total requests queued because all strings in use	29

Chapter 299. MLOCTRAN Resource Table

A CICS Monitored resource that describes a subset of the local transaction attributes sampled by the CICSplex SM MAS Monitor agents.

The **Primary** key field for this resource class is TRANID.

The following actions are supported:

DISCARD

Remove the Monitored resource instance.

RESET

Reset all Monitoring instance attributes.

These actions require no unique parameter data.

External resource name

Length

1392

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Monitored

Copybook identifier

EYUt1380

Table 699. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET	RESET	None	N/A

Table 700. MLOCTRAN FEEDBACK error codes

Value	Code	Description
9	MLOCTRAN_NO_MON_DATA	No data for monitored resource
10	MLOCTRAN_MON_SYSDEF_REQ	Monitored resource required by Real Time Analysis (RTA)

Table 701. MLOCTRAN resource table attributes

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release		
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved		
ACTMISMATS	CNUMERIC	STAT	4	AVG	Number of action mismatches		146
ALLOCATES	BINARY	CMF	4	AVG	Number of TCTTE allocation requests		25
BAACDCCT	BINARY	CMF	4	AVG	BTS activity data container requests		193
BAACQPCT	BINARY	CMF	4	AVG	BTS acquire process requests		190
BADACTCT	BINARY	CMF	4	AVG	BTS define activity requests		185
BADCPACT	BINARY	CMF	4	AVG	BTS delete activity and cancel requests		189
BADFIECT	BINARY	CMF	4	AVG	BTS define input event requests		196
BADPROCT	BINARY	CMF	4	AVG	BTS define process requests		184
BALKPACT	BINARY	CMF	4	AVG	BTS link requests		183
BAPRDCCT	BINARY	CMF	4	AVG	BTS process data container requests		192
BARASYCT	BINARY	CMF	4	AVG	BTS run asynchronous requests		182
BARATECT	BINARY	CMF	4	AVG	BTS retrieve reattach event requests		195
BARMPACT	BINARY	CMF	4	AVG	BTS resume requests		188
BARSPACT	BINARY	CMF	4	AVG	BTS reset requests		186
BARSYNCT	BINARY	CMF	4	AVG	BTS run synchronous requests		181
BASUPACT	BINARY	CMF	4	AVG	BTS suspend requests		187
BATIAECT	BINARY	CMF	4	AVG	BTS timer associated event requests		197
BATOTCCT	BINARY	CMF	4	AVG	BTS total data container requests		194
BATOTECT	BINARY	CMF	4	AVG	BTS total event requests		198
BATOTPCT	BINARY	CMF	4	AVG	BTS total requests		191
BMSCOUNT	BINARY	CMF	4	AVG	Total BMS requests		64
BMSINCNT	BINARY	CMF	4	AVG	Number of BMS in requests		62
BMSMAPCNT	BINARY	CMF	4	AVG	Number of BMS map requests		61
BMSOUTCNT	BINARY	CMF	4	AVG	Number of BMS out requests		63
CDSAGETM	BINARY	CMF	4	AVG	CDSA getmains		29
CDSAPSHWM	BINARY	CMF	4	AVG	CDSA program storage HWM		45
CDSASHWM	BINARY	CMF	4	AVG	CDSA storage HWM		33
CDSASOCC	BINARY	CMF	8	AVG	CDSA occupancy		37
CFDTWC	CNUMERIC	CMF	4	AVG	CF data table wait count		178
CFDTWT	INT16US	CMF	8	AVG	CF data table wait time		177
CHARIN	BINARY	CMF	4	AVG	Primary terminal control characters in		18
CHARINSEC	BINARY	CMF	4	AVG	Secondary terminal control characters in		22
CHAROUT	BINARY	CMF	4	AVG	Primary terminal control characters out		20
CHAROUTSEC	BINARY	CMF	4	AVG	Secondary terminal control characters out		24
CHMODECT	BINARY	CMF	4	AVG	Dispatcher change modes	E640+	243
CICSWC	CNUMERIC	CMF	4	AVG	Wait-CICS count		167

Table 701. MLOCTRAN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
CICSWT	INT16US	CMF	8	AVG	Wait-CICS time		166
CPUCNT	BINARY	CMF	4	AVG	User task CPU count		88
CPUTIME	INT16US	CMF	8	AVG	User task CPU time		73
CTLWC	CNUMERIC	CMF	4	AVG	Give up control wait count		171
CTLWT	INT16US	CMF	8	AVG	Give up control wait time		170
CURAVGCPUT	INT16US	CPSM	4	MAX	Average CPU time for current sample		71
CURAVGRES	INTMSEC	CPSM	4	MAX	Average response time for current sample		13
CURTRANRATE	RATE	CPSM	4	SUM	Transaction rate for current sample		8
DB2CONWC	BINARY	CMF	4	AVG	DB2 connection (TCB) count		220
DB2CONWT	INT16US	CMF	8	AVG	DB2 Connection wait time		219
DB2RDYQC	BINARY	CMF	4	AVG	DB2 ReadyQ wait count		218
DB2RDYQW	INT16US	CMF	8	AVG	DB2 ReadyQ wait time		217
DB2REQCT	BINARY	CMF	4	AVG	DB2 total number of requests		242
DB2WAIT	INT16US	CMF	8	AVG	DB2 request wait time	E680+	221
DB2WAITC	BINARY	CMF	4	AVG	DB2 request wait count	E680+	222
DHCRECT	BINARY	CMF	4	AVG	Document create requests		209
DHINSCT	BINARY	CMF	4	AVG	Document insert requests		210
DHRETCT	BINARY	CMF	4	AVG	Document retrieve requests		212
DHSETCT	BINARY	CMF	4	AVG	Document set requests		211
DHTOTCT	BINARY	CMF	4	AVG	Document total requests		213
DHTOTDCL	BINARY	CMF	4	AVG	Document total length created		214
DISPCNT	BINARY	CMF	4	AVG	Task dispatch count		87
DISPTIME	INT16US	CMF	8	AVG	Task dispatch time		72
DSPDELAY	INT16US	CMF	8	AVG	First dispatch delay		119
DSPDELAYCT	CNUMERIC	CMF	4	AVG	First dispatch delay count		128
ECDSAGETM	BINARY	CMF	4	AVG	ECDSA getmains		30
ECDSAPSHWM	BINARY	CMF	4	AVG	ECDSA program storage HWM		44
ECDSASHWM	BINARY	CMF	4	AVG	ECDSA storage HWM		34
ECDSASOCC	BINARY	CMF	8	AVG	ECDSA occupancy		38
ENQDELAY	INT16US	CMF	8	AVG	Task control enqueue delay time		122
ENQDELAYCT	CNUMERIC	CMF	4	AVG	KC enqueue delay count		131
EXTERNWC	CNUMERIC	CMF	4	AVG	External wait count		165
EXTERNWT	INT16US	CMF	8	AVG	External wait time		164
EXWAIT	INT16US	CMF	8	AVG	Exception wait time		76
EXWAITCNT	CNUMERIC	CMF	4	AVG	Exception wait count		91
FCADDCNT	BINARY	CMF	4	AVG	Number of file adds		49
FCAMCNT	BINARY	CMF	4	AVG	Number of access method requests		52
FCBRWCNT	BINARY	CMF	4	AVG	Number of file browses		48
FCCOUNT	BINARY	CMF	4	AVG	Total file control requests		51
FCDELCNT	BINARY	CMF	4	AVG	Number of file deletes		50
FCGETCNT	BINARY	CMF	4	AVG	Number of file gets		46
FCIOCNT	BINARY	CMF	4	AVG	File control I/O wait count		93

Table 701. MLOCTRAN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
FCIOTIME	INT16US	CMF	8	AVG	File control I/O wait time		78
FCPUTCNT	BINARY	CMF	4	AVG	Number of file puts		47
FORACTINDTO	CNUMERIC	STAT	4	AVG	Force actions due to indoubt		142
FORACTNOWT	CNUMERIC	STAT	4	AVG	Force actions due to no wait		143
FORACTOPER	CNUMERIC	STAT	4	AVG	Force actions due to operator		144
FORACTOTHER	CNUMERIC	STAT	4	AVG	Force actions due to other		145
FORACTTRNDF	CNUMERIC	STAT	4	AVG	Force actions due to transaction definition		141
GNQDELAC	BINARY	CMF	4	AVG	Sysplex-wide enqueue delay count		249
GNQDELAY	INT16US	CMF	8	AVG	Sysplex-wide enqueue delay time		248
ICCOUNT	BINARY	CMF	4	AVG	Interval control requests		69
ICTOTCNT	BINARY	CMF	4	AVG	Total interval control requests		174
IMSREQCT	BINARY	CMF	4	AVG	IMS total number of requests		241
IMSWAIT	INT16US	CMF	8	AVG	IMS request wait time		215
IMSWAITC	BINARY	CMF	4	AVG	IMS request wait count		216
INTAVGCPUT	INT16US	CPSM	4	MAX	Average CPU time for interval		84
INTAVGRES	INTMSEC	CPSM	4	MAX	Average response time for interval		16
INTERVALID	TIMESTP	CPSM	8	LIKE	Interval identifier		1
INTTRANRATE	RATE	CPSM	4	SUM	Transaction rate for interval		9
INTVLWC	CNUMERIC	CMF	4	AVG	Interval control wait count		169
INTVLWT	INT16US	CMF	8	AVG	Interval control wait time		168
IRIOCNT	BINARY	CMF	4	AVG	Interregion I/O count		96
IRIOTIME	INT16US	CMF	8	AVG	Interregion I/O wait		81
ISOLATEST	CVDAS	INQ	4	LIKE	Isolation status		98
ISOLATEST Output valid values	ISOLATE, NOISOLATE						
J8CPUC	BINARY	CMF	4	AVG	J8 TCB mode CPU count	E680+	238
J8CPUT	INT16US	CMF	8	AVG	J8 TCB mode CPU time	E680+	237
JCIOCNT	BINARY	CMF	4	AVG	Journal control I/O wait count		94
JCIOTIME	INT16US	CMF	8	AVG	Journal control I/O wait time		79
JCURWCNT	BINARY	CMF	4	AVG	Journal output requests		68
JNLWRTCT	CNUMERIC	CMF	4	AVG	Journal write requests		154
JVMSUSP	INT16US	CMF	8	AVG	Total JVM suspend time		256
JVMSUSPC	BINARY	CMF	4	AVG	Total JVM suspend time count		257
JVMTIME	INT16US	CMF	8	AVG	Total JVM elapsed time		254
JVMTIMEC	BINARY	CMF	4	AVG	Total JVM elapsed time count		255
L8CPUC	BINARY	CMF	4	AVG	L8 TCB mode CPU count		236
L8CPUT	INT16US	CMF	8	AVG	L8 TCB mode CPU time		235
LOCALCNT	CNUMERIC	STAT	4	AVG	Times local dynamic routing exit ran transaction		12
LOCKMWC	CNUMERIC	CMF	4	AVG	Lock manager wait count		161
LOCKMWT	INT16US	CMF	8	AVG	Lock manager wait time		160
LOGWRTCT	CNUMERIC	CMF	4	AVG	CICS logger write requests		155
LU61WTT	INT16US	CMF	8	AVG	LU6.1 I/O wait time		123

Table 701. MLOCTRAN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
LU61WTTCT	CNUMERIC	CMF	4	AVG	LU6.1 I/O wait count		132
LU62WTT	INT16US	CMF	8	AVG	LU6.2 I/O wait time		124
LU62WTTCT	CNUMERIC	CMF	4	AVG	LU6.2 I/O wait count		133
MSCPUC	BINARY	CMF	4	AVG	Other TCB mode CPU count		234
MSCPUT	INT16US	CMF	8	AVG	Other TCB mode CPU time		233
MSDISPC	BINARY	CMF	4	AVG	Other TCB mode dispatch count		232
MSDISPT	INT16US	CMF	8	AVG	Other TCB mode dispatch time		231
MSGIN	BINARY	CMF	4	AVG	Primary terminal control messages in		17
MSGINSEC	BINARY	CMF	4	AVG	Secondary terminal control messages in		21
MSGOUT	BINARY	CMF	4	AVG	Primary terminal control messages out		19
MSGOUTSEC	BINARY	CMF	4	AVG	Secondary terminal control messages out		23
MXTDELAY	INT16US	CMF	8	AVG	First dispatch delay		121
MXTDELAYCT	CNUMERIC	CMF	4	AVG	First dispatch delay MXT count		130
MXTOTDLC	BINARY	CMF	4	AVG	Maximum open TCB delay count		224
MXTOTDLY	INT16US	CMF	8	AVG	Maximum open TCB delay time		223
NUMINDOUBWT	CNUMERIC	STAT	4	AVG	Number of indoubt waits		140
PC24RHWM	CNUMERIC	CMF	4	AVG	R/O program storage HWM below 16M		106
PC24SHWM	CNUMERIC	CMF	4	AVG	Shared program storage HWM below 16M		108
PC31SHWM	CNUMERIC	CMF	4	AVG	Shared program storage HWM above 16M		107
PCDPLCT	BINARY	CMF	4	AVG	Distributed program links		245
PCLINKCNT	BINARY	CMF	4	AVG	Number of program links		65
PCLOADCNT	BINARY	CMF	4	AVG	Number of program loads		67
PCLOADTM	INT16US	CMF	8	AVG	Program fetch wait time		83
PCLOADWCNT	CNUMERIC	CMF	4	AVG	Program fetch wait count		175
PCLURMCT	BINARY	CMF	4	AVG	Link URM count		176
PCXCTLCNT	BINARY	CMF	4	AVG	Number of program XCTLs		66
PERRECNT	CNUMERIC	CMF	4	AVG	Performance record count		147
PRIORITY	BINARY	CMF	4	AVG	Transaction priority		85
PROGRAM	CHAR	CMF	8	DIFF	First program		86
PSTG24HWM	BINARY	CMF	4	AVG	Program storage HWM below 16M		40
PSTG31HWM	BINARY	CMF	4	AVG	Program storage HWM above 16M		41
PSTGHWM	BINARY	CMF	4	AVG	Program storage HWM		39
QRCPUUC	BINARY	CMF	4	AVG	QR TCB mode CPU count		230
QRCPUT	INT16US	CMF	8	AVG	QR TCB mode CPU time		229
QRDISPC	BINARY	CMF	4	AVG	QR TCB mode dispatch count		228
QRDISPT	INT16US	CMF	8	AVG	QR TCB mode dispatch time		227
QRMODDLC	BINARY	CMF	4	AVG	QR TCB mode delay count		226
QRMODDLY	INT16US	CMF	8	AVG	QR TCB mode delay time		225

Table 701. MLOCTRAN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
REMOECNT	CNUMERIC	STAT	4	AVG	Number of times run remotely by routing exit		99
REMSTARTCNT	CNUMERIC	STAT	4	AVG	Remote start count		100
RESPONSE	INTMSEC	CMF	8	AVG	Cumulative response time		15
RESTARTCNT	BINARY	STAT	4	AVG	Times restarted		6
RLSCPUCNT	CNUMERIC	CMF	4	AVG	RLS CPU time monitor count		163
RLSCPUT	INT16US	CMF	8	AVG	RLS SRB CPU time		162
RLSWAIT	INT16US	CMF	8	AVG	Total times waited for RLS I/O		158
RLSWAITCNT	CNUMERIC	CMF	4	AVG	Task suspend count		159
RMISUSP	INT16US	CMF	8	AVG	Total RMI suspend time		126
RMISUSPCT	CNUMERIC	CMF	4	AVG	Total RMI suspend count		135
RMITIME	INT16US	CMF	8	AVG	Total RMI elapsed time		125
RMITIMECT	CNUMERIC	CMF	4	AVG	Total RMI elapsed count		134
RRMSWAIC	BINARY	CMF	4	AVG	RRMS/MVS syncpoint delay count		253
RRMSWAIT	INT16US	CMF	8	AVG	RRMS/MVS syncpoint delay time		252
RSYSID	CHAR	CMF	4	DIFF	Remote system identifier		101
RUNTRWTC	BINARY	CMF	4	AVG	Run synchronous transaction wait count		200
RUNTRWTT	INT16US	CMF	8	AVG	Run synchronous transaction wait time		199
S8CPUC	BINARY	CMF	4	AVG	S8 TCB mode CPU count		240
S8CPUT	INT16US	CMF	8	AVG	S8 TCB mode CPU time		239
SC24FSHR	CNUMERIC	CMF	4	AVG	Shared storage bytes freed below 16M		150
SC24GSHR	CNUMERIC	CMF	4	AVG	Shared storage bytes get below 16M		149
SC24SGCT	CNUMERIC	CMF	4	AVG	Shared storage requests below 16M		148
SC31FSHR	CNUMERIC	CMF	4	AVG	Shared storage bytes freed above 16M		153
SC31GSHR	CNUMERIC	CMF	4	AVG	Shared storage bytes get above 16M		152
SC31SGCT	CNUMERIC	CMF	4	AVG	Shared storage getmain above 16M		151
SHDTSWC	CNUMERIC	CMF	4	AVG	Shared temporary storage wait count		173
SHDTSWT	INT16US	CMF	8	AVG	Shared temporary storage wait time		172
SOBYDECT	BINARY	CMF	4	AVG	Socket bytes decrypted		247
SOBYENCT	BINARY	CMF	4	AVG	Socket bytes encrypted		246
SOIOWTC	BINARY	CMF	4	AVG	Sockets I/O wait count		251
SOIOWTT	INT16US	CMF	8	AVG	Sockets I/O wait time		250
SRVSPWC	CNUMERIC	CMF	4	AVG	CF data-table-server syncpoint wait count		180
SRVSPWT	INT16US	CMF	8	AVG	CF server syncpoint wait time		179
STATUS	CVDAS	INQ	4	LIKE	Enabled status		4
STATUS Output valid values	ENABLED, DISABLED						
STGVCNT	BINARY	STAT	4	AVG	Number of storage violations		10
SUSPCNT	BINARY	CMF	4	AVG	Task suspend count		89
SUSPTIME	INT16US	CMF	8	AVG	Task suspend time		74

Table 701. MLOCTRAN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
SYNCCOUNT	BINARY	CMF	4	AVG	Syncpoint requests		70
SYNCDLY	INT16US	CMF	8	AVG	Waiting for parent syncpoint delay time		201
SYNCDLYC	BINARY	CMF	4	AVG	Waiting for parent syncpoint delay count		202
SYNCTIMCNT	CNUMERIC	CMF	4	AVG	Total times processed syncpoint request		157
SYNCTIME	INT16US	CMF	8	AVG	Syncpoint wait time		156
SZALLCTO	CNUMERIC	CMF	4	AVG	FEPI allocate timeouts		115
SZALLOCT	CNUMERIC	CMF	4	AVG	FEPI allocates		109
SZCHRIN	CNUMERIC	CMF	4	AVG	FEPI characters received		114
SZCHROUT	CNUMERIC	CMF	4	AVG	FEPI characters sent		113
SZRCVCT	CNUMERIC	CMF	4	AVG	FEPI receives		110
SZRCVTO	CNUMERIC	CMF	4	AVG	FEPI receive timeouts		116
SZSENDCT	CNUMERIC	CMF	4	AVG	FEPI sends		111
SZSTRCT	CNUMERIC	CMF	4	AVG	FEPI starts		112
SZTOTCT	CNUMERIC	CMF	4	AVG	Total FEPI requests		117
SZWAIT	INT16US	CMF	8	AVG	FEPI suspend time		118
SZWAITCT	CNUMERIC	CMF	4	AVG	FEPI suspend time count		127
TCBATTCT	BINARY	CMF	4	AVG	Dispatcher TCB attaches		244
TCC62IN2	CNUMERIC	CMF	4	AVG	LU6.2 Secondary terminal control chars in		103
TCC62OU2	CNUMERIC	CMF	4	AVG	LU6.2 secondary terminal control chars out		105
TCIOCNT	BINARY	CMF	4	AVG	Terminal control I/O wait count		92
TCIOTIME	INT16US	CMF	8	AVG	Terminal control I/O wait time		77
TCLDELAY	INT16US	CMF	8	AVG	First dispatch delay - transaction class		120
TCLDELAYCT	CNUMERIC	CMF	4	AVG	First dispatch delay count		129
TCM62IN2	CNUMERIC	CMF	4	AVG	LU6.2 secondary terminal control messages in		102
TCM62OU2	CNUMERIC	CMF	4	AVG	LU6.2 secondary terminal control messages out		104
TDCOUNT	BINARY	CMF	4	AVG	Total transient data requests		56
TDGETCNT	BINARY	CMF	4	AVG	Number of transient data gets		53
TDIOCNT	BINARY	CMF	4	AVG	Transient data I/O count		97
TDIOTIME	INT16US	CMF	8	AVG	Transient data I/O wait time		82
TDPURCNT	BINARY	CMF	4	AVG	Number of transient data purges		55
TDPUTCNT	BINARY	CMF	4	AVG	Number of transient data puts		54
TERMID	CHAR	INQ	4	DIFF	Terminal identifier		3
TERMSTG	CNUMERIC	CMF	4	AVG	Terminal storage	E410+	26
TMRDSCWT	INT16US	CMF	8	AVG	MVS DS storage constraint wait time		258
TRANCLASS	CHAR	INQ	8	DIFF	Transaction class name		5
TRANID-1	CHAR	INQ	4	DIFF	Transaction		2
TSCOUNT	BINARY	CMF	4	AVG	Total temporary storage requests		60
TSGETCNT	BINARY	CMF	4	AVG	Number of temporary storage gets		57

Table 701. MLOCTRAN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
TSIOCNT	BINARY	CMF	4	AVG	Temporary storage I/O wait count		95
TSIOTIME	INT16US	CMF	8	AVG	Temporary storage I/O wait time		80
TSPUTACNT	BINARY	CMF	4	AVG	Number of TS puts to auxiliary storage		58
TSPUTMCNT	BINARY	CMF	4	AVG	Number of TS puts to main storage		59
USECOUNT	BINARY	STAT	4	SUM	Times used		7
USRP24HWM	BINARY	CMF	4	AVG	Program storage HWM below 16M		43
USRP31HWM	BINARY	CMF	4	AVG	Program storage HWM above 16M		42
USTG24CNT	BINARY	CMF	4	AVG	Number of user getmains below 16M		27
USTG24HWM	BINARY	CMF	4	AVG	User task storage HWM below 16M		31
USTG24OCC	BINARY	CMF	8	AVG	User task storage occupancy below 16M		35
USTG31CNT	BINARY	CMF	4	AVG	Number of user getmains above 16M		28
USTG31HWM	BINARY	CMF	4	AVG	User task storage HWM above 16M		32
USTG31OCC	BINARY	CMF	8	AVG	User task storage occupancy above 16M		36
WAITCNT	CNUMERIC	CMF	4	AVG	Dispatch wait count		90
WAITTIME	INT16US	CMF	8	AVG	Dispatch wait time		75
WBCHRIN	BINARY	CMF	4	AVG	WEB characters received		204
WBCHROUT	BINARY	CMF	4	AVG	WEB characters sent		206
WBRCVCT	BINARY	CMF	4	AVG	WEB receive requests		203
WBREPWCT	BINARY	CMF	4	AVG	WEB repository writes		208
WSENDCT	BINARY	CMF	4	AVG	WEB send requests		205
WBTOTCT	BINARY	CMF	4	AVG	WEB total requests		207

Chapter 300. MLSRPBUF Resource Table

A CICS Monitored resource that describes a subset of the LSR pool buffer attributes sampled by the CICSplex SM MAS Monitor agents.

The **Primary** key field for this resource class is POOLSIZE TYPE. While the MLSRPBUF resource class identifies multiple key attributes, only the POOLSIZE TYPE attribute can be specified in an EVALDEF INSTANCE attribute.

The following actions are supported:

DISCARD

Remove the Monitored resource instance.

RESET

Reset all Monitoring instance attributes.

These actions require no unique parameter data.

External resource name

Length

112

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Monitored

Copybook identifier

EYUt1396

Table 702. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET	RESET	None	N/A

Table 703. MLSRPBUF FEEDBACK error codes

Value	Code	Description
9	MLSRPBUF_NO_MON_DATA	No data for monitored resource
10	MLSRPBUF_MON_SYSDEF_REQ	Monitored resource required by Real Time Analysis (RTA)

Table 704. MLSRPBUF resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
COUNT	BINARY	STAT	2	AVG	Number of buffers	20
CREADS	BINARY	STAT	4	AVG	Number of successful hiperspace CREADS	8
CURHREADRATE	RATE	CPSM	4	AVG	Hiperspace read rate for current sample	18
CURHWITRATE	RATE	CPSM	4	AVG	Hiperspace write rate for current sample	16
CURREADRATE	RATE	CPSM	4	AVG	Read rate for current sample	14
CURWITRATE	RATE	CPSM	4	AVG	Write rate for current sample	12
CWRITES	BINARY	STAT	4	AVG	Number of successful hiperspace CWRITES	9
FAILCREADS	BINARY	STAT	4	AVG	Number of failed hiperspace CREADS	10
FAILCWRITES	BINARY	STAT	4	AVG	Number of failed hiperspace CWRITES	11
HIPERBUFF	BINARY	STAT	4	AVG	Number of hiperspace buffers	3
INTERVALID	TIMESTP	CPSM	8	LIKE	Interval identifier	1
INTHREADRATE	RATE	CPSM	4	AVG	Hiperspace read rate for interval	19
INTHWITRATE	RATE	CPSM	4	AVG	Hiperspace write rate for interval	17
INTREADRATE	RATE	CPSM	4	AVG	Read rate for interval	15
INTWITRATE	RATE	CPSM	4	AVG	Write rate for interval	13
LOOKASIDES	BINARY	STAT	4	AVG	Number of successful lookasides	4
NONUWRITE	BINARY	STAT	4	AVG	Number of non-user initiated writes	7
POOLSIZE-1	CHAR	STAT	9	DIFF	Pool identifier/buffer size/buffer type	2
READS	BINARY	STAT	4	AVG	Number of buffer reads	5
USERIWRITE	BINARY	STAT	4	AVG	Number of user initiated writes	6

Chapter 301. MLSRPOOL Resource Table

A CICS Monitored resource that describes a subset of the LSR pool attributes sampled by the CICSplex SM MAS Monitor agents.

The **Primary** key field for this resource class is LSRPOOLID.

The following actions are supported:

DISCARD

Remove the Monitored resource instance.

RESET

Reset all Monitoring instance attributes.

These actions require no unique parameter data.

External resource name

Length

208

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Monitored

Copybook identifier

EYUt1374

Table 705. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET	RESET	None	N/A

Table 706. MLSRPOOL FEEDBACK error codes		
Value	Code	Description
9	MLSRPOOL_NO_MON_DATA	No data for monitored resource
10	MLSRPOOL_MON_SYSDEF_REQ	Monitored resource required by Real Time Analysis (RTA)

Table 707. MLSRPOOL resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
CREATETIME	DECTSTP	STAT	4	MAX	Local create time	2
CURDBHITRATE	RATE	CPSM	4	AVG	Data buffer lookaside rate for current sample	19
CURDHREARATE	RATE	CPSM	4	AVG	Data buffer CREAD rate for current sample	27
CURDHWIRATE	RATE	CPSM	4	AVG	Data buffer CWRITE rate for current sample	25
CURDREADRATE	RATE	CPSM	4	AVG	Data buffer read rate for current sample	23
CURDWIRATE	RATE	CPSM	4	AVG	Data buffer write rate for current sample	21
CURIBHITRATE	RATE	CPSM	4	AVG	Index buffer lookaside rate for current sample	39
CURIHREARATE	RATE	CPSM	4	AVG	Index buffer CREAD rate for current sample	47
CURIHWIRATE	RATE	CPSM	4	AVG	Index buffer CWRITE rate for current sample	45
CURIREADRATE	RATE	CPSM	4	AVG	Index buffer read rate for current sample	43
CURIWIRATE	RATE	CPSM	4	AVG	Index buffer write rate for current sample	41
DBLOOKASIDE	BINARY	STAT	4	AVG	Number of successful lookasides to data buffers	11
DBNUWRITE	BINARY	STAT	4	AVG	Number of non user-initiated data buffer writes	14
DBREAD	BINARY	STAT	4	AVG	Number of read I/Os to data buffers	12
DBUFFCNT	BINARY	STAT	4	AVG	Number of data buffers	9
DBUIWRITE	BINARY	STAT	4	AVG	Number of user-initiated data buffer writes	13
DCREAD	BINARY	STAT	4	AVG	Number of successful data buffer CREAD requests	15
DCWRITE	BINARY	STAT	4	AVG	Number of successful data buffer CWRITE requests	16
DELETETIME	DECTSTP	STAT	4	MAX	Local delete time	3
DFAILCREAD	BINARY	STAT	4	AVG	Number of failed data buffer CREAD requests	17
DFAILCWRITE	BINARY	STAT	4	AVG	Number of failed data buffer CWRITE requests	18
DHUPERBUF	BINARY	STAT	4	AVG	Number of Hiperspace data buffers	10
IBLOOKASIDE	BINARY	STAT	4	AVG	Number of lookaside index buffer reads	31
IBNUWRITE	BINARY	STAT	4	AVG	Number of non user-initiated index buffer writes	34
IBREADS	BINARY	STAT	4	AVG	Total number of index buffer reads	32
IBUFFCNT	BINARY	STAT	4	AVG	Number of index buffers	29
IBUIWRITE	BINARY	STAT	4	AVG	Number of user-initiated index buffer writes	33
ICREAD	BINARY	STAT	4	AVG	Number of successful index buffer CREAD requests	35
ICWRITE	BINARY	STAT	4	AVG	Number of successful index buffer CWRITE requests	36

Table 707. MLSPPOOL resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
IDHIPERBUF	BINARY	STAT	4	AVG	Number of Hiperspace index buffers	30
IDXDATFLG	BIT	STAT	1	LIKE	Separate data and index flag	50
IFAILCREAD	BINARY	STAT	4	AVG	Number of failed index buffer CREAD requests	37
IFAILCWRITE	BINARY	STAT	4	AVG	Number of failed index buffer CWRITE requests	38
INTDBHITRATE	RATE	CPSM	4	AVG	Data buffer lookaside rate for monitor interval	20
INTDHREARATE	RATE	CPSM	4	AVG	Data buffer CREAD rate for monitor interval	28
INTDHWIRATE	RATE	CPSM	4	AVG	Data buffer CWRITE rate for monitor interval	26
INTDREADRATE	RATE	CPSM	4	AVG	Data buffer read rate for monitor interval	24
INTDWRITRATE	RATE	CPSM	4	AVG	Data buffer write rate for monitor interval	22
INTERVALID	TIMESTP	CPSM	8	LIKE	Interval ID	1
INTIBHITRATE	RATE	CPSM	4	AVG	Index buffer lookaside rate for monitor interval	40
INTIHREARATE	RATE	CPSM	4	AVG	Index buffer CREAD rate for monitor interval	48
INTIHWIRATE	RATE	CPSM	4	AVG	Index buffer CWRITE rate for monitor interval	46
INTIREADRATE	RATE	CPSM	4	AVG	Index buffer read rate for monitor interval	44
INTIWRITRATE	RATE	CPSM	4	AVG	Index buffer write rate for monitor interval	42
LSRPOOLID-1	BINARY	STAT	2	AVG	LSR pool number	7
MAXCCURSTR	BINARY	STAT	2	AVG	Peak number of concurrent active strings	49
MAXKEYLEN	BINARY	STAT	2	AVG	Maximum key length	4
PEAKWAITREQ	BINARY	STAT	2	AVG	Peak number of requests waiting	6
TOTSTRINGS	BINARY	STAT	2	AVG	Total number of strings	5
TOTWAITREQ	BINARY	STAT	4	AVG	Total number of string waits	8

Chapter 302. MMODNAME Resource Table

A CICS Monitored resource that describes a subset of the modename attributes sampled by the CICSplex SM MAS Monitor agents.

The **Primary** key field for this resource class is CONNECTION.

The **Secondary** key field for this resource class is NAME.

While the MMODNAME resource class identifies multiple key attributes, only the CONNECTION attribute can be specified in an EVALDEF INSTANCE attribute.

The following actions are supported:

DISCARD

Remove the Monitored resource instance.

RESET

Reset all Monitoring instance attributes.

These actions require no unique parameter data.

External resource name

Length

48

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Monitored

Copybook identifier

EYUt1376

Table 708. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM SET	DISCARD	None	N/A
	RESET	None	N/A

Table 709. MMODNAME FEEDBACK error codes

Value	Code	Description
9	MMODNAME_NO_MON_DATA	No data for monitored resource

Table 709. MMODNAME FEEDBACK error codes (continued)

Value	Code	Description
10	MMODNAME_MON_SYSDEF_REQ	Monitored resource required by Real Time Analysis (RTA)

Table 710. MMODNAME resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
CONNECTION-1	CHAR	INQ	4	DIFF	Connection name	3
CONNSTATUS	CVDAS	INQ	4	LIKE	Connection status	4
CONNSTATUS Output valid values		RELEASED, OBTAINING, ACQUIRED, FREEING, AVAILABLE				
INTERVALID	TIMESTP	CPSM	8	LIKE	Interval ID	1
NAME-2	CHAR	INQ	8	DIFF	Mode name	2
SESSACTV	BINARY	INQ	2	SUM	Number of active sessions	5
SESSAVAIL	BINARY	INQ	2	SUM	Number of sessions available	6
SESSMAX	BINARY	INQ	2	MAX	Maximum number of sessions	7
SESSMAXWIN	CNUMERIC	INQ	2	MAX	Maximum number of contention winner sessions	8

Chapter 303. MNTRATDQ Resource Table

A CICS Monitored resource that describes a subset of the intrapartition transient data queue attributes sampled by the CICSplex SM MAS Monitor agents.

The **Primary** key field for this resource class is TDQUEUE.

The following actions are supported:

DISCARD

Remove the Monitored resource instance.

RESET

Reset all Monitoring instance attributes.

These actions require no unique parameter data.

External resource name

Length

72

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Monitored

Copybook identifier

EYUt1385

Table 711. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM SET	DISCARD	None	N/A
	RESET	None	N/A

Table 712. MNTRATDQ FEEDBACK error codes

Value	Code	Description
9	MNTRATDQ_NO_MON_DATA	No data for monitored resource
10	MNTRATDQ_MON_SYSDEF_REQ	Monitored resource required by Real Time Analysis (RTA)

Table 713. MNTRATDQ resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	3
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ATIFACILITY	CVDAS	INQ	4	LIKE	ATI facility	
ATIFACILITY Output valid values	TERMINAL, NOTERMINAL					
ATITERMID	CHAR	INQ	4	DIFF	ATI terminal identifier	4
ATITRANID	CHAR	INQ	4	DIFF	ATI transaction identifier	5
ATIUSERID	CHAR	INQ	8	DIFF	ATI user identifier	12
CUROUTQRATE	RATE	CPSM	4	AVG	Output rate for current sample	10
INTERVALID	TIMESTP	CPSM	8	LIKE	Interval identifier	1
INTOUTQRATE	RATE	CPSM	4	AVG	Output rate for interval	11
NUMITEMS	BINARY	INQ	4	SUM	Number of items	7
OUTCNT	BINARY	STAT	4	SUM	Number of I/O requests	9
STATUS	CVDAS	INQ	4	LIKE	Enable status	6
STATUS Output valid values	ENABLED, DISABLED					
TDQUEUE-1	CHAR	INQ	4	DIFF	Queue identifier	2
TRIGGERLEVEL	BINARY	INQ	4	MAX	Trigger level	8

Chapter 304. MODENAME Resource Table

A CICS Resource that describes an LU6.2 modename in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is CONNECTION.

The **Secondary** key field for this resource class is NAME.

While the MODENAME resource class identifies multiple key attributes, only the CONNECTION attribute can be specified in an EVALDEF INSTANCE attribute.

The following actions are supported:

ACQUIRE

Acquire a modename.

CLOSE

Close a modename.

These actions require no unique parameter data.

External resource name

CICSLU62ModeName

Length

48

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0007

Table 714. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	ACQUIRE	None	N/A
	CLOSE	None	N/A

Table 715. MODENAME resource table attributes							
Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name	3
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved	
AUTOCONN	CVDAS	INQ	4	LIKE	No	Autoconnect status	
AUTOCONN Output valid values	ALLCONN, AUTOCONN, NONAUTOCONN						
CONNECTION-1	CHAR	INQ	4	DIFF	No	Connection name	2
CONNSTATUS	CVDAS	INQ	4	LIKE	Yes	Connection status	4
CONNSTATUS Input/output valid values	ACQUIRED						
CONNSTATUS Input valid values	CLOSED						
CONNSTATUS Output valid values	RELEASED, OBTAINING, FREEING, AVAILABLE						
NAME-2	CHAR	INQ	8	DIFF	No	Mode name	1
SESSACTV	BINARY	INQ	2	AVG	No	Number of active sessions	5
SESSAVAIL	BINARY	INQ	2	AVG	Yes	Number of sessions available	6
SESSMAX	BINARY	INQ	2	AVG	No	Maximum number of sessions	7
SESSMAXWIN	BINARY	INQ	2	AVG	No	Maximum number of contention winner sessions	8

Chapter 305. MONDEF Resource Table

A CPSM Monitor Definition that describes the monitoring requirements for a class of CICS resources. Monitoring requirements include both CICSplex SM resource and resource status facility status monitoring. The resource class and name selection criteria are identified by the attribute values.

The **Primary** key field for this resource class is NAME.

The following action is supported:

INSTALL

Install the definition into each active CICS system that has monitoring active within the specified scope. If provided the PERIODEF is used to determine the valid operational time of the MONDEF.

The parameter data for the INSTALL action is:

```
PARM(' [PERIOD(period)]. ')  
  
where:  
  
period = The name of a PERIODEF definition.
```

The MONDEF is installed in each active CICS system in the current scope that has Monitoring active. If provided, the PERIODEF definition is used to determine the valid operational time of the MONDEF.

External resource name

CICSMonitorDefinition

Length

128

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt3510

Table 716. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
UPDATE		None	N/A
REMOVE		None	N/A

Table 716. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
PERFORM SET	INSTALL	PERIOD(value)	No
		SCOPE(value)	No
	ADDTOGRP	ACTIVETIME(value)	No
		RESGROUP(value)	Yes

Table 717. MONDEF FEEDBACK error codes		
Value	Code	Description
1	MONDEF_INV_DATA	Attribute data invalid
2	MONDEF_REC_NOT_FOUND	Requested resource not found
3	MONDEF_INV_REFERENCE	Name not found
4	MONDEF_REC_EXISTS	Resource already exists
5	MONDEF_REC_CHANGED	Resource definition already changed
21	MONDEF_PARTIAL_INSTALL	Partial install
22	MONDEF_MON_OFF	Monitoring off
23	MONDEF_NOT_INSTALLED	Not installed
24	MONDEF_INV_PERIOD	Period invalid

Table 718. MONDEF resource table attributes									
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			17
CHANGEAGENT Input/output valid values	DREPAPI								
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			20
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification			1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			19
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created			18
DESC	CHAR	CPSM	58	No	DIFF	Description			9
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999	16
INCLUDE	EYUDA	CPSM	4	Yes	LIKE	Inclusion in CPSM monitoring option	YES		8
INCLUDE Input/output valid values	YES, NO								
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name			5
RESCLASS	EYUDA	CPSM	4	Yes	LIKE	Monitoring resource class			7
RESCLASS Input/output valid values	MCONN, MFILE, MJRNL, MPROG, MTERM, MTRAN, MTDQS								
RESNAME	CHAR	CPSM	8	Yes	DIFF	Name or generic name of resource being monitored			6
RODMPOP	EYUDA	CPSM	4	Yes	LIKE	Resource status facility population	NO		11

Table 718. MONDEF resource table attributes (continued)									
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
RODMPOP Input/output valid values	YES, NO								

Chapter 306. MONGROUP Resource Table

A CPSM Monitor Definition that provides the association anchor for a set of MONDEF definitions. References to the MONGROUP are inferred to be references to the set of associated MONDEF instances.

The **Primary** key field for this resource class is NAME.

The following action is supported:

INSTALL

Install the set of MONDEF definitions in the group into each active CICS system that has monitoring active within the specified scope.

The INSTALL action requires no unique parameter data.

The set of MONDEFs is installed in each active CICS system in the current scope that has Monitoring active.

External resource name

CICSMonitorGroup

Length

112

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt3504

Table 719. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
UPDATE		None	N/A
REMOVE		None	N/A
PERFORM SET	INSTALL	SCOPE(value)	No
	ADDTOSPC	SPEC(value)	Yes

Table 720. MONGROUP FEEDBACK error codes

Value	Code	Description
1	MONGROUP_INV_DATA	Attribute data invalid
2	MONGROUP_REC_NOT_FOUND	Requested resource not found
3	MONGROUP_INV_REF	Name not found
4	MONGROUP_REC_EXISTS	Resource already exists
5	MONGROUP_REC_CHANGED	Resource definition already changed
21	MONGROUP_PARTIAL_INSTALL	Partial install
22	MONGROUP_MON_OFF	Monitoring off
23	MONGROUP_NOT_INSTALLED	Not installed
24	MONGROUP_NOT_UNIQUE	Not unique

Table 721. MONGROUP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
CHANGEAGENT	CV DAS	CPSM	4	No	LIKE	Last modification agent			8
CHANGEAGENT Input/ output valid values	DREPAPI								
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification			1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created			9
DESC	CHAR	CPSM	58	No	DIFF	Description			6
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999	7
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name			5

Chapter 307. MONINGRP Resource Table

A CPSM Monitor Definition that describes the membership of a monitor definition (MONDEF) in a monitor group (MONGROUP). A MONDEF can be a member of multiple MONGROUPS.

The **Primary** key field for this resource class is GROUP.

The **Secondary** key field for this resource class is DEFNAME.

There are no object specific actions for this resource class.

External resource name

CICSMonitorResourceInGroup

Length

64

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt5380

Table 722. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
UPDATE		None	N/A
REMOVE		None	N/A

Table 723. MONINGRP FEEDBACK error codes

Value	Code	Description
1	MONINGRP_INV_DATA	Attribute data invalid
2	MONINGRP_REC_NOT_FOUND	Requested resource not found
3	MONINGRP_INV_REFERENCE	Attribute references an invalid resource
4	MONINGRP_REC_EXISTS	Resource already exists
5	MONINGRP_REC_CHANGED	Resource definition already changed

Table 724. MONINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
ACTIVETIME	CHAR	CPSM	8	No	DIFF	Period definition	7
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
DEFNAME-2	CHAR	CPSM	8	Yes	DIFF	Monitor definition	6
GROUP-1	CHAR	CPSM	8	Yes	DIFF	Monitor group	5

Chapter 308. MONINSPC Resource Table

A CPSM Monitor Definition that describes the membership of a monitor group (MONGROUP) in a monitor specification (MONSPEC). A MONGROUP can be a member of multiple MONSPECS.

The **Primary** key field for this resource class is SPEC.

The **Secondary** key field for this resource class is GROUP.

There are no object specific actions for this resource class.

External resource name

CICSMonitorGroupInSpecification

Length

56

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt5121

Table 725. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 726. MONINSPC FEEDBACK error codes

Value	Code	Description
2	MONINSPC_REC_NOT_FOUND	Requested resource not found
3	MONINSPC_INV_REFERENCE	Attribute references an invalid resource
4	MONINSPC_REC_EXISTS	Resource already exists

Table 727. MONINSPC resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	7
CHANGEAGENT Input/output valid values	DREPAPI						

Table 727. MONINSPC resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	10
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	9
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	8
GROUP-2	CHAR	CPSM	8	Yes	DIFF	Monitor group	6
SPEC-1	CHAR	CPSM	8	Yes	DIFF	Monitor specification	5

Chapter 309. MONITOR Resource Table

This CICS resource provides CICS monitoring and statistics information in an active system being managed by CICSplex SM.

The MONITOR resource class does not provide an explicit key attribute. The set of object instances returned is a function of the scope in effect when the request is made.

This resource class has no object specific actions.

External resource name

CICSMonitoringAndStatistics

Length

368

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0125

Table 728. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM	STATISTICS	ALL	No
SET		ATOMSERVICE	No
		AUTOINSTALL	No
		BEAN	No
		BUNDLE	No
		CAPTURESPEC	No
		CONNECTION	No
		CORBASERVER	No
		DB2	No
		DISPATCHER	No
		DOCTEMP	No

Table 728. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		ENQUEUE	No
		EVENTBINDING	No
		EVENTPROCESS	No
		FEPI	No
		FILE	No
		IPCONN	No
		JOURNAL	No
		JVMPPOOL	No
		JVMPROFILE	No
		JVMPROGRAM	No
		JVMSERVER	No
		LIBRARY	No
		LSRPOOL	No
		MONITOR	No
		MQCONN	No
		PIPELINE	No
		PROGAUTOINS	No
		PROGRAM	No
		PROGRAMDEF	No
		RECOVERY	No
		REQUESTMODEL	No
		RESETNOW	No
		STATISTICS	No
		STORAGE	No
		STREAMNAME	No
		SYSDUMP	No
		TABLEMGR	No
		TCPIP	No
		TCPIPSERVICE	No
		TEMPSTOR	No
		TERMINAL	No
		TRANCLASS	No
		TRANDATA	No
		TRANDUMP	No
		TRANSACTION	No
		URIMAP	No

Table 728. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
		VTAM	No
		WEBSERVICE	No
		XMLTRANSFORM	No

Table 729. MONITOR FEEDBACK error codes		
Value	Code	Description
21	XMONITOR_RESOURCE_REQUIRED	Resource required

Table 730. MONITOR resource table attributes									
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Set Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			59
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
APPLNAMEST	CVDAS	INQ	4	LIKE	No	Application naming option			
APPLNAMEST Output valid values	NOAPPLNAME, APPLNAME								
COMPRESSST	CVDAS	INQ	4	LIKE	Yes	Compression status option			61
COMPRESSST Input/output valid values	COMPRESS, NOCOMPRESS								
CONVERSEST	CVDAS	INQ	4	LIKE	Yes	Performance record for conversational task option			1
CONVERSEST Input/output valid values	CONVERSE, NOCONVERSE								
DPLLIMIT	BINARY	INQ	2	SUM	Yes	Distributed program link limit		E640 E650	62
ENDOFDAY	DECIMAL	INQ	4	MAX	Yes	Statistics end-of-day time			38
EXCEPTCLASS	CVDAS	INQ	4	LIKE	Yes	Exception class status			2
EXCEPTCLASS Input/output valid values	EXCEPT, NOEXCEPT								
FILELIMIT	BINARY	INQ	2	SUM	Yes	File resource limit		E640 E650	57
FREQUENCY	DECIMAL	INQ	4	MAX	Yes	Long-running task performance record frequency			3
IDNTYCLASS	CVDAS	INQ	4	LIKE	Yes	Identity class status		E640 E650	64
IDNTYCLASS Input/output valid values	IDNTY, NOIDNTY								
INTERVAL	DECIMAL	INQ	4	MAX	Yes	Statistics collection interval			37
MNGAUTRT	INTTSTP	STAT	8	LIKE	No	Average user transaction resp time	E640 E650 E660 E670 E680		75
MNGCAUTA	BINARY	STAT	4	LIKE	No	Current tasks at last attach	E640 E650 E660 E670 E680		74

Table 730. MONITOR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Set Invalid	Attr ID
MNGCPUT	INTTSTP	STAT	8	LIKE	No	Total transaction CPU time	E640 E650 E660 E670 E680 E690		78
MNGER	BINARY	STAT	4	AVG	No	Number of CMF exception records			14
MNGERS	BINARY	STAT	4	AVG	No	Number of CMF exception records suppressed by exit			15
MNGIR	BINARY	STAT	4	AVG	No	Number of CMF identity records	E640 E650		65
MNGIRS	BINARY	STAT	4	AVG	No	Number of CMF identity records suppressed by exit	E640 E650		66
MNGLUTAT	DATETIME	STAT	8	LIKE	No	Time last user transaction attached	E640 E650 E660 E670 E680		71
MNGLUTCL	DATETIME	STAT	8	LIKE	No	Time last user transaction ended	E640 E650 E660 E670 E680		72
MNGLUTRT	DATETIME	STAT	8	LIKE	No	Time the peak user transaction resp time was recorded	E640 E650 E660 E670 E680		77
MNGMXUTA	BINARY	STAT	4	LIKE	No	MXT at last user transaction attach	E640 E650 E660 E670 E680		73
MNGOFLCP	INTTSTP	STAT	8	LIKE	No	Total transaction CPU time offload on CP	E640 E650 E660 E670 E680 E690		80
MNGPR	BINARY	STAT	4	AVG	No	Number of CMF performance records			16
MNGPRS	BINARY	STAT	4	AVG	No	Number of performance records suppressed by exit			17
MNGPUTRT	INTTSTP	STAT	8	LIKE	No	Peak user transaction resp time	E640 E650 E660 E670 E680		76
MNGRR	BINARY	STAT	4	AVG	No	Number of CMF resource records			20
MNGRRS	BINARY	STAT	4	AVG	No	Number of CMF resource records suppressed by exit			21
MNGSMFR	BINARY	STAT	4	AVG	No	Number of SMF records for CMF			18
MNGSMFRS	BINARY	STAT	4	AVG	No	Number of SMF errors for CMF			19
MNGSTNUM	BINARY	STAT	4	LIKE	No	System transactions ended	E640 E650 E660 E670 E680		69

Table 730. MONITOR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Set Invalid	Attr ID
MNGTONCP	INTTSTP	STAT	8	LIKE	No	Total transaction CPU time on CP	E640 E650 E660 E670 E680 E690		79
MNGUTNUM	BINARY	STAT	4	LIKE	No	User transactions ended	E640 E650 E660 E670 E680		68
NUMCMF2SMF	RATE3	CPSM	8	AVG	No	Rate of SMF writes for CMF			41
NUMSTAT2SMF	RATE3	CPSM	8	AVG	No	Rate of SMF writes for statistics			42
PERFCLASS	CVDAS	INQ	4	LIKE	Yes	Performance class status			4
PERFCLASS Input/output valid values	PERF, NOPERF								
PEXCSUPR	PERCENT3	CPSM	4	AVG	No	Percent exception records suppressed to SMF writes			47
PIDNSUPR	PERCENT3	CPSM	4	AVG	No	Percent identity records suppressed to writes	E640 E650		67
PPERSUPR	PERCENT3	CPSM	4	AVG	No	Percent performance records suppressed to writes			48
PRESSUPR	PERCENT3	CPSM	4	AVG	No	Percent resource records suppressed to SMF writes			49
PSMFWERRC	PERCENT3	CPSM	4	AVG	No	Percentage of SMF errors to writes for CMF			43
PSMFWERRS	PERCENT3	CPSM	4	AVG	No	Percent of SMF errors to writes for statistics			44
PSTASUPR	PERCENT3	CPSM	4	AVG	No	Percent of statistics records suppressed to writes			50
RECORDING	CVDAS	INQ	4	LIKE	Yes	STATRCD recording			39
RECORDING Input/output valid values	ON, OFF								
RESRCECLASS	CVDAS	INQ	4	LIKE	Yes	Resource class status			5
RESRCECLASS Input/output valid values	NORES RCE, RESRCE								
RMIST	CVDAS	INQ	4	LIKE	No	RMI option			60
RMIST Output valid values	NORMI, RMI								
RSMFWERRC	RATE3	CPSM	8	AVG	No	Rate of SMF write errors for CMF			45
RSMFWERRS	RATE3	CPSM	8	AVG	No	Rate of SMF write errors for statistics			46
RSMFWRITE	RATE3	CPSM	8	AVG	No	Rate of CMF and statistics records written to SMF			54
RSTAWRITE	RATE3	CPSM	8	AVG	No	Statistics write request rate before suppression			52
STATUS	CVDAS	INQ	4	LIKE	Yes	Monitoring status			6
STATUS Input/output valid values	ON, OFF								
STGCSTRT	TIMESTP	STAT	8	MAX	No	Statistics CICS start time			35
STGEODR	BINARY	STAT	4	AVG	No	Number of EOD statistics records			31
STGINTR	BINARY	STAT	4	AVG	No	Number of INT statistics records			30

Table 730. MONITOR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Set Invalid	Attr ID
STGLDW	BINARY	STAT	4	AVG	No	Length of statistics data written			27
STGLRT	TIMESTP	STAT	8	MAX	No	Statistics last reset time			36
STGNC	BINARY	STAT	4	AVG	No	Number of interval collections			25
STGREQR	BINARY	STAT	4	AVG	No	Number of REQ statistics records			33
STGRRTTR	BINARY	STAT	4	AVG	No	Number of RRT statistics records			34
STGSMFE	BINARY	STAT	4	AVG	No	Number of SMF errors for statistics			29
STGSMFS	BINARY	STAT	4	AVG	No	Number of SMF writes suppressed for statistics			28
STGSMFW	BINARY	STAT	4	AVG	No	Number of SMF writes for statistics			26
STGUSSR	BINARY	STAT	4	AVG	No	Number of USS statistics records			32
SUBSYSTEMID	CHAR	INQ	4	DIFF	No	SYSEVENT class subsystem ID	E650+		7
SYNCPOINTST	CVDAS	INQ	4	LIKE	Yes	Performance record at syncpoint option			8
SYNCPOINTST Input/output valid values	SYNCPOINT, NOSYNCPOINT								
TIME	CVDAS	INQ	4	LIKE	No	Monitor reports clock value			9
TIME Output valid values	GMT, LOCAL								
TOTCICSSTAT	BINARY	CPSM	8	AVG	No	Total statistics records write attempts to SMF			51
TSMFWITES	BINARY	CPSM	8	AVG	No	Total number of SMF write requests			53
TSQUEUELIMIT	BINARY	INQ	2	SUM	Yes	Temporary storage queue limit		E640 E650	58

Chapter 310. MONSPEC Resource Table

A CPSM Monitor Definition that describes the control directives for monitoring a set of CICS systems. Using group associators, a MONSPEC object can determine which MONDEF instances are to be installed in each CICS system. Using scope link associators (LNKSMSCS), a MONSPEC object can determine which CICS systems fall under its processing scope. A CICS System can have a scope link associator to only one MONSPEC.

The **Primary** key field for this resource class is NAME.

External resource name

CICSMonitorSpecification

Length

168

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSPlex SM Definition

Copybook identifier

EYUt3511

Table 731. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
UPDATE		None	N/A
REMOVE		None	N/A
PERFORM SET	ADDSYSGRP	FORCE	Yes
		GROUP(value)	Yes
		NONE	Yes
		NULL	Yes
	ADDSYSDEF	SYSTEM(value)	Yes

Table 732. MONSPEC FEEDBACK error codes		
Value	Code	Description
1	MONSPEC_INV_DATA	Attribute data invalid

Table 732. MONSPEC FEEDBACK error codes (continued)

Value	Code	Description
2	MONSPEC_REC_NOT_FOUND	Requested resource not found
4	MONSPEC_REC_EXISTS	Resource already exists
5	MONSPEC_REC_CHANGED	Resource definition already changed
6	MONSPEC_RODMCMAS_NOT_FOUND	RODM CMAS Not Found
7	MONSPEC_INV_REFERENCE	Does not exist
8	MONSPEC_LNKASSOC_EXISTS	Association already exists

Table 733. MONSPEC resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
ACTSTATUS	EYUDA	CPSM	4	Yes	LIKE	Monitor activation status	INACTIVE		27
ACTSTATUS Input/output valid values	ACTIVE, INACTIVE								
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			31
CHANGEAGENT Input/output valid values	DREPAPI								
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			34
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification			1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			33
CICSSAMP	BINARY	CPSM	4	Yes	AVG	Sample interval for CICS region monitoring	0	0-86400	8
CONNSAMP	BINARY	CPSM	4	Yes	AVG	Sample interval for connection monitoring	0	0-86400	14
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created			32
DBXSAMP	BINARY	CPSM	4	Yes	AVG	Sample interval for DB2 and DBCTRL monitoring	0	0-86400	12
DESC	CHAR	CPSM	58	No	DIFF	Description			28
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999	30
FILESAMP	BINARY	CPSM	4	Yes	AVG	Sample interval for file monitoring	0	0-86400	16
GLBLSAMP	BINARY	CPSM	4	Yes	AVG	Sample interval for global region monitoring	0	0-86400	10
JRNLSAMP	BINARY	CPSM	4	Yes	AVG	Sample interval for journal monitoring	0	0-86400	18
NAME-1	CHAR	CPSM	8	Yes	DIFF	Specification			5
PROGSAMP	BINARY	CPSM	4	Yes	AVG	Sample interval for program monitoring	0	0-86400	20
RETENTION	BINARY	CPSM	4	Yes	AVG	Data retention period	0	0-1440	6
RODMCMAS	CHAR	CPSM	8	No	DIFF	Resource status facility CMAS name			29
TDQSAMP	BINARY	CPSM	4	Yes	AVG	Sample interval for TDQ monitoring	0	0-86400	24
TERMSAMP	BINARY	CPSM	4	Yes	AVG	Sample interval for terminal monitoring	0	0-86400	22
TRANSAMP	BINARY	CPSM	4	Yes	AVG	Sample interval for transaction monitoring	0	0-86400	26

Chapter 311. MPROGRAM Resource Table

A CICS Monitored resource that describes a subset of the program attributes sampled by the CICSplex SM MAS Monitor agents.

The **Primary** key field for this resource class is PROGRAM.

The following actions are supported:

DISCARD

Remove the Monitored resource instance.

RESET

Reset all Monitoring instance attributes.

These actions require no unique parameter data.

External resource name

Length

120

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Monitored

Copybook identifier

EYUt1377

Table 734. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET	RESET	None	N/A

Table 735. MPROGRAM FEEDBACK error codes

Value	Code	Description
9	MPROGRAM_NO_MON_DATA	No data for monitored resource
10	MPROGRAM_MON_SYSDEF_REQ	Monitored resource required by Real Time Analysis (RTA)

Table 736. MPROGRAM resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
CURAVGFETCH	INT16US	INQ	4	MAX	Average fetch time for current sample	22
CURRUSEPCT	PERCENT	CPSM	4	AVG	% of times program reused - current sample	10
CURUSERATE	RATE	CPSM	4	AVG	Program access rate for current sample	6
EXECKEY	CVDAS	INQ	4	LIKE	Program execution key	13
EXECKEY Output valid values	CICSEXECKEY, USEREXECKEY, NOTAPPLIC					
FETCHCNT	BINARY	STAT	4	AVG	Number of times program loaded into storage	9
FETCHTIME	INT16US	STAT	4	AVG	Total time for all program fetches	20
HOLDSTATUS	CVDAS	INQ	4	LIKE	Hold status	15
HOLDSTATUS Output valid values	HOLD, NOHOLD, NOTAPPLIC					
INTAVGFETCH	INT16US	INQ	4	MAX	Average fetch time for monitor interval	23
INTERVALID	TIMESTP	CPSM	8	LIKE	Interval ID	1
INTRUSEPCT	PERCENT	CPSM	4	AVG	% of times program reused - monitor interval	11
INTUSERATE	RATE	CPSM	4	AVG	Program access rate for monitor interval	7
LENGTH	BINARY	INQ	4	AVG	Program length	17
LPASTAT	CVDAS	INQ	4	LIKE	Link pack area (LPA) status	18
LPASTAT Output valid values	LPA, NOTLPA, NOTAPPLIC					
NEWCOPYCNT	CNUMERIC	STAT	4	AVG	Number of NEWCOPY requests issued	3
PROGRAM-1	CHAR	INQ	8	DIFF	Program name	2
PROGTYPE	CVDAS	INQ	4	LIKE	Program type	19
PROGTYPE Output valid values	PROGRAM, MAP, PARTITIONSET					
REMOVECNT	CNUMERIC	STAT	4	AVG	Number of times removed by program compression	21
RESCOUNT	BINARY	INQ	4	AVG	Number of times program currently accessed	8
RPLID	CNUMERIC	STAT	4	AVG	DFHRPL data set number	16
SHARESTATUS	CVDAS	INQ	4	LIKE	Share status	14
SHARESTATUS Output valid values	PRIVATE, SHARED, NOTAPPLIC					
STATUS	CVDAS	INQ	4	LIKE	Enabled status	12
STATUS Output valid values	ENABLED, DISABLED					
USEAGELSTAT	CNUMERIC	STAT	4	AVG	Number of times program accessed since last reset	5
USECOUNT	BINARY	INQ	4	SUM	Total number of times program executed	4

Chapter 312. MQCINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a WebSphere® MQ connection definition (MQCONDEF) in a resource group (RESGROUP). An MQCONDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is MQCGROUP.

The **Secondary** key field for this resource class is MQCNAME.

The **Tertiary** key field for this resource class is MQCVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6185

Table 737. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 738. MQCINGRP FEEDBACK error codes		
Value	Code	Description
1	MQCINGRP_INV_DATA	Attribute data invalid
2	MQCINGRP_REC_NOT_FOUND	Requested resource not found
4	MQCINGRP_REC_EXISTS	Resource already exists
6	MQCINGRP_INV_RESTYPE	Invalid resource type
7	MQCINGRP_INV_VER	Invalid resource version
11	MQCINGRP_NON_MP	Maintenance point CMAS not available

Table 738. MQCINGRP FEEDBACK error codes (continued)

Value	Code	Description
12	MQCINGRP_INV_CONTEXT	Context not found
21	MQCINGRP_INCONSISTENT_SET	Inconsistent set
22	MQCINGRP_DIFF_VERSION	Different version
23	MQCINGRP_INV_NAME	Invalid name
24	MQCINGRP_INV_MINNAME	Invalid minor name

Table 739. MQCINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
MQCGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
MQCNAME-2	CHAR	CPSM	8	Yes	DIFF	MQ Connection definition name	6
MQCVER-3	BINARY	CPSM	1	Yes	AVG	MQ Connection definition version	7

Chapter 313. MQCON Resource Table

A CICS Resource that provides information about the WebSphere MQ connection definition (MQCONN resource definition) for the CICS system.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

CONNECT

Connect to WebSphere MQ.

DISCONNECT

Disconnect from WebSphere MQ.

The parameter data for the DISCONNECT action is:

```
PARM('BUSY(cvda)')
```

where *cvda* is required and is one of the following valid CVDA values for the WebSphere MQ connection busy condition:

WAIT
NOWAIT
FORCE

DISCARD

Discard the WebSphere MQ connection definition.

External resource name

CICSMQConnection

Length

352

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0184

Table 740. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A

Table 740. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
PERFORM SET	CONNECT	None	N/A
	DISCONNECT	BUSY(WAIT, NOWAIT, FORCE)	Yes
	DISCARD	None	N/A

Table 741. MQCON resource table attributes								
Name	Datatype	Source	Len	Sum	Set	Description	Default	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release		
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved		
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0	53
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent		45
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, CREATESPI, NOTAPPLIC							
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release		46
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time		47
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID		44
CONNECTST	CVDAS	INQ	4	LIKE	Yes	Connection status		10
CONNECTST Input/output valid values	CONNECTED, NOTCONNECTED							
CONNECTST Output valid values	CONNECTING, DISCONNING							
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition		48
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time		49
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent		52
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, GRPLIST							
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time		51
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID		50
MQGGMTCONN	DATETIME	INQ	8	MAX	No	GMT connection time		39
MQGGMTDISC	DATETIME	INQ	8	MAX	No	GMT disconnect time		41
MQGINDBTUOW	BINARY	STAT	4	AVG	No	Number of indoubt units of work		30
MQGINITQ	CHAR	STAT	48	DIFF	No	Initiation queue name		13
MQGLOCCONN	DATETIME	INQ	8	MAX	No	Local connection time		40
MQGLOCDISC	DATETIME	INQ	8	MAX	No	Local disconnect time		42
MQGRESBACUW	BINARY	STAT	4	AVG	No	Number of resolved backout units of work		33
MQGRESCOMUW	BINARY	STAT	4	AVG	No	Number of resolved committed units of work		32
MQGT2PCOMM	BINARY	STAT	4	AVG	No	Number of two phase commit operations		38
MQGTAPI	BINARY	STAT	4	AVG	No	Number of WebSphere MQ API calls since WebSphere MQ connected		15
MQGTAPIOK	BINARY	STAT	4	AVG	No	Number of WebSphere MQ API calls completed successfully		16
MQGTBACKUOW	BINARY	STAT	4	AVG	No	Number of backout units of work		34

Table 741. MQCON resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Attr ID
MQGTBUFMH	BINARY	STAT	4	AVG	No	Number of MQBUFMH requests		67
MQGTCALL	BINARY	STAT	4	AVG	No	Number of internal WebSphere MQ calls		17
MQGTCALLIO	BINARY	STAT	4	AVG	No	Number of WebSphere MQ calls that needed I/O		19
MQGTCALLSYNC	BINARY	STAT	4	AVG	No	Number of WebSphere MQ calls that completed synchronously		18
MQGTCTCB	BINARY	STAT	4	AVG	No	Number of MQCTCB requests		55
MQGTCTCLOSE	BINARY	STAT	4	AVG	No	Number of MQCTCLOSE requests		23
MQGTCTCOMMUOW	BINARY	STAT	4	AVG	No	Number of committed units of work		35
MQGTCTCONSUME	BINARY	STAT	4	AVG	No	Number of messages consumed		56
MQGTCTCTMH	BINARY	STAT	4	AVG	No	Number of MQCTCTMH requests		61
MQGTCTCTL	BINARY	STAT	4	AVG	No	Number of MQCTCTL requests		57
MQGTCTDLTMH	BINARY	STAT	4	AVG	No	Number of MQCTDLTMH requests		62
MQGTCTDLTMP	BINARY	STAT	4	AVG	No	Number of MQCTDLTMP requests		65
MQGTCTFUTATT	BINARY	STAT	4	AVG	No	Number of WebSphere MQ API calls when WebSphere MQ was not connected		14
MQGTCTGET	BINARY	STAT	4	AVG	No	Number of MQCTGET requests		24
MQGTCTGETWAIT	BINARY	STAT	4	AVG	No	Number of MQCTGET with wait requests		25
MQGTCTINQ	BINARY	STAT	4	AVG	No	Number of MQCTINQ requests		28
MQGTCTINQMP	BINARY	STAT	4	AVG	No	Number of MQCTINQMP requests		64
MQGTCTMHBUF	BINARY	STAT	4	AVG	No	Number of MQCTMHBUF requests		66
MQGTCTOPEN	BINARY	STAT	4	AVG	No	Number of MQCTOPEN requests		22
MQGTCTPUT	BINARY	STAT	4	AVG	No	Number of MQCTPUT requests		26
MQGTCTPUT1	BINARY	STAT	4	AVG	No	Number of MQCTPUT1 requests		27
MQGTCTSET	BINARY	STAT	4	AVG	No	Number of MQCTSET requests		29
MQGTCTSETMP	BINARY	STAT	4	AVG	No	Number of MQCTSETMP requests		63
MQGTCTSPCOMM	BINARY	STAT	4	AVG	No	Number of single phase commit operations		37
MQGTCTSTAT	BINARY	STAT	4	AVG	No	Number of MQCTSTAT requests		60
MQGTCTSUB	BINARY	STAT	4	AVG	No	Number of MQCTSUB requests		58
MQGTCTSUBRQ	BINARY	STAT	4	AVG	No	Number of MQCTSUBRQ requests		59
MQGTCTSUBTASK	BINARY	STAT	4	AVG	No	Number of WebSphere MQ calls that had a TCB switch		21
MQGTCTTASKEND	BINARY	STAT	4	AVG	No	Number of completed tasks		36
MQGTCTWAITMSG	BINARY	STAT	4	AVG	No	Number of MQCTGET with wait requests that waited		20
MQGTCTUNRESUOW	BINARY	STAT	4	AVG	No	Number of unresolved units of work		31
MQNAME	CHAR	INQ	4	DIFF	Yes	WebSphere MQ queue manager or QSG name		2
MQQMGR	CHAR	INQ	4	DIFF	No	Connected Queue Manager name		3
MQRELEASE	CHAR	INQ	4	DIFF	No	WebSphere MQ Release		8
NAME-1	CHAR	STAT	8	DIFF	No	WebSphere MQ connection name		1

Table 741. MQCON resource table attributes (continued)								
Name	Datatype	Source	Len	Sum	Set	Description	Default	Attr ID
RESYNCMEMBER	CVDAS	INQ	4	LIKE	Yes	Resynchronization member		9
RESYNCMEMBER Input/output valid values	RESYNC, NORESYNC, GROUPRESYNC							
RESYNCMEMBER Output valid values	NOTAPPLIC							
TASKS	BINARY	INQ	4	AVG	No	Number of current tasks		11
TRIGMONTASKS	BINARY	INQ	4	AVG	No	Number of current CICS MQMonitor tasks		12

Chapter 314. MQCONDEF Resource Table

A CICS Definition that describes the connection properties of a WebSphere MQ connection.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install a WebSphere MQ connection definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionMQConnection

Length

200

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3840

Table 742. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM	INSTALL SET	FORCEINS(YES, NO)	No
SET		MODE(value)	No

Table 742. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 743. MQCONDEF FEEDBACK error codes

Value	Code	Description
1	MQCONDEF_INV_DATA	Attribute data invalid
2	MQCONDEF_REC_NOT_FOUND	Requested resource not found
4	MQCONDEF_REC_EXISTS	Resource already exists
5	MQCONDEF_REC_CHANGED	Resource definition already changed
6	MQCONDEF_INV_RESTYPE	Invalid resource type
7	MQCONDEF_INV_VER	Invalid resource version
11	MQCONDEF_NON_MP	Maintenance point CMAS not available
12	MQCONDEF_INV_CONTEXT	Context not found
13	MQCONDEF_INCONSISTENT_SET	Inconsistent set condition
14	MQCONDEF_INV_RESGROUP	Resource group not found
21	MQCONDEF_INV_ACTION	Invalid action
22	MQCONDEF_INV_RECADDR	Invalid record address
23	MQCONDEF_INV_RECLEN	Invalid record length
24	MQCONDEF_DIFF_VERSION	Different version
25	MQCONDEF_EARLY_NAMELIST_END	Early name list end
26	MQCONDEF_INV_NAMELIST	Invalid name list
27	MQCONDEF_INV_NAME	Invalid name
28	MQCONDEF_INV_MINNAME	Invalid minor name
29	MQCONDEF_NOTIFY	Notify
30	MQCONDEF_PARTIAL_INSTALL	Partial install
31	MQCONDEF_NOTHING_INSTALLED	Nothing installed

Table 743. MQCONDEF FEEDBACK error codes (continued)

Value	Code	Description
32	MQCONDEF_NO_TARGETS	No targets
33	MQCONDEF_NO_RELATED	No related systems
34	MQCONDEF_INV_TSCOPE	Invalid target scope
35	MQCONDEF_INV_RSCOPE	Invalid related scope
36	MQCONDEF_INV_USAGE	Invalid usage
37	MQCONDEF_INV_MODE	Invalid mode
38	MQCONDEF_INV_STATECHK	Invalid state check
39	MQCONDEF_INV_FORCEINS	Invalid force install
40	MQCONDEF_INV_NOTIFY	Invalid notify
41	MQCONDEF_INV_OVERTYPE	Invalid over type
42	MQCONDEF_INV_OVRBLOCK	Invalid override block
43	MQCONDEF_INV_ORSTRING	Invalid override string
44	MQCONDEF_INV_STRNGTERM	Invalid string term
45	MQCONDEF_INV_EMBEDTERM	Invalid embedded terminator
46	MQCONDEF_INV_ATTRIBUTE	Invalid attribute
47	MQCONDEF_INV_LITERAL	Invalid literal
48	MQCONDEF_INV_ORSTGNA	Invalid override string
49	MQCONDEF_SCOPE_REQUIRED	Scope required
50	MQCONDEF_USAGE_CONFLICT	Usage conflict
51	MQCONDEF_NODEFS_SELECTED	No definitions selected
52	MQCONDEF_MORE_THAN_1_RELSYS	More than one related system
53	MQCONDEF_MISSING_RELSYSID	Missing related system identifier
54	MQCONDEF_SCOPE_CONFLICT	Scope conflict
55	MQCONDEF_INV_INITQNAME	Invalid INITQNAME value
56	MQCONDEF_INV_MQNAME	Invalid MQNAME value
57	MQCONDEF_INV_RESYNCMEMBER	Invalid RESYNCMEMBER value
58	MQCONDEF_INV_CSDGROUP	Invalid CSD group
59	MQCONDEF_REC_NOT_REMOVED	Record not removed
60	MQCONDEF_INV_RESOURCE	Invalid resource
61	MQCONDEF_INV_CICS_RESTYPE	Invalid CICS restype
62	MQCONDEF_PARTIAL_ACTION	Partial action
63	MQCONDEF_NOTHING_ACTIONED	Nothing actioned
64	MQCONDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
65	MQCONDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
66	MQCONDEF_CSD_ERROR	CSD access error

Table 744. MQCONDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
CHANGEAGENT	CV DAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	4
CHANGEAGENT Input/ output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	7
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	6
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				5
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	21
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		10
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		20
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				19
INITQNAME	CHAR	CPSM	48	No	DIFF	MQ initiation queue name				13
MQNAME	CHAR	CPSM	4	Yes	DIFF	MQ queue manager or QSG name				14
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				12
RESYNCMEMBER	EYUDA	CPSM	4	Yes	LIKE	Resynchronization Member	YES			15
RESYNCMEMBER Input/ output valid values	YES, NO, GROUPRESYNC									
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				16
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				17
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				18

Chapter 315. MQCONN Resource Table

A CICS resource that describes a subset of the WebSphere MQ connection attributes sampled by the CICSplex SM MAS Monitor agents.

The **Primary** key field for this resource class is MQGQMGRNAME.

There are no object specific actions for this resource class.

External resource name

CICSMQConnectionStatistics

Length

288

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0159

Table 745. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 746. MQCONN resource table attributes							
Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release		35
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved		
MQCONNECT	CHAR	STAT	8	DIFF	MQ connection name	E640 E650	
MQGCONNSTAT	EYUDA	STAT	4	LIKE	MQ connection status		7
MQGCONNSTAT Output valid values	CONNECTED, NOTCONNECTED						
MQGINDBTUOW	BINARY	STAT	4	AVG	Number of indoubt units of work		26
MQGINITQ	CHAR	STAT	48	DIFF	Initiation queue name		8
MQGMQRELEASE	CHAR	STAT	4	DIFF	MQ Release		6
MQGQMGRNAME-1	CHAR	STAT	48	DIFF	MQ queue manager name		1
MQGRESBACUW	BINARY	STAT	4	AVG	Number of resolved backout units of work		29

Table 746. MQCONN resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
MQGRESCOMUW	BINARY	STAT	4	AVG	Number of resolved committed units of work		28
MQGT2PCOMM	BINARY	STAT	4	AVG	Number of two phase commit operations		34
MQGTAPI	BINARY	STAT	4	AVG	Number of MQ API calls since MQ connected		11
MQGTAPIOK	BINARY	STAT	4	AVG	Number of MQ API calls completed successfully		12
MQGTBACKUOW	BINARY	STAT	4	AVG	Number of backout units of work		30
MQGTBUFMH	BINARY	STAT	4	AVG	Number of MQBUFMH requests		48
MQGTCALL	BINARY	STAT	4	AVG	Number of internal MQ calls		13
MQGTCALLIO	BINARY	STAT	4	AVG	Number of MQ calls that needed I/O		15
MQGTCALLSYNC	BINARY	STAT	4	AVG	Number of MQ calls that completed synchronously		14
MQGTCTCB	BINARY	STAT	4	AVG	Number of MQCTCB requests		36
MQGTCTCLOSE	BINARY	STAT	4	AVG	Number of MQCTCLOSE requests		19
MQGTCTCOMMUOW	BINARY	STAT	4	AVG	Number of committed units of work		31
MQGTCTCONSUME	BINARY	STAT	4	AVG	Number of messages consumed		37
MQGTCTCRTHM	BINARY	STAT	4	AVG	Number of MQCTCRTHM requests		42
MQGTCTCTL	BINARY	STAT	4	AVG	Number of MQCTCTL requests		38
MQGTCTDLTHM	BINARY	STAT	4	AVG	Number of MQCTDLTHM requests		43
MQGTCTDLTMP	BINARY	STAT	4	AVG	Number of MQCTDLTMP requests		46
MQGTCTFUTATT	BINARY	STAT	4	AVG	Number of MQ API calls when MQ was not connected		10
MQGTCTGET	BINARY	STAT	4	AVG	Number of MQCTGET requests		20
MQGTCTGETWAIT	BINARY	STAT	4	AVG	Number of MQCTGET with wait requests		21
MQGTCTINQ	BINARY	STAT	4	AVG	Number of MQCTINQ requests		24
MQGTCTINQMPP	BINARY	STAT	4	AVG	Number of MQCTINQMPP requests		45
MQGTCTMHBUF	BINARY	STAT	4	AVG	Number of MQCTMHBUF requests		47
MQGTCTOPEN	BINARY	STAT	4	AVG	Number of MQCTOPEN requests		18
MQGTCTPUT	BINARY	STAT	4	AVG	Number of MQCTPUT requests		22
MQGTCTPUT1	BINARY	STAT	4	AVG	Number of MQCTPUT1 requests		23
MQGTCTSET	BINARY	STAT	4	AVG	Number of MQCTSET requests		25
MQGTCTSETMP	BINARY	STAT	4	AVG	Number of MQCTSETMP requests		44
MQGTCTSPCOMM	BINARY	STAT	4	AVG	Number of single phase commit operations		33
MQGTCTSTAT	BINARY	STAT	4	AVG	Number of MQCTSTAT requests		41
MQGTCTSUB	BINARY	STAT	4	AVG	Number of MQCTSUB requests		39
MQGTCTSUBRQ	BINARY	STAT	4	AVG	Number of MQCTSUBRQ requests		40
MQGTCTSUBTASK	BINARY	STAT	4	AVG	Number of MQ calls that had a TCB switch		17
MQGTCTTASKEND	BINARY	STAT	4	AVG	Number of tasks		32
MQGTCTTASKS	BINARY	STAT	4	AVG	Number of current tasks		9
MQGTCTWAITMSG	BINARY	STAT	4	AVG	Number of MQCTGET with wait requests that waited		16
MQGTCTUNRESUOW	BINARY	STAT	4	AVG	Number of unresolved units of work		27

Chapter 316. MQINI Resource Table

A CICS Resource that names the default initiation queue for the CICS-WebSphere MQ connection. CICS installs this resource implicitly when you create a WebSphere MQ connection definition for the CICS system.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSMQInitiationQueue

Length

136

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0185

Table 747. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 748. MQINI resource table attributes								
Name	Datatype	Source	Len	Sum	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved			
BASDEFINEVER	BINARY	CPSM	1	AVG	BAS resource definition version	0		12
CHANGEAGENT	CVDAS	INQ	4	LIKE	Last modification agent		E640 E650	4
CHANGEAGENT Input/output valid values	AUTOINSTALL, DYNAMIC							
CHANGEAGREL	CHAR	INQ	4	DIFF	Last modification agent release		E640 E650	5
CHANGETIME	DATETIME	INQ	8	MAX	Last modification time			6
CHANGEUSRID	CHAR	INQ	8	DIFF	Last modification user ID		E640 E650	3

Table 748. MQINI resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Default	Get Invalid	Attr ID
DEFINESOURCE	CHAR	INQ	8	DIFF	Source of the resource definition		E640 E650	7
DEFINETIME	DATETIME	INQ	8	MAX	Creation time			8
INITQNAME	CHAR	INQ	48	DIFF	MQ initiation queue name			2
INSTALLAGENT	CVDAS	INQ	4	LIKE	Installation agent		E640 E650	11
INSTALLAGENT Input/output valid values	AUTOINSTALL, DYNAMIC							
INSTALLTIME	DATETIME	INQ	8	MAX	Installation time			10
INSTALLUSRID	CHAR	INQ	8	DIFF	Installation user ID		E640 E650	9
NAME-1	CHAR	INQ	8	DIFF	MQ initiation queue resource name			1

Chapter 317. MQMINGRP Resource Table

A CPSM Business Application Services definition that describes the membership of a WebSphere MQ monitor definition (MQMONDEF) in a resource group (RESGROUP). An MQMONDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is MQMGROUP.

The **Secondary** key field for this resource class is MQMNAME.

The **Tertiary** key field for this resource class is MQMVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6187

Table 749. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 750. MQMINGRP FEEDBACK error codes		
Value	Code	Description
1	MQMINGRP_INV_DATA	Attribute data invalid
2	MQMINGRP_REC_NOT_FOUND	Requested resource not found
4	MQMINGRP_REC_EXISTS	Resource already exists
6	MQMINGRP_INV_RESTYPE	Invalid resource type
7	MQMINGRP_INV_VER	Invalid resource version
11	MQMINGRP_NON_MP	Maintenance point CMAS not available

Table 750. MQMINGRP FEEDBACK error codes (continued)

Value	Code	Description
12	MQMINGRP_INV_CONTEXT	Context not found
21	MQMINGRP_INCONSISTENT_SET	Inconsistent set
22	MQMINGRP_DIFF_VERSION	Different version
23	MQMINGRP_INV_NAME	Invalid name
24	MQMINGRP_INV_MINNAME	Invalid minor name

Table 751. MQMINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
MQMGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
MQMNAME-2	CHAR	CPSM	8	Yes	DIFF	MQMonitor definition name	6
MQMVER-3	BINARY	CPSM	1	Yes	AVG	MQMonitor definition version	7

Chapter 318. MQMON Resource Table

A CICS resource that describes a WebSphere MQ monitor in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

ENABLE

Enable the MQMONITOR resource for use in the CICS region.

DISABLE

Disable the MQMONITOR resource.

DISCARD

Discard the WebSphere MQ monitor definition.

START

Start the WebSphere MQ monitor.

STOP

Stop the WebSphere MQ monitor.

External resource name

CICSMQMonitor

Length

520

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0219

Table 752. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM	ENABLE	None	N/A
SET	DISABLE	None	N/A
	DISCARD	None	N/A

Table 752. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
	START	None	N/A
	STOP	None	N/A

Table 753. MQMON resource table attributes									
Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
AUTOSTATUS	CVDAS	INQ	4	LIKE	Yes	Autostart status		E640 E650 E660 E670 E680 E690 E700	3
AUTOSTATUS Input/output valid values	AUTOSTART, NOAUTOSTART								
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0		39
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent		E640 E650 E660 E670 E680 E690 E700	31
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, CREATESPI, NOTAPPLIC, AUTOINSTALL, DYNAMIC								
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release		E640 E650 E660 E670 E680 E690 E700	32
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time			33
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID		E640 E650 E660 E670 E680 E690 E700	30
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition		E640 E650 E660 E670 E680 E690 E700	34
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time			35
ENABLESTATUS	CVDAS	INQ	4	LIKE	Yes	Enabled status		E640 E650 E660 E670 E680 E690 E700	4
ENABLESTATUS Input/output valid values	ENABLED, DISABLED								

Table 753. MQMON resource table attributes (continued)									
Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
ENABLESTATUS Output valid values	ENABLING, DISABLING, DISCARDING								
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent		E640 E650 E660 E670 E680 E690 E700	38
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, GRPLIST, DYNAMIC								
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time			37
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID		E640 E650 E660 E670 E680 E690 E700	36
MONDATA	CHAR	INQ	218	DIFF	No	Monitor data		E640 E650 E660 E670 E680 E690 E700	9
MONSTATUS	CVDAS	INQ	4	LIKE	Yes	Monitor status		E640 E650 E660 E670 E680 E690 E700	5
MONSTATUS Input/output valid values	STARTED, STOPPED								
MONSTATUS Output valid values	STARTING, STOPPING								
MONUSERID	CHAR	INQ	8	DIFF	No	Monitor userid		E640 E650 E660 E670 E680 E690 E700	7
MQRGMTSTART	DATETIME	INQ	8	MAX	No	GMT start time			26
MQRGMTSTOP	DATETIME	INQ	8	MAX	No	GMT stop time			28
MQRLCLSTART	DATETIME	INQ	8	MAX	No	Local start time			27
MQRLCLSTOP	DATETIME	INQ	8	MAX	No	Local stop time			29
MQRQNAME	CHAR	STAT	48	DIFF	No	MQ queue name			13
MQRTBACKUOW	BINARY	STAT	4	AVG	No	Number of backout units of work			24
MQRTCLOSE	BINARY	STAT	4	AVG	No	Number of MQCLOSE requests			15
MQRTCOMMUOW	BINARY	STAT	4	AVG	No	Number of committed units of work			23
MQRTGET	BINARY	STAT	4	AVG	No	Number of MQGET requests			16
MQRTGETWAIT	BINARY	STAT	4	AVG	No	Number of MQGET with wait requests			17
MQRTINQ	BINARY	STAT	4	AVG	No	Number of MQINQ requests			20
MQRTINQL	BINARY	STAT	4	AVG	No	Number of MQINQL requests			21

Table 753. MQMON resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
MQRTOPEN	BINARY	STAT	4	AVG	No	Number of MQOPEN requests			14
MQRTOTHER	BINARY	STAT	4	AVG	No	Number of other MQ calls			25
MQRTPUT	BINARY	STAT	4	AVG	No	Number of MQPUT requests			18
MQRTPUT1	BINARY	STAT	4	AVG	No	Number of MQPUT1 requests			19
MQRTSET	BINARY	STAT	4	AVG	No	Number of MQSET requests			22
NAME-1	CHAR	INQ	8	DIFF	No	MQ monitor resource name			1
QNAME	CHAR	INQ	48	DIFF	No	MQ queue name			2
TASKID	DECIMAL	INQ	4	DIFF	No	Task number		E640 E650 E660 E670 E680 E690 E700	11
TRANSACTION	CHAR	INQ	4	DIFF	No	Monitor transaction		E640 E650 E660 E670 E680 E690 E700	6
USERID	CHAR	INQ	8	DIFF	No	Target userid		E640 E650 E660 E670 E680 E690 E700	8

Chapter 319. MQMONDEF Resource Table

A CICS definition that describes the properties of a WebSphere MQ monitor.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install a WebSphere MQ monitor definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionMQMonitor

Length

424

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3842

Table 754. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM	INSTALL SET	FORCEINS(YES, NO)	No
SET		MODE(value)	No

Table 754. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 755. MQMONDEF FEEDBACK error codes

Value	Code	Description
1	MQMONDEF_INV_DATA	Attribute data invalid
2	MQMONDEF_REC_NOT_FOUND	Requested resource not found
4	MQMONDEF_REC_EXISTS	Resource already exists
5	MQMONDEF_REC_CHANGED	Resource definition already changed
6	MQMONDEF_INV_RESTYPE	Invalid resource type
7	MQMONDEF_INV_VER	Invalid resource version
11	MQMONDEF_NON_MP	Maintenance point CMAS not available
12	MQMONDEF_INV_CONTEXT	Context not found
13	MQMONDEF_INCONSISTENT_SET	Inconsistent set condition
14	MQMONDEF_INV_RESGROUP	Resource group not found
21	MQMONDEF_INV_ACTION	Invalid action
22	MQMONDEF_INV_RECADDR	Invalid record address
23	MQMONDEF_INV_RECLEN	Invalid record length
24	MQMONDEF_DIFF_VERSION	Different version
25	MQMONDEF_EARLY_NAMELIST_END	Early name list end
26	MQMONDEF_INV_NAMELIST	Invalid name list
27	MQMONDEF_INV_NAME	Invalid name
28	MQMONDEF_INV_MINNAME	Invalid minor name
29	MQMONDEF_NOTIFY	Notify
30	MQMONDEF_PARTIAL_INSTALL	Partial install
31	MQMONDEF_NOTHING_INSTALLED	Nothing installed

Table 755. MQMONDEF FEEDBACK error codes (continued)

Value	Code	Description
32	MQMONDEF_NO_TARGETS	No targets
33	MQMONDEF_NO_RELATED	No related systems
34	MQMONDEF_INV_TSCOPE	Invalid target scope
35	MQMONDEF_INV_RSCOPE	Invalid related scope
36	MQMONDEF_INV_USAGE	Invalid usage
37	MQMONDEF_INV_MODE	Invalid mode
38	MQMONDEF_INV_STATECHK	Invalid state check
39	MQMONDEF_INV_FORCEINS	Invalid force install
40	MQMONDEF_INV_NOTIFY	Invalid notify
41	MQMONDEF_INV_OVERTYPE	Invalid over type
42	MQMONDEF_INV_OVRBLOCK	Invalid override block
43	MQMONDEF_INV_ORSTRING	Invalid override string
44	MQMONDEF_INV_STRNGTERM	Invalid string term
45	MQMONDEF_INV_EMBEDTERM	Invalid embedded terminator
46	MQMONDEF_INV_ATTRIBUTE	Invalid attribute
47	MQMONDEF_INV_LITERAL	Invalid literal
48	MQMONDEF_INV_ORSTGNA	Invalid override string
49	MQMONDEF_SCOPE_REQUIRED	Scope required
50	MQMONDEF_USAGE_CONFLICT	Usage conflict
51	MQMONDEF_NODEFS_SELECTED	No definitions selected
52	MQMONDEF_MORE_THAN_1_RELSYS	More than one related system
53	MQMONDEF_MISSING_RELSYSID	Missing related system identifier
54	MQMONDEF_SCOPE_CONFLICT	Scope conflict
55	MQMONDEF_INV_CSDGROUP	Invalid CSD group
56	MQMONDEF_REC_NOT_REMOVED	Record not removed
57	MQMONDEF_INV_RESOURCE	Invalid resource
58	MQMONDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	MQMONDEF_PARTIAL_ACTION	Partial action
60	MQMONDEF_NOTHING_ACTIONED	Nothing actioned
61	MQMONDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	MQMONDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	MQMONDEF_CSD_ERROR	CSD access error

Table 756. MQMONDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Set	Description	Default	Value Range	Get Inval id	Attr ID
AUTOSTART	EYUDA	CPSM	4	No	DIFF	Yes	Autostart status	YES			14
AUTOSTART Input/output valid values	YES, NO										
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	No	Last modification agent			E640 E650 E660 E670 E680 E690 E700	4
CHANGEAGENT Input/output valid values	DREPAPI										
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	No	Last modification agent release			E640 E650 E660 E670 E680 E690 E700	7
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	No	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	No	Last modification user ID			E640 E650 E660 E670 E680 E690 E700	6
CREATETIME	DATETIME	CPSM	8	Yes	MAX	No	Time created				5
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	No	CSD group			E640 E650 E660 E670 E680 E690 E700	21
DEFVER-2	BINARY	CPSM	1	Yes	AVG	No	Version	0	0-15		10
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	No	Description code page	37	0-99999999		25
DESCRIPTION	CHAR	CPSM	58	No	DIFF	No	Description				24
MONDATA	CHAR	CPSM	200	No	DIFF	No	Monitor data				19
MONUSERID	CHAR	CPSM	8	Yes	DIFF	No	Monitor userid				17
NAME-1	CHAR	CPSM	8	Yes	DIFF	No	Name				12
QNAME	CHAR	CPSM	48	No	DIFF	No	MQ queue name				13
STATUS	CVDAS	CPSM	4	No	DIFF	Yes	Enabled status	ENABLED			15
STATUS Input/output valid values	ENABLED, DISABLED										
TRANSACTION	CHAR	CPSM	4	No	DIFF	No	Monitor transaction				16
USERDATA1	CHAR	CPSM	8	No	DIFF	No	User data area 1				20
USERDATA2	CHAR	CPSM	8	No	DIFF	No	User data area 2				22
USERDATA3	CHAR	CPSM	8	No	DIFF	No	User data area 3				23
USERID	CHAR	CPSM	8	No	DIFF	No	Target userid				18

Chapter 320. MREMFILe Resource Table

A CICS Monitored resource that describes a subset of the remote file attributes sampled by the CICSplex SM MAS Monitor agents.

The **Primary** key field for this resource class is FILE.

The following actions are supported:

DISCARD

Remove the Monitored resource instance.

RESET

Reset all Monitoring instance attributes.

These actions require no unique parameter data.

External resource name

Length

88

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Monitored

Copybook identifier

EYUt1373

Table 757. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET	RESET	None	N/A

Table 758. MREMFILe FEEDBACK error codes

Value	Code	Description
9	MREMFILe_NO_MON_DATA	No data for monitored resource
10	MREMFILe_MON_SYSDEF_REQ	Monitored resource required by Real Time Analysis (RTA)

Table 759. MREMFIL resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ADDCNT	BINARY	STAT	4	AVG	Number of WRITE requests	10
BROWSECNT	BINARY	STAT	4	AVG	Number of READNEXT and READPREV requests	9
CURREQRATE	RATE	CPSM	4	AVG	Request rate for current sample	13
ENABLESTATUS	CV DAS	INQ	4	LIKE	Enable status	5
ENABLESTATUS Output valid values	ENABLED, DISABLED, UNENABLED, DISABLING					
FILE-1	CHAR	INQ	8	DIFF	File ID	2
GETCNT	BINARY	STAT	4	AVG	Number of READ Requests	7
GETUPDCNT	BINARY	STAT	4	AVG	Number of READ UPDATE requests	8
INTERVALID	TIMESTP	CPSM	8	LIKE	Interval ID	1
INTREQRATE	RATE	CPSM	4	AVG	Request rate for monitor interval	14
REMDLCNT	BINARY	STAT	4	AVG	Number of DELETE requests	6
REMOTENAME	CHAR	INQ	8	DIFF	Remote file name	3
REMOTESYSTEM	CHAR	INQ	4	DIFF	Remote system name	4
TOTLREQCNT	BINARY	CPSM	4	AVG	Total number of all requests	12
UPDATECNT	BINARY	STAT	4	AVG	Number of REWRITE requests	11

Chapter 321. MREMTDQ Resource Table

A CICS Monitored resource that describes a subset of the remote transient data queue attributes sampled by the CICSplex SM MAS Monitor agents.

The **Primary** key field for this resource class is TDQUEUE.

The following actions are supported:

DISCARD

Remove the Monitored resource instance.

RESET

Reset all Monitoring instance attributes.

These actions require no unique parameter data.

External resource name

Length

48

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Monitored

Copybook identifier

EYUt1387

Table 760. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET	RESET	None	N/A

Table 761. MREMTDQ FEEDBACK error codes

Value	Code	Description
9	MREMTDQ_NO_MON_DATA	No data for monitored resource
10	MREMTDQ_MON_SYSDEF_REQ	Monitored resource required by Real Time Analysis (RTA)

Table 762. MREMTDQ resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	6
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
CUROUTQRATE	RATE	CPSM	4	AVG	Output rate for current sample	
INTERVALID	TIMESTP	CPSM	8	LIKE	Interval identifier	1
INTOUTQRATE	RATE	CPSM	4	AVG	Output rate for interval	7
OUTCNT	BINARY	STAT	4	SUM	Number of I/O requests	5
REMOTENAME	CHAR	INQ	4	DIFF	Remote name	3
REMOTESYSTEM	CHAR	INQ	4	DIFF	Remote system name	4
TDQUEUE-1	CHAR	INQ	4	DIFF	Queue identifier	2

Chapter 322. MREMTRAN Resource Table

A CICS Monitored resource that describes a subset of the remote transaction attributes sampled by the CICSplex SM MAS Monitor agents.

The **Primary** key field for this resource class is TRANID.

The following actions are supported:

DISCARD

Remove the Monitored resource instance.

RESET

Reset all Monitoring instance attributes.

These actions require no unique parameter data.

External resource name

Length

80

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Monitored

Copybook identifier

EYUt1381

Table 763. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET	RESET	None	N/A

Table 764. MREMTRAN FEEDBACK error codes

Value	Code	Description
9	MREMTRAN_NO_MON_DATA	No data for monitored resource
10	MREMTRAN_MON_SYSDEF_REQ	Monitored resource required by Real Time Analysis (RTA)

Table 765. MREMTRAN resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
CURAVGRES	AVERAGE	CPSM	4	MAX	Average response time for current sample	10
CURTRANRATE	RATE	CPSM	4	SUM	Transaction rate for current sample	7
INTAVGRES	AVERAGE	CPSM	4	MAX	Average response time for monitor interval	11
INTERVALID	TIMESTP	CPSM	8	LIKE	Interval ID	1
INTTRANRATE	RATE	CPSM	4	SUM	Transaction rate for monitor interval	8
IRIOTIME	INT16US	CMF	4	AVG	Interregion wait time	12
REMOTECNT	CNUMERIC	STAT	4	SUM	Number of times transaction run remotely	5
REMOTENAME	CHAR	INQ	4	DIFF	Remote transaction ID	3
REMOTESYSTEM	CHAR	INQ	4	DIFF	Remote system name	4
REMSTARTCNT	CNUMERIC	STAT	4	AVG	Number of times transaction started	14
RESPTIME	BINARY	CMF	4	AVG	Response time	9
TRANCLASS	CHAR	INQ	8	DIFF	Transaction class name	13
TRANID-1	CHAR	INQ	4	DIFF	Transaction	2
USECOUNT	BINARY	STAT	4	SUM	Number of times transaction has been used	6

Chapter 323. MTDQGBL Resource Table

A CICS Monitored resource that describes a subset of the transient data queue attributes sampled by the CICSplex SM MAS Monitor agents.

The MTDQGBL resource class does not provide an explicit key attribute. The set of object instances returned is a function of the current scope in effect when the request is made.

The following actions are supported:

DISCARD

Remove the Monitored resource instance.

RESET

Reset all Monitoring instance attributes.

These actions require no unique parameter data.

External resource name

Length

160

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Monitored

Copybook identifier

EYUt1383

Table 766. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM SET	DISCARD	None	N/A
	RESET	None	N/A

Table 767. MTDQGBL FEEDBACK error codes

Value	Code	Description
9	MTDQGBL_NO_MON_DATA	No data for monitored resource
10	MTDQGBL_MON_SYSDEF_REQ	Monitored resource required by Real Time Analysis (RTA)

Table 768. MTDQGBL resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ACCESSCNT	BINARY	STAT	4	AVG	Number of inpartition accesses	4
BUFFERS	BINARY	STAT	4	AVG	Number of inpartition buffers	2
BUFFWAITS	BINARY	STAT	4	AVG	Number of inpartition buffer waits	8
CINUM	BINARY	STAT	4	AVG	Number of control intervals	11
CISIZE	BINARY	STAT	4	AVG	Control interval size	10
CURACCCNT	RATE	CPSM	4	AVG	Inpartition access rate for current sample	5
CURBUFFWAIT	CNUMERIC	STAT	4	AVG	Number of current buffer waits	30
CURBUFVALDA	CNUMERIC	STAT	4	AVG	Number of current buffers with valid data	31
CURCONBUFAC	CNUMERIC	STAT	4	AVG	Number of current concurrent buffer accesses	29
CURCONSTRAC	CNUMERIC	STAT	4	AVG	Number of current concurrent string accesses	32
CURFULLPER	PERCENT	CPSM	4	AVG	Percentage buffer-full time for current sample	14
CURREADRATE	RATE	CPSM	4	AVG	Read rate for current sample	20
CURSTRWAITS	CNUMERIC	STAT	4	AVG	Number of current string waits	33
CURWRITRATE	RATE	CPSM	4	AVG	Write rate for current sample	18
FMTWRITE	BINARY	STAT	4	AVG	Number of formatting writes	22
INTACCCNT	RATE	CPSM	4	AVG	Inpartition access rate for monitor interval	6
INTERVALID	TIMESTP	CPSM	8	LIKE	Interval ID	1
INTFULLPER	PERCENT	CPSM	4	AVG	Percentage buffer-full time for monitor interval	15
INTREADRATE	RATE	CPSM	4	AVG	Read rate for monitor interval	21
INTWRITRATE	RATE	CPSM	4	AVG	Write rate for monitor interval	19
IOERRS	BINARY	STAT	4	AVG	Number of I/O errors	23
NOSPACECNT	BINARY	STAT	4	AVG	Number of times NOSPACE occurred	13
NUMCTRLINTV	CNUMERIC	STAT	4	AVG	Number of control intervals in use	34
PEAKBWAIT	BINARY	STAT	4	AVG	Peak number of inpartition buffer waits	9
PEAKCACCESS	BINARY	STAT	4	AVG	Peak number of concurrent inpartition accesses	7
PEAKCIUSE	BINARY	STAT	4	AVG	Peak number of control intervals used	12
PEAKQACTV	BINARY	STAT	4	AVG	Peak number of queues that contain data	3
PEAKSTRACC	BINARY	STAT	4	AVG	Peak number of concurrent string accesses	26
PEAKSTRWAIT	BINARY	STAT	4	AVG	Peak number of string waits	28
READS	BINARY	STAT	4	AVG	Number of reads from data set	17
STRACCESS	BINARY	STAT	4	AVG	Number of times string accessed	25
STRINGS	BINARY	STAT	4	AVG	Number of strings	24
STRNGWAITS	BINARY	STAT	4	AVG	Number of string waits	27
WRITES	BINARY	STAT	4	AVG	Number of writes to data set	16

Chapter 324. MTERMNL Resource Table

A CICS Monitored resource that describes a subset of the terminal attributes sampled by the CICSplex SM MAS Monitor agents.

The **Primary** key field for this resource class is TERMID.

The following actions are supported:

DISCARD

Remove the Monitored resource instance.

RESET

Reset all Monitoring instance attributes.

These actions require no unique parameter data.

External resource name

Length

136

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Monitored

Copybook identifier

EYUt1378

Table 769. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM SET	DISCARD	None	N/A
	RESET	None	N/A

Table 770. MTERMNL FEEDBACK error codes

Value	Code	Description
9	MTERMNL_NO_MON_DATA	No data for monitored resource
10	MTERMNL_MON_SYSDEF_REQ	Monitored resource required by Real Time Analysis (RTA)

Table 771. MTERMNL resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ACQSTATUS	CVDAS	INQ	4	LIKE	Acquired status	26
ACQSTATUS Output valid values	ACQUIRED, RELEASED, ACQUIRING, NOTAPPLIC					
CURIMSGRATE	RATE	CPSM	4	AVG	Input message rate for current sample	11
CUROMSGRATE	RATE	CPSM	4	AVG	Output message rate for current sample	13
CURTRANRATE	RATE	CPSM	4	AVG	Transaction rate for current sample	16
DEVICE	CVDAT	INQ	4	LIKE	Device type	3
DEVICE Output valid values	BATCHLU, BIPROG, BISYNCH, CDRDLPR, CONTNLU, HARDCOPY, INTACTLU, ISCMCONV, LUCMODGRP, LUCSESS, LUTYPE4, LUTYPE6, MAGTAPE, RESSYS, SDLC, SEQDISK, SYSTEM3, SYSTEM7, SYS7BCSA, TCONSOLE, TELETYPE, TTCAM, TWX3335, T1050, T1053, T2260L, T2260R, T2265, T2740, T2741BCD, T2741COR, T2770, T2780, T3275R, T3277L, T3277R, T3284L, T3284R, T3286L, T3286R, T3600BI, T3601, T3614, T3650ATT, T3735, T3650PIPE, T3650USER, T3653HOST, T3740, T3780, T3790, T3790SCSP, T3790UP, T7770, VIDEOTERM					
INPMSCNT	BINARY	STAT	4	AVG	Number of input messages	9
INTERVALID	TIMESTP	CPSM	8	LIKE	Interval ID	1
INTIMSGRATE	RATE	CPSM	4	AVG	Input message rate for monitor interval	12
INTOMSGRATE	RATE	CPSM	4	AVG	Output message rate for monitor interval	14
INTTRANRATE	RATE	CPSM	4	AVG	Transaction rate for monitor interval	17
LUNAME	CHAR	STAT	8	DIFF	LU name	24
NETNAME	CHAR	INQ	8	DIFF	Network name	7
OUTMSGCNT	BINARY	STAT	4	AVG	Number of output messages	10
PMSGCNT	CNUMERIC	STAT	4	AVG	Total pipeline-throwaway count	21
PMSGCONSEC	CNUMERIC	STAT	4	AVG	Maximum pipeline-throwaway count	23
PMSGGRPCNT	CNUMERIC	STAT	4	AVG	Number of consecutive pipeline-throwaways	22
POLLCNT	DECIMAL	STAT	4	AVG	Number of polls sent to terminal	8
REMOTENAME	CHAR	INQ	4	DIFF	Name of terminal in remote CICS	5
REMOTESYSTEM	CHAR	INQ	4	DIFF	Remote system name	6
SERVSTATUS	CVDAS	INQ	4	LIKE	Service status	4
SERVSTATUS Output valid values	INSERVICE, OUTSERVICE, GOINGOUT					
STGVCNT	CNUMERIC	STAT	4	AVG	Number of storage violations	18
STORAGE	CNUMERIC	STAT	4	AVG	Terminal input-output area (TIOA) storage	25
TERMINID-1	CHAR	INQ	4	DIFF	Terminal ID	2
TERRCNT	BINARY	STAT	4	AVG	Number of transaction errors	20
TRANCNT	BINARY	STAT	4	AVG	Number of transactions	15
XERRCNT	BINARY	STAT	4	AVG	Number of transmission errors or disconnects	19

Chapter 325. MTRANCLS Resource Table

A CICS Monitored resource that describes a subset of the transaction class attributes sampled by the CICSplex SM MAS Monitor agents.

The MTRANCLS resource class can be used to request object instances that were identified as MTCLASS objects in versions of CICS before 4.1.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

DISCARD

Remove the Monitored resource instance.

RESET

Reset all Monitoring instance attributes.

These actions require no unique parameter data.

External resource name

Length

104

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Monitored

Copybook identifier

EYUt1400

Table 772. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET	RESET	None	N/A

Table 773. MTRANCLS FEEDBACK error codes		
Value	Code	Description
9	MTRANCLS_NO_MON_DATA	No data for monitored resource
10	MTRANCLS_MON_SYSDEF_REQ	Monitored resource required by Real Time Analysis (RTA)

Table 774. MTRANCLS resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ACCEPTAFTRQD	CNUMERIC	STAT	4	AVG	Number of transactions accepted after being queued	10
ACCEPTIMMED	CNUMERIC	STAT	4	AVG	Number of transactions accepted immediately	9
ACTIVE	BINARY	INQ	4	SUM	Number of transactions currently active in class	3
ACTIVEPEAK	BINARY	STAT	4	MAX	Peak number of active transactions	13
ATTACHES	CNUMERIC	STAT	4	AVG	Total number of attach requests	6
CURQUEUETIME	INTTSTP	STAT	8	AVG	Total time current transactions on queue	18
INSTALLDEFS	CNUMERIC	STAT	4	AVG	Number of transaction definitions installed	12
MAXACTIVE	BINARY	INQ	4	MAX	Maximum number of transactions allowed in class	2
NAME-1	CHAR	INQ	8	DIFF	Transaction class	1
PURGEIMMED	CNUMERIC	STAT	4	AVG	Number of transactions purged due to threshold	7
PURGETHRESH	CNUMERIC	INQ	4	AVG	Purge threshold	5
PURGEWHILEQD	CNUMERIC	STAT	4	AVG	Number of transactions purged while queued	11
PURGTHRTIMES	CNUMERIC	STAT	4	AVG	Number of times purge threshold met	16
QUEUED	CNUMERIC	INQ	4	AVG	Number of transactions currently queued	4
QUEUEDPEAK	CNUMERIC	STAT	4	AVG	Peak number of queued transactions	14
QUEUETIME	INTTSTP	STAT	8	AVG	Total time transactions queued	17
TIMESATMAX	BINARY	STAT	4	MAX	Times maximum active transactions reached	15
TOTQUEDCNT	CNUMERIC	STAT	4	AVG	Total number of transactions queued	8

Chapter 326. MTSQGBL Resource Table

A CICS Monitored resource that describes a subset of the temporary storage queue attributes sampled by the CICSplex SM MAS Monitor agents.

The MTSQGBL resource class does not provide an explicit key attribute. The set of object instances returned is a function of the current scope in effect when the request is made.

The following actions are supported:

DISCARD

Remove the Monitored resource instance.

RESET

Reset all Monitoring instance attributes.

These actions require no unique parameter data.

External resource name

Length

248

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Monitored

Copybook identifier

EYUt1388

Table 775. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET	RESET	None	N/A

Table 776. MTSQGBL FEEDBACK error codes

Value	Code	Description
9	MTSQGBL_NO_MON_DATA	No data for monitored resource
10	MTSQGBL_MON_SYSDEF_REQ	Monitored resource required by Real Time Analysis (RTA)

Table 777. MTSQGBL resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
AUXFULL	BINARY	STAT	4	AVG	Times auxiliary storage exhausted	23
BUFFERS	BINARY	STAT	4	AVG	Number of temporary storage buffers	26
BUFFWAITS	BINARY	STAT	4	AVG	Count of buffer waits	28
BUFREADS	BINARY	STAT	4	AVG	Buffer reads	32
BUFWRITES	BINARY	STAT	4	AVG	Buffer writes	30
BYTESPERCI	BINARY	STAT	4	AVG	Available bytes per control interval	50
BYTESPERSEG	BINARY	STAT	4	AVG	Bytes per segment	52
CINUM	BINARY	STAT	4	AVG	Number of control intervals in data set	21
CISINUSE	BINARY	STAT	4	AVG	Number of control intervals in use	47
CISIZE	BINARY	STAT	4	AVG	Control interval size	19
COMPRESSIONS	BINARY	STAT	4	AVG	Number of temporary storage compressions	46
CURAGETQRATE	RATE	CPSM	4	AVG	GetQ auxiliary rate current sample	13
CURAPUTQRATE	RATE	CPSM	4	AVG	PutQ auxiliary rate current sample	11
CURBHITRATE	RATE	CPSM	4	AVG	Buffer read hit rate for current sample	33
CURFULLPER	PERCENT	CPSM	4	AVG	Auxiliary storage % full for current sample	24
CURMGETQRATE	RATE	CPSM	4	AVG	GetQ main rate current sample	6
CURMPUTQRATE	RATE	CPSM	4	AVG	PutQ main rate current sample	4
CURREADRATE	RATE	CPSM	4	AVG	Read rate for current sample	37
CURRUWBFR	BINARY	STAT	4	AVG	Current users waiting on buffer	43
CURRUWSTR	BINARY	STAT	4	AVG	Current users waiting on string	42
CURWRITRATE	RATE	CPSM	4	AVG	Write rate for current sample	35
ENTLGQUE	BINARY	STAT	4	AVG	Entries in longest queue	16
EXTTHRESHOLD	BINARY	STAT	4	AVG	Queue extension threshold	53
FMTWRT	BINARY	STAT	4	AVG	Number of format writes	39
GETQAU	BINARY	STAT	4	AVG	Get/GetQ auxiliary	10
GETQMAIN	BINARY	STAT	4	AVG	Get/Getq main	3
INTAGETQRATE	RATE	CPSM	4	AVG	GetQ auxiliary rate for interval	14
INTAPUTQRATE	RATE	CPSM	4	AVG	PutQ auxiliary rate for interval	12
INTBHITRATE	RATE	CPSM	4	AVG	Buffer read hit rate for interval	34
INTERVALID	TIMESTP	CPSM	8	LIKE	Interval identifier	1
INTFULLPER	PERCENT	CPSM	4	AVG	Auxiliary storage % full for interval	25
INTMGETQRATE	RATE	CPSM	4	AVG	GetQ main rate for interval	7
INTMPUTQRATE	RATE	CPSM	4	AVG	PutQ main rate for interval	5
INTREADRATE	RATE	CPSM	4	AVG	Read rate for interval	38
INTWRITRATE	RATE	CPSM	4	AVG	Write rate for interval	36
IOERRS	BINARY	STAT	4	AVG	Number of I/O errors on DSN	44
LONGAUXREC	BINARY	STAT	4	AVG	Longest auxiliary record length	49
NAMESINUSE	BINARY	STAT	4	AVG	Number of temporary storage names in use	48

Table 777. MTSQGBL resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
PEAKCIUSE	BINARY	STAT	4	AVG	Peak CIs used	22
PEAKQUES	BINARY	STAT	4	AVG	Peak queue names in use	15
PEAKSTG	BINARY	STAT	4	AVG	Peak storage	8
PEAKUSDSTR	BINARY	STAT	4	AVG	Peak strings in use	40
PEAKUWBUF	BINARY	STAT	4	AVG	Peak users waiting on buffers	29
PEAKUWSTR	BINARY	STAT	4	AVG	Peak users waiting on strings	41
PUTQAUX	BINARY	STAT	4	AVG	Put/PutQ auxiliary	9
PUTQMAIN	BINARY	STAT	4	AVG	Put/PutQ main	2
QUECRECNT	BINARY	STAT	4	AVG	Times queues created	17
QUEXTENDS	BINARY	STAT	4	AVG	Queue extensions created	18
SEGSPERCI	BINARY	STAT	4	AVG	Segments per control interval	51
SHRDPOLCONN	CNUMERIC	STAT	4	AVG	Number of shared pools that CICS is connected to	55
SHRDPOLDEF	CNUMERIC	STAT	4	AVG	Shared pools defined	54
SHRDREADREQ	CNUMERIC	STAT	4	AVG	Shared read requests	56
SHRDWRITEREQ	CNUMERIC	STAT	4	AVG	Shared write requests	57
STRINGS	BINARY	STAT	4	AVG	Number of temporary storage strings	27
STRINGWAIT	BINARY	STAT	4	AVG	Number of string waits	45
WRTFRECVR	BINARY	STAT	4	AVG	Buffer writes forced for recovery	31
WRTGTCISZ	BINARY	STAT	4	AVG	Writes greater than CISIZE	20

Chapter 327. MVSESTG Resource Table

A CICS Resource that describes an MVS storage element for a TCB in the CICS address space.

The **Primary** key field for this resource class is TCBADDRESS.

The **Secondary** key field for this resource class is ELEMENTADDR.

There are no object specific actions for this resource class.

External resource name

CICSMVSStorageArea

Length

40

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0141

Table 778. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 779. MVSESTG resource table attributes

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release		
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved		
ELEMENTADDR-2	HEX	INQ	4	MAX	Storage element address		2
ELEMENTLEN	BINARY	INQ	4	SUM	Element length		3
INUSELENGTH	BINARY	INQ	4	AVG	Element length in use	E640	6
STORAGEKEY	BINARY	INQ	4	AVG	Storage key	E640	5
SUBPOOLNUM	BINARY	INQ	4	AVG	Subpool number		4
TCBADDRESS-1	HEX	INQ	4	MAX	Address of MVS TCB		1

Chapter 328. MVSTCBGL Resource Table

A CICS Resource that provides information about all the MVS TCBs in the CICS address space.

The MVSTCBGL resource does not provide an explicit key attribute. The set of object instances returned is a function of the scope in effect when the request is made.

There are no object specific actions for this resource class.

External resource name

CICSGlobalMVSTCBStatistics

Length

72

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0143

Table 780. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 781. MVSTCBGL resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
CICSTCBCOUNT	BINARY	STAT	4	SUM	Current CICS TCBs	1
CICSTCBSTGA	BINARY	STAT	4	SUM	Storage above 16M for CICS TCBs	7
CICSTCBSTGAI	BINARY	STAT	4	SUM	Storage in use above 16M	13
CICSTCBSTGB	BINARY	STAT	4	SUM	Storage below 16M for CICS TCBs	5
CICSTCBSTGBI	BINARY	STAT	4	SUM	Storage below 16M in use by CICS TCBs	12
CICSTCBTIME	INTTSTP	STAT	8	SUM	CPU time used by current attached CICS TCBs	3
NCICSTCBSGAI	BINARY	STAT	4	SUM	Storage above 16M in use by non-CICS TCBs	15
NCICSTCBSGBI	BINARY	STAT	4	SUM	Storage in use below 16M	14
NCICSTCBSTGA	BINARY	STAT	4	SUM	Storage above 16M for non-CICS TCBs	8

Table 781. MVSTCBGL resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
NCICSTCBSTGB	BINARY	STAT	4	SUM	Storage below 16M for non-CICS TCBs	6
NCICSTCBTIME	INTTSTP	STAT	8	SUM	CPU time used by current attached non-CICS TCBs	4
NONCICSTCBCT	BINARY	STAT	4	SUM	Current non-CICS TCBs	2

Chapter 329. MVSTCB Resource Table

A CICS Resource that describes an MVS TCB in the CICS address space.

The **Primary** key field for this resource class is TCBADDRESS.

There are no object specific actions for this resource class.

External resource name

CICSMVSTCB

Length

72

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0142

Table 782. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 783. MVSTCB resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
TCBADDRESS-1	HEX	STAT	4	MAX	TCB address	1
TCBCICSTASK	DECIMAL	STAT	4	MAX	CICS task number	9
TCBCPUTIME	INTTSTP	STAT	8	MAX	CPU time used by the TCB	4
TCBDAUGHTER	HEX	STAT	4	MAX	Daughter TCB	8
TCBMOTHER	HEX	STAT	4	MAX	Mother TCB	6
TCBNAME	CHAR	STAT	8	DIFF	TCB name	2
TCBSISTER	HEX	STAT	4	MAX	Sister TCB	7
TCBSTGABOVE	BINARY	STAT	4	SUM	Private storage allocated above 16M	5
TCBSTGAINUSE	BINARY	STAT	4	SUM	Private storage in use above 16M	15
TCBSTGBELOW	BINARY	STAT	4	SUM	Private storage allocated below 16M	3

Table 783. MVSTCB resource table attributes (continued)						
Name	Datatype	Source	Len	Sum	Description	Attr ID
TCBSTGBINUSE	BINARY	STAT	4	SUM	Private storage in use below 16M	14
TCBTYPE	CVDAS	STAT	4	LIKE	TCB type	13
TCBTYPE Output valid values	CICS, NONCICS					

Chapter 330. MVSWLM Resource Table

A CICS Resource that provides the z/OS Workload Manager (WLM) information in an active system being managed by CICSplex SM.

The MVSWLM resource class does not provide an explicit key attribute. The set of object instances returned is a function of the scope in effect when the request is made.

There are no object specific actions for this resource class.

External resource name

CICSMVSWLM

Length

128

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0126

Table 784. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM	OPEN	None	N/A
SET	CLOSE	None	N/A
	IMMCLOSE	None	N/A

Table 785. MVSWLM FEEDBACK error codes		
Value	Code	Description
21	MVSWLM_ACTNOT_SUPPORTED	Action not supported

Table 786. MVSWLM resource table attributes								
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release		

Table 786. MVSWLM resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved		19
MNGMCHTP	CHAR	STAT	4	DIFF	No	CEC machine type		
MNGMDLID	CHAR	STAT	16	DIFF	No	CEC model number		20
MNGWLMAD	BINARY	INQ	4	LIKE	Yes	Adjustment value for z/OS WLM health	E640 E650 E660 E670 E680 E690 E700	21
MNGWLMCC	EYUDA	STAT	4	LIKE	No	CPU critical		14
MNGWLMCC Output valid values	YES, NO, NOTAPPLIC							
MNGWLMGI	BINARY	STAT	2	SUM	No	Goal importance		16
MNGWLMGM	EYUDA	STAT	4	SUM	No	Goal management		17
MNGWLMGM Output valid values	TRANSACTION, REGION, BOTH, NOTAPPLIC							
MNGWLMGT	EYUDA	STAT	4	LIKE	No	Goal type		12
MNGWLMGT Output valid values	VELOCITY, DISCRETIONRY, SYSTEM, NOTAPPLIC							
MNGWLMGV	BINARY	STAT	4	SUM	No	Velocity goal value		13
MNGWLMHL	CNUMERIC	INQ	4	LIKE	No	z/OS WLM health	E640 E650 E660 E670 E680 E690 E700	22
MNGWLMHT	DATETIME	INQ	8	LIKE	No	Last time z/OS WLM health was updated	E640 E650 E660 E670 E680 E690 E700	23
MNGWLMIN	BINARY	INQ	4	LIKE	Yes	Time interval (seconds) between z/OS WLM health updates	E640 E650 E660 E670 E680 E690 E700	24
MNGWLMMD	EYUDA	STAT	4	LIKE	No	Goal mode		5
MNGWLMMD Output valid values	YES, NO							
MNGWLMOS	CVDAS	INQ	4	LIKE	Yes	z/OS WLM health open status	E640 E650 E660 E670 E680 E690 E700	25
MNGWLMOS Input/output valid values	OPEN, CLOSED, IMMCLOSE							
MNGWLMOS Output valid values	OPENING, CLOSING, IMMCLOSING							
MNGWLMRC	CHAR	STAT	8	DIFF	No	Report class		9
MNGWLMRG	CHAR	STAT	8	DIFF	No	Resource group		10
MNGWLMSC	CHAR	STAT	8	DIFF	No	Service class		8
MNGWLM SK	EYUDA	STAT	4	LIKE	No	Storage critical		15
MNGWLM SK Output valid values	YES, NO, NOTAPPLIC							

Table 786. MVSWLM resource table attributes (continued)								
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
MNGWLMST	EYUDA	STAT	4	LIKE	No	WLM server		6
MNGWLMST Output valid values	YES, NO							
MNGWLMWN	CHAR	STAT	8	DIFF	No	Workload name		11

Chapter 331. MXTRATDQ Resource Table

A CICS Monitored resource that describes a subset of the extrapartition transient data queue attributes sampled by the CICSplex SM MAS Monitor agents.

The **Primary** key field for this resource class is TDQUEUE.

The following actions are supported:

DISCARD

Remove the Monitored resource instance.

RESET

Reset all Monitoring instance attributes.

These actions require no unique parameter data.

External resource name

Length

48

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Monitored

Copybook identifier

EYUt1384

Table 787. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET	RESET	None	N/A

Table 788. MXTRATDQ FEEDBACK error codes

Value	Code	Description
9	MXTRATDQ_NO_MON_DATA	No data for monitored resource
10	MXTRATDQ_MON_SYSDEF_REQ	Monitored resource required by Real Time Analysis (RTA)

Table 789. MXTRATDQ resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	6
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
CUROUTQRATE	RATE	CPSM	4	AVG	Output rate for current sample	
ENABLESTATUS	CV DAS	INQ	4	LIKE	Enabled status	3
ENABLESTATUS Output valid values	ENABLED, DISABLED					
INTERVALID	TIMESTP	CPSM	8	LIKE	Interval identifier	1
INTOUTQRATE	RATE	CPSM	4	AVG	Output rate for interval	7
OPENSTATUS	CV DAS	INQ	4	LIKE	Open status	4
OPENSTATUS Output valid values	OPEN, CLOSED, OPENING, CLOSING, SWITCHING					
OUTCNT	BINARY	STAT	4	AVG	Number of READ and WRITE requests	5
TDQUEUE-1	CHAR	INQ	4	DIFF	Queue identifier	2

Chapter 332. OBJACT Resource Table

A CPSM MetaData resource that describes the existence of an object specific action for a CICSplex SM managed object

The **Primary** key field for this resource class is OBJECT.

The **Secondary** key field for this resource class is TABLEVER.

The **Tertiary** key field for this resource class is ACTION.

There are no object specific actions for this resource class.

External resource name

Length

96

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Metadata

Copybook identifier

EYUt2579

<i>Table 790. Valid CPSM operations</i>			
Operations	Actions	Parameters	Required
Not applicable			

<i>Table 791. OBJACT resource table attributes</i>						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ACTION-3	CHAR	CPSM	12	DIFF	Action name	6
APIPERFORM	CHAR	CPSM	1	LIKE	Valid for EXEC CPSM PERFORM	18
APIPERFORM Input/output valid values	Y (YES) - Valid for PERFORM, N (NO) - Not valid for PERFORM					
DESCRIPTION	CHAR	CPSM	50	DIFF	Description	15
ID	BINARY	CPSM	4	AVG	Action number	16
OBJECT-1	CHAR	CPSM	8	DIFF	Object name	4
PARMCOUNT	BINARY	CPSM	4	AVG	Parameter count	17
TABLEVER-2	BINARY	CPSM	2	AVG	Object table version	5
VALCICES2	BIT	CPSM	1	LIKE	Not valid in CICS/ESA byte 2	13
VALCICES2 Input/output valid values	128 (E630) - CICS for MVS/ESA 630, 64 (E640) - CICS for MVS/ESA 640, 32 (E650) - CICS for MVS/ESA 650, 16 (E660) - CICS for MVS/ESA 660, 8 (E670) - CICS for MVS/ESA 670, 4 (E680) - CICS for MVS/ESA 680, 2 (E690) - CICS for MVS/ESA 690, 1 (E700) - CICS for MVS/ESA 700					

Table 791. OBJACT resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
VALCICES3	BIT	CPSM	1	LIKE	Not valid in CICS/ESA byte 3	14
VALCICES3 Input/output valid values	128 (E710) - CICS for MVS/ESA 710					
VALCICESA	BIT	CPSM	1	LIKE	Not valid in CICS/ESA	7
VALCICESA Input/output valid values	128 (M212) - CICS/MVS 212, 64 (E330) - CICS/ESA 330, 32 (E410) - CICS/ESA 410, 16 (E510) - CICS for MVS/ESA 510, 8 (E520) - CICS for MVS/ESA 520, 4 (E530) - CICS for MVS/ESA 530, 2 (E610) - CICS for MVS/ESA 610, 1 (E620) - CICS for MVS/ESA 620					
VALCICSOS2	BIT	CPSM	1	LIKE	Not valid in CICS OS/2	9
VALCICSOS2 Input/output valid values	128 (O201) - CICS OS/2 201, 64 (O300) - CICS OS/2 300, 32 (O311) - CICS OS/2 310					
VALCICSVSE	BIT	CPSM	1	LIKE	Not valid in CICS/VSE	8
VALCICSVSE Input/output valid values	128 (V220) - CICS/VSE 220, 64 (V230) - CICS/VSE 230, 32 (V410) - CICS/VSE 410					
VALCICSWNT	BIT	CPSM	1	LIKE	Not valid in CICS for Windows	12
VALCICSWNT Input/output valid values	128 (N430) - CICS for Windows 430, 64 (N500) - CICS for Windows 500					

Chapter 333. OBJECT Resource Table

A CPSM MetaData resource that describes the characteristics of a CICSplex SM managed object.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

Length

160

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Metadata

Copybook identifier

EYUt2578

Table 792. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 793. OBJECT resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
APIPREFIX	CHAR	CPSM	1	LIKE	Requires API prefix	42
APIPREFIX Input/output valid values	Y (YES) - Required, N (NO) - Not required					
CMASCONTEXT	CHAR	CPSM	1	DIFF	Context is CMAS	41
CMASCONTEXT Input/output valid values	Y (YES) - CMAS required, N (NO) - CMAS not required					
CREATEREL	CHAR	CPSM	4	DIFF	CPSM release object created	10
CURACTVAL	CHAR	CPSM	1	DIFF	Actions defined	29
CURACTVAL Input/output valid values	Y (YES) - Actions defined, N (NO) - No actions					
CURCPSMREL	CHAR	CPSM	4	DIFF	CPSM release version created	20
CURCREVAL	CHAR	CPSM	1	DIFF	Create valid	26
CURCREVAL Input/output valid values	Y (YES) - Valid, N (NO) - Not valid					
CURDESC	CHAR	CPSM	50	DIFF	Table description	38
CURGETVAL	CHAR	CPSM	1	DIFF	Get valid	24
CURGETVAL Input/output valid values	Y (YES) - Valid, N (NO) - Not valid					
CURNUMATTR	BINARY	CPSM	2	AVG	Current number attributes	15

Table 793. OBJECT resource table attributes (continued)						
Name	Datatype	Source	Len	Sum	Description	Attr ID
CURREMVAL	CHAR	CPSM	1	DIFF	Remove valid	28
CURREMVAL Input/output valid values	Y (YES) - Valid, N (NO) - Not valid					
CURSETVAL	CHAR	CPSM	1	DIFF	Set valid	25
CURSETVAL Input/output valid values	Y (YES) - Valid, N (NO) - Not valid					
CURSTGSIZE	BINARY	CPSM	2	AVG	Current table storage size	17
CURTLBLVER	BINARY	CPSM	2	AVG	Current table version	14
CURUPDVAL	CHAR	CPSM	1	DIFF	Update valid	27
CURUPDVAL Input/output valid values	Y (YES) - Valid, N (NO) - Not valid					
CURVALES2	BIT	CPSM	1	LIKE	Not valid in CICS Transaction Server for z/OS byte 2	45
CURVALES2 Input/output valid values	128 (E630) - CICS Transaction Server for z/OS, Version 2 Release 3, 64 (E640) - CICS Transaction Server for z/OS, Version 3 Release 1, 32 (E650) - CICS Transaction Server for z/OS, Version 3 Release 2, 16 (E660) - CICS Transaction Server for z/OS, Version 4 Release 1, 8 (E670) - CICS Transaction Server for z/OS, Version 4 Release 2, 4 (E680) - CICS Transaction Server for z/OS, Version 5 Release 1, 2 (E690) - CICS Transaction Server for z/OS, Version 5 Release 2, 1 (E700) - CICS Transaction Server for z/OS, Version 5 Release 3					
CURVALES3	BIT	CPSM	1	LIKE	Not valid in CICS Transaction Server for z/OS byte 3	50
CURVALES3 Input/output valid values	128 (E710) - CICS Transaction Server for z/OS, Version 5 Release 4					
CURVALESA	BIT	CPSM	1	LIKE	Not valid in CICS/ESA	30
CURVALESA Input/output valid values	128 (M212) - CICS/MVS 212, 64 (E330) - CICS/ESA 330, 32 (E410) - CICS/ESA 410, 16 (E510) - CICS Transaction Server for OS/390, Release 1, 8 (E520) - CICS Transaction Server for OS/390, Release 2, 4 (E530) - CICS Transaction Server for OS/390, Release 3, 2 (E610) - CICS Transaction Server for z/OS, Version 2 Release 1, 1 (E620) - CICS Transaction Server for z/OS, Version 2 Release 2					
CURVALOS2	BIT	CPSM	1	LIKE	Not valid in CICS OS/2	32
CURVALOS2 Input/output valid values	128 (O201) - CICS OS/2 201, 64 (O300) - CICS OS/2 300, 32 (O311) - CICS OS/2 310					
CURVALRTA	CHAR	CPSM	1	DIFF	Valid for real time analysis	22
CURVALRTA Input/output valid values	Y (YES) - Valid, N (NO) - Not valid					
CURVALUTL	CHAR	CPSM	1	DIFF	Valid for batch	23
CURVALUTL Input/output valid values	Y (YES) - Valid, N (NO) - Not valid					
CURVALVSE	BIT	CPSM	1	LIKE	Not valid in CICS/VSE	31
CURVALVSE Input/output valid values	128 (V220) - CICS/VSE 220, 64 (V230) - CICS/VSE 230, 32 (V410) - CICS/VSE 410					
CURVALWNT	BIT	CPSM	1	LIKE	Not valid in CICS for Windows	35
CURVALWNT Input/output valid values	128 (N430) - CICS for Windows 430, 64 (N500) - CICS for Windows 500					
CURVALWUI	CHAR	CPSM	1	LIKE	Valid as WUI view object	49
CURVALWUI Input/output valid values	Y (YES) - Valid, N (NO) - Not valid					
HIGHTBLVER	BINARY	CPSM	2	AVG	Highest known table version	7
ID	RESTYPE	CPSM	2	LIKE	Object resource type	46
MODELNAME	CHAR	CPSM	50	DIFF	Model name	47
NAME-1	CHAR	CPSM	8	DIFF	Object name	4
NUMTBLVER	BINARY	CPSM	2	AVG	Number of table elements known	6
OBJTYPE	CHAR	CPSM	1	DIFF	Object class type	12
OBJTYPE Input/output valid values	C (CICSRES) - CICS Resource, M (MONCRES) - Monitored CICS Resource, D (CPSMDEF) - CPSM Definition, V (CPSMRES) - CPSM Resource, O (METADEF) - CPSM Metadata, N (CPSMNTF) - CPSM Notification, R (CICSDEF) - CICS Resource Definition, L (CPSMCFG) - CPSM Configuration Definition					
OWNERNAME	CHAR	CPSM	3	DIFF	Owning major object name	9
QUERYREL	CHAR	CPSM	4	DIFF	CPSM release of querying CMAS	11
RELTBLVER	BINARY	CPSM	2	AVG	Table version at this CPSM release	8
SCOPEREQ	CHAR	CPSM	1	LIKE	Scope required	44

Table 793. OBJECT resource table attributes (continued)						
Name	Datatype	Source	Len	Sum	Description	Attr ID
SCOPEREQ Input/output valid values	Y (YES) - Scope required, N (NO) - Scope not required					
SCOPESORT	CHAR	CPSM	1	LIKE	Sort by scope	43
SCOPESORT Input/output valid values	Y (YES) - Sort by scope, N (NO) - No scope sort					
VIEWMOD	CHAR	CPSM	1	DIFF	Eligible for SPECIFY VIEW command	40
VIEWMOD Input/output valid values	Y (YES) - Valid, N (NO) - Not valid					

Chapter 334. OBJSTAT Resource Table

A CPSM MetaData resource that describes control status information about a resource table instance contained in a result set.

The **Primary** key field for this resource class is RECORDNUM.

There are no object specific actions for this resource class.

OBJSTAT does not participate in summary operations.

External resource name

Length

256

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Metadata

Copybook identifier

EYUt2594

Table 794. Valid CPSM operations			
Operations	Actions	Parameters	Required
Not applicable			

Table 795. OBJSTAT resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
CICSNAME	CHAR	CPSM	8	LIKE	CICS system name	3
CICSREL	CHAR	CPSM	4	LIKE	CICS release number	4
CNTRECORDS	BINARY	CPSM	4	LIKE	Detail record count for summary	10
CONTEXT	CHAR	CPSM	8	LIKE	Context	2
KEYDATA	CHAR	CPSM	44	LIKE	Native key	12
KEYLEN	BINARY	CPSM	2	LIKE	Length of key data	11
LASTOPER	BINARY	CPSM	1	LIKE	Last operation type	8
LASTOPER Input/output valid values	1 (COPY) - Copy operation, 2 (DELETE) - Delete operation, 3 (GET) - Get operation, 4 (MARK) - Mark operation, 5 (REFRESH) - Refresh operation, 6 (PERFOBJ) - Perform Object operation, 7 (PERFSET) - Perform Set operation, 8 (SET) - Set operation, 9 (UNMARK) - Unmark operation					
OBJECT	CHAR	CPSM	8	LIKE	Object name	5
OBJTYPE	BINARY	CPSM	1	LIKE	Object type	6
OBJTYPE Input/output valid values	1 (RESOURCE) - CPSM Resource, 2 (VIEW) - Logical View					

Table 795. OBJSTAT resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
RECORDNUM-1	BINARY	CPSM	4	LIKE	Record number	1
RECTYPE	BINARY	CPSM	1	LIKE	Record type	7
RECTYPE Input/output valid values	1 (DETAIL) - Detail data, 2 (SUMMARY) - Summarized data					
RESERVE1	CHAR	CPSM	170	LIKE	Reserved	13
STATUS	BIT	CPSM	1	LIKE	Record status	9
STATUS Input/output valid values	128 (MARKED) - Record marked, 1 (OPERERR) - Operation error					

Chapter 335. OSGIBUND Resource Table

A CICS resource that provides information about OSGi bundles.

The **Primary** key field for this resource class is OSGIBUND.

The **Secondary** key field for this resource class is JVMSERVER.

The **Tertiary** key field for this resource class is OSGIVERSION.

The following actions are supported:

INQUIRE

Retrieve information about an OSGi bundle that is installed in a JVM server.

External resource name

CICSOSGiBundle

Length

872

Usage

API or WUI or CICS Management Client Interface

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0208

Table 796. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 797. OSGIBUND resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
BUNDLE	CHAR	INQ	8	DIFF	CICS BUNDLE name	17
BUNDLEPART	CHAR	INQ	255	DIFF	CICS BUNDLE bundlepart	15
CHANGEAGENT	CVDAS	INQ	4	LIKE	Last modification agent	3
CHANGEAGENT Input/output valid values		CSDAPI, CSDBATCH, DREPAPI, CREATESPI, NOTAPPLIC				
CHANGEAGREL	CHAR	INQ	4	DIFF	Last modification agent release	4
CHANGETIME	DATETIME	INQ	8	MAX	Last modification time	11

Table 797. OSGIBUND resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
CHANGEUSRID	CHAR	INQ	8	DIFF	Last modification user ID	5
DEFINESOURCE	CHAR	INQ	8	DIFF	Source of the resource definition	6
DEFINETIME	DATETIME	INQ	8	MAX	Creation time	10
INSTALLAGENT	CVDAS	INQ	4	LIKE	Installation agent	7
INSTALLAGENT Input/output valid values	BUNDLE					
INSTALLTIME	DATETIME	INQ	8	MAX	Installation time	12
INSTALLUSRID	CHAR	INQ	8	DIFF	Installation user ID	8
JVMSEVER-2	CHAR	CPSM	8	DIFF	JVM server	16
OSGIBUND-1	CHAR	INQ	255	DIFF	OSGi bundle name	1
OSGIBUNDLEID	BINARY	INQ	8	DIFF	OSGi bundle ID	14
OSGISTATUS	CVDAS	INQ	4	LIKE	Status	9
OSGISTATUS Output valid values	UNINSTALLED, INSTALLED, RESOLVED, STARTING, STOPPING, ACTIVE					
OSGIVERSION-3	CHAR	INQ	255	DIFF	Version of the OSGi bundle	18

Chapter 336. OSGISERV Resource Table

A CICS resource that provides information about OSGi services.

The **Primary** key field for this resource class is OSGISERVICE.

The **Secondary** key field for this resource class is JVMSERVER.

The following actions are supported:

INQUIRE

Retrieve information about an OSGi service that is registered in a JVM server.

External resource name

CICSOSGiService

Length

1064

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0209

Table 798. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 799. OSGISERV resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	4
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
BUNDLE	CHAR	INQ	8	SUM	CICS BUNDLE name	
BUNDLEPART	CHAR	INQ	255	DIFF	CICS BUNDLEPART name	5
JVMSERVER-2	CHAR	CPSM	8	AVG	JVM server	3
OSGIBUNDLE	CHAR	INQ	255	DIFF	Symbolic name of the OSGi bundle	7
OSGISERVICE-1	BINARY	INQ	8	DIFF	OSGi service ID	1
OSGIVERSION	CHAR	INQ	255	DIFF	Version of the OSGi bundle	6
SRVCNAME	CHAR	INQ	255	DIFF	Name of the OSGi service	8

Table 799. OSGISERV resource table attributes (continued)						
Name	Datatype	Source	Len	Sum	Description	Attr ID
SRVCSTATUS	CVDAS	INQ	4	LIKE	Service status	2
SRVCSTATUS Input/output valid values	ACTIVE, INACTIVE					

Chapter 337. PARINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a partner definition (PARTDEF) in a resource group (RESGROUP). A PARTDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is PARTGROUP.

The **Secondary** key field for this resource class is PARTNAME.

The **Tertiary** key field for this resource class is PARTVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6151

Table 800. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 801. PARINGRP FEEDBACK error codes		
Value	Code	Description
1	PARINGRP_INV_DATA	Attribute data invalid
2	PARINGRP_REC_NOT_FOUND	Requested resource not found
4	PARINGRP_REC_EXISTS	Resource already exists
6	PARINGRP_INV_RESTYPE	Invalid resource type
7	PARINGRP_INV_VER	Invalid resource version
11	PARINGRP_NON_MP	Maintenance point CMAS not available
12	PARINGRP_INV_CONTEXT	Context not found

Table 801. PARINGRP FEEDBACK error codes (continued)

Value	Code	Description
21	PARINGRP_INCONSISTENT_SET	Inconsistent set
22	PARINGRP_DIFF_VERSION	Different version
23	PARINGRP_INV_NAME	Invalid name
24	PARINGRP_INV_MINNAME	Invalid minor name

Table 802. PARINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
PARTGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
PARTNAME-2	CHAR	CPSM	8	Yes	DIFF	Partner definition name	6
PARTVER-3	BINARY	CPSM	1	Yes	AVG	Partner definition version	7

Chapter 338. PARMAVA Resource Table

A CPSM MetaData resource that describes the allowable values for a parameter.

The **Primary** key field for this resource class is PARMIDN.

The **Secondary** key field for this resource class is PARMAVAIDN.

There are no object specific actions for this resource class.

External resource name

Length

40

Usage

API

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Metadata

Copybook identifier

EYUt2635

Table 803. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 804. PARMAVA resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
LITERAL	CHAR	CPSM	12	DIFF	Parameter literal	6
PARMAVAIDN-2	BINARY	CPSM	4	AVG	AVA number for parameter	5
PARMIDN-1	BINARY	CPSM	4	AVG	Parameter number	4
VALUE	BINARY	CPSM	4	AVG	Parameter value in numeric form	7
VALUENAME	CHAR	CPSM	12	DIFF	Parameter value as character string	8

Chapter 339. PARTDEF Resource Table

A CICS Definition that describes a partner, which enables application programs to communicate via APPC protocols with a partner application on a remote logical unit.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install a Partner Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionPartner

Length

360

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3806

Table 805. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM SET	INSTALL	FORCEINS(YES, NO)	No

Table 805. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		MODE(value)	No
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 806. PARTDEF FEEDBACK error codes

Value	Code	Description
1	PARTDEF_INV_DATA	Attribute data invalid
2	PARTDEF_REC_NOT_FOUND	Requested resource not found
4	PARTDEF_REC_EXISTS	Resource already exists
5	PARTDEF_REC_CHANGED	Resource definition already changed
6	PARTDEF_INV_RESTYPE	Invalid resource type
7	PARTDEF_INV_VER	Invalid resource version
11	PARTDEF_NON_MP	Maintenance point CMAS not available
12	PARTDEF_INV_CONTEXT	Context not found
13	PARTDEF_INCONSISTENT_SET	Inconsistent set condition
14	PARTDEF_INV_RESGROUP	Resource group not found
21	PARTDEF_INV_ACTION	Invalid action
22	PARTDEF_INV_RECADDR	Invalid record address
23	PARTDEF_INV_RECLEN	Invalid record length
24	PARTDEF_DIFF_VERSION	Different version
25	PARTDEF_EARLY_NAMELIST_END	Early name list end
26	PARTDEF_INV_NAMELIST	Invalid name list
27	PARTDEF_INV_NAME	Invalid name
28	PARTDEF_INV_MINNAME	Invalid minor name
29	PARTDEF_NOTIFY	Notify
30	PARTDEF_PARTIAL_INSTALL	Partial install

Table 806. PARTDEF FEEDBACK error codes (continued)

Value	Code	Description
31	PARTDEF_NOTHING_INSTALLED	Nothing installed
32	PARTDEF_NO_TARGETS	No targets
33	PARTDEF_NO_RELATED	No related systems
34	PARTDEF_INV_TSCOPE	Invalid target scope
35	PARTDEF_INV_RSCOPE	Invalid related scope
36	PARTDEF_INV_USAGE	Invalid usage
37	PARTDEF_INV_MODE	Invalid mode
38	PARTDEF_INV_STATECHK	Invalid state check
39	PARTDEF_INV_FORCEINS	Invalid force install
40	PARTDEF_INV_NOTIFY	Invalid notify
41	PARTDEF_INV_OVERTYPE	Invalid oertype
42	PARTDEF_INV_OVRBLOCK	Invalid override block
43	PARTDEF_INV_ORSTRING	Invalid override string
44	PARTDEF_INV_STRNGTERM	Invalid string terminator
45	PARTDEF_INV_EMBEDTERM	Invalid embedded terminator
46	PARTDEF_INV_ATTRIBUTE	Invalid attribute
47	PARTDEF_INV_LITERAL	Invalid literal
48	PARTDEF_INV_ORSTGNA	Invalid override string
49	PARTDEF_SCOPE_REQUIRED	Scope required
50	PARTDEF_USAGE_CONFLICT	Usage conflict
51	PARTDEF_NODEFS_SELECTED	No definitions selected
52	PARTDEF_MORE_THAN_1_RELSYS	More than one related system
53	PARTDEF_MISSING_RELSYSID	Missing related system identifier
54	PARTDEF_SCOPE_CONFLICT	Scope conflict
55	PARTDEF_INV_CSDGROUP	Invalid CSD group
56	PARTDEF_REC_NOT_REMOVED	Record not removed
57	PARTDEF_INV_RESOURCE	Invalid resource
58	PARTDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	PARTDEF_PARTIAL_ACTION	Partial action
60	PARTDEF_NOTHING_ACTIONED	Nothing actioned
61	PARTDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	PARTDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	PARTDEF_CSD_ERROR	CSD access error

Table 807. PARTDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
CHANGEAGENT	CV DAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	19
CHANGEAGENT Input/ output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	21
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	20
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				13
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	23
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		18
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				17
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
NETNAME	CHAR	CPSM	8	Yes	DIFF	VTAM node name				8
NETWORK	CHAR	CPSM	8	No	DIFF	Network name				9
PROFILE	CHAR	CPSM	8	Yes	DIFF	Profile definition name	DFHCICSA			10
TPNAME	CHAR	CPSM	64	No	DIFF	Remote transaction program name (characters)				11
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				14
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				15
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				16
XTPNAME	CHAR	CPSM	128	No	DIFF	Remote transaction program name (hexadecimal)				12

Chapter 340. PARTNER Resource Table

A CICS Resource that describes a CPI-C partner table in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is PARTNER.

The following action is supported:

DISCARD

Discard the partner definition

The DISCARD action requires no unique parameter data.

External resource name

CICSPartner

Length

120

Usage

API or WUI or CICS Management Client Interface

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0052

Table 808. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET			

Table 809. PARTNER resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
NETNAME	CHAR	INQ	8	DIFF	Node where partner located	2
NETWORK	CHAR	INQ	8	DIFF	Network where partner located	3
PARTNER-1	CHAR	INQ	8	DIFF	Partner name	1
PROFILE	CHAR	INQ	8	DIFF	Profile name for partner	4
TPNAME	CHAR	INQ	64	DIFF	Remote transaction program name	5

Table 809. PARTNER resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
TPNAMELEN	BINARY	INQ	2	AVG	Length of remote transaction program name	6

Chapter 341. PERIODEF Resource Table

A CPSM Communications Definition that describes a named period of time. Time periods are used to control when certain management application definitions are installed. They are also used to identify the expected operational period for CICS systems.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSPeriodDefinition

Length

112

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt2811

Table 810. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
UPDATE		None	N/A
REMOVE		None	N/A

Table 811. PERIODEF FEEDBACK error codes		
Value	Code	Description
1	PERIODEF_INV_DATA	Attribute data invalid
2	PERIODEF_REC_NOT_FOUND	Requested resource not found
4	PERIODEF_REC_EXISTS	Resource already exists
5	PERIODEF_REC_CHANGED	Resource definition already changed

Table 812. PERIODEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			12
CHANGEAGENT Input/ output valid values	DREPAPI								
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			15
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification			1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			14
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created			13
DESC	CHAR	CPSM	58	No	DIFF	Description			10
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999	11
END	HHMM	CPSM	2	Yes	MAX	End time			7
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name			5
START	HHMM	CPSM	2	Yes	MAX	Start time			6
ZONE	CHAR	CPSM	1	Yes	DIFF	Time zone			9
ZONEADJ	BINARY	CPSM	1	Yes	AVG	Time zone adjustment factor	0		8

Chapter 342. PGMINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a program definition (PROGDEF) in a resource group (RESGROUP). A PROGDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is PROGGROUP.

The **Secondary** key field for this resource class is PROGNAME.

The **Tertiary** key field for this resource class is PROGVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6154

Table 813. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 814. PGMINGRP FEEDBACK error codes		
Value	Code	Description
1	PGMINGRP_INV_DATA	Attribute data invalid
2	PGMINGRP_REC_NOT_FOUND	Requested resource not found
4	PGMINGRP_REC_EXISTS	Resource already exists
6	PGMINGRP_INV_RESTYPE	Invalid resource type
7	PGMINGRP_INV_VER	Invalid resource version
11	PGMINGRP_NON_MP	Maintenance point CMAS not available
12	PGMINGRP_INV_CONTEXT	Context not found

Table 814. PGMINGRP FEEDBACK error codes (continued)

Value	Code	Description
21	PGMINGRP_INCONSISTENT_SET	Inconsistent set
22	PGMINGRP_DIFF_VERSION	Different version
23	PGMINGRP_INV_NAME	Invalid name
24	PGMINGRP_INV_MINNAME	Invalid minor name

Table 815. PGMINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
PROGGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
PROGNAME-2	CHAR	CPSM	8	Yes	DIFF	Program definition name	6
PROGVER-3	BINARY	CPSM	1	Yes	AVG	Program definition version	7

Chapter 343. PIPEDEF Resource Table

A CICS definition that describes the processing nodes that will act on a service request and on the response to it when a CICS application acts in the role of a Web-service provider or requester.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install a Connection Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

ADDTGRP

Add to resource group

PARM(' [ERRQUEUE] RESGROUP(value) .')

External resource name

CICSDefinitionPipeline

Length

920

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3834

Table 816. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No

Table 816. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
REMOVE		CSD	No
PERFORM SET	INSTALL	FORCEINS(YES, NO)	No
		MODE(value)	No
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 817. PIPEDEF FEEDBACK error codes

Value	Code	Description
1	PIPEDEF_INV_DATA	Attribute data invalid
2	PIPEDEF_REC_NOT_FOUND	Requested resource not found
4	PIPEDEF_REC_EXISTS	Resource already exists
5	PIPEDEF_REC_CHANGED	Resource definition already changed
6	PIPEDEF_INV_RESTYPE	Invalid resource type
7	PIPEDEF_INV_VER	Invalid resource version
11	PIPEDEF_NON_MP	Maintenance point CMAS not available
12	PIPEDEF_INV_CONTEXT	Context not found
13	PIPEDEF_INCONSISTENT_SET	Inconsistent set condition
14	PIPEDEF_INV_RESGROUP	Resource group not found
21	PIPEDEF_INV_ACTION	Invalid action
22	PIPEDEF_INV_RECADDR	Invalid record address
23	PIPEDEF_INV_RECLEN	Invalid record length
24	PIPEDEF_DIFF_VERSION	Different version
25	PIPEDEF_EARLY_NAMELIST_END	Early name list end
26	PIPEDEF_INV_NAMELIST	Invalid name list
27	PIPEDEF_INV_NAME	Invalid name

Table 817. PIPEDEF FEEDBACK error codes (continued)

Value	Code	Description
28	PIPEDEF_INV_MINNAME	Invalid minor name
29	PIPEDEF_NOTIFY	Notify
30	PIPEDEF_PARTIAL_INSTALL	Partial install
31	PIPEDEF_NOTHING_INSTALLED	Nothing installed
32	PIPEDEF_NO_TARGETS	No targets
33	PIPEDEF_NO_RELATED	No related systems
34	PIPEDEF_INV_TSCOPE	Invalid target scope
35	PIPEDEF_INV_RSCOPE	Invalid related scope
36	PIPEDEF_INV_USAGE	Invalid usage
37	PIPEDEF_INV_MODE	Invalid mode
38	PIPEDEF_INV_STATECHK	Invalid state check
39	PIPEDEF_INV_FORCEINS	Invalid force install
40	PIPEDEF_INV_NOTIFY	Invalid notify
41	PIPEDEF_INV_OVERTYPE	Invalid over type
42	PIPEDEF_INV_OVRBLOCK	Invalid override block
43	PIPEDEF_INV_ORSTRING	Invalid override string
44	PIPEDEF_INV_STRNGTERM	Invalid string term
45	PIPEDEF_INV_EMBEDTERM	Invalid embedded terminator
46	PIPEDEF_INV_ATTRIBUTE	Invalid attribute
47	PIPEDEF_INV_LITERAL	Invalid literal
48	PIPEDEF_INV_ORSTGNA	Invalid override string
49	PIPEDEF_SCOPE_REQUIRED	Scope required
50	PIPEDEF_USAGE_CONFLICT	Usage conflict
51	PIPEDEF_NODEFS_SELECTED	No definitions selected
52	PIPEDEF_MORE_THAN_1_RELSYS	More than one related system
53	PIPEDEF_MISSING_RELSYSID	Missing related system identifier
54	PIPEDEF_SCOPE_CONFLICT	Scope conflict
55	PIPEDEF_INV_CSDGROUP	Invalid CSD group
56	PIPEDEF_REC_NOT_REMOVED	Record not removed
57	PIPEDEF_INV_RESOURCE	Invalid resource
58	PIPEDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	PIPEDEF_PARTIAL_ACTION	Partial action
60	PIPEDEF_NOTHING_ACTIONED	Nothing actioned
61	PIPEDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	PIPEDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required

Table 817. PIPEDEF FEEDBACK error codes (continued)

Value	Code	Description
63	PIPEDEF_CSD_ERROR	CSD access error

Table 818. PIPEDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	21
CHANGEAGENT Input/output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	23
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	22
CONFIGFILE	CHAR	CPSM	255	Yes	DIFF	Configuration file name on zFS for this pipeline				14
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				9
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	25
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		18
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				13
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
RESPWAIT	CHAR	CPSM	4	No	DIFF	Response wait time for Requester Pipeline (SSSS)	DEFT	0-9999	E640	19
RESPWAIT Input/output valid values	DEFT									
SHELF	CHAR	CPSM	255	No	DIFF	Name of a directory (shelf) for WSBIND files	/var/cicsts			15
STATUS	CVDAS	CPSM	4	No	LIKE	ENABLED status	ENABLED			16
STATUS Input/output valid values	ENABLED, DISABLED									
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				10
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				11
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				12
WSDIR	CHAR	CPSM	255	No	DIFF	Name of the WSBIND (pickup) directory on zFS				17

Chapter 344. PIPELINE Resource Table

A CICS resource that describes the processing nodes that will act on a service request and on the response to it when a CICS application acts in the role of a Web-service provider or requester.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

ENABLE

Process inbound service requests normally.

DISABLE

Reject inbound service requests.

DISCARD

Remove this PIPELINE definition.

SCAN

Scan the PIPELINE's web service binding directory.

External resource name

CICSPipeline

Length

1176

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0164

Table 819. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM	ENABLE	None	N/A
SET	DISABLE	None	N/A
	DISCARD	None	N/A
	SCAN	None	N/A

Table 820. PIPELINE resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0	E640 E650	30
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent		E640 E650	22
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, CREATESPI, NOTAPPLIC								
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release		E640 E650	23
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time		E640 E650	25
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID		E640 E650	20
CIDDOMAIN	CHAR	INQ	255	DIFF	No	MIME content id domain name		E640	13
CONFIGFILE	CHAR	INQ	255	DIFF	No	Configuration file name on zFS for this pipeline			4
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition		E640 E650	26
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time		E640 E650	27
ENABLESTATUS	CVDAS	INQ	4	LIKE	Yes	Status			2
ENABLESTATUS Input/output valid values	ENABLED, DISABLED								
ENABLESTATUS Output valid values	ENABLING, DISABLING, DISCARDING								
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent		E640 E650	24
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, GRPLIST, BUNDLE								
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time		E640 E650	29
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID		E640 E650	28
MSGFORMAT	CHAR	INQ	8	DIFF	No	Format of messages processed by the pipeline		E640 E650 E660 E670 E680	33
MTOMNOXOPST	EYUDA	INQ	4	LIKE	No	Use MTOM even when no XOP attachments are present		E640	16
MTOMNOXOPST Output valid values	YES, NO								
MTOMST	EYUDA	INQ	4	LIKE	No	SOAP MTOM status		E640	14
MTOMST Output valid values	SUPPORTED, NOTSUPPORTED								
NAME-1	CHAR	INQ	8	DIFF	No	Name			1
PIPEMODE	CVDAS	INQ	4	LIKE	No	Pipeline operation mode		E640	8
PIPEMODE Output valid values	REQUESTER, PROVIDER, UNKNOWN								
PIPEUSECOUNT	BINARY	STAT	4	SUM	No	Number of times pipeline has been used			3

Table 820. PIPELINE resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
RESPWAIT	BINARY	INQ	4	LIKE	Yes	Response wait time for Requester Pipelines			9
SENDMTOMST	EYUDA	INQ	4	LIKE	No	Outbound SOAP message MTOM status		E640	15
SENDMTOMST Output valid values	YES, NO, SAME								
SHELF	CHAR	INQ	255	DIFF	No	Name of a directory (shelf) for WSBInd files			5
SOAPLEVEL	CHAR	INQ	8	DIFF	No	SOAP level supported by the pipeline		E640	12
SOAPRNUM	BINARY	INQ	4	LIKE	No	SOAP release number part of SOAPLEVEL		E640	11
SOAPVNUM	BINARY	INQ	4	LIKE	No	SOAP version number part of SOAPLEVEL		E640	10
WSDIR	CHAR	INQ	255	DIFF	No	Name of the WSBInd (pickup) directory on zFS			6
XOPDIRECTST	EYUDA	INQ	4	LIKE	No	Pipeline direct mode XOP status		E640	18
XOPDIRECTST Output valid values	SUPPORTED, NOTSUPPORTED								
XOPSUPPORTST	EYUDA	INQ	4	LIKE	No	Pipeline application handler XOP capability		E640	17
XOPSUPPORTST Output valid values	SUPPORTED, NOTSUPPORTED								

Chapter 345. PIPINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a pipeline definition (PIPEDEF) in a resource group (RESGROUP). A PIPEDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is PIPGROUP.

The **Secondary** key field for this resource class is PIPNAME.

The **Tertiary** key field for this resource class is PIPVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6179

Table 821. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 822. PIPINGRP FEEDBACK error codes		
Value	Code	Description
1	PIPINGRP_INV_DATA	Attribute data invalid
2	PIPINGRP_REC_NOT_FOUND	Requested resource not found
4	PIPINGRP_REC_EXISTS	Resource already exists
6	PIPINGRP_INV_RESTYPE	Invalid resource type
7	PIPINGRP_INV_VER	Invalid resource version
11	PIPINGRP_NON_MP	Maintenance point CMAS not available
12	PIPINGRP_INV_CONTEXT	Context not found

Table 822. PIPINGRP FEEDBACK error codes (continued)

Value	Code	Description
21	PIPINGRP_INCONSISTENT_SET	Inconsistent set
22	PIPINGRP_DIFF_VERSION	Different version
23	PIPINGRP_INV_NAME	Invalid name
24	PIPINGRP_INV_MINNAME	Invalid minor name

Table 823. PIPINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
PIPGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
PIPNAME-2	CHAR	CPSM	8	Yes	DIFF	Pipeline definition name	6
PIPER-3	BINARY	CPSM	1	Yes	AVG	Pipeline definition version	7

Chapter 346. PLATDEF Resource Table

This CICS resource object provides information about platform definitions.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

INSTALL

Deploy a PLATDEF resource into the CICSplex.

External resource name

CICSPlatformDefinition

Length

368

Usage

API or Batch Utility or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt3527

Table 824. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A
PERFORM SET	INSTALL	None	N/A

Table 825. PLATDEF FEEDBACK error codes

Value	Code	Description
1	PLATDEF_DATA_INVALID	Attribute data invalid
2	PLATDEF_REC_NOT_FOUND	Platform definition not found
3	PLATDEF_CICSplex_MATCHES_NAME	PLATDEF name matches an existing CICSplex
4	PLATDEF_REC_EXISTS	Platform definition already exists

Table 825. PLATDEF FEEDBACK error codes (continued)

Value	Code	Description
5	PLATDEF_CSYSGRP_MATCHES_NAME	PLATDEF name matches an existing system group
6	PLATDEF_CSYSDEF_MATCHES_NAME	PLATDEF name matches an existing system definition
7	PLATDEF_PLATFORM_INSTALLED	Platform is already installed
8	PLATDEF_BUNDLE_FILE_NOT_AUTH	User ID not authorized to access zFS file
9	PLATDEF_NOT_FOUND_BUNDLE_FILE	Platform bundle file not found
10	PLATDEF_XML_IN_BUNDLE_INVALID	Invalid XML in bundle
12	PLATDEF_CSYSGRP_NOT_FOUND	System group named in platform bundle not found
13	PLATDEF_CSYSGRP_IN_USE	System group named in platform bundle is in use
15	PLATDEF_PLATFORM_INVALID	The specified platform is invalid
16	PLATDEF_PLATHOME_INVALID	The specified platform home is invalid
17	PLATDEF_RGNTYPE_ID_INVALID	A region type ID used in the platform is invalid
18	PLATDEF_RGNTYPE_NAME_INVALID	A region type name used in the platform is invalid
19	PLATDEF_DUPLICATE_RGNTYPE	The platform contains a duplicate region type name
20	PLATDEF_RGNTYPE_HAS_SUBGROUPS	A region type used in the platform has subgroups
21	PLATDEF_INSTALLED_SOME_BUNDLES	CICS bundles were not installed in some regions
22	PLATDEF_INSTALLED_NO_BUNDLES	CICS bundles were not installed in any regions
23	PLATDEF_DUPLICATE_RGNTYPE_ID	Platform references a duplicate region type ID
24	PLATDEF_DUPLICATE_REGION	A duplicate CICS region exists and cannot be used
25	PLATDEF_REGION_MATCHES_GROUP	VTAM APPLID matches an existing group definition
26	PLATDEF_BUNDLE_INVALID_VERSION	Invalid version of Platform bundle.
27	PLATDEF_INSTALL_FAILED	PLATDEF install failed.
28	PLATDEF_PLATFORM_BUSY	Platform is busy for another action.
29	PLATDEF_PLATDIR_INVALID	Platform directory does not reside in a sub directory named platform, within the platform home directory.
30	PLATDEF_RLINK_DUPLICATE	Duplicate regionLink.
31	PLATDEF_REGIONTYPE_UNEXPECTED	Region type defined in regionTypes.xml not defined in platform.xml.

Table 825. PLATDEF FEEDBACK error codes (continued)

Value	Code	Description
32	PLATDEF_REGIONTYPE_MISSING	Missing regionType.
33	PLATDEF_REGION_FIELD_INVALID	Region attribute specifies an unrecognised value.
34	PLATDEF_INCOMPATIBLE_MODEL	A region type model for region type contains an incompatible attribute value.
35	PLATDEF_NOLINK_CREATED_RTYPE	No region type links were found for created region type.
36	PLATDEF_LINK_FOR_ADOPTED_RTYPE	A region type link was found for an adopted region type.
37	PLATDEF_SHARED_RGN_NOT_CREATED	A region could not be shared to created region.
38	PLATDEF_NO_RTYPE_FND_FOR_LINK	A region type link specifies unknown region type.
39	PLATDEF_NO_REGION_FND_FOR_LINK	A region type link specifies unknown region.
40	PLATDEF_INVALID_MODEL_ATTR	A region type model attribute is invalid.
41	PLATDEF_NOLINK_CREATED_RGN	No region types link for a created region
42	PLATDEF_CREATED_RTYPE_EXISTS	System group for a created region type already exists.
43	PLATDEF_CREATED_REGION_ACTIVE	Created region already active.
44	PLATDEF_NO_RTYPE_FOR_BINDING	No region type for binding.
45	PLATDEF_RGNTYPE_HAS_CREATEDRGN	A platform created region was found in an adopted region type.

Table 826. PLATDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Attr ID
CHANGEAGENT	CV DAS	CPSM	4	No	LIKE	Last modification agent		4
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release		7
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification		1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID		6
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created		5
DESCCODEPAGE	BINARY	CPSM	4	No	MAX	Description code page	37	12
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description		11
NAME-1	CHAR	CPSM	8	Yes	DIFF	Platform definition		10
PLATDIR	CHAR	CPSM	255	Yes	DIFF	Platform bundle directory.		13

Chapter 347. PLATFORM Resource Table

This CICS resource object is the runtime object that represents a deployed platform.

The **Primary** key field for this resource class is PLATDEF.

The following actions are supported:

ADDBUNDLE

Add a CICS bundle to the platform.

BUNDLEID

CICS bundle ID of the CICS bundle to add to this platform.

BUNDMAJORVER

CICS bundle major version of the CICS bundle to add to the platform.

BUNDMICROVER

CICS bundle micro version of the CICS bundle to add to the platform.

BUNDMINORVER

CICS bundle minor version of the CICS bundle to add to the platform.

REGIONTYPE

Region type that the supplied CICS bundle should be installed into.

ADDREGION

Add a CICS region to a region type.

APPLID

APPLID of the CICS region to be added.

CSYSDEF_NAME

Name of the CICS system definition for the CICS region to be added.

PRICMAS

Primary CMAS for the CICS region to be added.

REGIONTYPE

Platform region type to which the CICS region will be added.

SYSID

SYSID of the CICS region to be added.

DISABLE

Disable a platform in the CICSplex.

DISCARD

Remove a platform from the CICSplex.

ENABLE

Enable a platform in the CICSplex.

GET

Retrieve information about a deployed platform.

REMOVEBUNDLE

Remove a CICS bundle from the platform.

BUNDLEID

CICS bundle ID of the CICS bundle to be removed.

BUNDMAJORVER

CICS bundle major version of the CICS bundle to be removed.

BUNDMICROVER

CICS bundle micro version of the CICS bundle to be removed.

BUNDMINORVER

CICS bundle minor version of the CICS bundle to be removed.

REGIONTYPE

Platform region type where the CICS bundle will be removed.

REMOVEREGION

Remove a CICS region from a region type.

CSYSDEF_NAME

Name of the CICS system definition for the CICS region to be removed.

REGIONTYPE

Platform region type from which the CICS region will be removed.

External resource name

CICSPlatform

Length

760

Usage

API or CICS Management Client Interface

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt3526

Table 827. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET	ENABLE	None	N/A
	DISABLE	None	N/A
	REMOVEBUNDLE	BUNDLEID(value)	Yes
		BUNDMAJORVER(value)	Yes
		BUNDMICROVER(value)	Yes
		BUNDMINORVER(value)	Yes
		REGIONTYPE(value)	Yes
	ADDBUNDLE	BUNDLEID(value)	Yes
		BUNDMAJORVER(value)	Yes
		BUNDMICROVER(value)	Yes

Table 827. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
ADDREGION		BUNDMINORVER(value)	Yes
		REGIONTYPE(value)	Yes
		APPLID(value)	No
		CSYSDEF_NAME(value)	Yes
		PRICMAS(value)	No
		REGIONTYPE(value)	Yes
REMOVEREGION		SYSID(value)	No
		CSYSDEF_NAME(value)	Yes
		REGIONTYPE(value)	Yes

Table 828. PLATFORM FEEDBACK error codes		
Value	Code	Description
1	PLATFORM_REC_NOT_FOUND	Platform not found
2	PLATFORM_CONTAINS_APPLICATIONS	Applications are installed in this Platform
3	PLATFORM_DISABLED_SOME_BUNDLES	CICS bundles were not disabled in some regions
4	PLATFORM_DISCARDED_SOME_BUNDS	CICS bundles were not discarded in some regions
5	PLATFORM_DISCARDED_NO_BUNDLES	CICS bundles were not discarded in any regions
6	PLATFORM_ENABLED_SOME_BUNDLES	CICS bundles were not enabled in some regions
7	PLATFORM_ENABLED_NO_BUNDLES	CICS bundles were not enabled in any regions
8	PLATFORM_DISABLED_NO_BUNDLES	CICS bundles were not disabled in any regions
11	PLATFORM_BUNDLE_NOT_FOUND	CICS bundle was not found
12	PLATFORM_RGNTYPE_INVALID	Invalid region type
13	PLATFORM_BUNDLE_ID_INVALID	Invalid CICS bundle ID
17	PLATFORM_REGION_ACTIVE	Region is active
18	PLATFORM_CONTEXT_INVALID	CICSplex not found
19	PLATFORM_APPLID_INVALID	Invalid VTAM APPLID
20	PLATFORM_SYSID_INVALID	Invalid system ID
21	PLATFORM_PRIMARY_CMAS_INVALID	Invalid primary CMAS
22	PLATFORM_REGION_INVALID	CICS region could not be created
23	PLATFORM_RGNTYPE_NOT_FOUND	Requested region type not found
24	PLATFORM_DUPLICATE_REGION	Duplicate CICS region exists

Table 828. PLATFORM FEEDBACK error codes (continued)

Value	Code	Description
25	PLATFORM_CSYSGRP_EXISTS	VTAM APPLID matches an existing group definition
26	PLATFORM_REGION_NOT_FOUND	Requested region not found
27	PLATFORM_RECORD_EXISTS	The CICS bundle already exists in the region type
28	PLATFORM_INSTALLED_SOME_BUNDS	CICS bundles were not installed in some regions
29	PLATFORM_INSTALLED_NO_BUNDLES	CICS bundles were not installed in any regions
30	PLATFORM_BUSY	Platform is busy for another action.
31	PLATFORM_NOT_DISABLED	At least one installed bundle is enabled.
32	PLATFORM_BUNDLE_NOT_DISABLED	At least one installed bundle is enabled.
33	PLATFORM_ADDBUNDLE_FAILED	Platform ADDBUNDLE request failed.
34	PLATFORM_BUNDLE_MAJVER_INVALID	Invalid CICS bundle major version
35	PLATFORM_BUNDLE_MINVER_INVALID	Invalid CICS bundle minor version
36	PLATFORM_BUNDLE_MICVER_INVALID	Invalid CICS bundle micro version
37	PLATFORM_PLATDEF_INVALID	Invalid platform definition
38	PLATFORM_CREATED_REGION_ACTIVE	A created region was still active.
39	PLATFORM_CREATED_REGION_IN_USE	A created region was still in use by Business Application Services (BAS).
40	PLATFORM_RTYPE_IN_USE	A region type was still in use by Business Application Services (BAS).
41	PLATFORM_CSYSDEF_NAME_INVALID	Invalid CSYSDEF name
42	PLATFORM_INCOMPAT_REGION	Incompatible region
43	PLATFORM_REGION_NOT_IN_RTYPE	Region not in Region Type
44	PLATFORM_STATUS_FAILED	Platform in failed state

Table 829. PLATFORM resource table attributes

Name	Datatype	Source	Len	Sum	Description	Default	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	LIKE	Last modification agent		3
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	DIFF	Last modification agent release		7
CHANGETIME	DATETIME	CPSM	8	MAX	Last modification		5
CHANGEUSRID	CHAR	CPSM	8	DIFF	Last modification user ID		6
CREATETIME	DATETIME	CPSM	8	MAX	Time created		4
DESCCODEPAGE	BINARY	CPSM	4	MAX	Description code page	37	16
DESCRIPTION	CHAR	CPSM	255	DIFF	Description of this platform		12
ENABLESTATUS	EYUDA	CPSM	4	LIKE	Enable Status		18

Table 829. PLATFORM resource table attributes (continued)							
Name	Datatype	Source	Len	Sum	Description	Default	Attr ID
ENABLESTATUS Input/output valid values	ENABLED, DISABLED, ENABLING, DISABLING, INCOMPLETE, EMPTY, SOMEDISABLED, INSTALLING, DISCARDING, FAILED						
PLATDEF-1	CHAR	CPSM	8	DIFF	Platform definition		10
PLATDIR	CHAR	CPSM	255	DIFF	Platform bundle directory		13
PLATFORM	CHAR	CPSM	64	DIFF	Platform		15
PLATHOME	CHAR	CPSM	128	DIFF	Platform home directory		14
STATUS	EYUDA	CPSM	4	LIKE	Status		11
STATUS Input/output valid values	ACTIVE, PARTIAL, INACTIVE						

Chapter 348. POLMON Resource Table

A CPSM Monitor Manager object that describes a monitor definition installed in a specific CICS system.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is STATUS.

The **Tertiary** key field for this resource class is ACTIVETIME.

The following actions are supported:

DISCARD

Unconditionally remove the installed definition.

DEACTIVATE

Remove the installed definition honoring a PERIODEF.

These actions require no unique parameter data.

External resource name

Length

56

Usage

API or WUI

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2406

Table 830. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET	DEACTIVATE	None	N/A

Table 831. POLMON FEEDBACK error codes

Value	Code	Description
1	POLMON_INV_DATA	Invalid name
2	POLMON_REC_NOT_FOUND	Requested resource not found
3	POLMON_INV_REFERENCE	Does not exist

Table 831. POLMON FEEDBACK error codes (continued)

Value	Code	Description
4	POLMON_REC_EXISTS	Record exists
21	POLMON_DISCARD_NOT_ALLOWED	Discard not allowed
22	POLMON_DEACT_NOT_ALLOWED	Deactivate not allowed

Table 832. POLMON resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ACTIVETIME-3	CHAR	CPSM	8	DIFF	Activation period	5
INCLUDE	EYUDA	CPSM	4	LIKE	Monitoring inclusion status	4
INCLUDE Output valid values	YES, NO					
NAME-1	CHAR	CPSM	8	DIFF	Definition name	1
RESCLASS	EYUDA	CPSM	4	LIKE	Monitoring resource class	3
RESCLASS Output valid values	MCICS, MCONN, MGLBL, MDBX, MFILE, MJRNL, MPROG, MTDQS, MTERM, MTRAN					
RESNAME	CHAR	CPSM	8	DIFF	Resource name pattern	2
RODMPOP	EYUDA	CPSM	4	LIKE	Resource status facility monitoring status	7
RODMPOP Output valid values	YES, NO					
STATUS-2	EYUDA	CPSM	4	LIKE	Definition status	6
STATUS-2 Output valid values	ACTIVE, PENDING					

Chapter 349. PRCINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a Process Type definition (PROCDEF) in a resource group (RESGROUP). A PROCDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is PROCGROUP.

The **Secondary** key field for this resource class is PROCNAME.

The **Tertiary** key field for this resource class is PRCVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6170

Table 833. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 834. PRCINGRP FEEDBACK error codes		
Value	Code	Description
1	PRCINGRP_INV_DATA	Attribute data invalid
2	PRCINGRP_REC_NOT_FOUND	Requested resource not found
4	PRCINGRP_REC_EXISTS	Resource already exists
6	PRCINGRP_INV_RESTYPE	Invalid resource type
7	PRCINGRP_INV_VER	Invalid resource version
11	PRCINGRP_NON_MP	Maintenance point CMAS not available

Table 834. PRCINGRP FEEDBACK error codes (continued)

Value	Code	Description
12	PRCINGRP_INV_CONTEXT	Context not found
21	PRCINGRP_INCONSISTENT_SET	Inconsistent set
22	PRCINGRP_DIFF_VERSION	Different version
23	PRCINGRP_INV_NAME	Invalid name
24	PRCINGRP_INV_MINNAME	Invalid minor name

Table 835. PRCINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
PRCOVER-3	BINARY	CPSM	1	Yes	AVG	Process type definition version	7
PROCGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
PROCNAME-2	CHAR	CPSM	8	Yes	DIFF	Process type definition name	6

Chapter 350. PRNINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a partition set definition (PRTNDEF) in a resource group (RESGROUP). A PRTNDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is PRTNGROUP.

The **Secondary** key field for this resource class is PRTNNAME.

The **Tertiary** key field for this resource class is PRTNVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6152

Table 836. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 837. PRNINGRP FEEDBACK error codes		
Value	Code	Description
1	PRNINGRP_INV_DATA	Attribute data invalid
2	PRNINGRP_REC_NOT_FOUND	Requested resource not found
4	PRNINGRP_REC_EXISTS	Resource already exists
6	PRNINGRP_INV_RESTYPE	Invalid resource type
7	PRNINGRP_INV_VER	Invalid resource version
11	PRNINGRP_NON_MP	Maintenance point CMAS not available

Table 837. PRNINGRP FEEDBACK error codes (continued)

Value	Code	Description
12	PRNINGRP_INV_CONTEXT	Context not found
21	PRNINGRP_INCONSISTENT_SET	Inconsistent set
22	PRNINGRP_DIFF_VERSION	Different version
23	PRNINGRP_INV_NAME	Invalid name
24	PRNINGRP_INV_MINNAME	Invalid minor name

Table 838. PRNINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
PRTNGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
PRTNNAME-2	CHAR	CPSM	8	Yes	DIFF	Partition set definition name	6
PRTNVER-3	BINARY	CPSM	1	Yes	AVG	Partition set definition version	7

Chapter 351. PROCDEF Resource Table

A CICS Definition that describes a Process Type.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install a Process Type Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionProcessType

Length

168

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3825

Table 839. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM SET	INSTALL	FORCEINS(YES, NO)	No
		MODE(value)	No

Table 839. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 840. PROCDEF FEEDBACK error codes

Value	Code	Description
1	PROCDEF_INV_DATA	Attribute data invalid
2	PROCDEF_REC_NOT_FOUND	Requested resource not found
4	PROCDEF_REC_EXISTS	Resource already exists
5	PROCDEF_REC_CHANGED	Resource definition already changed
6	PROCDEF_INV_RESTYPE	Invalid resource type
7	PROCDEF_INV_VER	Invalid resource version
11	PROCDEF_NON_MP	Maintenance point CMAS not available
12	PROCDEF_INV_CONTEXT	Context not found
13	PROCDEF_INCONSISTENT_SET	Inconsistent set condition
14	PROCDEF_INV_RESGROUP	Resource group not found
21	PROCDEF_INV_ACTION	Invalid action
22	PROCDEF_INV_RECADDR	Invalid record address
23	PROCDEF_INV_RECLEN	Invalid record length
24	PROCDEF_DIFF_VERSION	Different version
25	PROCDEF_EARLY_NAMELIST_END	Early name list end
26	PROCDEF_INV_NAMELIST	Invalid name list
27	PROCDEF_INV_NAME	Invalid name
28	PROCDEF_INV_MINNAME	Invalid minor name
29	PROCDEF_NOTIFY	Notify
30	PROCDEF_PARTIAL_INSTALL	Partial install
31	PROCDEF_NOTHING_INSTALLED	Nothing installed

Table 840. PROCDEF FEEDBACK error codes (continued)

Value	Code	Description
32	PROCDEF_NO_TARGETS	No targets
33	PROCDEF_NO_RELATED	No related systems
34	PROCDEF_INV_TSCOPE	Invalid target scope
35	PROCDEF_INV_RSCOPE	Invalid related scope
36	PROCDEF_INV_USAGE	Invalid usage
37	PROCDEF_INV_MODE	Invalid mode
38	PROCDEF_INV_STATECHK	Invalid state check
39	PROCDEF_INV_FORCEINS	Invalid force install
40	PROCDEF_INV_NOTIFY	Invalid notify
41	PROCDEF_INV_OVERTYPE	Invalid over type
42	PROCDEF_INV_OVRBLOCK	Invalid override block
43	PROCDEF_INV_ORSTRING	Invalid override string
44	PROCDEF_INV_STRNGTERM	Invalid string terminator
45	PROCDEF_INV_EMBEDTERM	Invalid embedded terminator
46	PROCDEF_INV_ATTRIBUTE	Invalid attribute
47	PROCDEF_INV_LITERAL	Invalid literal
48	PROCDEF_INV_ORSTGNA	Invalid override string
49	PROCDEF_SCOPE_REQUIRED	Scope required
50	PROCDEF_USAGE_CONFLICT	Usage conflict
51	PROCDEF_NODEFS_SELECTED	No definitions selected
52	PROCDEF_MORE_THAN_1_RELSYS	More than one related system
53	PROCDEF_MISSING_RELSYSID	Missing related system identifier
54	PROCDEF_SCOPE_CONFLICT	Scope conflict
55	PROCDEF_INV_CSDGROUP	Invalid CSD group
56	PROCDEF_REC_NOT_REMOVED	Record not removed
57	PROCDEF_INV_RESOURCE	Invalid resource
58	PROCDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	PROCDEF_PARTIAL_ACTION	Partial action
60	PROCDEF_NOTHING_ACTIONED	Nothing actioned
61	PROCDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	PROCDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	PROCDEF_CSD_ERROR	CSD access error

Table 841. PROCDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
AUDITLEVEL	CVDAS	CPSM	4	Yes	LIKE	Audit level	OFF			11
AUDITLEVEL Input/output valid values	OFF, FULL, ACTIVITY, PROCESS									
AUDITLOG	CHAR	CPSM	8	No	DIFF	Audit log name				10
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	19
CHANGEAGENT Input/output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	21
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	20
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				13
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	23
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		18
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				17
FILE	CHAR	CPSM	8	Yes	DIFF	File name				9
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
STATUS	CVDAS	CPSM	4	Yes	LIKE	Enable status	ENABLED			12
STATUS Input/output valid values	ENABLED, DISABLED									
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				14
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				15
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				16

Chapter 352. PROCTYP Resource Table

A CICS Resource that describes a process type in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

DISABLE

Disable a process type

DISCARD

Discard a process type.

These actions require no unique parameter data.

External resource name

CICSProcessType

Length

112

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0101

Table 842. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	DISCARD	None	N/A
	DISABLE	None	N/A
	ENABLE	None	N/A

Table 843. PROCTYP resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			

Table 843. PROCTYP resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
AUDITLEV	CVDAS	INQ	4	LIKE	Yes	Audit level			4
AUDITLEV Input/output valid values	OFF, FULL, ACTIVITY, PROCESS								
AUDITLOG	CHAR	INQ	8	DIFF	No	Audit log name			3
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0	E640 E650	15
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent		E640 E650	6
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, CREATESPI, NOTAPPLIC								
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release		E640 E650	8
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time		E640 E650	9
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID		E640 E650	7
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition		E640 E650	10
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time		E640 E650	11
ENASTAT	CVDAS	INQ	4	LIKE	Yes	Enable status			5
ENASTAT Input/output valid values	ENABLED, DISABLED								
FILE	CHAR	INQ	8	DIFF	No	File name			2
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent		E640 E650	14
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, GRPLIST								
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time		E640 E650	13
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID		E640 E650	12
NAME-1	CHAR	INQ	8	DIFF	No	BTS process type			1

Chapter 353. PROFDEF Resource Table

A CICS Definition that describes a profile, which controls the interactions between transactions and terminals or logical units.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install a Profile Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionProfile

Length

224

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3808

Table 844. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM SET	INSTALL	FORCEINS(YES, NO)	No

Table 844. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		MODE(value)	No
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 845. PROFDEF FEEDBACK error codes

Value	Code	Description
1	PROFDEF_INV_DATA	Attribute data invalid
2	PROFDEF_REC_NOT_FOUND	Requested resource not found
4	PROFDEF_REC_EXISTS	Resource already exists
5	PROFDEF_REC_CHANGED	Resource definition already changed
6	PROFDEF_INV_RESTYPE	Invalid resource type
7	PROFDEF_INV_VER	Invalid resource version
11	PROFDEF_NON_MP	Maintenance point CMAS not available
12	PROFDEF_INV_CONTEXT	Context not found
13	PROFDEF_INCONSISTENT_SET	Inconsistent set condition
14	PROFDEF_INV_RESGROUP	Resource group not found
21	PROFDEF_INV_ACTION	Invalid action
22	PROFDEF_INV_RECADDR	Invalid record address
23	PROFDEF_INV_RECLEN	Invalid record length
24	PROFDEF_DIFF_VERSION	Different version
25	PROFDEF_EARLY_NAMELIST_END	Early name list end
26	PROFDEF_INV_NAMELIST	Invalid name list
27	PROFDEF_INV_NAME	Invalid name
28	PROFDEF_INV_MINNAME	Invalid minor name
29	PROFDEF_NOTIFY	Notify
30	PROFDEF_PARTIAL_INSTALL	Partial install

Table 845. PROFDEF FEEDBACK error codes (continued)

Value	Code	Description
31	PROFDEF_NOTHING_INSTALLED	Nothing installed
32	PROFDEF_NO_TARGETS	No targets
33	PROFDEF_NO_RELATED	No related systems
34	PROFDEF_INV_TSCOPE	Invalid target scope
35	PROFDEF_INV_RSCOPE	Invalid related scope
36	PROFDEF_INV_USAGE	Invalid usage
37	PROFDEF_INV_MODE	Invalid mode
38	PROFDEF_INV_STATECHK	Invalid state check
39	PROFDEF_INV_FORCEINS	Invalid force install
40	PROFDEF_INV_NOTIFY	Invalid notify
41	PROFDEF_INV_OVERTYPE	Invalid over type
42	PROFDEF_INV_OVRBLOCK	Invalid override block
43	PROFDEF_INV_ORSTRING	Invalid override string
44	PROFDEF_INV_STRNGTERM	Invalid string terminator
45	PROFDEF_INV_EMBEDTERM	Invalid embedded terminator
46	PROFDEF_INV_ATTRIBUTE	Invalid attribute
47	PROFDEF_INV_LITERAL	Invalid literal
48	PROFDEF_INV_ORSTGNA	Invalid override string
49	PROFDEF_SCOPE_REQUIRED	Scope required
50	PROFDEF_USAGE_CONFLICT	Usage conflict
51	PROFDEF_NODEFS_SELECTED	No definitions selected
52	PROFDEF_MORE_THAN_1_RELSYS	More than one related system
53	PROFDEF_MISSING_RELSYSID	Missing related system identifier
54	PROFDEF_SCOPE_CONFLICT	Scope conflict
55	PROFDEF_INV_CSDGROUP	Invalid CSD group
56	PROFDEF_REC_NOT_REMOVED	Record not removed
57	PROFDEF_INV_RESOURCE	Invalid resource
58	PROFDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	PROFDEF_PARTIAL_ACTION	Partial action
60	PROFDEF_NOTHING_ACTIONED	Nothing actioned
61	PROFDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	PROFDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	PROFDEF_CSD_ERROR	CSD access error

Table 846. PROFDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
CHAINCONTROL	EYUDA	CPSM	4	Yes	LIKE	Outbound chaining control	NO			8
CHAINCONTROL Input/output valid values	YES, NO									
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	31
CHANGEAGENT Input/output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	33
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	32
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				24
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	35
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		30
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				28
DVSUPRT	EYUDA	CPSM	4	Yes	LIKE	Supported devices	ALL			9
DVSUPRT Input/output valid values	ALL, NONVTAM, VTAM									
FACILITYLIKE	CHAR	CPSM	4	No	DIFF	Facility model				29
INBFMH	EYUDA	CPSM	4	Yes	LIKE	Pass function management header (FMH) to application	NO			10
INBFMH Input/output valid values	NO, ALL, DIP, EODS									
JOURNAL	CHAR	CPSM	4	No	DIFF	Journal identifier	NO	1-99		23
JOURNAL Input/output valid values	NO									
LOGREC	EYUDA	CPSM	4	Yes	LIKE	Receive requires logical record	NO			11
LOGREC Input/output valid values	YES, NO									
MODENAME	CHAR	CPSM	8	No	DIFF	Mode name				12
MSGINTEG	EYUDA	CPSM	4	Yes	LIKE	Message response requested	NO			13
MSGINTEG Input/output valid values	YES, NO									
MSGJRNL	EYUDA	CPSM	4	Yes	LIKE	Messages to be journaled	NO			14
MSGJRNL Input/output valid values	NO, INPUT, OUTPUT, INOUT									
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
NEPCCLASS	CHAR	CPSM	4	No	DIFF	Node error program transaction class	0	0-255		21
ONEWTE	EYUDA	CPSM	4	Yes	LIKE	One write operation	NO			15
ONEWTE Input/output valid values	YES, NO									
PRINTERCOMP	EYUDA	CPSM	4	Yes	LIKE	Printer compatability option	NO			17

Table 846. PROFDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
PRINTERCOMP Input/output valid values	YES, NO									
PROTECT	EYUDA	CPSM	4	Yes	LIKE	Output message recovery	N_A		E510+	16
PROTECT Input/output valid values	YES, NO, N_A									
RAQ	EYUDA	CPSM	4	Yes	LIKE	Read ahead queueing option	NO			18
RAQ Input/output valid values	YES, NO									
RTIMOUT	CHAR	CPSM	8	No	DIFF	Read time-out value	NO	1-7000		22
RTIMOUT Input/output valid values	NO									
SCRNSIZE	CVDAS	CPSM	4	Yes	LIKE	Screen size	DEFAULT			20
SCRNSIZE Input/output valid values	DEFAULT, ALTERNATE									
UCTRAN	EYUDA	CPSM	4	Yes	LIKE	Upper case translation	NO			19
UCTRAN Input/output valid values	YES, NO									
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				25
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				26
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				27

Chapter 354. PROFILE Resource Table

A CICS Resource that identifies a profile in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is PROFILE.

The following action is supported:

DISCARD

Remove the installed profile.

The DISCARD action requires no unique parameter data.

External resource name

CICSProfile

Length

88

Usage

API or WUI or CICS Management Client Interface

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0053

Table 847. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM SET	DISCARD	None	N/A

Table 848. PROFILE resource table attributes

Name	Datatype	Source	Len	Sum	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved			
BASDEFINEVER	BINARY	CPSM	1	AVG	BAS resource definition version	0	E640 E650	11
CHANGEAGENT	CVDAS	INQ	4	LIKE	Last modification agent		E640 E650	2
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, SYSTEM, CREATESPI, NOTAPPLIC							

Table 848. PROFILE resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Default	Get Invalid	Attr ID
CHANGEAGREL	CHAR	INQ	4	DIFF	Last modification agent release		E640 E650	4
CHANGETIME	DATETIME	INQ	8	MAX	Last modification time		E640 E650	5
CHANGEUSRID	CHAR	INQ	8	DIFF	Last modification user ID		E640 E650	3
DEFINESOURCE	CHAR	INQ	8	DIFF	Source of the resource definition		E640 E650	6
DEFINETIME	DATETIME	INQ	8	MAX	Creation time		E640 E650	7
INSTALLAGENT	CVDAS	INQ	4	LIKE	Installation agent		E640 E650	10
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, GRPLIST							
INSTALLTIME	DATETIME	INQ	8	MAX	Installation time		E640 E650	9
INSTALLUSRID	CHAR	INQ	8	DIFF	Installation user ID		E640 E650	8
PROFILE-1	CHAR	INQ	8	DIFF	Profile name			1

Chapter 355. PROGDEF Resource Table

A CICS Definition that describes the control information for a program stored in the program library.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install a Program Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionProgram

Length

504

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3809

Table 849. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM	INSTALL SET	FORCEINS(YES, NO)	No
SET		MODE(DYNAM, STAT)	No

Table 849. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL, REMOTE)	Yes
	ADDTOGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 850. PROGDEF FEEDBACK error codes

Value	Code	Description
1	PROGDEF_INV_DATA	Attribute data invalid
2	PROGDEF_REC_NOT_FOUND	Requested resource not found
4	PROGDEF_REC_EXISTS	Resource already exists
5	PROGDEF_REC_CHANGED	Resource definition already changed
6	PROGDEF_INV_RESTYPE	Invalid resource type
7	PROGDEF_INV_VER	Invalid resource version
11	PROGDEF_NON_MP	Maintenance point CMAS not available
12	PROGDEF_INV_CONTEXT	Context not found
13	PROGDEF_INCONSISTENT_SET	Inconsistent set condition
14	PROGDEF_INV_RESGROUP	Resource group not found
21	PROGDEF_INV_ACTION	Invalid action
22	PROGDEF_INV_RECADDR	Invalid record address
23	PROGDEF_INV_RECLEN	Invalid record length
24	PROGDEF_DIFF_VERSION	Different version
25	PROGDEF_EARLY_NAMELIST_END	Early name list end
26	PROGDEF_INV_NAMELIST	Invalid name list
27	PROGDEF_INV_NAME	Invalid name
28	PROGDEF_INV_MINNAME	Invalid minor name
29	PROGDEF_NOTIFY	Notify
30	PROGDEF_PARTIAL_INSTALL	Partial install
31	PROGDEF_NOTHING_INSTALLED	Nothing installed

Table 850. PROGDEF FEEDBACK error codes (continued)

Value	Code	Description
32	PROGDEF_NO_TARGETS	No targets
33	PROGDEF_NO_RELATED	No related systems
34	PROGDEF_INV_TSCOPE	Invalid target scope
35	PROGDEF_INV_RSCOPE	Invalid related scope
36	PROGDEF_INV_USAGE	Invalid usage
37	PROGDEF_INV_MODE	Invalid mode
38	PROGDEF_INV_STATECHK	Invalid state check
39	PROGDEF_INV_FORCEINS	Invalid force install
40	PROGDEF_INV_NOTIFY	Invalid notify
41	PROGDEF_INV_OVERTYPE	Invalid oertype
42	PROGDEF_INV_OVRBLOCK	Invalid override block
43	PROGDEF_INV_ORSTRING	Invalid override string
44	PROGDEF_INV_STRNGTERM	Invalid string term
45	PROGDEF_INV_EMBEDTERM	Invalid embedded terminator
46	PROGDEF_INV_ATTRIBUTE	Invalid attribute
47	PROGDEF_INV_LITERAL	Invalid literal
48	PROGDEF_INV_ORSTGNA	Invalid override string
49	PROGDEF_SCOPE_REQUIRED	Scope required
50	PROGDEF_USAGE_CONFLICT	Usage conflict
51	PROGDEF_NODEFS_SELECTED	No definitions selected
52	PROGDEF_MORE_THAN_1_RELSYS	More than one related system
53	PROGDEF_MISSING_RELSYSID	Missing related system identifier
54	PROGDEF_SCOPE_CONFLICT	Scope conflict
55	PROGDEF_INV_CSDGROUP	Invalid CSD group
56	PROGDEF_REC_NOT_REMOVED	Record not removed
57	PROGDEF_INV_RESOURCE	Invalid resource
58	PROGDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	PROGDEF_PARTIAL_ACTION	Partial action
60	PROGDEF_NOTHING_ACTIONED	Nothing actioned
61	PROGDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	PROGDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	PROGDEF_CSD_ERROR	CSD access error
64	PROGDEF_JVM_CONFLICT	JVMSERVER conflicts with JVMPROFILE

Table 850. PROGDEF FEEDBACK error codes (continued)

Value	Code	Description
65	PROGDEF_JVM_MISSING	Either JVMSERVER or JVMPROFILE is required

Table 851. PROGDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
API	EYUDA	CPSM	4	Yes	LIKE	Application program interfaces	CICSAPI			36
API Input/output valid values	CICSAPI, OPENAPI									
CEDF	EYUDA	CPSM	4	Yes	LIKE	Display execution diagnostic facility (EDF) screens	YES			8
CEDF Input/output valid values	YES, NO									
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	38
CHANGEAGENT Input/output valid values	DREAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	40
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	39
CONCURRENCY	EYUDA	CPSM	4	Yes	LIKE	Concurrency status	QUASIRENT			30
CONCURRENCY Input/output valid values	N_A, QUASIRENT, THREADSAFE, REQUIRED									
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				23
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	42
DATALOCATION	CVDAS	CPSM	4	Yes	LIKE	Data location	ANY			9
DATALOCATION Input/output valid values	BELOW, ANY									
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		37
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				27
DYNAMIC	EYUDA	CPSM	4	Yes	LIKE	Dynamic routing status	NO			29
DYNAMIC Input/output valid values	YES, NO									
EXECKEY	CVDAS	CPSM	4	Yes	LIKE	Program execution key	USER			10
EXECKEY Input/output valid values	USER, CICS									
EXECUTIONSET	CVDAS	CPSM	4	Yes	LIKE	API subset restriction type	FULLAPI			11
EXECUTIONSET Input/output valid values	FULLAPI, DPLSUBSET									
HOTPOOL	EYUDA	CPSM	4	Yes	LIKE	Hot pooling status	NO		E640 +	34
HOTPOOL Input/output valid values	YES, NO									

Table 851. PROGDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
JVM	EYUDA	CPSM	4	Yes	LIKE	Java virtual machine (JVM) mode	NO			31
JVM Input/output valid values	YES, NO, DEBUG									
JVMCLASS	CHAR	CPSM	255	No	DIFF	Java virtual machine (JVM) class				32
JVMPROFILE	CHAR	CPSM	8	No	DIFF	Java virtual machine (JVM) profile			E680+	35
JVMSERVER	CHAR	CPSM	8	No	DIFF	Java virtual machine (JVM) server			E640 E650 E660	43
LANGUAGE	EYUDA	CPSM	4	Yes	LIKE	Language	N_A			12
LANGUAGE Input/output valid values	ASSEMBLER, C, COBOL, LE370, LEVSE, PLI, RPG, N_A									
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
RELOAD	EYUDA	CPSM	4	Yes	LIKE	Reload new copy	NO			13
RELOAD Input/output valid values	YES, NO									
REMOTENAME	CHAR	CPSM	8	No	DIFF	Program name in remote system				18
REMOTESYSTEM	CHAR	CPSM	4	No	DIFF	Remote system name				19
RESIDENT	EYUDA	CPSM	4	Yes	LIKE	Residence status	NO			17
RESIDENT Input/output valid values	YES, NO									
RSL	CHAR	CPSM	8	No	DIFF	Resource security value	0	0-24	E330+	22
RSL Input/output valid values	PUBLIC									
STATUS	CVDAS	CPSM	4	Yes	LIKE	Enabled status	ENABLED			14
STATUS Input/output valid values	ENABLED, DISABLED									
TRANSID	CHAR	CPSM	4	No	DIFF	Mirror transaction name for remote attach				20
USAGE	EYUDA	CPSM	4	Yes	LIKE	Program storage release	NORMAL			16
USAGE Input/output valid values	NORMAL, TRANSIENT									
USELPACOPY	EYUDA	CPSM	4	Yes	LIKE	Use program from the link pack area (LPA)	NO			15
USELPACOPY Input/output valid values	YES, NO									
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				24
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				25
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				26

Chapter 356. PROGRAM Resource Table

A CICS Resource that describes a program in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is PROGRAM.

The following actions are supported:

DISABLE

Disable the program.

DISCARD

Remove the installed program.

ENABLE

Enable the program.

NEWCOPY

Load a new copy of the program.

CICS loads the new version from the DFHRPL or dynamic LIBRARY concatenation, or uses an LPA resident version, depending on the PRIVATE or SHARED options. PRIVATE is the default setting.

PHASEIN

CICS will use a new copy of the program for all new transaction requests. CICS continues to use the old copy for all currently running transactions until they have finished, and have a RESCOUNT value of zero. CICS loads the new version from the DFHRPL or dynamic LIBRARY concatenation, or uses an LPA resident version, depending on the PRIVATE or SHARED options. PRIVATE is the default setting.

RELEASE

Release a program that is previously loaded by a LOAD command. Therefore, the issuing task can no longer use the resource unless another LOAD is issued.

These actions require no unique parameter data.

Note:

1. The PLATFORM, APPLICATION, APPLMAJORVER, APPLMINORVER, and APPLMICROVER parameters are all required when the GET operation is in the context of an application that is deployed on a platform.
2. The CVDA value returned by CICS for the attribute APIST(CICSAPI) conflicts with an existing CVDA value. In order to retain the attribute's uniqueness, CICSplex SM adds 8000 to the value returned by CICS. For more information about translating CVDA values, see [TRANSLATE command](#).

External resource name

CICSProgram

Length

800

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0017

Table 852. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		APPLICATION(value)	No
		APPLMAJORVER(value)	No
		APPLMICROVER(value)	No
		APPLMINORVER(value)	No
		PLATFORM(value)	No
SET		None	N/A
PERFORM SET	DISABLE	None	N/A
	DISCARD	None	N/A
	ENABLE	None	N/A
	NEWCOPY	None	N/A
	PHASEIN	None	N/A
	RELEASE	None	N/A

Table 853. PROGRAM FEEDBACK error codes		
Value	Code	Description
1	PROGRAM_INCOMP_APPLCON	Incomplete application qualifier

Table 854. PROGRAM resource table attributes										
Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Set Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name				
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release				
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved				
ALOADTIME	INT16US	CPSM	4	AVG	No	Average load time				37
APIST	CVDAS	INQ	4	LIKE	No	API status				45
APIST Output valid values	CICSAPI, OPENAPI									
APPLICATION	CHAR	INQ	64	DIFF	No	Application Name		E640 E650 E660 E670		60
APPLMAJORVER	BINARY	INQ	4	MAX	No	Major Version		E640 E650 E660 E670		63
APPLMICROVER	BINARY	INQ	4	MAX	No	Micro Version		E640 E650 E660 E670		65

Table 854. PROGRAM resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Set Invalid	Attr ID
APPLMINORVER	BINARY	INQ	4	MAX	No	Minor Version		E640 E650 E660 E670		64
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0	E640 E650		57
CEDFSTATUS	CVDAS	INQ	4	LIKE	Yes	CEDF status				14
CEDFSTATUS Input/output valid values	CEDF, NOCEDF									
CEDFSTATUS Output valid values	NOTAPPLIC									
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent		E640 E650		49
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, SYSTEM, AUTOINSTALL, DYNAMIC, CREATESPI, NOTAPPLIC									
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release		E640 E650		50
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time		E640 E650		52
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID		E640 E650		48
COBOLTYPE	CVDAS	INQ	4	LIKE	No	COBOL type				23
COBOLTYPE Output valid values	COBOL, COBOLII, NOTINIT, NOTAPPLIC									
CONCURRENCY	CVDAS	INQ	4	LIKE	No	Concurrency option				30
CONCURRENCY Output valid values	THREADSAFE, QUASIRENT, REQUIRED									
COPY	CVDAS	INQ	4	LIKE	Yes	Newcopy required status				28
COPY Input valid values	NEWCOPY, PHASEIN									
COPY Output valid values	REQUIRED, NOTREQUIRED									
CURRENTLOC	EYUDA	STAT	4	LIKE	No	CICS DSA in which current copy is located				27
CURRENTLOC Output valid values	NOCOPY, DSA, CDSA, UDSA, LPA, EDSA, ECDSA, EUDSA, ERDSA, ELPA, ESDSA, RDSA, SDSA									
DATALOCATION	CVDAS	INQ	4	LIKE	No	Data location				16
DATALOCATION Output valid values	BELOW, ANY, NOTAPPLIC									
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition		E640 E650		53
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time		E640 E650		54
DYNAMSTATUS	CVDAS	INQ	4	LIKE	No	Dynamic routing type				29
DYNAMSTATUS Output valid values	DYNAMIC, NOTDYNAMIC									
ENTRYPOINT	ADDRESS	INQ	4	MAX	No	Program entry point				21
EXECKEY	CVDAS	INQ	4	LIKE	No	Program execution key				19
EXECKEY Output valid values	CICSEXECKEY, USEREXECKEY, NOTAPPLIC									
EXECUTIONSET	CVDAS	INQ	4	LIKE	Yes	API subset restriction type				20
EXECUTIONSET Input/output valid values	DPLSUBSET, FULLAPI									

Table 854. PROGRAM resource table attributes (continued)										
Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Set Invalid	Attr ID
EXECUTIONSET Output valid values	NOTAPPLIC									
FETCHCNT	BINARY	STAT	4	AVG	No	Number of times program loaded into storage				7
FETCHTIME	INT16US	STAT	4	MAX	No	Total time for all program fetches				17
HOLDSTATUS	CVDAS	INQ	4	LIKE	No	Hold status				9
HOLDSTATUS Output valid values	HOLD, NOHOLD, NOTAPPLIC									
HOTPOOLING	CVDAS	INQ	4	LIKE	Yes	Hot pooling status		E640+	E640+	35
HOTPOOLING Input/output valid values	HOTPOOL, NOTHOTPOOL									
HOTPOOLING Output valid values	NOTAPPLIC									
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent		E640 E650		51
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, SYSTEM, AUTOINSTALL, DYNAMIC, GRPLIST, BUNDLE									
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time		E640 E650		56
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID		E640 E650		55
JVMCLASS	CHAR	INQ	25 5	DIFF	Yes	Java virtual machine class				33
JVMDEBUG	CVDAS	INQ	4	LIKE	Yes	Java virtual machine (JVM) debug status		E610+		32
JVMDEBUG Input/output valid values	DEBUG, NODEBUG									
JVMPROFILE	CHAR	INQ	8	DIFF	Yes	Java virtual machine (JVM) profile name	DFHJVMPR	E680+		36
JVMSERVER	CHAR	INQ	8	DIFF	No	Java virtual machine (JVM) server		E640 E650 E660		58
LANGUAGE	CVDAS	INQ	4	LIKE	No	Language				2
LANGUAGE Output valid values	COBOL, C, LE370, PLIPL1, ASSEMBLER, NOTDEFINED, NOTAPPLIC, LEVSE, JAVA									
LENGTH	CNUMERIC	INQ	4	MAX	No	Program length				11
LIBRARY	CHAR	INQ	8	DIFF	No	LIBRARY name		E640		46
LIBRARYDSN	CHAR	INQ	44	DIFF	No	Load data set name		E640		47
LOADPOINT	ADDRESS	INQ	4	MAX	No	Program load point				22
LPASTAT	CVDAS	INQ	4	LIKE	No	Link pack area (LPA) status				13
LPASTAT Output valid values	LPA, NOTLPA, NOTAPPLIC, SVA, NOTSVA									
NEWCOPYCNT	BINARY	STAT	4	AVG	No	Number of NEWCOPY requests issued				3
OPERATION	CHAR	INQ	64	DIFF	Yes	Operation Name		E640 E650 E660 E670		62
PGRJUSECOUNT	BINARY	STAT	4	AVG	No	Number of times JVM program used since last reset				44

Table 854. PROGRAM resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Set Invalid	Attr ID
PLATFORM	CHAR	INQ	64	DIFF	No	Platform Name		E640 E650 E660 E670		61
PROGRAM-1	CHAR	INQ	8	DIFF	No	Program name				1
PROGTYPE	CVDAS	INQ	4	LIKE	No	Program type				15
PROGTYPE Output valid values	PROGRAM, MAP, PARTITIONSET									
REMOTENAME	CHAR	INQ	8	DIFF	No	Program name in remote system				24
REMOTESYSTEM	CHAR	INQ	4	DIFF	No	Remote system name				25
REMOVECNT	BINARY	STAT	4	AVG	No	Number of times removed by program compression				18
RESCOUNT	CNUMERIC	INQ	4	SUM	No	Number of times program currently accessed				6
RESIDENCY	CVDAS	INQ	4	MAX	No	Program residency		E640 E650 E660 E670 E680		66
RESIDENCY Output valid values	RESIDENT, NONRESIDENT									
RLOADING	RATE3	CPSM	8	AVG	No	Rate of program loading				39
RPLID	BINARY	STAT	4	AVG	No	Data set offset number				12
RREMOVAL	RATE3	CPSM	8	AVG	No	Rate of program removal				40
RUNTIME	CVDAS	INQ	4	LIKE	Yes	Runtime environment information				31
RUNTIME Input/output valid values	JVM									
RUNTIME Input valid values	NOJVM									
RUNTIME Output valid values	UNKNOWN, LE370, NONLE370, NOTAPPLIC, XPLINK									
RUSE	RATE3	CPSM	8	AVG	No	Rate of program use				41
SHARESTATUS	CVDAS	INQ	4	LIKE	Yes	Share status				10
SHARESTATUS Input/output valid values	PRIVATE, SHARED									
SHARESTATUS Output valid values	NOTAPPLIC									
STATUS	CVDAS	INQ	4	LIKE	Yes	Enabled status				8
STATUS Input/output valid values	ENABLED, DISABLED									
TRANSID	CHAR	INQ	4	DIFF	No	Mirror transaction name for remote attach				26
USEAGELSTAT	BINARY	STAT	4	AVG	No	Number of times program was used since last reset				5
USECOUNT	CNUMERIC	INQ	4	SUM	No	Total number of times program was executed				4
USEFETCH	AVERAGE3	CPSM	8	AVG	No	Average number of program uses per fetch				38

Chapter 357. PROINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a profile definition (PROFDEF) in a resource group (RESGROUP). A PROFDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is PROFGROUP.

The **Secondary** key field for this resource class is PROFNAME.

The **Tertiary** key field for this resource class is PROFVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6153

Table 855. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 856. PROINGRP FEEDBACK error codes		
Value	Code	Description
1	PROINGRP_INV_DATA	Attribute data invalid
2	PROINGRP_REC_NOT_FOUND	Requested resource not found
4	PROINGRP_REC_EXISTS	Resource already exists
6	PROINGRP_INV_RESTYPE	Invalid resource type
7	PROINGRP_INV_VER	Invalid resource version
11	PROINGRP_NON_MP	Maintenance point CMAS not available
12	PROINGRP_INV_CONTEXT	Context not found

Table 856. PROINGRP FEEDBACK error codes (continued)

Value	Code	Description
21	PROINGRP_INCONSISTENT_SET	Inconsistent set
22	PROINGRP_DIFF_VERSION	Different version
23	PROINGRP_INV_NAME	Invalid name
24	PROINGRP_INV_MINNAME	Invalid minor name

Table 857. PROINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
PROFGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
PROFNAME-2	CHAR	CPSM	8	Yes	DIFF	Profile definition name	6
PROFVER-3	BINARY	CPSM	1	Yes	AVG	Profile definition version	7

Chapter 358. PRTNDEF Resource Table

A CICS Definition that describes a partition set, or display partition configuration.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install a Partition Set Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionPartitionSet

Length

168

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3807

Table 858. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM SET	INSTALL	FORCEINS(YES, NO)	No
		MODE(value)	No

Table 858. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 859. PRTNDEF FEEDBACK error codes

Value	Code	Description
1	PRTNDEF_INV_DATA	Attribute data invalid
2	PRTNDEF_REC_NOT_FOUND	Requested resource not found
4	PRTNDEF_REC_EXISTS	Resource already exists
5	PRTNDEF_REC_CHANGED	Resource definition already changed
6	PRTNDEF_INV_RESTYPE	Invalid resource type
7	PRTNDEF_INV_VER	Invalid resource version
11	PRTNDEF_NON_MP	Maintenance point CMAS not available
12	PRTNDEF_INV_CONTEXT	Context not found
13	PRTNDEF_INCONSISTENT_SET	Inconsistent set condition
14	PRTNDEF_INV_RESGROUP	Resource group not found
21	PRTNDEF_INV_ACTION	Invalid action
22	PRTNDEF_INV_RECADDR	Invalid record address
23	PRTNDEF_INV_RECLEN	Invalid record length
24	PRTNDEF_DIFF_VERSION	Different version
25	PRTNDEF_EARLY_NAMELIST_END	Early name list end
26	PRTNDEF_INV_NAMELIST	Invalid name list
27	PRTNDEF_INV_NAME	Invalid name
28	PRTNDEF_INV_MINNAME	Invalid minor name
29	PRTNDEF_NOTIFY	Notify
30	PRTNDEF_PARTIAL_INSTALL	Partial install
31	PRTNDEF_NOTHING_INSTALLED	Nothing installed

Table 859. PRTNDEF FEEDBACK error codes (continued)

Value	Code	Description
32	PRTNDEF_NO_TARGETS	No targets
33	PRTNDEF_NO_RELATED	No related systems
34	PRTNDEF_INV_TSCOPE	Invalid target scope
35	PRTNDEF_INV_RSCOPE	Invalid related scope
36	PRTNDEF_INV_USAGE	Invalid usage
37	PRTNDEF_INV_MODE	Invalid mode
38	PRTNDEF_INV_STATECHK	Invalid state check
39	PRTNDEF_INV_FORCEINS	Invalid force install
40	PRTNDEF_INV_NOTIFY	Invalid notify
41	PRTNDEF_INV_OVERTYPE	Invalid overtype
42	PRTNDEF_INV_OVRBLOCK	Invalid override block
43	PRTNDEF_INV_ORSTRING	Invalid override string
44	PRTNDEF_INV_STRNGTERM	Invalid string term
45	PRTNDEF_INV_EMBEDTERM	Invalid embedded terminator
46	PRTNDEF_INV_ATTRIBUTE	Invalid attribute
47	PRTNDEF_INV_LITERAL	Invalid literal
48	PRTNDEF_INV_ORSTGNA	Invalid override string
49	PRTNDEF_SCOPE_REQUIRED	Scope required
50	PRTNDEF_USAGE_CONFLICT	Usage conflict
51	PRTNDEF_NODEFS_SELECTED	No definitions selected
52	PRTNDEF_MORE_THAN_1_RELSYS	More than one related system
53	PRTNDEF_MISSING_RELSYSID	Missing related system identifier
54	PRTNDEF_SCOPE_CONFLICT	Scope conflict
55	PRTNDEF_INV_CSDGROUP	Invalid CSD group
56	PRTNDEF_REC_NOT_REMOVED	Record not removed
57	PRTNDEF_INV_RESOURCE	Invalid resource
58	PRTNDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	PRTNDEF_PARTIAL_ACTION	Partial action
60	PRTNDEF_NOTHING_ACTIONED	Nothing actioned
61	PRTNDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	PRTNDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	PRTNDEF_CSD_ERROR	CSD access error

Table 860. PRTNDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	19
CHANGEAGENT Input/output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	21
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	20
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				13
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	23
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		18
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				17
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
RESIDENT	EYUDA	CPSM	4	Yes	LIKE	Residence status	NO			8
RESIDENT Input/output valid values	YES, NO									
RSL	CHAR	CPSM	8	No	DIFF	Resource security value	0	0-24	E330 +	12
RSL Input/output valid values	PUBLIC									
STATUS	CVDAS	CPSM	4	Yes	LIKE	Partition set status	ENABLED			9
STATUS Input/output valid values	ENABLED, DISABLED									
USAGE	EYUDA	CPSM	4	Yes	LIKE	Partition set storage release	NORMAL			10
USAGE Input/output valid values	NORMAL, TRANSIENT									
USELPACOPY	EYUDA	CPSM	4	Yes	LIKE	Use copy of partition set from link pack area (LPA)	NO			11
USELPACOPY Input/output valid values	YES, NO									
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				14
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				15
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				16

Chapter 359. RASGNDEF Resource Table

A CPSM Business Application Services Definition that describes how CICS Definitions of a particular resource class are assigned to and installed in a set of CICS systems.

The **Primary** key field for this resource class is RESASSGN.

External resource name

CICSResourceAssignmentDefinition

Length

1280

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt3520

Table 861. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
UPDATE		None	N/A
REMOVE		None	N/A
PERFORM	ADDTODSC	DESCCODEPAGE(value)	No
SET		DESCRIPTION(value)	No
		RESDESC(value)	Yes
		RESGROUP(value)	No
		RSCOPE(value)	No
		TSCOPE(value)	No

Table 862. RASGNDEF FEEDBACK error codes		
Value	Code	Description
1	RASGNDEF_INV_DATA	Attribute data invalid
2	RASGNDEF_REC_NOT_FOUND	Requested resource not found

Table 862. RASGNDEF FEEDBACK error codes (continued)

Value	Code	Description
4	RASGNDEF_REC_EXISTS	Resource already exists
5	RASGNDEF_REC_CHANGED	Resource definition already changed
6	RASGNDEF_INV_RESTYPE	Invalid resource type
11	RASGNDEF_NON_MP	Maintenance point CMAS not available
12	RASGNDEF_INV_CONTEXT	Context not found
13	RASGNDEF_INCONSISTENT_SET	Inconsistent set condition
21	RASGNDEF_INV_RECORD	Invalid record
22	RASGNDEF_INV_ACTION	Invalid action
23	RASGNDEF_INCOMPLETE_DEFSET	Incomplete definition set
24	RASGNDEF_INCONSISTENT_SCOPES	Inconsistent scopes
25	RASGNDEF_RASGNDEF_IN_USE	Resource assignment definition in use
26	RASGNDEF_INV_NAME	Name generic or blanks
27	RASGNDEF_REFASSIGN_NOTFND	Referenced resource assignment not found

Table 863. RASGNDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			20
CHANGEAGENT Input/output valid values	DREPAPI								
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			23
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification			1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			22
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created			21
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999	19
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description			18
FILTER	CHAR	CPSM	80 0	No	DIFF	Filter string			15
MODE	EYUDA	CPSM	4	Yes	LIKE	Resource usage qualifier	N_A		12
MODE Input/output valid values	AUTO, DYNAM, EXTRA, INTRA, IND, STAT, N_A								
ORSTRING	CHAR	CPSM	32 0	No	DIFF	Override string			17
OVERRIDE	EYUDA	CPSM	4	Yes	LIKE	Scope that override is applied to	NONE		13
OVERRIDE Input/output valid values	BOTH, RELATED, TARGET, NONE								
RDEFTYPE	CHAR	CPSM	8	Yes	DIFF	Resource type			9
REFASSGN	CHAR	CPSM	8	No	DIFF	Referenced resource assignment name			10
RESASSGN-1	CHAR	CPSM	8	Yes	DIFF	Name			5
RESGROUP	CHAR	CPSM	8	No	DIFF	Resource group			8
RSCOPE	CHAR	CPSM	8	No	DIFF	Related scope			7

Table 863. RASGNDEF resource table attributes (continued)									
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
TSCOPE	CHAR	CPSM	8	No	DIFF	Target scope			6
USAGE	EYUDA	CPSM	4	Yes	LIKE	Resource usage			11
USAGE Input/output valid values	LOCAL, REMOTE								

Chapter 360. RASINDSC Resource Table

A CPSM Business Application Services Definition that describes the membership of a resource assignment (RASGNDEF) in a resource description (RESDESC).

The **Primary** key field for this resource class is RESDESC.

The **Secondary** key field for this resource class is RESASSGN.

There are no object specific actions for this resource class.

External resource name

CICSResourceAssignmentInDescription

Length

144

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt4866

Table 864. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
UPDATE		None	N/A
REMOVE		None	N/A

Table 865. RASINDSC FEEDBACK error codes		
Value	Code	Description
1	RASINDSC_INV_DATA	Attribute data invalid
2	RASINDSC_REC_NOT_FOUND	Requested resource not found
4	RASINDSC_REC_EXISTS	Resource already exists
5	RASINDSC_REC_CHANGED	Resource definition already changed
6	RASINDSC_INV_RESTYPE	Invalid resource type
11	RASINDSC_NON_MP	Maintenance point CMAS not available

Table 865. RASINDSC FEEDBACK error codes (continued)

Value	Code	Description
12	RASINDSC_INV_CONTEXT	Context not found
13	RASINDSC_INCONSISTENT_SET	Inconsistent set condition
21	RASINDSC_INV_RECORD	Invalid record
22	RASINDSC_INV_ACTION	Invalid action
23	RASINDSC_INCOMPLETE_DEFSET	Incomplete definition set
24	RASINDSC_REFASSIGN_NOTFND	Referenced resource assignment not found
25	RASINDSC_INCONSISTENT_SCOPES	Inconsistent scopes
26	RASINDSC_INV_NAME	Invalid name
27	RASINDSC_INV_MINNAME	Invalid minor name

Table 866. RASINDSC resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			12
CHANGEAGENT Input/ output valid values	DREPAPI								
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			15
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification			1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			14
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created			13
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999	11
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description			10
RESASSGN-2	CHAR	CPSM	8	Yes	DIFF	Resource assignment (RASGNDEF) name			6
RESDESC-1	CHAR	CPSM	8	Yes	DIFF	Resource description (RESDESC) name			5
RESGROUP	CHAR	CPSM	8	No	DIFF	Resource group name			9
RSOPE	CHAR	CPSM	8	No	DIFF	Related scope name			8
TSCOPE	CHAR	CPSM	8	No	DIFF	Target scope name			7

Chapter 361. RASPROC Resource Table

A CPSM Business Application Services Manager object that describes the set of CICS Definitions to be installed in CICS systems for a particular resource assignment (RASGNDEF), if the assignment is associated with a resource description (RESDDESC). The CICS systems include all systems named in the target and related scopes (TARGET and RELATED) of the RASGNDEF.

This object is referenced within the scope of a CICSplex and resource assignment. As such, the resource assignment must be explicitly identified in the API GET command PARM option by coding the following text string:

```
PARM('RASGNDEF(resassign).')
```

where resassign = (Required) The name of a resource assignment.

Other parameters can also be specified, but the resource assignment name is required.

The **Primary** key field for this resource class is RESDEF.

The **Secondary** key field for this resource class is RDEFTYPE.

The **Tertiary** key field for this resource class is TSCOPE.

The **Fourth** key field for this resource class is RSCOPE.

The **Fifth** key field for this resource class is REFDEF.

The **Sixth** key field for this resource class is RESASSGN.

There are no object specific actions for this resource class.

- External resource name**
CICSResourceByAssignment
- Length**
88
- Usage**
API or WUI or CICS Management Client Interface
- API view**
No
- CMAS context**
No
- SCOPE applies**
No
- Only query CMASs in workload**
No
- Object type**
CICSplex SM Manager
- Copybook identifier**
EYUt2610

Table 867. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		RASGNDEF(value)	Yes

Table 868. RASPROC FEEDBACK error codes

Value	Code	Description
21	RASPROC_RESASSGN_NOT_FOUND	Resource assignment not found

Table 869. RASPROC resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
ALIAS	CHAR	CPSM	8	DIFF	Alias for remote definition	16
DEFVER	BINARY	CPSM	1	AVG	Resource definition version	12
MODE	EYUDA	CPSM	4	LIKE	Resource usage qualifier	11
MODE Output valid values	AUTO, DYNAM, EXTRA, INTRA, IND, STAT					
RDEFTYPE-2	CHAR	CPSM	8	DIFF	Resource definition type	5
REFDEF-5	CHAR	CPSM	8	DIFF	Referenced definition name	13
REFTYPE	CHAR	CPSM	8	DIFF	Referenced definition type	15
REFVER	CHAR	CPSM	2	DIFF	Referenced definition version	14
RESASSGN-6	CHAR	CPSM	8	DIFF	Resource assignment name	8
RESDEF-1	CHAR	CPSM	8	DIFF	Resource definition name	4
RESGROUP	CHAR	CPSM	8	DIFF	Resource group name	9
RSCOPE-4	CHAR	CPSM	8	DIFF	Related scope name	7
TSCOPE-3	CHAR	CPSM	8	DIFF	Target scope name	6
USAGE	EYUDA	CPSM	4	LIKE	Resource usage type	10
USAGE Output valid values	LOCAL, REMOTE					

Chapter 362. RDSCPROC Resource Table

A CPSM Business Application Services Manager object that describes the set of CICS Definitions to be installed in CICS systems for a particular resource description (RESDESC).

This object is referenced within the scope of a CICSplex and resource description. As such, the resource description must be explicitly identified in the API GET command PARM option by coding the following text string:

```
PARM(' RESDESC(resdesc) . ')
```

where resdesc = (Required) The name of a resource description.

Other parameters can also be specified, but the resource description name is required.

The **Primary** key field for this resource class is RESDEF.

The **Secondary** key field for this resource class is RDEFTYPE.

The **Tertiary** key field for this resource class is TSCOPE.

The **Fourth** key field for this resource class is RSCOPE.

The **Fifth** key field for this resource class is REFDEF.

The **Sixth** key field for this resource class is RESDESC.

There are no object specific actions for this resource class.

External resource name

CICSResourceByDescription

Length

96

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2609

Table 870. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		RESDESC(value)	Yes

Table 871. RDSCPROC FEEDBACK error codes		
Value	Code	Description
21	RDSCPROC_RESDESC_NOT_FOUND	Resource description not found

Table 872. RDSCPROC resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ALIAS	CHAR	CPSM	8	DIFF	Alias for remote definition	17
DEFVER	BINARY	CPSM	1	AVG	Resource definition version	13
MODE	EYUDA	CPSM	4	LIKE	Resource usage qualifier	12
MODE Output valid values	AUTO, DYNAM, EXTRA, INTRA, IND, STAT					
RDEFTYPE-2	CHAR	CPSM	8	DIFF	Resource definition type	5
REFDEF-5	CHAR	CPSM	8	DIFF	Referenced definition name	14
REFTYPE	CHAR	CPSM	8	DIFF	Referenced definition type	16
REFVER	CHAR	CPSM	2	DIFF	Referenced definition version	15
RESASSGN	CHAR	CPSM	8	DIFF	Resource assignment name	8
RESDEF-1	CHAR	CPSM	8	DIFF	Resource definition name	4
RESDESC-6	CHAR	CPSM	8	DIFF	Resource description name	10
RESGROUP	CHAR	CPSM	8	DIFF	Resource group name	9
RSCOPE-4	CHAR	CPSM	8	DIFF	Related scope name	7
TSCOPE-3	CHAR	CPSM	8	DIFF	Target scope name	6
USAGE	EYUDA	CPSM	4	LIKE	Resource usage type	11
USAGE Output valid values	LOCAL, REMOTE					

Chapter 363. RECOVERY Resource Table

A CICS Resource that provides recovery manager information in an active system being managed by CICSplex SM.

The RECOVERY resource class does not provide an explicit key attribute. The set of object instances returned is a function of the scope in effect when the request is made.

There are no object specific actions for this resource class.

External resource name

CICSRecoveryManager

Length

160

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0124

Table 873. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 874. RECOVERY resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
RMGATSHTI	INTTSTP	STAT	8	AVG	Average time UOWs shunted for indoubt failure	29
RMGATSHTR	INTTSTP	STAT	8	AVG	Average UOW commit/backout failure shunt time	31
RMGCATSHTI	INTTSTP	STAT	8	AVG	Average current UOW shunt time for indoubt failure	30
RMGCATSHTR	INTTSTP	STAT	8	AVG	Average current commit/backout failure shunt time	32
RMGCSHIN	BINARY	STAT	4	AVG	Total UOWs currently shunted for indoubt failure	9
RMGCSHRO	BINARY	STAT	4	AVG	Current UOWs shunted for commit/backout failure	11

Table 874. RECOVERY resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
RMGCSHTI	INTTSTP	STAT	8	MAX	Time current UOWs shunted for indoubt failure	14
RMGCSHTR	INTTSTP	STAT	8	MAX	Current UOW shunt time for commit/backout failure	16
RMGIAFNW	BINARY	STAT	4	AVG	Total of indoubt actions forced by NOWAIT option	19
RMGIAFOP	BINARY	STAT	4	AVG	Total of indoubt actions forced by operator	20
RMGIAFOT	BINARY	STAT	4	AVG	Total of indoubt actions forced by other reasons	21
RMGIAFTI	BINARY	STAT	4	AVG	Total of indoubt actions forced by timeout	18
RMGIAFTR	BINARY	STAT	4	AVG	Total indoubt actions forced by definition	17
RMGIAMIS	BINARY	STAT	4	AVG	Total number of indoubt action mismatches	22
RMGNW61	BINARY	STAT	4	AVG	Total indoubt actions forced by LU61 NOWAIT option	24
RMGNWMRO	BINARY	STAT	4	AVG	Total indoubt actions forced by MRO NOWAIT option	25
RMGNWOTH	BINARY	STAT	4	AVG	Total indoubt actions forced by other NOWAIT	27
RMGNWRMI	BINARY	STAT	4	AVG	Total indoubt actions forced by RMI NOWAIT option	26
RMGNWTD	BINARY	STAT	4	AVG	Total indoubt actions forced by TD NOWAIT option	23
RMGRESYN	BINARY	STAT	4	AVG	Total resynchronization requests issued	7
RMGSYBWD	BINARY	STAT	4	AVG	Number of SYNCPOINT ROLLBACK requests issued	6
RMGSYFWD	BINARY	STAT	4	AVG	Number of SYNCPOINT requests issued	5
RMGTSHIN	BINARY	STAT	4	AVG	Total number of UOWs shunted for indoubt failure	8
RMGTSHRO	BINARY	STAT	4	AVG	Total of UOWs shunted for commit/backout failure	10
RMGTSHTI	INTTSTP	STAT	8	MAX	Total time UOWs shunted for indoubt failure	13
RMGTSHTR	INTTSTP	STAT	8	MAX	Total time UOWs shunted for commit/backout failure	15

Chapter 364. REMFILE Resource Table

A CICS Resource that describes a remote file in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is FILE.

The following action is supported:

DISCARD

Remove the installed Remote File

The DISCARD action requires no unique parameter data.

External resource name

CICSRemoteFile

Length

136

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0010

Table 875. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM SET	DISCARD	None	N/A

Table 876. REMFILE resource table attributes

Name	Datatype	Source	Len	Sum	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved			
ADDCNT	BINARY	STAT	4	AVG	Number of WRITE requests			10
BASDEFINEVER	BINARY	CPSM	1	AVG	BAS resource definition version	0	E640 E650	21
BROWSECNT	BINARY	STAT	4	AVG	The number of READNEXT and READPREV requests			9

Table 876. REMFILE resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Default	Get Invalid	Attr ID
CHANGEAGENT	CVDAS	INQ	4	LIKE	Last modification agent		E640 E650	13
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, TABLE, SYSTEM, CREATESPI, NOTAPPLIC							
CHANGEAGREL	CHAR	INQ	4	DIFF	Last modification agent release		E640 E650	14
CHANGETIME	DATETIME	INQ	8	MAX	Last modification time		E640 E650	16
CHANGEUSRID	CHAR	INQ	8	DIFF	Last modification user ID		E640 E650	12
DEFINESOURCE	CHAR	INQ	8	DIFF	Source of the resource definition		E640 E650	17
DEFINETIME	DATETIME	INQ	8	MAX	Creation time		E640 E650	18
ENABLESTATUS	CVDAS	INQ	4	LIKE	Enable status		E330+	4
ENABLESTATUS Output valid values	ENABLED, DISABLED, UNENABLED, DISABLING, NOTAPPLIC							
FILE-1	CHAR	INQ	8	DIFF	File ID			1
GETCNT	BINARY	STAT	4	AVG	Number of READ requests			7
GETUPDCNT	BINARY	STAT	4	AVG	Number of READ UPDATE requests			8
INSTALLAGENT	CVDAS	INQ	4	LIKE	Installation agent		E640 E650	15
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, TABLE, SYSTEM, GRPLIST							
INSTALLTIME	DATETIME	INQ	8	MAX	Installation time		E640 E650	20
INSTALLUSRID	CHAR	INQ	8	DIFF	Installation user ID		E640 E650	19
KEYLENGTH	BINARY	INQ	4	AVG	Key length			5
REMDELCNT	BINARY	STAT	4	AVG	Number of DELETE requests			6
REMOTENAME	CHAR	INQ	8	DIFF	Remote file name			2
REMOTESYSTEM	CHAR	INQ	4	DIFF	Remote system name			3
UPDATECNT	BINARY	STAT	4	AVG	Number of REWRITE requests			11

Chapter 365. REMTDQ Resource Table

A CICS Resource that describes a remote transient data queue in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is TDQUEUE.

The following action is supported:

DISCARD

Remove the remote transient data queue.

The DISCARD action requires no unique parameter data.

External resource name

CICSRemoteTDQueue

Length

96

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0029

Table 877. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET			

Table 878. REMTDQ resource table attributes								
Name	Datatype	Source	Len	Sum	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved			
BASDEFINEVER	BINARY	CPSM	1	AVG	BAS resource definition version	0	E640 E650	14
CHANGEAGENT	CVDAS	INQ	4	LIKE	Last modification agent		E640 E650	5

Table 878. REMTDQ resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Default	Get Invalid	Attr ID
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, SYSTEM, CREATESPI, NOTAPPLIC							
CHANGEAGREL	CHAR	INQ	4	DIFF	Last modification agent release		E640 E650	7
CHANGETIME	DATETIME	INQ	8	MAX	Last modification time		E640 E650	8
CHANGEUSRID	CHAR	INQ	8	DIFF	Last modification user ID		E640 E650	6
DEFINESOURCE	CHAR	INQ	8	DIFF	Source of the resource definition		E640 E650	9
DEFINETIME	DATETIME	INQ	8	MAX	Creation time		E640 E650	10
INSTALLAGENT	CVDAS	INQ	4	LIKE	Installation agent		E640 E650	13
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, GRPLIST, SYSTEM							
INSTALLTIME	DATETIME	INQ	8	MAX	Installation time		E640 E650	12
INSTALLUSRID	CHAR	INQ	8	DIFF	Installation user ID		E640 E650	11
OUTCNT	BINARY	STAT	4	AVG	Number of I/O requests			4
REMOTENAME	CHAR	INQ	4	DIFF	Remote name			2
REMOTESYSTEM	CHAR	INQ	4	DIFF	Remote system			3
TDQUEUE-1	CHAR	INQ	4	DIFF	Queue ID			1

Chapter 366. REMTRAN Resource Table

A CICS Resource that describes a remote transaction in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is TRANID.

The following actions are supported:

DISABLE

Disable the remote transaction.

DISCARD

Remove the remote transaction.

ENABLE

Enable the remote transaction.

These actions require no unique parameter data.

External resource name

CICSRemoteTransaction

Length

368

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0023

Table 879. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	DISABLE	None	N/A
	DISCARD	None	N/A
	ENABLE	None	N/A

Table 880. REMTRAN FEEDBACK error codes

Value	Code	Description
1	REMTRAN_INV_DATA	Attribute data invalid

Table 881. REMTRAN resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
APPLICATION	CHAR	INQ	64	DIFF	No	Application Name		E640 E650 E660 E670 E680 E690	27
APPLMAJORVER	BINARY	INQ	4	MAX	No	Major Version		E640 E650 E660 E670 E680 E690	30
APPLMICROVER	BINARY	INQ	4	MAX	No	Micro Version		E640 E650 E660 E670 E680 E690	32
APPLMINORVER	BINARY	INQ	4	MAX	No	Minor Version		E640 E650 E660 E670 E680 E690	31
AVAILSTATUS	CVDAS	INQ	4	LIKE	No	Availability status		E640 E650 E660 E670 E680 E690	33
AVAILSTATUS Output valid values	AVAILABLE, UNAVAILABLE, NONE								
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0	E640 E650	25
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent		E640 E650	16
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, SYSTEM, CREATESPI, NOTAPPLIC								
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release		E640 E650	18
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time		E640 E650	20
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID		E640 E650	17
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition		E640 E650	21
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time		E640 E650	22
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent		E640 E650	19

Table 881. REMTRAN resource table attributes (continued)									
Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
INSTALLAGENT Input/output valid values	CSDAPI, CREATSPI, SYSTEM, GRPLIST, BUNDLE								
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time		E640 E650	24
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID		E640 E650	23
OPERATION	CHAR	INQ	64	DIFF	No	Operation Name		E640 E650 E660 E670 E680 E690	29
PLATFORM	CHAR	INQ	64	DIFF	No	Platform Name		E640 E650 E660 E670 E680 E690	28
PRIORITY	BINARY	INQ	4	AVG	Yes	Transaction priority			9
PROFILE	CHAR	INQ	8	DIFF	No	Profile name			4
PURGEABILITY	CVDAS	INQ	4	LIKE	Yes	Purgeability status			10
PURGEABILITY Input/output valid values	PURGEABLE, NOTPURGEABLE								
REMOTECNT	BINARY	STAT	4	AVG	No	Number of times transaction run remotely			7
REMOTENAME	CHAR	INQ	8	DIFF	No	Remote transaction ID			2
REMOTESYSTEM	CHAR	INQ	4	DIFF	No	Remote system name			3
REMSTARTCNT	CNUMERIC	STAT	4	SUM	No	Number of times transaction started			15
ROUTING	CVDAS	INQ	4	LIKE	No	Routing status			6
ROUTING Output valid values	DYNAMIC, STATIC								
RTIMEOUT	BINARY	INQ	4	AVG	No	Read timeout (seconds)			11
SCRNSIZE	CVDAS	INQ	4	LIKE	No	Screen size			12
SCRNSIZE Output valid values	DEFAULT, ALTERNATE								
STATUS	CVDAS	INQ	4	LIKE	Yes	Enabled status			13
STATUS Input/output valid values	ENABLED, DISABLED								
TRANCLASS	CHAR	INQ	8	DIFF	Yes	Transaction class name			14
TRANID-1	CHAR	INQ	4	DIFF	No	Transaction ID			1
TRPROF	CHAR	INQ	8	DIFF	No	Name of transaction-routing-session profile			5
USECOUNT	BINARY	STAT	4	SUM	No	Number of times transaction has been used			8

Chapter 367. REQID Resource Table

A CICS Resource that describes an outstanding interval control request in an active CICS system being managed byCICSplex SM .

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is RSEQ.

External resource name
CICSIntervalControlRequest

Length
80

Usage
API or WUI or CICS Management Client Interface or EVALDEF

API view
Yes

CMAS context
No

SCOPE applies
Yes

Only query CMASs in workload
No

Object type
CICS Resource

Copybook identifier
EYUt0060

Table 882. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	CANCEL	None	N/A
SET			

Table 883. REQID resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	9
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
FMHSTATUS	CVDAS	INQ	4	LIKE	Function management headers status	
FMHSTATUS Output valid values	FMH, NOFMH, NOTAPPLIC					
INTERVAL	DECTIME	INQ	4	MAX	Interval until request expires	10
NAME-1	CHAR	INQ	8	MIN	Request name	1
QUEUE	CHAR	INQ	8	DIFF	QUEUE from START command that created request	8
REQTYPE	CVDAS	INQ	4	LIKE	Type of command that created request	3
REQTYPE Output valid values	START, POST, DELAY					

Table 883. REQID resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
RSEQ-2	BINARY	CPSM	4	MIN	Sequence number	14
RTERMID	CHAR	INQ	4	DIFF	RTERMID from START command that created request	7
RTRANSID	CHAR	INQ	4	DIFF	RTRANSID from START command that created request	6
TERMID	CHAR	INQ	4	DIFF	TERMID from START command that created request	5
TIME	DECTIME	INQ	4	MAX	Expiration time	11
TRANSID	CHAR	INQ	4	DIFF	TRANSID specified by command creating request	2
USERID	CHAR	INQ	8	DIFF	Associated user ID	4

Chapter 368. RESDESC Resource Table

A CPSM Business Application Services Definition that describes a set of logically related CICS Definitions. The set of CICS Definitions can be installed in CICS systems that support EXEC CICS CREATE and named as the scope for CICSplex SM requests.

The **Primary** key field for this resource class is RESDESC.

The following actions are supported:

INSTALL

Install a Resource Description.

REPLACE

Replace a Resource Description.

The parameter data for these actions is described in Parameters for installing CICS definitions using BAS. For information about the API CREATE parameter **MODEL**, see [Creating Resource descriptions](#).

External resource name

CICSResourceDescription

Length

1144

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt3521

Table 884. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		MODEL(value)	No
UPDATE		None	N/A
REMOVE		None	N/A
PERFORM	INSTALL	FORCEINS(YES, NO)	No
SET		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		STATECHK(YES, NO)	No
	REPLACE	CURRENT(value)	Yes

Table 884. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
		FORCEINS(YES, NO)	No
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		STATECHK(YES, NO)	No

Table 885. RESDESC FEEDBACK error codes		
Value	Code	Description
1	RESDESC_INV_DATA	Attribute data invalid
2	RESDESC_REC_NOT_FOUND	Requested resource not found
4	RESDESC_REC_EXISTS	Resource already exists
5	RESDESC_REC_CHANGED	Resource definition already changed
6	RESDESC_INV_RESTYPE	Invalid resource type
11	RESDESC_NON_MP	Maintenance point CMAS not available
12	RESDESC_INV_CONTEXT	Context not found
13	RESDESC_INCONSISTENT_SET	Inconsistent set condition
21	RESDESC_INV_RECORD	Invalid record
22	RESDESC_INV_ACTION	Invalid action
23	RESDESC_INV_MODEL	Invalid model
24	RESDESC_INCOMPLETE_DEFSET	Incomplete definition set
25	RESDESC_INCONSISTENT_SCOPES	Inconsistent scopes
26	RESDESC_NOTIFY	Notify
27	RESDESC_INSRDSC_NOTFND	Install resource description not found
28	RESDESC_REPRDSC_NOTFND	Replacement resource description not found
29	RESDESC_PARTIAL_INSTALL	Partial install
30	RESDESC_NOTHING_INSTALLED	Nothing installed
31	RESDESC_NODEFS_SELECTED	No definitions selected
32	RESDESC_NO_TARGETS	No targets
33	RESDESC_INV_INSRDSC	Invalid install resource description name
34	RESDESC_INV_REPRDSC	Invalid replacement resource description name
35	RESDESC_INV_FORCEINS	Invalid force install
36	RESDESC_INV_STATECHK	Invalid state check
37	RESDESC_INV_NOTIFY	Invalid notify
38	RESDESC_INV_NAME	Name generic or blanks

Table 886. RESDESC resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
ATMDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for Atom Service definitions			132
ATMDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for Atom Service definitions			134
ATMDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for Atom Service definitions			133
AUTOINST	EYUDA	CPSM	4	No	LIKE	Autoinstall request type	NO		9
AUTOINST Input/output valid values	NO, YES								
BUNDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for Bundle definitions			135
BUNDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for Bundle definitions			137
BUNDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for Bundle definitions			136
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			127
CHANGEAGENT Input/output valid values	DREPAPI								
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			130
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification			1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			129
CONDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for connection definitions			11
CONDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for connection definitions			13
CONDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for connection definitions			12
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created			128
D2CDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for DB2 connection definitions			62
D2CDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for DB2 connection definitions			64
D2CDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for DB2 connection definitions			63
D2EDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for DB2 entry definitions			65
D2EDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for DB2 entry definitions			67
D2EDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for DB2 entry definitions			66
D2TDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for DB2 transaction definitions			68
D2TDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for DB2 transaction definitions			70
D2TDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for DB2 transaction definitions			69
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999	120
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description			10
DOCDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for document template definitions			84

Table 886. RESDESC resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
DOCDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for document template definitions			86
DOCDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for document template definitions			85
EJCDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for CorbaServer definitions			105
EJCDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for CorbaServer definitions			107
EJCDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for CorbaServer definitions			106
EJDDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for CICS-deployed JAR file definitions			108
EJDDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for CICS-deployed JAR file definitions			110
EJDDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for CICS-deployed JAR file definitions			109
ENQDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for enqueue model definitions			78
ENQDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for enqueue model definitions			80
ENQDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for enqueue model definitions			79
FLEDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for file definitions			14
FLEDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for file definitions			16
FLEDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for file definitions			15
FNODEFRG	CHAR	CPSM	8	No	DIFF	Resource group for FEPI node definitions			99
FNODEFRS	CHAR	CPSM	8	No	DIFF	Related scope for FEPI node definitions			101
FNODEFTS	CHAR	CPSM	8	No	DIFF	Target scope for FEPI node definitions			100
FPODEFRG	CHAR	CPSM	8	No	DIFF	Resource group for FEPI pool definitions			93
FPODEFRS	CHAR	CPSM	8	No	DIFF	Related scope for FEPI pool definitions			95
FPODEFTS	CHAR	CPSM	8	No	DIFF	Target scope for FEPI pool definitions			94
FPRDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for FEPI property set definitions			102
FPRDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for FEPI property set definitions			104
FPRDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for FEPI property set definitions			103
FSGDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for file key segment definitions			71
FSGDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for file key segment definitions			73
FSGDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for file key segment definitions			72

Table 886. RESDESC resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
FTRDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for FEPI target definitions			96
FTRDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for FEPI target definitions			98
FTRDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for FEPI target definitions			97
IPCDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for IPIC connection definitions			121
IPCDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for IPIC connection definitions			123
IPCDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for IPIC connection definitions			122
JMSDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for JVM server definitions			141
JMSDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for JVM Sever definitions			143
JMSDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for JVM server definitions			142
JRLDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for journal definitions			17
JRLDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for journal definitions			19
JRLDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for journal definitions			18
JRMDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for journal model definitions			20
JRMDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for journal model definitions			22
JRMDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for journal model definitions			21
LIBDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for LIBRARY definitions			124
LIBDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for LIBRARY definitions			126
LIBDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for LIBRARY definitions			125
LSCOPE	CHAR	CPSM	8	No	DIFF	Logical scope name			6
LSRDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for LSR pool definitions			23
LSRDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for LSR pool definitions			25
LSRDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for LSR pool definitions			24
LSREGSTR	EYUDA	CPSM	4	No	LIKE	Logical scope registration	NO		8
LSREGSTR Input/output valid values	NO, YES								
MAPDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for map set definitions			26
MAPDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for map set definitions			28
MAPDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for map set definitions			27
MQCDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for MQ Connection definitions			138

Table 886. RESDESC resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
MQCDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for MQ Connection definitions			140
MQCDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for MQ Connection definitions			139
MQMDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for MQ Monitor definitions			144
MQMDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for MQ Monitor definitions			146
MQMDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for MQ Monitor definitions			145
PARDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for partner definitions			29
PARDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for partner definitions			31
PARDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for partner definitions			30
PIPDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for Pipeline definitions			111
PIPDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for Pipeline definitions			113
PIPDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for Pipeline definitions			112
PRCDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for process type definitions			87
PRCDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for process type definitions			89
PRCDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for process type definitions			88
PRGDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for program definitions			38
PRGDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for program definitions			40
PRGDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for program definitions			39
PRODEFRG	CHAR	CPSM	8	No	DIFF	Resource group for profile definitions			35
PRODEFRS	CHAR	CPSM	8	No	DIFF	Related scope for profile definitions			37
PRODEFTS	CHAR	CPSM	8	No	DIFF	Target scope for profile definitions			36
PRTDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for partition set definitions			32
PRTDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for partition set definitions			34
PRTDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for partition set definitions			33
RESDESC-1	CHAR	CPSM	8	Yes	DIFF	Resource description name			5
RGSCOPE	CHAR	CPSM	8	No	DIFF	Resource group scope name			7
RQMDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for request model definitions			90
RQMDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for request model definitions			92

Table 886. RESDESC resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
RQMDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for request model definitions			91
SESDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for session definitions			41
SESDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for session definitions			43
SESDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for session definitions			42
TCLDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for transaction class definitions			53
TCLDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for transaction class definitions			55
TCLDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for transaction class definitions			54
TCPDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for TCP/IP service definitions			81
TCPDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for TCP/IP service definitions			83
TCPDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for TCP/IP service definitions			82
TDQDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for TD queue definitions			44
TDQDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for TD queue definitions			46
TDQDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for TD queue definitions			45
TRMDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for terminal definitions			47
TRMDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for terminal definitions			49
TRMDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for terminal definitions			48
TRNDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for transaction definitions			50
TRNDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for transaction definitions			52
TRNDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for transaction definitions			51
TSMDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for TS model definitions			75
TSMDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for TS model definitions			77
TSMDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for TS model definitions			76
TYPDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for typeterm definitions			59
TYPDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for typeterm definitions			61
TYPDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for typeterm definitions			60
URIDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for URIMAP definitions			114
URIDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for URIMAP definitions			116

Table 886. RESDESC resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
URIDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for URIMAP definitions			115
WEBDEFRG	CHAR	CPSM	8	No	DIFF	Resource group for WebService definitions			117
WEBDEFRS	CHAR	CPSM	8	No	DIFF	Related scope for WebService definitions			119
WEBDEFTS	CHAR	CPSM	8	No	DIFF	Target scope for WebService definitions			118

Chapter 369. RESGROUP Resource Table

A CICSplex SM Business Application Services Definition that provides the association anchor for a set of CICS Definitions. References to a RESGROUP are inferred to be references to the set of associated CICS Definition instances.

The **Primary** key field for this resource class is RESGROUP.

The following actions are supported:

INSTALL

Install definitions from a Resource Group.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

For information on the API CREATE parameters (MODEL and MODE), see [Parameters for managing CICS Definitions](#).

External resource name

CICSResourceGroup

Length

112

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt3519

Table 887. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		MODE(NO, ASSOCIATIONS, MEMBERS)	No
		MODEL(value)	No
UPDATE		None	N/A
REMOVE		None	N/A
PERFORM	INSTALL	ASSIGNMENT(value)	No
SET		CRITERIA	No
		FORCEINS(YES, NO)	No

Table 887. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		MODE(DYNAM, STAT, INTRA, EXTRA, IND)	No
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		REFASSIGN(value)	No
		RELATED(value)	No
		RESTYPE(ATOMDEF, BUNDDEF, CONNDEF, DB2CDEF, DB2EDEF, DB2TDEF, DOCDEF, EJCODEF, EJDJDEF, ENQMDEF, FENODDEF, FEPOODEF, FEPRODEF, FETRGDEF, FILEDEF, FSEGDEF, IPCONDEF, JRNLDEF, JRNMDEF, JVMSVDEF, LIBDEF, LSRDEF, MAPDEF, MQCONDEF, MQMONDEF, PARTDEF, PIPEDEF, PROCDEF, PROFDEF, PROGDEF, PRTNDEF, RQMDEF, SESSDEF, TCPDEF, TDQDEF, TERMDEF, TRANDEF, TRNCLDEF, TSMDEF, TYPTMDEF, URIMPDEF, WEBSVDEF)	No
		STATECHK(YES, NO)	No
		TARGET(value)	No
		USAGE(LOCAL, REMOTE)	No
	ADDTODSC	DESCCODEPAGE(value)	No
		DESCRIPTION(value)	No
		RESDESC(value)	Yes

Table 888. RESGROUP FEEDBACK error codes

Value	Code	Description
1	RESGROUP_INV_DATA	Attribute data invalid
2	RESGROUP_REC_NOT_FOUND	Requested resource not found
4	RESGROUP_REC_EXISTS	Resource already exists
5	RESGROUP_REC_CHANGED	Resource definition already changed
6	RESGROUP_INV_RESTYPE	Invalid resource type
11	RESGROUP_NON_MP	Maintenance point CMAS not available
12	RESGROUP_INV_CONTEXT	Context not found
21	RESGROUP_INV_RECORD	Invalid record
22	RESGROUP_INV_COPYRES	Invalid copy mode
23	RESGROUP_INV_MODEL	Invalid model
24	RESGROUP_INV_MODEL_REQUIRED	Model name required
25	RESGROUP_INV_MAX_VERSIONS	Invalid maximum versions
26	RESGROUP_INCOMPLETE_DEFSET	Incomplete definition set
27	RESGROUP_RESGROUP_IN_USE	Resource group in use

Table 888. RESGROUP FEEDBACK error codes (continued)

Value	Code	Description
28	RESGROUP_RASGNDEF_IN_USE	Resource assignment definition in use
29	RESGROUP_INV_NAME	Invalid name
30	RESGROUP_NOTIFY	Notify
31	RESGROUP_PARTIAL_INSTALL	Partial install
32	RESGROUP_NOTHING_INSTALLED	Nothing installed
33	RESGROUP_NO_TARGETS	No targets
34	RESGROUP_NO_RELATED	No related systems
35	RESGROUP_INV_TSCOPE	Invalid target scope
36	RESGROUP_INV_RSCOPE	Invalid related scope
37	RESGROUP_INV_USAGE	Invalid usage
38	RESGROUP_INV_MODE	Invalid mode value
39	RESGROUP_INV_STATECHK	Invalid state check
40	RESGROUP_INV_FORCEINS	Invalid force install
41	RESGROUP_INV_NOTIFY	Invalid notify
42	RESGROUP_INV_OVERTYPE	Invalid oertype
43	RESGROUP_INV_OVRBLOCK	Invalid override block
44	RESGROUP_INV_FILTER	Invalid filter
45	RESGROUP_INV_ORSTRING	Invalid override string
46	RESGROUP_INV_STRNGTERM	Invalid string terminator
47	RESGROUP_INV_EMBEDTERM	Invalid embedded terminator
48	RESGROUP_INV_ATTRIBUTE	Invalid attribute
49	RESGROUP_INV_OPERATOR	Invalid operator
50	RESGROUP_INV_LITERAL	Invalid literal
51	RESGROUP_INV_ORSTGNA	Override string not allowed
52	RESGROUP_RSCOPE_REQUIRED	Related scope required
53	RESGROUP_TSCOPE_REQUIRED	Target scope required
54	RESGROUP_USAGE_CONFLICT	Usage conflict
55	RESGROUP_REFASSGN_REQ	Referenced resource assignment required
56	RESGROUP_REFASSIGN_NOTFND	Referenced resource assignment not found
57	RESGROUP_RESTYPE_NOTINSTL	Resource type not installed
58	RESGROUP_NODEFS_SELECTED	No definitions selected
59	RESGROUP_INCOMPATIBLE_OVR	Incompatible override
60	RESGROUP_INCOMPATIBLE_FILTER	Incompatible filter
61	RESGROUP_MORE_THAN_1_RELSYS	More than one related system
62	RESGROUP_MISSING_RELSYSID	Missing related system identifier

Table 888. RESGROUP FEEDBACK error codes (continued)

Value	Code	Description
63	RESGROUP_SCOPE_CONFLICT	Scope conflict
64	RESGROUP_INV_ACTION	Invalid action
65	RESGROUP_INCONSISTENT_SET	Inconsistent set

Table 889. RESGROUP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			8
CHANGEAGENT Input/ output valid values	DREPAPI								
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification			1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created			9
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999	7
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description			6
RESGROUP-1	CHAR	CPSM	8	Yes	DIFF	Name			5

Chapter 370. RESINDSC Resource Table

A CPSM Business Application Services Definition that describes the membership of a resource group (RESGROUP) in a resource description (RESDESC).

The **Primary** key field for this resource class is RESDESC.

The **Secondary** key field for this resource class is RESGROUP.

There are no object specific actions for this resource class.

External resource name

CICSResourceGroupInDescription

Length

120

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt4865

Table 890. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
UPDATE		None	N/A
REMOVE		None	N/A

Table 891. RESINDSC FEEDBACK error codes		
Value	Code	Description
1	RESINDSC_INV_DATA	Attribute data invalid
2	RESINDSC_REC_NOT_FOUND	Requested resource not found
4	RESINDSC_REC_EXISTS	Resource already exists
5	RESINDSC_REC_CHANGED	Resource definition already changed
6	RESINDSC_INV_RESTYPE	Invalid resource type
11	RESINDSC_NON_MP	Maintenance point CMAS not available

Table 891. RESINDSC FEEDBACK error codes (continued)

Value	Code	Description
12	RESINDSC_INV_CONTEXT	Context not found
13	RESINDSC_INCONSISTENT_SET	Inconsistent set condition
21	RESINDSC_INV_RECORD	Invalid record
22	RESINDSC_INV_ACTION	Invalid action
23	RESINDSC_RESDESC_NOUPD	Resource description not updatable
24	RESINDSC_RESGROUP_NOUPD	Resource group not updatable
25	RESINDSC_INV_NAME	Invalid name
26	RESINDSC_INV_MINNAME	Invalid minor name

Table 892. RESINDSC resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			9
CHANGEAGENT Input/ output valid values	DREPAPI								
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			12
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification			1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			11
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created			10
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999	8
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description			7
RESDESC-1	CHAR	CPSM	8	Yes	DIFF	Resource description name			5
RESGROUP-2	CHAR	CPSM	8	Yes	DIFF	Resource group name			6

Chapter 371. RESINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a resource definition in a resource group (RESGROUP). A resource definition can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is RESGROUP.

The **Secondary** key field for this resource class is DEFTYPE.

The **Tertiary** key field for this resource class is DEFNAME.

The **Fourth** key field for this resource class is DEFVER.

The following action is supported:

REMOVE

Remove the association between a resource definition and a resource group.

The REMOVE action requires no unique parameter data.

External resource name

CICSResourceInGroup

Length

136

Usage

API or WUI or CICS Management Client Interface

API view

Yes

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6144

Table 893. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		RESGROUP(value)	No
		RESNAME(value)	No
		RESTYPE(value)	No
		RESVER(value)	No
REMOVE		None	N/A

Table 894. RESINGRP FEEDBACK error codes		
Value	Code	Description
2	RESINGRP_REC_NOT_FOUND	Requested resource not found

Table 894. RESINGRP FEEDBACK error codes (continued)

Value	Code	Description
6	RESINGRP_INV_RESTYPE	Invalid resource type
7	RESINGRP_INV_VER	Invalid resource version
11	RESINGRP_NON_MP	Maintenance point CMAS not available
12	RESINGRP_INV_CONTEXT	Context not found
23	RESINGRP_INV_NAME	Invalid name
24	RESINGRP_INV_MINNAME	Invalid minor name

Table 895. RESINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			14
CHANGEAGENT Input/ output valid values	DREPAPI								
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			17
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification			1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			16
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created			15
DEFDESC	CHAR	CPSM	58	No	DIFF	Resource definition description			9
DEFNAME-3	CHAR	CPSM	8	Yes	DIFF	Resource definition			7
DEFTYPE-2	CHAR	CPSM	8	Yes	DIFF	Resource definition type			6
DEFTYPEX	RESTYPE	CPSM	2	Yes	LIKE	Resource definition ID			11
DEFVER-4	BINARY	CPSM	1	Yes	AVG	Resource definition version	0	0-15	8
INGPTYPE	CHAR	CPSM	8	Yes	LIKE	Resource in group type			12
INGPTYPX	RESTYPE	CPSM	2	Yes	LIKE	Resource in group ID			13
RESGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group			5

Chapter 372. RPLLIST Resource Table

A CICS resource that describes a data set in the DFHRPL concatenation sequence.

The **Primary** key field for this resource class is RPLNUM.

There are no object specific actions for this resource class.

External resource name

CICSDFHRPLDataSet

Length

64

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0018

Table 896. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 897. RPLLIST resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	2
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
DSNAME	CHAR	CPSM	44	DIFF	Static RPL data set name	
RPLNUM-1	BINARY	CPSM	4	AVG	Static RPL data set position	1

Chapter 373. RQMDEF Resource Table

A CICS Definition that describes a request model.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install a Request Model Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name
CICSDefinitionRequestModel

Length
1288

Usage
API or Batch Utility or WUI or CICS Management Client Interface

API view
No

CMAS context
No

SCOPE applies
No

Only query CMASs in workload
No

Object type
CICS Definition

Copybook identifier
EYUt3826

Table 898. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM	INSTALL SET	FORCEINS(YES, NO)	No
SET		MODE(value)	No

Table 898. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 899. RQMDEF FEEDBACK error codes

Value	Code	Description
1	RQMDEF_INV_DATA	Attribute data invalid
2	RQMDEF_REC_NOT_FOUND	Requested resource not found
4	RQMDEF_REC_EXISTS	Resource already exists
5	RQMDEF_REC_CHANGED	Resource definition already changed
6	RQMDEF_INV_RESTYPE	Invalid resource type
7	RQMDEF_INV_VER	Invalid resource version
11	RQMDEF_NON_MP	Maintenance point CMAS not available
12	RQMDEF_INV_CONTEXT	Context not found
13	RQMDEF_INCONSISTENT_SET	Inconsistent set condition
14	RQMDEF_INV_RESGROUP	Resource group not found
21	RQMDEF_INV_ACTION	Invalid action
22	RQMDEF_INV_RECADDR	Invalid record address
23	RQMDEF_INV_RECLEN	Invalid record length
24	RQMDEF_DIFF_VERSION	Different version
25	RQMDEF_EARLY_NAMELIST_END	Early name list end
26	RQMDEF_INV_NAMELIST	Invalid name list
27	RQMDEF_INV_NAME	Invalid name
28	RQMDEF_INV_MINNAME	Invalid minor name
29	RQMDEF_NOTIFY	Notify
30	RQMDEF_PARTIAL_INSTALL	Partial install
31	RQMDEF_NOTHING_INSTALLED	Nothing installed

Table 899. RQMDEF FEEDBACK error codes (continued)

Value	Code	Description
32	RQMDEF_NO_TARGETS	No targets
33	RQMDEF_NO_RELATED	No related systems
34	RQMDEF_INV_TSCOPE	Invalid target scope
35	RQMDEF_INV_RSCOPE	Invalid related scope
36	RQMDEF_INV_USAGE	Invalid usage
37	RQMDEF_INV_MODE	Invalid mode
38	RQMDEF_INV_STATECHK	Invalid state check
39	RQMDEF_INV_FORCEINS	Invalid force install
40	RQMDEF_INV_NOTIFY	Invalid notify
41	RQMDEF_INV_OVERTYPE	Invalid over type
42	RQMDEF_INV_OVRBLOCK	Invalid override block
43	RQMDEF_INV_ORSTRING	Invalid override string
44	RQMDEF_INV_STRNGTERM	Invalid string terminator
45	RQMDEF_INV_EMBEDTERM	Invalid embedded terminator
46	RQMDEF_INV_ATTRIBUTE	Invalid attribute
47	RQMDEF_INV_LITERAL	Invalid literal
48	RQMDEF_INV_ORSTGNA	Invalid override string
49	RQMDEF_SCOPE_REQUIRED	Scope required
50	RQMDEF_USAGE_CONFLICT	Usage conflict
51	RQMDEF_NODEFS_SELECTED	No definitions selected
52	RQMDEF_MORE_THAN_1_RELSYS	More than one related system
53	RQMDEF_MISSING_RELSYSID	Missing related system identifier
54	RQMDEF_SCOPE_CONFLICT	Scope conflict
55	RQMDEF_INV_CSDGROUP	Invalid CSD group
56	RQMDEF_REC_NOT_REMOVED	Record not removed
57	RQMDEF_INV_RESOURCE	Invalid resource
58	RQMDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	RQMDEF_PARTIAL_ACTION	Partial action
60	RQMDEF_NOTHING_ACTIONED	Nothing actioned
61	RQMDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	RQMDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	RQMDEF_CSD_ERROR	CSD access error

Table 900. RQMDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
BEANNAME	CHAR	CPSM	240	Yes	DIFF	Enterprise bean				23
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	28
CHANGEAGENT Input/ output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	30
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	29
CORBASERVER	CHAR	CPSM	4	Yes	DIFF	CorbaServer				17
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				12
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	32
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		27
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				16
INTERFACE	CHAR	CPSM	255	Yes	DIFF	Interface name				25
INTFACETYPE	CVDAS	CPSM	4	Yes	LIKE	Java interface type	BOTH			20
INTFACETYPE Input/ output valid values	HOME, REMOTE, BOTH, NOTAPPLIC									
MODULE	CHAR	CPSM	255	Yes	DIFF	Module name				24
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
OMGINTERFACE	CHAR	CPSM	31	No	DIFF	Object management group (OMG) interface name				9
OMGMODULE	CHAR	CPSM	58	No	DIFF	Object management group (OMG) module name				8
OMGOPERATION	CHAR	CPSM	31	No	DIFF	Object management group (OMG) operation name				10
OPERATION	CHAR	CPSM	255	Yes	DIFF	Operation name				26
RTYPE	CVDAS	CPSM	4	Yes	LIKE	Request model type	GENERIC			19
RTYPE Input/output valid values	EJB, CORBA, GENERIC									
TRANSID	CHAR	CPSM	4	Yes	DIFF	CICS transaction ID				11
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				13
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				14
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				15

Chapter 374. RQMINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a request model definition (RQMDEF) in a resource group (RESGROUP). A RQMDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is RQMGROUP.

The **Secondary** key field for this resource class is RQMNAME.

The **Tertiary** key field for this resource class is RQMVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6171

Table 901. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 902. RQMINGRP FEEDBACK error codes		
Value	Code	Description
1	RQMINGRP_INV_DATA	Attribute data invalid
2	RQMINGRP_REC_NOT_FOUND	Requested resource not found
4	RQMINGRP_REC_EXISTS	Resource already exists
6	RQMINGRP_INV_RESTYPE	Invalid resource type
7	RQMINGRP_INV_VER	Invalid resource version
11	RQMINGRP_NON_MP	Maintenance point CMAS not available

Table 902. RQMINGRP FEEDBACK error codes (continued)

Value	Code	Description
12	RQMINGRP_INV_CONTEXT	Context not found
21	RQMINGRP_INCONSISTENT_SET	Inconsistent set
22	RQMINGRP_DIFF_VERSION	Different version
23	RQMINGRP_INV_NAME	Invalid name
24	RQMINGRP_INV_MINNAME	Invalid minor name

Table 903. RQMINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
RQMGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
RQMNAME-2	CHAR	CPSM	8	Yes	DIFF	Request model definition name	6
RQMVER-3	BINARY	CPSM	1	Yes	AVG	Request model definition version	7

Chapter 375. RQMODEL Resource Table

A CICS Resource that describes a request model in an active CICS system being managed by CICSplex SM. This resource is not supported in CICS TS for z/OS, Version 5.1 and later versions.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

DISCARD

Discard a request model.

The DISCARD action requires no unique parameter data.

External resource name

CICSRequestModel

Length

1232

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0098

Table 904. Valid CPSM operations				
Operations	Actions	Parameters		Required
GET		None		N/A
PERFORM	DISCARD	None		N/A
SET				

Table 905. RQMODEL resource table attributes								
Name	Datatype	Source	Len	Sum	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved			
BASDEFINEVER	BINARY	CPSM	1	AVG	BAS resource definition version	0	E640 E650	23
BEANNAME	CHAR	INQ	240	DIFF	Enterprise bean			9
CHANGEAGENT	CVDAS	INQ	4	LIKE	Last modification agent		E640 E650	14

Table 905. RQMODEL resource table attributes (continued)								
Name	Datatype	Source	Len	Sum	Description	Default	Get Invalid	Attr ID
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, CREATESPI, NOTAPPLIC							
CHANGEAGREL	CHAR	INQ	4	DIFF	Last modification agent release		E640 E650	16
CHANGETIME	DATETIME	INQ	8	MAX	Last modification time		E640 E650	17
CHANGEUSRID	CHAR	INQ	8	DIFF	Last modification user ID		E640 E650	15
CORBASERVER	CHAR	INQ	4	DIFF	CorbaServer			6
DEFINESOURCE	CHAR	INQ	8	DIFF	Source of the resource definition		E640 E650	18
DEFINETIME	DATETIME	INQ	8	MAX	Creation time		E640 E650	19
INSTALLAGENT	CVDAS	INQ	4	LIKE	Installation agent		E640 E650	22
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, GRPLIST							
INSTALLTIME	DATETIME	INQ	8	MAX	Installation time		E640 E650	21
INSTALLUSRID	CHAR	INQ	8	DIFF	Installation user ID		E640 E650	20
INTERFACE	CHAR	INQ	255	DIFF	Interface name			11
INTFACETYPE	CVDAS	INQ	4	LIKE	Java interface type	BOTH		8
INTFACETYPE Output valid values	HOME, REMOTE, BOTH, NOTAPPLIC							
MODULE	CHAR	INQ	255	DIFF	Module name			10
NAME-1	CHAR	INQ	8	DIFF	Request model name			1
OMGINTERFACE	CHAR	INQ	31	DIFF	Object management group (OMG) interface name		E610+	3
OMGMODULE	CHAR	INQ	58	DIFF	Object management group (OMG) module name		E610+	2
OMGOPERATION	CHAR	INQ	31	DIFF	Object management group (OMG) operation name		E610+	4
OPERATION	CHAR	INQ	255	DIFF	Operation name			12
RTYPE	CVDAS	INQ	4	LIKE	Request model type	GENERIC		7
RTYPE Output valid values	EJB, CORBA, GENERIC							
TRANSID	CHAR	INQ	4	DIFF	CICS transaction ID			5

Chapter 376. RTAACTV Resource Table

A CPSM Real Time Analysis Manager object that describes the characteristics of an analysis or status definition installed in a specific CICS system.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is ACTIVETIME.

The **Tertiary** key field for this resource class is TYPE.

The following actions are supported:

DISCARD

Unconditionally remove the installed definition.

DEACTIVATE

Remove the installed definition honoring a PERIODEF.

These actions require no unique parameter data.

External resource name

CICSRTAInstalledDefinition

Length

64

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2529

Table 906. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET	DEACTIVATE	None	N/A
	REACTIVATE	None	N/A

Table 907. RTAACTV FEEDBACK error codes

Value	Code	Description
1	RTAACTV_INV_DATA	Attribute data invalid
2	RTAACTV_REC_NOT_FOUND	Requested resource not found
21	RTAACTV_DEACT_NOT_ALLOWED	Deactivate not allowed
22	RTAACTV_REACT_NOT_ALLOWED	Reactivate not allowed

Table 908. RTAACTV resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	4
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ACTION	CHAR	CPSM	8	DIFF	Associated action name	
ACTIVETIME-2	CHAR	CPSM	8	DIFF	Period definition name	3
CICSSYS	CHAR	CPSM	8	DIFF	CICS system name	2
NAME-1	CHAR	CPSM	8	DIFF	Definition name	1
RATE	BINARY	CPSM	4	AVG	Interval between evaluations (seconds)	5
STATUS	EYUDA	CPSM	4	LIKE	Definition status	6
STATUS Output valid values	ACTIVE, PENDING					
TYPE-3	RESTYPE	CPSM	2	LIKE	Analysis definition type (analysis or status)	7

Chapter 377. RTADEF Resource Table

A CPSM Real Time Analysis Definition that describes a single analysis operation for a set of evaluations. The analysis operation controls identify the evaluations to reference and information about the frequency and modes used to determine if the analysis state is TRUE.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

INSTALL

Install the definition into each active CICS system that has Real Time Analysis active within the specified scope. If provided the PERIODEF is used to provide the valid operational time of the RTADEF.

The parameter data for the INSTALL action is:

```
PARM(' [PERIOD(period)] .')  
  
where:  
  
period = The name of a PERIODEF definition.
```

APINSTALL

Install the definition into an active APSPEC.

The parameter data for the APINSTALL action is:

```
PARM(' APSPEC(spec) [PERIOD(period)] .')  
  
where:  
  
spec   = (Required) The name of an active APSPEC.  
period = The name of a PERIODEF definition.
```

The RTADEF is installed in each active CICS system in the current scope that has Real Time Analysis active. If provided, the PERIODEF is used to determine the valid operational time of the RTADEF.

External resource name

CICSRTADefinition

Length

672

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt3507

Table 909. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
UPDATE		None	N/A
REMOVE		None	N/A
PERFORM SET	INSTALL	PERIOD(value)	No
		SCOPE(value)	No
	APINSTALL	APSPEC(value)	Yes
		PERIOD(value)	No
		SCOPE(value)	No
	ADDTGRP	ACTIVETIME(value)	No
		RESGROUP(value)	Yes

Table 910. RTADEF FEEDBACK error codes		
Value	Code	Description
1	RTADEF_INV_DATA	Attribute data invalid
2	RTADEF_REC_NOT_FOUND	Requested resource not found
3	RTADEF_INV_REFERENCE	Not found
4	RTADEF_REC_EXISTS	Resource already exists
5	RTADEF_REC_CHANGED	Resource definition already changed
6	RTADEF_INV_RESTYPE	Invalid restype
7	RTADEF_NONE_INSTALLED	None installed
8	RTADEF_PARTIAL_INSTALL	Partial install
9	RTADEF_ALREADY_INSTALLED	Already installed
10	RTADEF_NO_ACTIVE_SYSTEMS	No active systems for install
11	RTADEF_MISSING_APSPEC	Missing analysis point specification
12	RTADEF_INVALID_APSPEC_NAME	Invalid analysis point specification name
13	RTADEF_INVALID_NAMELIST	Invalid namelist
14	RTADEF_EARLY_NAMELIST_END	Early namelist end
15	RTADEF_INVALID_DEFTYPE	Invalid definition type
16	RTADEF_INVALID_TYPE	Invalid request type
17	RTADEF_INVALID_SCOPE	Invalid scope
18	RTADEF_INVALID_CONTEXT	Invalid context
19	RTADEF_NO_RECORD_FOUND	No RTA definition found for install

Table 911. RTADEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
ACTION	CHAR	CPSM	8	Yes	DIFF	Action definition name			9
CHANGEAGENT	CV DAS	CPSM	4	No	LIKE	Last modification agent			32
CHANGEAGENT Input/output valid values	DREPAPI								
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			35
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification			1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			34
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created			33
DESC	CHAR	CPSM	58	No	DIFF	Description			22
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999	31
EVALEXPRTEXT	CHAR	CPSM	500	Yes	DIFF	Evaluation expression			24
EXEC_OPS	EYUDA	CPSM	4	Yes	LIKE	Execute evaluation modification string	NO		30
EXEC_OPS Input/output valid values	YES, NO, ALWAYS								
HSEENTRY	BINARY	CPSM	4	Yes	AVG	Count of true evaluations before HS raised	1	1-9999	14
HSEXIT	BINARY	CPSM	4	Yes	AVG	Count of false evaluations before HS resolved	1	1-9999	20
HWENTRY	BINARY	CPSM	4	Yes	AVG	Count of true evaluations before HW raised	1	1-9999	13
HWEXIT	BINARY	CPSM	4	Yes	AVG	Count of false evaluations before HW resolved	1	1-9999	19
LSEENTRY	BINARY	CPSM	4	Yes	AVG	Count of true evaluations before LS raised	1	1-9999	11
LSEXIT	BINARY	CPSM	4	Yes	AVG	Count of false evaluations before LS resolved	1	1-9999	17
LWENTRY	BINARY	CPSM	4	Yes	AVG	Count of true evaluations before LW raised	1	1-9999	12
LWEXIT	BINARY	CPSM	4	Yes	AVG	Count of false evaluations before LW resolved	1	1-9999	18
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name			7
RATE	BINARY	CPSM	4	Yes	AVG	Analysis interval	300	1-86400	8
VHSEENTRY	BINARY	CPSM	4	Yes	AVG	Count of true evaluations before VHS raised	1	1-9999	15
VHSEXIT	BINARY	CPSM	4	Yes	AVG	Count of false evaluations before VHS resolved	1	1-9999	21
VLSEENTRY	BINARY	CPSM	4	Yes	AVG	Count of true evaluations before VLS raised	1	1-9999	10
VLSEXIT	BINARY	CPSM	4	Yes	AVG	Count of false evaluations before VLS resolved	1	1-9999	16

Chapter 378. RTAGROUP Resource Table

A CPSM Real Time Analysis Definition that provides the association anchor for a set of RTADEF or STATDEF definitions. References to the RTAGROUP are inferred to be references to the set of associated RTADEF or STATDEF instances.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

INSTALL

Install the set of definition RTADEF and STATDEF instances in the group into each active CICS system that has Real Time Analysis active within the specified scope.

APINSTALL

Install the set of definition into an active APSPEC.

The parameter data for the APINSTALL action is:

```
PARM('APSPEC(spec).')  
  
where:  
  
spec = (Required) The name of an active APSPEC.
```

Only the set of RTADEF instances associated with the RTAGROUP are installed since an APSPEC does not support STATDEF objects.

External resource name

CICSRTAGroup

Length

112

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt3505

Table 912. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
UPDATE		None	N/A
REMOVE		None	N/A

Table 912. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
PERFORM SET	INSTALL	SCOPE(value)	No
	APINSTALL	APSPEC(value)	Yes
		SCOPE(value)	No
	ADDTOSPC	SPEC(value)	Yes
	ADDTOAPS	SCOPE(value)	No
		SPEC(value)	Yes

Table 913. RTAGROUP FEEDBACK error codes		
Value	Code	Description
1	RTAGROUP_INV_DATA	Attribute data invalid
2	RTAGROUP_REC_NOT_FOUND	Requested resource not found
3	RTAGROUP_INV_REFERENCE	Attribute references an invalid resource
4	RTAGROUP_REC_EXISTS	Resource already exists
5	RTAGROUP_REC_CHANGED	Resource definition already changed
6	RTAGROUP_INV_RESTYPE	Invalid Restype
7	RTAGROUP_INV_VER	Invalid version
21	RTAGROUP_NONE_INSTALLED	No groups installed
22	RTAGROUP_PARTIAL_INSTALL	Partial install
23	RTAGROUP_NO_ACTIVE_SYSTEMS	No active systems
24	RTAGROUP_DUPLICATE_DEFINITION	Duplicate definition

Table 914. RTAGROUP resource table attributes									
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
CHANGEAGENT	CV DAS	CPSM	4	No	LIKE	Last modification agent			8
CHANGEAGENT Input/ output valid values	DREPAPI								
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed			1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created			9
DESC	CHAR	CPSM	58	No	DIFF	Description			6
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999	7
NAME-1	CHAR	CPSM	8	Yes	DIFF	RTA group			5

Chapter 379. RTAINAPS Resource Table

A CPSM Real Time Analysis Definition that describes the membership of a real-time analysis group (RTAGROUP) in an analysis point specification (APSPEC). An RTAGROUP can be a member of multiple APSPECs.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is GROUP.

There are no object specific actions for this resource class.

External resource name

CICSRTAGroupInAnalysisPointSpecification

Length

64

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt5124

Table 915. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 916. RTAINAPS FEEDBACK error codes

Value	Code	Description
1	RTAINAPS_INV_DATA	Attribute data invalid
2	RTAINAPS_REC_NOT_FOUND	Requested resource not found
3	RTAINAPS_INV_REFERENCE	Attribute references an invalid resource
4	RTAINAPS_REC_EXISTS	Resource already exists
6	RTAINAPS_INV_RESTYPE	Invalid resource type
7	RTAINAPS_INV_VER	Invalid resource version

Table 917. RTAINAPS resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
GROUP-2	CHAR	CPSM	8	Yes	DIFF	RTA group	6
NAME-1	CHAR	CPSM	8	Yes	DIFF	Analysis point specification	5
SCOPE	CHAR	CPSM	8	No	DIFF	Scope of RTA definitions in group	7

Chapter 380. RTAINGRP Resource Table

A CPSM Real Time Analysis Definition that describes the membership of a real-time analysis definition (RTADEF) in a real-time analysis group (RTAGROUP). An RTADEF can be a member of multiple RTAGROUPs.

The **Primary** key field for this resource class is GROUP.

The **Secondary** key field for this resource class is DEFNAME.

There are no object specific actions for this resource class.

External resource name

CICSRTAResourceInGroup

Length

64

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt5377

Table 918. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
UPDATE		None	N/A
REMOVE		None	N/A

Table 919. RTAINGRP FEEDBACK error codes

Value	Code	Description
1	RTAINGRP_INV_DATA	Attribute data invalid
2	RTAINGRP_REC_NOT_FOUND	Requested resource not found
3	RTAINGRP_INV_REFERENCE	Attribute references an invalid resource
4	RTAINGRP_REC_EXISTS	Resource already exists
5	RTAINGRP_REC_CHANGED	Resource definition already changed
6	RTAINGRP_INV_RESTYPE	Invalid resource type

Table 920. RTAINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
ACTIVETIME	CHAR	CPSM	8	No	DIFF	Period definition	7
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
DEFNAME-2	CHAR	CPSM	8	Yes	DIFF	RTA definition	6
GROUP-1	CHAR	CPSM	8	Yes	DIFF	RTA group	5

Chapter 381. RTAINSPC Resource Table

A CPSM Real Time Analysis Definition that describes the membership of a real-time analysis group (RTAGROUP) in a real-time analysis specification (RTASPEC). An RTAGROUP may be a member of multiple RTASPECs.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is GROUP.

There are no object specific actions for this resource class.

External resource name

CICSRTAGroupInSpecification

Length

56

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt5122

Table 921. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 922. RTAINSPC FEEDBACK error codes		
Value	Code	Description
1	RTAINSPC_INV_DATA	Attribute data invalid
2	RTAINSPC_REC_NOT_FOUND	Requested resource not found
3	RTAINSPC_INV_REFERENCE	Attribute references an invalid resource
4	RTAINSPC_REC_EXISTS	Resource already exists

Table 923. RTAINSPC resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	7
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	10
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	9
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	8
GROUP-2	CHAR	CPSM	8	Yes	DIFF	RTA group	6
NAME-1	CHAR	CPSM	8	Yes	DIFF	RTA specification name	5

Chapter 382. RTASPEC Resource Table

A CPSM Real Time Analysis Definition that describes the RTA control directives for a set of CICS systems. Using group associators, an RTASPEC object can determine which RTADEF and STATDEF instances are to be installed in each CICS system. Using scope link associators (LNKSRSCS), an RTASPEC object can determine which CICS systems fall under its processing scope. A CICS system can have a scope link associator to only one RTASPEC.

The **Primary** key field for this resource class is NAME.

External resource name

CICSRTASpecification

Length

192

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt3512

Table 924. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
UPDATE		None	N/A
REMOVE		None	N/A
PERFORM SET	ADDSYSGRP	FORCE	No
		GROUP(value)	Yes
		INHERIT(NONE, NULL, FORCE)	No
		NONE	No
		NULL	No
	ADDSYSDEF	SYSTEM(value)	Yes

Table 925. RTASPEC FEEDBACK error codes

Value	Code	Description
1	RTASPEC_INV_DATA	Attribute data invalid
2	RTASPEC_REC_NOT_FOUND	Requested resource not found
3	RTASPEC_INV_REFERENCE	Does not exist
4	RTASPEC_REC_EXISTS	Resource already exists
5	RTASPEC_REC_CHANGED	Resource definition already changed
6	RTASPEC_INV_RESTYPE	Invalid resource type
7	RTASPEC_INV_VER	Invalid resource version
8	RTASPEC_ACTION_NOT_FOUND	Action not found
9	RTASPEC_LNKASSOC_EXISTS	Association already exists

Table 926. RTASPEC resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			20
CHANGEAGENT Input/output valid values	DREPAPI								
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			23
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification			1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			22
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created			21
DESC	CHAR	CPSM	58	No	DIFF	Description			18
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999	19
MXTACTION	CHAR	CPSM	8	No	DIFF	Action for CICS-at-maximum-tasks event			16
MXTSEV	EYUDA	CPSM	4	No	LIKE	Severity for CICS-at-maximum-tasks event			10
MXTSEV Input/output valid values	VLS, LS, LW, HW, HS, VHS, NO, N_A								
NAME-1	CHAR	CPSM	8	Yes	DIFF	RTA specification name			5
NRMACTION	CHAR	CPSM	8	No	DIFF	Action for Non-responsive-MAS event			26
NRMSEV	EYUDA	CPSM	4	No	LIKE	Severity for Non-responsive-MAS event			25
NRMSEV Input/output valid values	VLS, LS, LW, HW, HS, VHS, NO, N_A								
SAMACTION	CHAR	CPSM	8	No	DIFF	Action for system availability monitoring event			12
SAMSEV	EYUDA	CPSM	4	No	LIKE	Severity for system availability monitoring event			6
SAMSEV Input/output valid values	VLS, LS, LW, HW, HS, VHS, NO, N_A								
SDMACTION	CHAR	CPSM	8	No	DIFF	Action for system dump event			14
SDMSEV	EYUDA	CPSM	4	No	LIKE	Severity for system dump event			8
SDMSEV Input/output valid values	VLS, LS, LW, HW, HS, VHS, NO, N_A								

Table 926. RTASPEC resource table attributes (continued)									
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
SOSACTION	CHAR	CPSM	8	No	DIFF	Action for short on storage (SOS) event			13
SOSSEV	EYUDA	CPSM	4	No	LIKE	Severity for short on storage (SOS) event			7
SOSSEV Input/output valid values	VLS, LS, LW, HW, HS, VHS, NO, N_A								
STLACTION	CHAR	CPSM	8	No	DIFF	Action for CICS-stalled event			17
STLSEV	EYUDA	CPSM	4	No	LIKE	Severity for CICS-stalled event			11
STLSEV Input/output valid values	VLS, LS, LW, HW, HS, VHS, NO, N_A								
TDMACTION	CHAR	CPSM	8	No	DIFF	Action for transaction dump event			15
TDMSEV	EYUDA	CPSM	4	No	LIKE	Severity for transaction dump event			9
TDMSEV Input/output valid values	VLS, LS, LW, HW, HS, VHS, NO, N_A								

Chapter 383. RULE Resource Table

This CICS resource object provides information about policy rules.

The **Primary** key field for this resource class is POLICYSET.

The **Secondary** key field for this resource class is POLICY.

The **Tertiary** key field for this resource class is RULE.

There are no object specific actions for this resource class.

Restriction: The RACF® security profiles do not support the RULE resource; consequently, security checks do not apply to policy query operations.

External resource name

CICSRule

Length

920

Usage

API or CICS Management Client Interface

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0215

Table 927. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		APPLICATION(value)	No
		APPLMAJORVER(value)	No
		APPLMICROVER(value)	No
		APPLMINORVER(value)	No
		OPERATION(value)	No
		PLATFORM(value)	No
		POLICY(value)	No
		POLICYSET(value)	No
		RULE(value)	No

Table 928. RULE FEEDBACK error codes

Value	Code	Description
21	RULE_NO_DATA	No data to return
22	RULE_INV_PLATFORM	Platform name is invalid
23	RULE_INV_APPLICATION	Application name is invalid
24	RULE_INV_MAJVER	Application major version is invalid
25	RULE_INV_MINVER	Application minor version is invalid
26	RULE_INV_MICVER	Application micro version is invalid
27	RULE_INV_OPERATION	Operation name is invalid
28	RULE_INV_POLICY	Policy name is invalid
29	RULE_INV_RULE	Rule name is invalid

Table 929. RULE resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ABCODE	CHAR	INQ	4	DIFF	Abend code	36
ACTION	EYUDA	INQ	4	DIFF	Action	17
BASEAPMAJVER	BINARY	INQ	4	MAX	Base application major version	31
BASEAPMICVER	BINARY	INQ	4	MAX	Base application micro version	33
BASEAPMINVER	BINARY	INQ	4	MAX	Base application minor version	32
BASEAPPLICTN	CHAR	INQ	64	DIFF	Base application name	30
BASELEVEL	EYUDA	INQ	4	DIFF	Base level	28
BASEOPERATN	CHAR	INQ	64	DIFF	Operation name	34
BASEPLATFORM	CHAR	INQ	64	DIFF	Base platform name	29
BUNDLE	CHAR	INQ	8	DIFF	Bundle Name	21
BUNDLEDIR	CHAR	INQ	255	DIFF	Bundle directory name	26
BUNDLEID	CHAR	INQ	64	DIFF	Bundle ID	22
BUNDLEMAJVER	BINARY	INQ	4	DIFF	Bundle major version	23
BUNDLEMICVER	BINARY	INQ	4	DIFF	Bundle micro version	25
BUNDLEMINVER	BINARY	INQ	4	DIFF	Bundle minor version	24
CHANGEAGENT	CV DAS	INQ	4	LIKE	Last modification agent	2
CHANGEAGENT Input/output valid values	CSDAPI, CREATESPI, CSDBATCH, DREPAPI, NOTAPPLIC					
CHANGEAGREL	CHAR	INQ	4	DIFF	Last modification agent release	3
CHANGETIME	DATETIME	INQ	8	MAX	Last modification time	7
CHANGEUSRID	CHAR	INQ	8	DIFF	Last modification user ID	4
COUNT	BINARY	INQ	4	MAX	Action count	35
DEFINESOURCE	CHAR	INQ	8	DIFF	Source of the resource definition	5
DEFINETIME	DATETIME	INQ	8	MAX	Creation time	6
EPADAPTER	CHAR	INQ	32	DIFF	EP adapter name	39
EPADAPTERSET	CHAR	INQ	32	DIFF	EP adapter set name	38

Table 929. RULE resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
INSTALLAGENT	CVDAS	INQ	4	DIFF	Installation agent	9
INSTALLAGENT Input/output valid values	BUNDLE					
INSTALLTIME	DATETIME	INQ	8	MAX	Installation time	8
INSTALLUSRID	CHAR	INQ	8	DIFF	Installation user ID	10
OPERATOR	EYUDA	INQ	4	DIFF	Test operator	13
POLICY-2	CHAR	INQ	64	DIFF	Policy name	19
POLICYSET-1	CHAR	INQ	12	DIFF	Policy set	18
RULE-3	CHAR	INQ	64	DIFF	Policy Rule	1
RULEGROUP	EYUDA	INQ	4	LIKE	Rule group	40
RULEITEM	CHAR	INQ	16	DIFF	Rule item name	12
RULETYPE	CHAR	INQ	16	DIFF	Rule type	11
THRESHOLD	CNUMERIC	INQ	8	MAX	Actual threshold value	15
TIME	DATETIME	INQ	8	MAX	Last action time	37
UNIT	EYUDA	INQ	4	DIFF	Unit qualifier	16
USERTAG	CHAR	INQ	8	DIFF	User tag	20
VALUE	CNUMERIC	INQ	8	MAX	Specified threshold value	14

Chapter 384. SESINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a session definition (SESSDEF) in a resource group (RESGROUP). A SESSDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is SESSGROUP.

The **Secondary** key field for this resource class is SESSNAME.

The **Tertiary** key field for this resource class is SESSVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6155

Table 930. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 931. SESINGRP FEEDBACK error codes		
Value	Code	Description
1	SESINGRP_INV_DATA	Attribute data invalid
2	SESINGRP_REC_NOT_FOUND	Requested resource not found
4	SESINGRP_REC_EXISTS	Resource already exists
6	SESINGRP_INV_RESTYPE	Invalid resource type
7	SESINGRP_INV_VER	Invalid resource version
11	SESINGRP_NON_MP	Maintenance point CMAS not available
12	SESINGRP_INV_CONTEXT	Context not found

Table 931. SESINGRP FEEDBACK error codes (continued)

Value	Code	Description
21	SESINGRP_INCONSISTENT_SET	Inconsistent set
22	SESINGRP_DIFF_VERSION	Different version
23	SESINGRP_INV_NAME	Invalid name
24	SESINGRP_INV_MINNAME	Invalid minor name

Table 932. SESINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
SESSGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
SESSNAME-2	CHAR	CPSM	8	Yes	DIFF	Session definition name	6
SESSVER-3	BINARY	CPSM	1	Yes	AVG	Session definition version	7

Chapter 385. SESSDEF Resource Table

A CICS Definition that describes a session, which is a logical link between connected systems.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

External resource name

CICSDefinitionSession

Length

496

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3810

Table 933. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM SET	ADDTGRP	RESGROUP(value)	Yes
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 934. SESSDEF FEEDBACK error codes

Value	Code	Description
1	SESSDEF_INV_DATA	Attribute data invalid
2	SESSDEF_REC_NOT_FOUND	Requested resource not found
4	SESSDEF_REC_EXISTS	Resource already exists
5	SESSDEF_REC_CHANGED	Resource definition already changed
6	SESSDEF_INV_RESTYPE	Invalid resource type
7	SESSDEF_INV_VER	Invalid resource version
11	SESSDEF_NON_MP	Maintenance point CMAS not available
12	SESSDEF_INV_CONTEXT	Context not found
13	SESSDEF_INCONSISTENT_SET	Inconsistent set condition
14	SESSDEF_INV_RESGROUP	Resource group not found
21	SESSDEF_INV_ACTION	Invalid action
22	SESSDEF_INV_RECADDR	Invalid record address
23	SESSDEF_INV_RECLEN	Invalid record length
24	SESSDEF_DIFF_VERSION	Different version
25	SESSDEF_EARLY_NAMELIST_END	Early name list end
26	SESSDEF_INV_NAMELIST	Invalid name list
27	SESSDEF_INV_NAME	Invalid name
28	SESSDEF_INV_MINNAME	Invalid minor name
29	SESSDEF_INV_CSDGROUP	Invalid CSD group
30	SESSDEF_REC_NOT_REMOVED	Record not removed
31	SESSDEF_INV_RESOURCE	Invalid resource
32	SESSDEF_INV_CICS_RESTYPE	Invalid CICS restype
33	SESSDEF_PARTIAL_ACTION	Partial action
34	SESSDEF_NOTHING_ACTIONED	Nothing actioned
35	SESSDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
36	SESSDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
37	SESSDEF_CSD_ERROR	CSD access error

Table 935. SESSDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
AUTOCONNECT	EYUDA	CPSM	4	Yes	LIKE	Autoconnect option	NO			8
AUTOCONNECT Input/output valid values	YES, NO, ALL									
BUILDCHAIN	EYUDA	CPSM	4	Yes	LIKE	Chain assembly required	YES			9
BUILDCHAIN Input/output valid values	YES, NO									

Table 935. SESSDEF resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	57
CHANGEAGENT Input/output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	59
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	58
CONNECTION	CHAR	CPSM	4	Yes	DIFF	Connection definition name				10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				49
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	61
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		56
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				53
DISCREQ	EYUDA	CPSM	4	Yes	LIKE	Honor disconnect requests	NO			11
DISCREQ Input/output valid values	YES, NO									
INSERVICE	EYUDA	CPSM	4	Yes	LIKE	Session inservice	N_A		E330 +	30
INSERVICE Input/output valid values	YES, NO, N_A									
IOAREALEN	CHAR	CPSM	8	No	DIFF	Minimum terminal input output area (TIOA) size	0	0-32767		12
IOAREALEN2	CHAR	CPSM	8	No	DIFF	Alternate terminal input output area (TIOA) size	0	0-32767		13
MAXCTWIN	CHAR	CPSM	4	No	DIFF	Maximum number of contention winner sessions		0-999		15
MAXINGRP	CHAR	CPSM	4	No	DIFF	Maximum number of sessions in the group		0-999		14
MODENAME	CHAR	CPSM	8	No	DIFF	Mode name				16
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
NEPCCLASS	CHAR	CPSM	4	No	DIFF	Network error program transaction class	0	0-255		17
NETNAMEQ	CHAR	CPSM	8	No	DIFF	Name IMS system uses to identify session				18
OPERID	CHAR	CPSM	3	No	DIFF	Operator identifier			E330 +	37
OPERPRIORITY	CHAR	CPSM	4	No	DIFF	Operator priority	0	0-255	E330 +	29
OPERRSL	CHAR	CPSM	50	No	DIFF	Operator resource security keys			E330 +	54
OPERSEC	CHAR	CPSM	150	No	DIFF	Operator transaction security keys			E330 +	55
PARTCODEPAGE	CHAR	CPSM	8	No	DIFF	Partner code page	0	0-65534	EALL	33
PROTOCOL	CVDAS	CPSM	4	Yes	LIKE	Intercommunication link protocol	APPC			19

Table 935. SESSDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
PROTOCOL Input/output valid values	APPC, EXCI, LU61, NOTAPPLIC									
RECEIVECOUNT	CHAR	CPSM	4	No	DIFF	Receive count		1-999		20
RECEIVEPFX	CHAR	CPSM	2	No	DIFF	Receive prefix				35
RECEIVESIZE	CHAR	CPSM	8	No	DIFF	Receive buffer size	4096	1-30720		21
RECOVNOTIFY	EYUDA	CPSM	4	Yes	LIKE	XRF recovery notification option	N_A		E410 +	23
RECOVNOTIFY Input/output valid values	NONE, MESSAGE, TRANSACTION, N_A									
RECOVOPTION	EYUDA	CPSM	4	Yes	LIKE	Recovery option	SYSDEFAULT			22
RECOVOPTION Input/output valid values	SYSDEFAULT, CLEARCONV, NONE, RELEASESESS, UNCONDREL									
RELREQ	EYUDA	CPSM	4	Yes	LIKE	Honor release requests	NO			24
RELREQ Input/output valid values	YES, NO									
SENDCOUNT	CHAR	CPSM	4	No	DIFF	Send count		1-999		25
SENDPFX	CHAR	CPSM	2	No	DIFF	Send prefix				36
SENDSIZE	CHAR	CPSM	8	No	DIFF	Send buffer size	4096	1-30720		26
SESSNAME	CHAR	CPSM	4	No	DIFF	Session name				27
SESSPRIORITY	CHAR	CPSM	4	No	DIFF	Session priority	0	0-255		28
TRANSACTION	CHAR	CPSM	4	No	DIFF	Transaction to be initiated from device			E330 +	31
USERAREALEN	CHAR	CPSM	4	No	DIFF	User area size	0	0-255		32
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				50
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				51
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				52
USERID	CHAR	CPSM	8	No	DIFF	User signon ID				34

Chapter 386. SMFJRNL Resource Table

A CICS Resource that describes an SMF type journal in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is JOURNALNUM.

There are no object specific actions for this resource class.

External resource name

Length

40

Usage

EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0014

Table 936. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A

Table 937. SMFJRNL resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name	2
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved	
AVGSIZE	BINARY	STAT	2	AVG	No	Average block size	
BLKWRCNT	DECIMAL	STAT	4	AVG	No	Number of blocks written	4
BUFULLCNT	DECIMAL	STAT	3	AVG	No	Number of times buffer was full	6
JOURNALNUM-1	BINARY	INQ	2	AVG	No	Journal number	1
OPENSTATUS	CVDAS	INQ	4	LIKE	Yes	Open status	3
OPENSTATUS Output valid values		OPENOUTPUT, CLOSED					
RECWRCNT	DECIMAL	STAT	5	AVG	No	Number of records written	5

Chapter 387. STAINGRP Resource Table

A CPSM Real Time Analysis Definition that describes the membership of a status definition (STATDEF) in a real-time analysis group (RTAGROUP). A STATDEF can be a member of multiple RTAGROUPs.

The **Primary** key field for this resource class is GROUP.

The **Secondary** key field for this resource class is DEFNAME.

There are no object specific actions for this resource class.

External resource name

CICSRTASStatusDefinitionInGroup

Length

64

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt5381

Table 938. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
UPDATE		None	N/A
REMOVE		None	N/A

Table 939. STAINGRP FEEDBACK error codes		
Value	Code	Description
1	STAINGRP_INV_DATA	Attribute data invalid
2	STAINGRP_REC_NOT_FOUND	Requested resource not found
3	STAINGRP_INV_REFERENCE	Attribute references an invalid resource
4	STAINGRP_REC_EXISTS	Resource already exists
5	STAINGRP_REC_CHANGED	Resource definition already changed
6	STAINGRP_INV_RESTYPE	Invalid resource type

Table 940. STAINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
ACTIVETIME	CHAR	CPSM	8	No	DIFF	Period definition	7
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
DEFNAME-2	CHAR	CPSM	8	Yes	DIFF	Status definition	6
GROUP-1	CHAR	CPSM	8	Yes	DIFF	RTA group	5

Chapter 388. STATDEF Resource Table

A CPSM Real Time Analysis Definition that describes a site-defined status probe program to be run in a CICS system as part of Real Time Analysis processing.

The **Primary** key field for this resource class is NAME.

The following action is supported:

INSTALL

Install the definition into each active CICS system that has Real Time Analysis active within the specified scope. If provided the PERIODEF is used to provide the valid operational time of the STATDEF.

The parameter data for the INSTALL action is:

```
PARM(' [PERIOD(period)]. ')  
  
where:  
  
period = The name of a PERIODEF definition.
```

The STATDEF is installed in each active CICS system in the current scope that has Real Time Analysis active. If provided, the PERIODEF is used to determine the valid operational time of the STATDEF.

External resource name

CICSRTASStatusDefinition

Length

192

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt3516

Table 941. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
UPDATE		None	N/A
REMOVE		None	N/A

Table 941. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
PERFORM SET	INSTALL	PERIOD(value)	No
		SCOPE(value)	No
	ADDTGRP	ACTIVETIME(value)	No
		RESGROUP(value)	Yes

Table 942. STATDEF FEEDBACK error codes		
Value	Code	Description
1	STATDEF_INV_DATA	Attribute data invalid
2	STATDEF_REC_NOT_FOUND	Requested resource not found
3	STATDEF_INV_REFERENCE	Attribute references an invalid resource
4	STATDEF_REC_EXISTS	Resource already exists
5	STATDEF_REC_CHANGED	Resource definition already changed
6	STATDEF_INV_RESTYPE	Invalid resource type
21	STATDEF_NONE_INSTALLED	None installed
22	STATDEF_PARTIAL_INSTALL	Partial install
23	STATDEF_NO_ACTIVE_SYSTEMS	No active systems

Table 943. STATDEF resource table attributes									
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
ACTION	CHAR	CPSM	8	No	DIFF	Action definition name			10
CHANGEAGENT	CV DAS	CPSM	4	No	LIKE	Last modification agent			33
CHANGEAGENT Input/ output valid values	DREPAPI								
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			36
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification			1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			35
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created			34
DESC	CHAR	CPSM	58	No	DIFF	Description			25
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999	32
FREQ	BINARY	CPSM	4	Yes	AVG	Interval between calls to status program (seconds)	300	1-86400	8
HSEENTRY	BINARY	CPSM	4	Yes	AVG	Evaluation count with HS true before event	1	1-9999	15
HSEXIT	BINARY	CPSM	4	Yes	AVG	Evaluation count with HS false before resolution	1	1-9999	21
HWENTRY	BINARY	CPSM	4	Yes	AVG	Evaluation count with HW true before event	1	1-9999	14
HWEXIT	BINARY	CPSM	4	Yes	AVG	Evaluation count with HW false before resolution	1	1-9999	20
LSEENTRY	BINARY	CPSM	4	Yes	AVG	Evaluation count with LS true before event	1	1-9999	12

Table 943. STATDEF resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
LSEXIT	BINARY	CPSM	4	Yes	AVG	Evaluation count with LS false before resolution	1	1-9999	18
LWENTRY	BINARY	CPSM	4	Yes	AVG	Evaluation count with LW true before event	1	1-9999	13
LWEXIT	BINARY	CPSM	4	Yes	AVG	Evaluation count with LW false before resolution	1	1-9999	19
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name			7
STATPGM	CHAR	CPSM	8	No	DIFF	Status program name			9
TRANID	CHAR	CPSM	4	No	DIFF	Transaction ID for task			24
USERID	CHAR	CPSM	8	No	DIFF	User ID for task			23
VHSENTRY	BINARY	CPSM	4	Yes	AVG	Evaluation count with VHS true before event	1	1-9999	16
VHSEXIT	BINARY	CPSM	4	Yes	AVG	Evaluation count with VHS false before resolution	1	1-9999	22
VLSENTRY	BINARY	CPSM	4	Yes	AVG	Evaluation count with VLS true before event	1	1-9999	11
VLSEXIT	BINARY	CPSM	4	Yes	AVG	Evaluation count with VLS false before resolution	1	1-9999	17

Chapter 389. STREAMNM Resource Table

A CICS Resource that describes an MVS log stream used by an active system running CICS Transaction Server and being managed by CICSplex SM.

The **Primary** key field for this resource class is STREAMNAME.

There are no object specific actions for this resource class.

External resource name

CICSMVSLogStream

Length

160

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0078

Table 944. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A

Table 945. STREAMNM resource table attributes							
Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name	21
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved	
AUTODEL	EYUDA	STAT	4	LIKE	No	Auto-delete option	
AUTODEL Output valid values	YES, NO						
BRWREAD	BINARY	STAT	4	AVG	No	Number of reads from log	13
BRWSTRT	BINARY	STAT	4	AVG	No	Number of log browse starts	12
BUFAPPNDRQ	BINARY	STAT	4	AVG	No	Number of buffer append requests	16
BUFFWAIT	BINARY	STAT	4	AVG	No	Number of waits due to buffer being full	11
BYTES	BINARY	STAT	8	AVG	No	Total number of bytes written	7

Table 945. STREAMNM resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
CUFWTRS	BINARY	STAT	4	AVG	No	Current number of tasks waiting for buffer flush	8
DASDONLY	EYUDA	STAT	4	LIKE	No	DASD-only option	17
DASDONLY Output valid values	YES, NO						
DELETES	BINARY	STAT	4	AVG	No	Number of log-tail deletes	14
LGGAKPFREQ	BINARY	STAT	4	AVG	Yes	Activity keypoint frequency	26
LGGAKPSTKN	BINARY	STAT	4	AVG	No	Number of activity keypoints taken	28
LGGLGDEFER	BINARY	STAT	4	AVG	Yes	Log deferral interval	27
LGSQUERIES	BINARY	STAT	4	AVG	No	Logstream query count	32
MAXBLK	BINARY	STAT	4	AVG	No	Maximum block size	19
PKFWTRS	BINARY	STAT	4	AVG	No	Peak number of tasks waiting for buffer flush	9
RETPD	BINARY	STAT	4	AVG	No	Data retention period (days)	20
RETRYERRS	BINARY	STAT	4	AVG	No	Number of retryable errors	15
RWRITES	RATE3	CPSM	8	AVG	No	Rate of writes to log	34
STATUS	CVDAS	INQ	4	LIKE	No	Log stream status	3
STATUS Output valid values	OK, FAILED						
STRCNAME	CHAR	STAT	16	DIFF	No	Coupling facility structure	18
STREAMNAME-1	CHAR	INQ	26	DIFF	No	MVS log stream	1
SYSTEMLOG	CVDAS	INQ	4	LIKE	No	System log indicator	4
SYSTEMLOG Output valid values	SYSLOG, NOSYSLOG						
TFCWAIT	BINARY	STAT	4	AVG	No	Total number of tasks that waited for buffer flush	10
USECOUNT	BINARY	INQ	4	SUM	No	Number of journals and forward recovery logs	5
WRITES	BINARY	STAT	4	AVG	No	Number of write requests	6

Chapter 390. SYSDUMP Resource Table

A CICS Resource that describes a system dump code in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is SYSDUMPCODE.

The following actions are supported:

ADD

Add a system dump code.

The parameter data for the ADD action is:

```
PARM('CODE(code) [SCOPE(cvda1)] [MAX(nnn)]  
      [SHUT(cvda2)] [SDUMP(cvda3)] [DAE(cvda4)] .')
```

where:

- *code* is required and must be the 1- to 8-character system dump code.
- *cvda1* is one of the following valid CVDA values for the dump scope option:

LOCAL
RELATED

- *nnn* is the maximum number of dumps, from 0 - 999.
- *cvda2* is one of the following valid CVDA values for the shutdown option:

SHUTDOWN
NOSHUTDOWN

- *cvda3* is one of the following valid CVDA values for the system dump option:

SYSDUMP
NOSYSDUMP

- *cvda4* is one of the following valid CVDA values for the DAE option:

DAE
NODAE

DELETE

Remove a system dump code.

RESET

Reset system dump code values.

External resource name

CICSSystemDump

Length

448

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0004

Table 946. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM	ADD	CODE(value)	Yes
SET		DAE(DAE, NODAE)	No
		MAX(value)	No
		SCOPE(LOCAL, RELATED)	No
		SDUMP(SYSDUMP, NOSYSDUMP)	No
		SHUT(SHUTDOWN, NOSHUTDOWN)	No
	RESET	None	N/A
	DELETE	None	N/A

Table 947. SYSDUMP FEEDBACK error codes

Value	Code	Description
1	SYSDUMP_ADD_FAILED	Add failed

Table 948. SYSDUMP resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release		
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved		
CURRENT	BINARY	INQ	4	AVG	No	Number of dump calls since last reset		2
DAEOPTION	CVDAS	INQ	4	LIKE	Yes	Dump analysis and elimination (DAE) option		9
DAEOPTION Input/output valid values	NODAE, DAE							
DSPLIST	CHAR	INQ	255	DIFF	No	Data space name list	E640 E650 E660 E670 E690 E690 E700	11
JOBLIST	CHAR	INQ	134	DIFF	No	Job name list	E640 E650 E660 E670 E690 E690 E700	10

Table 948. SYSDUMP resource table attributes (continued)								
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
MAXIMUM	BINARY	INQ	4	AVG	Yes	Maximum number of dumps with this code		3
SDMPSUPP	BINARY	STAT	4	AVG	No	Number of system dumps suppressed		7
SDMPTOTL	BINARY	STAT	4	AVG	No	Number of system dumps taken		6
SDUMPSCOPE	CVDAS	INQ	4	LIKE	Yes	System dump scope type		8
SDUMPSCOPE Input/output valid values	LOCAL, RELATED							
SHUTOPTION	CVDAS	INQ	4	LIKE	Yes	Shutdown option		4
SHUTOPTION Input/output valid values	SHUTDOWN, NOSHUTDOWN							
SYSDUMPCODE-1	CHAR	INQ	8	DIFF	No	System dump code		1
SYSDUMPING	CVDAS	INQ	4	LIKE	Yes	System dump option		5
SYSDUMPING Input/output valid values	SYSDUMP, NOSYSDUMP							

Chapter 391. SYSLINK Resource Table

A CICSplex SM topology definition that describes the endpoints of a communications link between two CICS systems being managed by CICSplex SM. A SYSLINK record is created when connection and sessions definitions (CONNDEF and SESSDEF) or IPIC and TCP/IP definitions (IPCONDEF and TCPDEF) are installed in one of the CICS systems. That information is used to create a link to the other CICS system.

The **Primary** key field for this resource class is FROMCSYS.

The **Secondary** key field for this resource class is TOCSYS.

The **Tertiary** key field for this resource class is CONNDEF.

The **Fourth** key field for this resource class is CONNDEFVER.

The **Fifth** key field for this resource class is SESSDEF.

The **Sixth** key field for this resource class is SESSDEFVER.

The **Seventh** key field for this resource class is LINKTYPE.

The following actions are supported:

INSTALL

Install a System Link.

The parameter data for the INSTALL action is:

```
PARM(' [NOTIFY(notify)]
      [STATECHK(statechk)]
      [FORCEINS(forceins)].')
```

where:

notify = Type of checking to be performed before install.
statechk = Whether the existence and operational state of
 each resource should be checked before install.
forceins = Whether definitions should be installed even
 if CICSplex SM believes they do not need to be.

External resource name

CICSSystemLink

Length

80

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt4610

Table 949. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A
PERFORM	INSTALL	FORCEINS(YES, NO)	No
SET		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		STATECHK(YES, NO)	No

Table 950. SYSLINK FEEDBACK error codes		
Value	Code	Description
1	SYSLINK_INV_DATA	Attribute data invalid
2	SYSLINK_REC_NOT_FOUND	Requested resource not found
4	SYSLINK_REC_EXISTS	Resource already exists
6	SYSLINK_INV_RESTYPE	Invalid resource type
7	SYSLINK_INV_VER	Invalid resource version
11	SYSLINK_NON_MP	Maintenance point CMAS not available
12	SYSLINK_INV_CONTEXT	Context not found
21	SYSLINK_INV_RECADDR	Invalid record address
22	SYSLINK_INV_RECLEN	Invalid record length
23	SYSLINK_INV_ACTION	Invalid action
24	SYSLINK_LOGICAL_DUP	Logical duplicate
25	SYSLINK_INV_MAJNAME	Invalid major name
26	SYSLINK_INV_MINNAME	Invalid minor name
27	SYSLINK_INV_QUALNAME	Invalid qualifier name
28	SYSLINK_INV_FORTHNAME	Invalid session definition name
29	SYSLINK_NOTIFY	Notify
30	SYSLINK_PARTIAL_INSTALL	Partial install
31	SYSLINK_NOTHING_INSTALLED	Nothing installed
32	SYSLINK_NO_ACTIVE_SYSTEMS	No active systems
33	SYSLINK_INV_NAMELIST	Invalid name list
34	SYSLINK_INV_NOTIFY	Invalid notify
35	SYSLINK_INV_FORCEINS	Invalid force install
36	SYSLINK_INV_STATECHK	Invalid state check
37	SYSLINK_INV_LINKTYPE	Invalid link type

Table 951. SYSLINK resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent		15
CHANGEAGENT Input/output valid values	DREPAPI							
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release		18
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification		1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID		17
CONNDEF-3	CHAR	CPSM	8	Yes	DIFF	Primary Connection definition name		9
CONNDEFVER-4	BINARY	CPSM	1	Yes	AVG	Primary connection definition version		11
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created		16
FROMCSYS-1	CHAR	CPSM	8	Yes	DIFF	Primary CICS system name		5
LINKTYPE-7	EYUDA	CPSM	4	Yes	LIKE	Connection resource type	SNA	14
LINKTYPE-7 Input/output valid values	SNA, IPIC							
SESSDEF-5	CHAR	CPSM	8	Yes	DIFF	Secondary connection definition name		10
SESSDEFVER-6	BINARY	CPSM	1	Yes	AVG	Secondary connection definition version		12
TOCSYS-2	CHAR	CPSM	8	Yes	DIFF	Secondary CICS system name		7

Chapter 392. SYSPARM Resource Table

A CICS Resource that describes a system initialization parameter or a system initialization parameter override in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is KEYWORD.

The **Secondary** key field for this resource class is SEGNUM.

For system initialization parameter values greater than 255 bytes, the value is split across multiple SYSPARM records. Each of the records making up the same parameter value is referred to as a segment and has a segment number referenced by the SEGNUM attribute.

The following action is supported:

GET

Get a parameter from a specified source table. Only SYSPARM records from CICS regions at Version 4.1 or higher are returned by this command.

External resource name

CICSSystemParameter

Length

328

Usage

API or WUI or CICS Management Client Interface

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0197

Table 952. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		PARMSRCE(TABLE, CONSOLE, SYSIN, JCL, COMBINED)	No
		PARMTYPE(SIT)	No

Table 953. SYSPARM FEEDBACK error codes

Value	Code	Description
1	SYSPARM_INVALID_SOURCE	Invalid source parameter
2	SYSPARM_INVALID_TYPE	Invalid type parameter
3	SYSPARM_INVALID_NAME	Unknown keyword name

Table 954. SYSPARM resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
KEYWORD-1	CHAR	INQ	32	DIFF	Keyword name	1
SEGNUM-2	BINARY	INQ	4	MAX	Record segment number	5
SEGTOT	BINARY	INQ	4	MAX	Total segment number	6
SOURCE	EYUDA	INQ	4	LIKE	Source of system parameter	3
SOURCE Output valid values	TABLE, CONSOLE, SYSIN, JCL, COMBINED					
TOTALLEN	BINARY	INQ	4	MAX	Total value length	7
TYPE	EYUDA	INQ	4	LIKE	Type of system parameter	2
TYPE Output valid values	SIT					
VALUE	CHAR	INQ	255	DIFF	Keyword value	8
VALUELEN	BINARY	INQ	4	MAX	Keyword value length	4

Chapter 393. SYSRES Resource Table

A CPSM Business Application Services Manager object that describes the set of CICS Definitions to be installed in a CICS system.

This object is referenced within the scope of a CICSplex and CICS system. As such, the CICS system must be explicitly identified in the API GET command PARM option by coding the following text string:

APAR PQ30578

Documentation for APAR PQ30578 addedd 18/04/2000

```
PARM( 'CICSSYS(sysname).')
```

where:

```
sysname = (Required) The name of a CICSplex SM managed CICS system.
```

The CICS system name is required.

The **Primary** key field for this resource class is RESDEF.

The **Secondary** key field for this resource class is RDEFTYPE.

The **Tertiary** key field for this resource class is RESDESC.

The **Fourth** key field for this resource class is REFDEF.

The **Fifth** key field for this resource class is CICSSYS.

There are no object specific actions for this resource class.

External resource name
CICSResourceBySystem

Length
88

Usage
API or WUI or CICS Management Client Interface

API view
No

CMAS context
No

SCOPE applies
No

Only query CMASs in workload
No

Object type
CICSplex SM Manager

Copybook identifier
EYUt2611

Table 955. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	Yes

Table 956. SYSRES FEEDBACK error codes

Value	Code	Description
21	SYSRES_CICSSYS_NOT_FOUND	CICS system not found

Table 957. SYSRES resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
ALIAS	CHAR	CPSM	8	DIFF	Alias for remote definition	16
CICSSYS-5	CHAR	CPSM	8	DIFF	CICS system name	4
DEFVER	BINARY	CPSM	1	AVG	Resource definition version	12
MODE	EYUDA	CPSM	4	LIKE	Resource usage qualifier	11
MODE Output valid values	AUTO, DYNAM, EXTRA, INTRA, IND, STAT					
RDEFTYPE-2	CHAR	CPSM	8	DIFF	Resource definition type	6
REFDEF-4	CHAR	CPSM	8	DIFF	Referenced definition name	13
REFTYPE	CHAR	CPSM	8	DIFF	Referenced definition type	15
REFVER	CHAR	CPSM	2	DIFF	Referenced definition version	14
RESASSGN	CHAR	CPSM	8	DIFF	Resource assignment name	8
RESDEF-1	CHAR	CPSM	8	DIFF	Resource definition name	5
RESDESC-3	CHAR	CPSM	8	DIFF	Resource description name	7
RESGROUP	CHAR	CPSM	8	DIFF	Resource group name	9
USAGE	EYUDA	CPSM	4	LIKE	Resource usage type	10
USAGE Output valid values	LOCAL, REMOTE, ASIS					

Chapter 394. TAPEJRNL Resource Table

A CICS Resource that describes a tape journal in an active CICS system being managed by CICSPlex SM.

The **Primary** key field for this resource class is JOURNALNUM.

The following actions are supported:

ADVANCE

Advance a tape journal.

CLOSE

Close a tape journal.

LEAVE

Close and leave a tape journal position.

OPEN

Open a tape journal.

These actions require no unique parameter data.

External resource name

Length

64

Usage

EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0015

Table 958. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM	ADVANCE	None	N/A
SET			
	CLOSE	None	N/A
	LEAVE	None	N/A
	OPEN	None	N/A

Table 959. TAPEJRNL resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release	2
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved	
AVGSIZE	BINARY	STAT	2	AVG	No	Average block size	
BLKWRCNT	DECIMAL	STAT	4	AVG	No	Number of blocks written	10
BUFULLCNT	DECIMAL	STAT	3	AVG	No	Number of times buffer was full	12
CURVOL	CHAR	INQ	6	DIFF	No	Current volume	7
JOURNALNUM-1	BINARY	INQ	2	AVG	No	Journal number	1
LASTVOL	CHAR	STAT	6	DIFF	No	Last volume written	6
OLDPART	CNUMERIC	INQ	4	AVG	No	Serial number of first tape in journal	5
OPENSTATUS	CVDAS	INQ	4	LIKE	Yes	Open status	4
OPENSTATUS Input/output valid values	OPENOUTPUT, CLOSED						
OPENSTATUS Input valid values	ADVANCE, CLOSELEAVE						
RECWRCNT	DECIMAL	STAT	5	AVG	No	Number of records written	11
TAPESLFT	BINARY	STAT	2	AVG	No	Number of tapes left	9
TAPESOPEN	BINARY	STAT	2	AVG	No	Number of tapes opened	8
TYPE	CVDAS	INQ	4	LIKE	No	Journal type	3
TYPE Output valid values	TAPE1, TAPE2						

Chapter 395. TASKASSC Resource Table

A CICSplex SM definition that, in a TCP/IP network, provides information about the tasks that make up a set of interrelated transactions. The interrelated tasks have the same transaction group ID and thus the records are organized by transaction group ID. You can filter the records using a substring of the user correlation data that has been added (by a CICS XAPADMGR global user exit program) to the user data section of the task's associated data origin descriptor.

The **Primary** key field for this resource class is TASKID.

The following actions are supported:

GET

Retrieve the TASKASSC records for a specified task or transaction group ID.

External resource name

CICSTaskAssociation

Length

1624

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0169

Table 960. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 961. TASKASSC resource table attributes

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release		
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved		
ACAPPLNAME	CHAR	INQ	64	LIKE	Current Application Name	E640 E650 E660 E670	57
ACMAJORVER	BINARY	INQ	4	MAX	Current Application Major Version	E640 E650 E660 E670	60

Table 961. TASKASSC resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
ACMICROVER	BINARY	INQ	4	MAX	Current Application Micro Version	E640 E650 E660 E670	62
ACMINORVER	BINARY	INQ	4	MAX	Current Application Minor Version	E640 E650 E660 E670	61
ACOPERNAME	CHAR	INQ	64	LIKE	Current Application Operation	E640 E650 E660 E670	59
ACPLATNAME	CHAR	INQ	64	LIKE	Current Platform	E640 E650 E660 E670	58
APPLDATA	CHAR	INQ	40	DIFF	Socket application data		11
APPLID	CHAR	INQ	8	DIFF	Application ID		12
CLIENTIPADDR	CHAR	INQ	39	DIFF	Client IP address		35
CLIENTLOC	CHAR	INQ	32	DIFF	Cluster connection type	E640 E650	40
CLIENTPORT	BINARY	INQ	4	DIFF	TCP/IP stack port number		13
CLNTIPFAMILY	CVDAS	INQ	4	LIKE	Client IP address format	E640 E650	42
CLNTIPFAMILY Output valid values	IPv4, IPv6, NOTAPPLIC						
DNAME	HEX	INQ	246	DIFF	Distinguished name	E640 E650	43
FACILNAME	CHAR	INQ	8	DIFF	Facility name		17
FACILTYPE	CVDAS	INQ	4	LIKE	Facility type		5
FACILTYPE Output valid values	NONE, TERMINAL, TRANDATA, START, STARTTERM, SCHEDULER, XMRUNTRAN, BRIDGE, SOCKET, WEB, RRSUR, LU61, APPC, MRO, IIOP, IPIC, RZINSTOR, IPECI, UNKNOWN, EVENT, JVMSERVER, ASRUNTRAN						
INITUSERID	CHAR	INQ	8	DIFF	User ID of initiating task	E680+	14
IPCONN	CHAR	INQ	8	DIFF	IPCONN resource		15
IPFAMILY	CVDAS	INQ	4	LIKE	Server IP address format		6
IPFAMILY Output valid values	IPv4, IPv6, NOTAPPLIC						
LUNAME	CHAR	INQ	8	DIFF	VTAM LU name		16
MVSIMAGE	CHAR	INQ	8	DIFF	MVS image		18
NETID	CHAR	INQ	8	DIFF	Network ID		33
ODAPPLID	CHAR	INQ	8	DIFF	Originating Application ID		19
ODAPTRDATA1	CHAR	INQ	64	MAX	Originating adapter data 1	E640 E650 E660	54
ODAPTRDATA2	CHAR	INQ	64	MAX	Originating adapter data 2	E640 E650 E660	55
ODAPTRDATA3	CHAR	INQ	64	MAX	Originating adapter data 3	E640 E650 E660	56
ODAPTRID	CHAR	INQ	64	MAX	Originating adapter ID	E640 E650 E660	53
ODCLNTIPADDR	CHAR	INQ	39	DIFF	Originating client IP address		36
ODCLNTPORT	BINARY	INQ	4	DIFF	Originating portnumber		3

Table 961. TASKASSC resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
ODFACILNAME	CHAR	INQ	8	DIFF	Originating facility name		20
ODFACILTYPE	CVDAS	INQ	4	LIKE	Originating facility type		4
ODFACILTYPE Output valid values	NONE, TERMINAL, TRANDATA, START, STARTTERM, SCHEDULER, XMRUNTRAN, BRIDGE, SOCKET, WEB, RRSUR, LU61, APPC, MRO, IIOP, IPIC, RZINSTOR, IPECI, UNKNOWN, EVENT, JVMSERVER, ASRUNTRAN						
ODIPFAMILY	CVDAS	INQ	4	LIKE	Originating client IP address format		7
ODIPFAMILY Output valid values	IPV4, IPV6, NOTAPPLIC						
ODLUNAME	CHAR	INQ	8	DIFF	Originating VTAM LU name		21
ODNETID	CHAR	INQ	8	DIFF	Originating network ID		34
ODNETWORKID	CHAR	INQ	8	DIFF	Originating network ID		32
ODSERVERPORT	BINARY	INQ	4	MAX	Originating server port	E640 E650 E660 E670 E680 E690	63
ODSTARTTIME	TIMESTP	INQ	8	MIN	Originating task start time		10
ODSTARTTM	CHAR	INQ	21	MIN	Originating task start time		39
ODTASKID	DECIMAL	INQ	4	MIN	Originating task ID		22
ODTCPIPS	CHAR	INQ	8	DIFF	Originating TCP/IP service name	E640 E650 E660 E670 E680 E690	64
ODTRANSID	CHAR	INQ	4	DIFF	Originating transaction ID		23
ODUSERID	CHAR	INQ	8	DIFF	Originating user ID		24
PHAPPLID	CHAR	INQ	8	DIFF	Previous hop applid	E640 E650 E660	45
PHCOUNT	BINARY	INQ	4	MAX	Previous hop count	E640 E650 E660	52
PHNETWORKID	CHAR	INQ	8	DIFF	Previous hop network qualifier	E640 E650 E660	46
PHSTARTTIME	TIMESTP	INQ	8	MIN	Previous hop task start time	E640 E650 E660	51
PHSTARTTM	CHAR	INQ	21	DIFF	Previous hop task start time	E640 E650 E660	48
PHTASKID	DECIMAL	INQ	4	MIN	Previous hop task ID	E640 E650 E660	50
PHTRANSID	CHAR	INQ	4	DIFF	Previous hop transaction ID	E640 E650 E660	47
PROGRAM	CHAR	INQ	8	DIFF	First program		25
PTCOUNT	BINARY	CMF	4	MAX	Previous transaction count	E640 E650 E660 E670 E680 E690 E700	65

Table 961. TASKASSC resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
PTSTARTTIME	TIMESTP	CMF	8	MIN	Previous transaction task start time	E640 E650 E660 E670 E680 E690 E700	66
PTSTARTTM	CHAR	INQ	21	DIFF	Previous transaction task start time	E640 E650 E660 E670 E680 E690 E700	67
PTTASKID	DECIMAL	CMF	4	MIN	Previous transaction task ID	E640 E650 E660 E670 E680 E690 E700	68
PTTRANSID	CHAR	CMF	4	DIFF	Previous transaction transaction ID	E640 E650 E660 E670 E680 E690 E700	69
REALM	HEX	INQ	255	DIFF	Basic authentication realm name	E640 E650	44
SERVERIPADDR	CHAR	INQ	39	DIFF	Scheduling IP server		37
SERVERPORT	BINARY	INQ	4	DIFF	Server listening port		8
STARTTIME	TIMESTP	INQ	8	MIN	Task start time		9
STARTTM	CHAR	INQ	21	MIN	Task start time		38
TASKID-1	DECIMAL	INQ	4	MIN	Task ID		1
TCPIPJOB	CHAR	INQ	8	DIFF	TCP/IP job		26
TCPIPSERVICE	CHAR	INQ	8	DIFF	TCP/IP service name		27
TCPIPZONE	CHAR	INQ	8	DIFF	TCP/IP network security zone		28
TRANSACTION	CHAR	INQ	4	DIFF	Transaction ID		29
TRNGRPID	HEX	INQ	28	DIFF	Transaction group ID		2
USERCORRDATA	CHAR	INQ	64	DIFF	User correlation data		30
USERID	CHAR	INQ	8	DIFF	User ID		31

Chapter 396. TASKESTG Resource Table

A CICS Resource that describes a CICS storage element for a task.

The **Primary** key field for this resource class is TASK.

The **Secondary** key field for this resource class is ELEMENTADDR.

There are no object specific actions for this resource class.

External resource name

CICSTaskStorage

Length

40

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0144

Table 962. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 963. TASKESTG resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	3
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
DSANAME	CHAR	STAT	8	DIFF	DSA name	
ELEMENTADDR-2	HEX	INQ	4	MAX	Storage element address	2
ELEMENTLEN	BINARY	INQ	4	AVG	Element length	4
TASK-1	DECIMAL	INQ	4	MAX	Task number	1

Chapter 397. TASKFILE Resource Table

A CICS Resource that describes tasks and the CICS files they have used in an active system being managed by CICSplex SM. Note that for these records to be available, the MAS must be running with the SIT parameter MNRES=ON, and be using an MCT that specifies a value for FILE greater than 0 on the DFHMCT TYPE=INITIAL macro.

The **Primary** key field for this resource class is MNRTASKNO.

The **Secondary** key field for this resource class is MNRNAME.

There are no object specific actions for this resource class.

External resource name

CICSTaskFileUsage

Length

176

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0115

Table 964. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 965. TASKFILE resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	8
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
DSNAME	CHAR	INQ	44	DIFF	Data set name	9
FCAMCNT	BINARY	STAT	4	AVG	Number of access method calls	14
MNRADD	SCLOCK	STAT	8	AVG	ADD request time and count	10
MNRBRWSE	SCLOCK	STAT	8	AVG	BROWSE request time and count	18
MNRCFDTIOWT	SCLOCK	STAT	8	AVG	CFDT I/O wait time and count	12
MNRDEL	SCLOCK	STAT	8	AVG	DELETE request time and count	21
MNRFILELIMIT	EYUDA	STAT	4	LIKE	File limit exceeded	

Table 965. TASKFILE resource table attributes (continued)						
Name	Datatype	Source	Len	Sum	Description	Attr ID
MNRFILELIMIT Output valid values	YES, NO					
MNRGET	SCLOCK	STAT	8	AVG	READ request time and count	11
MNRIOWT	SCLOCK	STAT	8	AVG	File I/O wait time and count	16
MNRNAME-2	CHAR	STAT	8	DIFF	File ID	7
MNRPUT	SCLOCK	STAT	8	AVG	WRITE request time and count	13
MNRRLSIOWT	SCLOCK	STAT	8	AVG	RLS I/O wait time and count	17
MNRSTART	TIMESTP	STAT	8	MAX	Task start time	20
MNRTASKNO-1	DECIMAL	STAT	4	AVG	Task ID	5
MNRTOTAL	SCLOCK	STAT	8	AVG	Total request time and count	15
MNRTRANID	CHAR	STAT	4	DIFF	Transaction ID	6
MNRUSERID	CHAR	STAT	8	DIFF	User ID	19

Chapter 398. TASKRMI Resource Table

A CICS Resource that describes tasks and the use they have made of the CICS Resource Manager Interface in an active system being managed by CICSplex SM. Note that for these records to be available, the MAS must be running with MNPER=YES, and be using an MCT that specifies RMI=YES on the DFHMCT TYPE=INITIAL macro.

The **Primary** key field for this resource class is TASKID.

There are no object specific actions for this resource class.

External resource name

CICSTaskRMIUsage

Length

216

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0145

Table 966. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		INCL_QUEUED(YES, NO)	No

Table 967. TASKRMI resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	17
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
CPUTIME	SCLOCK12	CMF	12	MAX	User task CPU time	16
DISPTIME	SCLOCK12	CMF	12	MAX	User task dispatch time	15
RESPTIME	INTTSTP	CPSM	8	MAX	Task response time	8
RMICPSMTIME	SCLOCK12	CMF	12	MAX	CICSplex SM RMI elapsed time	4
RMIDB2TIME	SCLOCK12	CMF	12	MAX	DB2 RMI elapsed time	5
RMIDBCTLTIME	SCLOCK12	CMF	12	MAX	DBCTL RMI elapsed time	6
RMIXECDLITM	SCLOCK12	CMF	12	MAX	DL/I RMI elapsed time	7
RMIMQSERIEST	SCLOCK12	CMF	12	MAX	MQSeries RMI elapsed time	

Table 967. TASKRMI resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
RMIOTHERTIME	SCLOCK12	CMF	12	MAX	Total other elapsed time	3
RMITCPIPTIME	SCLOCK12	CMF	12	MAX	TCP/IP Sockets RMI elapsed time	9
RMITIME	SCLOCK12	CMF	12	MAX	Total RMI elapsed time	1
RMITOTALTIME	SCLOCK12	CMF	12	MAX	Total RMI elapsed time at last statistics interval	2
START	TIMESTP	CMF	8	MAX	Task start time	13
STOP	TIMESTP	CMF	8	MAX	Task stop time	14
SUSPTIME	SCLOCK12	CMF	12	MAX	Task suspend time	18
TASKID-1	DECIMAL	INQ	4	MAX	Task ID	11
TRANID	CHAR	INQ	4	DIFF	Transaction ID	10
USERID	CHAR	INQ	8	DIFF	User ID	12
WAITTIME	SCLOCK12	CMF	12	MAX	Dispatch wait time	19

Chapter 399. TASK Resource Table

This CICS resource describes a task in an active CICS system that is being managed by CICSplex SM.

The **Primary** key field for this resource class is TASK.

When used in an evaluation definition (EVALDEF), you might want to limit the evaluation to include only those tasks for which a specific transaction is associated. To do so, include the TRANID attribute in the evaluation filter expression; for example, TRANID=TRN1.

The following actions are supported:

PURGE

Purge a task.

The parameter data for the PURGE action is:

```
PARM( 'PURGETYPE(cvda) . ' )
```

where *cvda* is required and is a valid CVDA value for the type of operation.

Valid CVDA values for the PURGE action are PURGE, FORCEPURGE, and KILL. For example:

```
PARM( 'PURGETYPE(FORCEPURGE) . ' )
```

FORCEPURGE

Force purge a task.

There are no parameters for the FORCEPURGE action.

KILL

Kill a task.

There are no parameters for the KILL action.

Note: The KILL action can lead to unpredictable results and should be used only in exceptional circumstances.

External resource name

CICSTask

Length

3696

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0020

Table 968. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		INCL_QUEUED(YES, NO)	No
SET		None	N/A
PERFORM SET	PURGE	TYPE(PURGE, FORCEPURGE, KILL)	Yes
	FORCEPURGE	None	N/A
	KILL	None	N/A

Table 969. TASK resource table attributes								
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release		
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved		
ABCODEC	CHAR	CMF	4	DIFF	No	Current ABEND code		23
ABCODEO	CHAR	CMF	4	DIFF	No	Original ABEND code		22
ACAPPLNAME	CHAR	CMF	64	LIKE	No	Initial Application Name	E640 E650 E660 E670	451
ACMAJORVER	BINARY	CMF	4	MAX	No	Initial Application Major Version	E640 E650 E660 E670	454
ACMICROVER	BINARY	CMF	4	MIN	No	Initial Application Micro Version	E640 E650 E660 E670	456
ACMINORVER	BINARY	CMF	4	MAX	No	Initial Application Minor Version	E640 E650 E660 E670	455
ACOPERNAME	CHAR	CMF	64	LIKE	No	Initial Application Operation	E640 E650 E660 E670	453
ACPLATNAME	CHAR	CMF	64	LIKE	No	Initial Platform	E640 E650 E660 E670	452
ACTVTYID	HEX	INQ	52	MIN	No	BTS activity ID		186
ACTVTYNM	CHAR	INQ	16	DIFF	No	BTS activity name		185
ALLOCATES	BINARY	CMF	4	AVG	No	Number of ALLOCATE requests		32
APPLNAMEPROG	CHAR	STAT	8	DIFF	No	Application name - program		269
APPLNAMETRAN	CHAR	STAT	4	DIFF	No	Application name - transaction		268
ASFRECT	BINARY	CMF	4	MAX	No	Number of EXEC CICS FREE CHILD commands	E640 E650 E660 E670 E680 E690 E700	476

Table 969. TASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
ASFTCHCT	BINARY	CMF	4	MAX	No	Number of EXEC CICS FETCH commands	E640 E650 E660 E670 E680 E690 E700	475
ASFTCHWT	SCLOCK12	CMF	12	MAX	No	EXEC CICS FETCH wait time	E640 E650 E660 E670 E680 E690 E700	477
ASRNATWT	SCLOCK12	CMF	12	MAX	No	EXEC CICS RUN TRANSID delayed time	E640 E650 E660 E670 E680 E690 E700	478
ASRUNCT	BINARY	CMF	4	MAX	No	Number of EXEC CICS RUN TRANSID commands	E640 E650 E660 E670 E680 E690 E700	474
ASTOTCT	BINARY	CMF	4	MAX	No	Number of asynchronous API commands	E640 E650 E660 E670 E680 E690 E700	473
ATTACHTIME	DATETIME	INQ	8	MAX	No	Task attach time		158
BAACDCCT	BINARY	CMF	4	AVG	No	BTS activity data container requests		199
BAACQPCT	BINARY	CMF	4	AVG	No	BTS acquire requests		196
BADACTCT	BINARY	CMF	4	AVG	No	BTS define activity requests		191
BADCPACT	BINARY	CMF	4	AVG	No	BTS delete activity and cancel requests		195
BADFIECT	BINARY	CMF	4	AVG	No	BTS define input event requests		202
BADPROCT	BINARY	CMF	4	AVG	No	BTS define process requests		190
BALCPACT	BINARY	CMF	4	AVG	No	BTS link requests		189
BAPRDCCT	BINARY	CMF	4	AVG	No	BTS process data container requests		198
BARASYCT	BINARY	CMF	4	AVG	No	BTS run asynchronous requests		188
BARATECT	BINARY	CMF	4	AVG	No	BTS retrieve reattach event requests		201
BARMPACT	BINARY	CMF	4	AVG	No	BTS resume requests		194
BARSPACT	BINARY	CMF	4	AVG	No	BTS reset requests		192
BARSYNCT	BINARY	CMF	4	AVG	No	BTS run synchronous requests		187
BASUPACT	BINARY	CMF	4	AVG	No	BTS suspend requests		193
BATIAECT	BINARY	CMF	4	AVG	No	BTS timer associated event requests		203
BATOTCCT	BINARY	CMF	4	AVG	No	BTS total data container requests		200
BATOTECT	BINARY	CMF	4	AVG	No	BTS total event requests		204

Table 969. TASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
BATOTPCT	BINARY	CMF	4	AVG	No	BTS total requests		197
BMSCOUNT	BINARY	CMF	4	AVG	No	Total number of BMS requests		72
BMSINCNT	BINARY	CMF	4	AVG	No	Number of BMS map in requests		70
BMSMAPCNT	BINARY	CMF	4	AVG	No	Number of BMS map requests		69
BMSOUTCNT	BINARY	CMF	4	AVG	No	Number of BMS map out requests		71
BRDGTRAN	EYUDA	CMF	4	LIKE	No	Transaction ID as started by bridge		166
BRDGTRAN Output valid values	YES, NO							
BRIDGE	CHAR	INQ	4	DIFF	No	Bridge transaction ID		163
BRTOKEN	HEX	INQ	8	DIFF	No	3270 Bridge Facility Token		247
BTECOMP	EYUDA	CPSM	4	LIKE	No	Workload manager begin-to-end phase complete		315
BTECOMP Output valid values	YES, NO							
CDSAGETM	BINARY	CMF	4	AVG	No	Number of GETMAIN requests in CDSA		36
CDSAPSHWM	BINARY	CMF	4	AVG	No	Maximum program storage in CDSA		52
CDSASHWM	BINARY	CMF	4	AVG	No	Peak number of bytes used by task in CDSA		40
CDSASOCC	BINARY	CMF	8	AVG	No	Average CDSA storage usage		44
CECMCHTP	CHAR	CMF	4	DIFF	No	CEC machine type		440
CECMDLID	CHAR	CMF	16	DIFF	No	CEC model number		441
CFDTPWAIT	SCLOCK12	CMF	12	MAX	No	CFDT wait time		179
CHARIN	BINARY	CMF	4	AVG	No	Number of Primary TC characters received		25
CHARINSEC	BINARY	CMF	4	AVG	No	Number of Secondary TC characters received		29
CHAROUT	BINARY	CMF	4	AVG	No	Number of Primary TC characters sent		27
CHAROUTSEC	BINARY	CMF	4	AVG	No	Number of Secondary TC characters sent		31
CHMODECT	BINARY	CMF	4	AVG	No	Number of CICS dispatcher change modes	E640+	234
CICSWAIT	SCLOCK12	CMF	12	MAX	No	CICS event wait time		169
CLIPADDR	CHAR	CMF	40	DIFF	No	Client IP address		241
CMDSEC	CVDAS	INQ	4	LIKE	No	Command level security status		93
CMDSEC Output valid values	CMDSECNO, CMDSECYES							
CONTROLWAIT	SCLOCK12	CMF	12	MAX	No	Give-up-control wait time		171
CORREUOW	HEX	CMF	23	MIN	No	Correlation UOW id		340
CPUTIME	SCLOCK12	CMF	12	MAX	No	User task CPU time		80
CPUTONCP	SCLOCK12	CMF	12	MAX	No	Total CPU time on a CP	E640 E650 E660 E670	457
CURRENTPROG	CHAR	INQ	8	DIFF	No	Current program being executed		270
CURTASKS	BINARY	CMF	4	AVG	No	Current tasks		439
DB2CONWT	SCLOCK12	CMF	12	MAX	No	DB2 Connection (TCB) wait time		221
DB2PLAN	CHAR	INQ	8	DIFF	No	DB2 plan name		178

Table 969. TASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
DB2RDYQW	SCLOCK12	CMF	12	MAX	No	DB2 ReadyQ wait time		220
DB2REQCT	BINARY	CMF	4	AVG	No	Total number of DB2 requests		233
DB2WAIT	SCLOCK12	CMF	12	MAX	No	DB2 request wait time	E680+	222
DETTRANYPE	EYUDA	CPSM	4	LIKE	No	Transaction type details		314
DETTRANYPE Output valid values	NONE, SYSTEM, MIRROR, DPL, ONCRPC, WEB, BRIDGE, CICSBTS							
DFHCHNL329	BINARY	STAT	8	AVG	No	Current container storage allocated to task.	E640	382
DFH SOCK292	BINARY	STAT	4	AVG	No	Non-persistent sockets		266
DFH SOCK293	BINARY	STAT	4	AVG	No	Persistent sockets		267
DFHSTOR033	BINARY	STAT	4	AVG	No	Task storage UDSA		253
DFHSTOR087	BINARY	STAT	4	AVG	No	Program storage - Total		257
DFHSTOR106	BINARY	STAT	4	AVG	No	Task storage EUDSA		254
DFHSTOR108	BINARY	STAT	4	AVG	No	Program storage - Below		259
DFHSTOR116	BINARY	STAT	4	AVG	No	Task storage CDSA		255
DFHSTOR119	BINARY	STAT	4	AVG	No	Task storage ECDSA		256
DFHSTOR122	BINARY	STAT	4	AVG	No	Program storage - ERDSA		262
DFHSTOR139	BINARY	STAT	4	AVG	No	Program storage - Above		258
DFHSTOR142	BINARY	STAT	4	AVG	No	Program storage - ECDSA		260
DFHSTOR143	BINARY	STAT	4	AVG	No	Program storage - CDSA		261
DFHSTOR160	BINARY	STAT	4	AVG	No	Program storage - SDSA		265
DFHSTOR161	BINARY	STAT	4	AVG	No	Program storage - ESDSA		264
DFHSTOR162	BINARY	STAT	4	AVG	No	Program storage - RDSA		263
DFHSTOR442	BINARY	STAT	4	AVG	No	Task Storage - GCDSA	E640 E650 E660 E670	460
DFHSTOR444	BINARY	STAT	4	AVG	No	Task Storage - GUDSA	E640 E650 E660 E670	461
DFHTASK252	BINARY	STAT	4	AVG	No	Current CICS dispatcher TCBs		376
DHCRECT	BINARY	CMF	4	AVG	No	Number of Document Create requests		213
DHINSCT	BINARY	CMF	4	AVG	No	Number of Document Insert requests		214
DHRETCT	BINARY	CMF	4	AVG	No	Number of Document Retrieve requests		216
DHSETCT	BINARY	CMF	4	AVG	No	Number of Document Set requests		215
DHTOTCT	BINARY	CMF	4	AVG	No	Total number of Document requests		217
DHTOTDCL	BINARY	CMF	4	AVG	No	Total length of documents created		218
DISPTIME	SCLOCK12	CMF	12	MAX	No	User task dispatch time		79
DSAPTHWT	SCLOCK12	STAT	12	AVG	No	Dispatcher allocate pthread wait time	E640 E650 E660 E670 E680 E690	472

Table 969. TASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
DSPDELAY	SCLOCK12	CMF	12	MAX	No	First dispatch delay time		131
DTB	CVDAS	INQ	4	LIKE	No	Dynamic transaction backout option		94
DTB Output valid values	NOTSUPPORTED, WAIT, COMMIT, BACKOUT							
DTIMEOUT	BINARY	INQ	4	AVG	No	Deadlock timeout (seconds)		95
DUMPING	CVDAS	INQ	4	LIKE	No	Transaction dump option		96
DUMPING Output valid values	TRANSDUMP, NOTRANDUMP							
ECDSAGETM	BINARY	CMF	4	AVG	No	Number of GETMAIN requests in ECDSA		37
ECDSAPSHWM	BINARY	CMF	4	AVG	No	Maximum program storage in ECDSA		51
ECDSASHWM	BINARY	CMF	4	AVG	No	Peak number of bytes used by task in ECDSA		41
ECDSASOCC	BINARY	CMF	8	AVG	No	Average ECDSA storage usage		45
ENQDELAY	SCLOCK12	CMF	12	MAX	No	Delay time for enqueue		134
EXECOMP	EYUDA	CPSM	4	LIKE	No	Workload manager execution phase complete		316
EXECOMP Output valid values	YES, NO							
EXTERNWAIT	SCLOCK12	CMF	12	MAX	No	External wait time		168
EXWAIT	SCLOCK12	CMF	12	MAX	No	Exception wait time		83
FACILITY	CHAR	INQ	4	DIFF	No	Principal facility		2
FACILITYTYPE	CVDAS	INQ	4	LIKE	No	Facility type		3
FACILITYTYPE Output valid values	TERM, DEST, TASK							
FCADDCNT	BINARY	CMF	4	AVG	No	Number of file control WRITE requests		57
FCAMCNT	BINARY	CMF	4	AVG	No	Number of file control access method requests		60
FCBRWCNT	BINARY	CMF	4	AVG	No	Number of file control browse requests		56
FCCOUNT	BINARY	CMF	4	AVG	No	Total number of file control requests		59
FCDELCNT	BINARY	CMF	4	AVG	No	Number of file control DELETE requests		58
FCGETCNT	BINARY	CMF	4	AVG	No	Number of file control READ requests		54
FCIOTIME	SCLOCK12	CMF	12	MAX	No	File control I/O wait time		85
FCPUTCNT	BINARY	CMF	4	AVG	No	Number of file control REWRITE requests		55
FCVSWTT	SCLOCK12	CMF	12	MAX	No	File control VSAM string wait time	E640 E650 E660 E670	450
FCXCWTT	SCLOCK12	CMF	12	MAX	No	File control exclusive control wait time	E640 E650 E660 E670	449
FIRSTPRGM	CHAR	CMF	8	DIFF	No	First program name		19
GCDSAGETM	BINARY	CMF	4	AVG	No	Number of GETMAIN requests in GCDSA	E640 E650 E660 E670	442

Table 969. TASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
GCDSASHWM	BINARY	CMF	4	AVG	No	Peak number of bytes used by task in GCDSA expressed in 4K pages	E640 E650 E660 E670	443
GNQDELAY	SCLOCK12	CMF	12	MAX	No	Global ENQ delay time		236
GUDSAGETM	BINARY	CMF	4	AVG	No	Number of GETMAIN requests in GUDSA	E640 E650 E660 E670	444
GUDSASHWM	BINARY	CMF	4	AVG	No	Peak number of bytes used by task in GUDSA expressed in 4K pages	E640 E650 E660 E670	445
ICCOUNT	BINARY	CMF	4	AVG	No	Number of interval control starts		77
IDENT	CHAR	INQ	48	DIFF	No	User data provided by the bridge exit		175
IMSREQCT	BINARY	CMF	4	AVG	No	Total number of IMS requests		232
IMSWAIT	SCLOCK12	CMF	12	MAX	No	IMS request wait time		219
INDOUBT	CVDAS	INQ	4	LIKE	No	Transaction in-doubt option		160
INDOUBT Output valid values	BACKOUT, COMMIT							
INDOUBTFAIL	EYUDA	CPSM	4	LIKE	No	Recovery manager UOW indoubt failure		322
INDOUBTFAIL Output valid values	YES, NO							
INDOUBTMINS	BINARY	INQ	4	AVG	No	In-doubt time (minutes)		161
INDOUBTWAIT	CVDAS	INQ	4	LIKE	No	In-doubt wait option		162
INDOUBTWAIT Output valid values	WAIT, NOWAIT							
INTVLC	BINARY	CMF	4	AVG	No	Number of interval control requests		174
INTVLWAIT	SCLOCK12	CMF	12	MAX	No	Interval control delay time		170
IPFACCNT	BINARY	INQ	4	AVG	No	Number of IP facilities associated with task	E640	384
IRIOTIME	SCLOCK12	CMF	12	MAX	No	Inter-region communication I/O wait time		88
ISALWTT	SCLOCK12	STAT	12	AVG	No	Delay time waiting for IPIC session allocation		436
ISOLATEST	CVDAS	INQ	4	LIKE	No	Data isolation type		97
ISOLATEST Output valid values	NOISOLATE, ISOLATE							
J8CPUT	SCLOCK12	CMF	12	MAX	No	J8 TCB mode CPU time	E680+	230
JCIOTIME	SCLOCK12	CMF	12	MAX	No	Journal control I/O wait time		86
JCUSRWCNT	BINARY	CMF	4	AVG	No	Number of journal output requests	E510+	76
JRNLWRITREQ	BINARY	CMF	4	AVG	No	Number of journal write requests		153
JVMSUSP	SCLOCK12	CMF	12	MAX	No	Total Java virtual machine (JVM) suspend time		246
JVMTIME	SCLOCK12	CMF	12	MAX	No	Total Java virtual machine (JVM) elapsed time		245
L8CPUT	SCLOCK12	CMF	12	MAX	No	L8 TCB mode CPU time		229
LOCKMGRWAIT	SCLOCK12	CMF	12	MAX	No	Lock manager wait time		167
LOGGRWRITREQ	BINARY	CMF	4	AVG	No	Number of CICS logger write requests		154

Table 969. TASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
LPARNAME	CHAR	CMF	8	DIFF	No	Logical partition name	E640 E650 E660 E670 E680 E690 E700	481
LU61WTT	SCLOCK12	CMF	12	MAX	No	LU6.1 I/O wait time		135
LU62WTT	SCLOCK12	CMF	12	MAX	No	LU6.2 I/O wait time		136
LUNAME	CHAR	CMF	8	DIFF	No	VTAM LU name		18
MAXTASKS	BINARY	CMF	4	AVG	No	Maximum tasks		438
MPPRTXCD	BINARY	CMF	4	MAX	No	Number of actions triggered by policy task rules		459
MPSRACT	BINARY	CMF	4	AVG	No	Number of actions triggered by policy system rules	E640 E650 E660 E670 E680 E690 E700	480
MPSRECT	BINARY	CMF	4	AVG	No	Number of times policy system rules evaluated	E640 E650 E660 E670 E680 E690 E700	479
MSCPUT	SCLOCK12	CMF	12	MAX	No	Other TCB mode CPU time		228
MSDISPT	SCLOCK12	CMF	12	MAX	No	Other TCB mode dispatch time		227
MSGIN	BINARY	CMF	4	AVG	No	Number of Primary TC message receives		24
MSGINSEC	BINARY	CMF	4	AVG	No	Number of Secondary TC message receives		28
MSGOUT	BINARY	CMF	4	AVG	No	Number of Primary TC message sends		26
MSGOUTSEC	BINARY	CMF	4	AVG	No	Number of Secondary TC message sends		30
MXTDELAY	SCLOCK12	CMF	12	MAX	No	First dispatch delay time caused by MXT limit		133
MXTOTDLY	SCLOCK12	CMF	12	MAX	No	Maximum delay time on an open TCB		223
NCGETCNT	BINARY	CMF	4	AVG	No	Number of named counter get requests	E640 E650 E660 E670 E680 E690	469
NETNAME	CHAR	CMF	20	DIFF	No	Originating system netname		20
NETUOWID	HEX	CMF	27	MIN	No	Network id of UOW		341
OAPPLID	CHAR	CMF	8	MAX	No	Originating application ID	E640	388
OCLIPADR	CHAR	CMF	40	MAX	No	Originating client IP address	E640	395
OCLIPORT	BINARY	CMF	4	MAX	No	Originating client port number	E640	396
OFCTYNME	CHAR	CMF	8	MAX	No	Originating facility name	E640	398
OFFLCPUT	SCLOCK12	CMF	12	MAX	No	Offload eligible on standard CP	E640 E650 E660 E670	458

Table 969. TASK resource table attributes (continued)								
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
ONETWKID	CHAR	CMF	8	MAX	No	Originating network ID	E640	386
OPORTNUM	BINARY	CMF	4	MAX	No	Originating port number	E640	394
ORIGINTYPE	EYUDA	CPSM	4	LIKE	No	Transaction origin type		318
ORIGINTYPE Output valid values	NONE, TERMINAL, TDQUEUE, START, TERMSTART, SCHEDULED, XMRUN, BRIDGE, SOCKET, WEB, IIOP, RRS, LU61, LU62, MRO, ECI, IIRQRECV, RZSTTRPT							
OSTART	TIMESTP	CMF	8	MAX	No	Originating start time	E640	387
OTCPSVCE	CHAR	CMF	8	MAX	No	Originating TCPIP SERVICE name	E640	393
OTRAN	CHAR	CMF	4	MAX	No	Originating transaction ID	E640	390
OTRANFLG	HEX	CMF	8	MAX	No	Originating transaction flags	E640	397
OTRANNUM	DECIMAL	CMF	4	MAX	No	Originating task ID	E640	389
OUSERCOR	CHAR	CMF	64	MAX	No	Originating user correlation data	E640	392
OUSERID	CHAR	CMF	8	MAX	No	Originating user ID	E640	391
PC24RHWM	BINARY	CMF	4	AVG	No	Maximum read-only storage in RDSA		118
PC24SHWM	BINARY	CMF	4	AVG	No	Maximum shared storage in SDSA		120
PC31SHWM	BINARY	CMF	4	AVG	No	Maximum shared storage in ESDSA		119
PCDPLCT	BINARY	CMF	4	AVG	No	Distributed program link (DPL) request count		240
PCLINKCNT	BINARY	CMF	4	AVG	No	Number of program link requests		73
PCLOADCNT	BINARY	CMF	4	AVG	No	Number of program load requests		75
PCLOADTM	SCLOCK12	CMF	12	MAX	No	Program load time		90
PCLURMCT	BINARY	CMF	4	AVG	No	Number of user replaceable module (URM) links		177
PCXCTLCNT	BINARY	CMF	4	AVG	No	Program transfer control (XCTL) request count		74
PERFRECCNT	BINARY	CMF	4	AVG	No	Number of performance records		141
PGCSTHWM	BINARY	STAT	8	AVG	No	Maximum container storage allocated to task.	E640	383
PRCSID	HEX	CMF	52	MIN	No	BTS process ID		183
PRCSNAME	CHAR	INQ	36	DIFF	No	BTS process name		182
PRCSTYPE	CHAR	INQ	8	DIFF	No	BTS process type		184
PRIORITY	BINARY	INQ	4	AVG	Yes	Task priority		7
PROFILE	CHAR	INQ	8	DIFF	No	Task profile name		98
PSTG24HWM	BINARY	CMF	4	AVG	No	Maximum program storage below 16 MB line		47
PSTG31HWM	BINARY	CMF	4	AVG	No	Maximum program storage above 16 MB line		48
PSTGHWM	BINARY	CMF	4	AVG	No	Maximum program storage across all DSAs		46
PURGEABILITY	CVDAS	INQ	4	LIKE	No	Purgeability status		99
PURGEABILITY Output valid values	PURGEABLE, NOTPURGEABLE							
PURGETYPE	CVDAS	INQ	4	LIKE	Yes	Purge Type		248
PURGETYPE Input/output valid values	PURGE, FORCEPURGE, KILL, N_A							
QRCPUT	SCLOCK12	CMF	12	MAX	No	CPU time used on QR TCB		226

Table 969. TASK resource table attributes (continued)								
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
QRDISPT	SCLOCK12	CMF	12	MAX	No	Dispatch time whilst running on QR TCB		225
QRMODDLY	SCLOCK12	CMF	12	MAX	No	QR TCB mode delay time		224
RECOVERTOKN	HEX	CMF	8	MIN	No	Recovery manager unit of work ID		142
RECTYPE	CHAR	CMF	4	DIFF	No	Record type		15
RECUNITID	HEX	INQ	8	MIN	No	Local unit of recovery ID	E510+	13
REMOTENAME	CHAR	INQ	4	DIFF	No	Remote transaction name		112
RESOLVEACT	EYUDA	CPSM	4	LIKE	No	Recovery manager UOW resolved with indoubt action		319
RESOLVEACT Output valid values	YES, NO							
RESPTIME	INTTSTP	CPSM	8	MAX	No	Task response time		324
RESSEC	CVDAS	INQ	4	LIKE	No	Resource level security status		101
RESSEC Output valid values	RESSECNO, RESSECYES							
RLSCPUT	SCLOCK12	CMF	12	MAX	No	CPU time used by VSAM record level sharing		173
RLSWAITTIME	SCLOCK12	CMF	12	MAX	No	VSAM record level sharing wait time		156
RMISUSP	SCLOCK12	CMF	12	MAX	No	RMI suspend time		138
RMITIME	SCLOCK12	CMF	12	MAX	No	Total RMI elapsed time		137
ROFAIL	EYUDA	CPSM	4	LIKE	No	Recovery manager UOW resource owner failure		323
ROFAIL Output valid values	YES, NO							
ROMODDLY	SCLOCK12	STAT	12	AVG	No	RO TCB mode delay time		433
ROPS31HWM	BINARY	CMF	4	AVG	No	Maximum program storage in ERDSA		53
ROUTING	CVDAS	INQ	4	LIKE	No	Dynamic routing type		100
ROUTING Output valid values	DYNAMIC, STATIC							
RRMSURID	HEX	CMF	16	MIN	No	RRMS/MVS unit of recovery ID		239
RRMSWAIT	SCLOCK12	CMF	12	MAX	No	RRMS/MVS syncpoint coordination delay time		237
RSVD1	SCLOCK12	CMF	12	MAX	No	Reserved space		164
RSVD2	EYUDA	CMF	4	LIKE	No	Reserved space		165
RSVD2 Output valid values	N_A							
RSYSID	CHAR	CMF	4	DIFF	No	Remote system ID		113
RTIMEOUT	BINARY	INQ	4	AVG	No	Read timeout (seconds)		102
RUNAWAY	BINARY	INQ	4	AVG	No	Runaway task time (milliseconds)		103
RUNSTATUS	CVDAS	INQ	4	LIKE	No	Dispatch status		9
RUNSTATUS Output valid values	DISPATCHABLE, RUNNING, SUSPENDED							
RUNTRWTT	SCLOCK12	CMF	12	MAX	No	Run synchronous transaction wait time		205
S8CPUT	SCLOCK12	CMF	12	MAX	No	S8 TCB mode CPU time		231
SCRNSIZE	CVDAS	INQ	4	LIKE	No	Screen size		104
SCRNSIZE Output valid values	ALTERNATE, DEFAULT							
SHAREDTSWAIT	SCLOCK12	CMF	12	MAX	No	Shared temporary storage wait time		172
SHSTGBYTEFMA	BINARY	CMF	4	AVG	No	FREEMAIN byte count of shared storage above 16MB		152

Table 969. TASK resource table attributes (continued)								
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
SHSTGBYTEFMB	BINARY	CMF	4	AVG	No	FREEMAIN byte count of shared storage below 16MB		149
SHSTGBYTEFMG	BINARY	CMF	4	AVG	No	The total number of FREEMAIN bytes of shared storage above the bar.	E640 E650 E660 E670	448
SHSTGBYTEGMA	BINARY	CMF	4	AVG	No	GETMAIN byte count of shared storage above 16MB		151
SHSTGBYTEGMB	BINARY	CMF	4	AVG	No	GETMAIN byte count of shared storage below 16MB		148
SHSTGBYTEGMG	BINARY	CMF	4	AVG	No	GETMAIN byte count of shared storage above the bar	E640 E650 E660 E670	447
SHSTGGMCAV	BINARY	CMF	4	AVG	No	Shared storage GETMAIN request count above 16MB		150
SHSTGGMCBAR	BINARY	CMF	4	AVG	No	Shared storage GETMAIN request count above the bar	E640 E650 E660 E670	446
SHSTGGMCBEL	BINARY	CMF	4	AVG	No	Shared storage GETMAIN request count below 16MB		147
SHUNTED	EYUDA	CPSM	4	LIKE	No	Recovery manager UOW shunted		320
SHUNTED Output valid values	YES, NO							
SOBYDECT	BINARY	CMF	4	AVG	No	Number of socket bytes decrypted		243
SOBYENCT	BINARY	CMF	4	AVG	No	Number of socket bytes encrypted		242
SOCIPHER	HEX	CMF	4	DIFF	No	Cipher selected		437
SOIOWTT	SCLOCK12	CMF	12	MAX	No	TCP/IP sockets I/O wait time		238
SOMODDLY	SCLOCK12	STAT	12	AVG	No	SO TCB mode delay time		434
SRVSYWTT	SCLOCK12	CMF	12	MAX	No	CFDT syncpoint wait time		180
START	TIMESTP	CMF	8	MAX	No	Task start time		16
STARTCODE	CHAR	INQ	2	DIFF	No	Start code		91
STOP	TIMESTP	CMF	8	MAX	No	Task stop time		17
STORAGECLEAR	CVDAS	INQ	4	LIKE	No	Storage clearance status		105
STORAGECLEAR Output valid values	CLEAR, NOCLEAR							
SUBEXECOMP	EYUDA	CPSM	4	LIKE	No	WLM subset of execution phase complete		317
SUBEXECOMP Output valid values	YES, NO							
SUSPENDTIME	INTSEC	INQ	4	MAX	No	Time task has been suspended		4
SUSPENDTYPE	CHAR	INQ	8	DIFF	No	Reason task is suspended		5
SUSPENDVALUE	CHAR	INQ	16	DIFF	No	Resource for which task is waiting		6
SUSPTIME	SCLOCK12	CMF	12	MAX	No	Task suspend time		81
SYNCCOUNT	BINARY	CMF	4	AVG	No	Number of syncpoint requests		78
SYNCDLY	SCLOCK12	CMF	12	MAX	No	Waiting for parent syncpoint delay time		206
SYNCPTWAITTM	SCLOCK12	CMF	12	MAX	No	Syncpoint wait time		155
SZALLCTO	BINARY	CMF	4	AVG	No	Number of FEPI allocate timeouts		127
SZALLOCT	BINARY	CMF	4	AVG	No	Number of FEPI allocate requests		121

Table 969. TASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
SZCHRIN	BINARY	CMF	4	AVG	No	Number of FEPI characters received		126
SZCHROUT	BINARY	CMF	4	AVG	No	Number of FEPI characters sent		125
SZRCVCT	BINARY	CMF	4	AVG	No	Number of FEPI receive requests		122
SZRCVTO	BINARY	CMF	4	AVG	No	Number of FEPI receive timeouts		128
SZSENDCT	BINARY	CMF	4	AVG	No	Number of FEPI send requests		123
SZSTRCT	BINARY	CMF	4	AVG	No	Number of FEPI start requests		124
SZTOTCT	BINARY	CMF	4	AVG	No	Total number of FEPI requests		129
SZWAIT	SCLOCK12	CMF	12	MAX	No	FEPI suspend time		130
TASK-1	DECIMAL	INQ	4	MAX	No	Task ID		1
TASKDATAKEY	CVDAS	INQ	4	LIKE	No	Data storage key		106
TASKDATAKEY Output valid values	CICSDATAKEY, USERDATAKEY							
TASKDATALOC	CVDAS	INQ	4	LIKE	No	Data location		107
TASKDATALOC Output valid values	BELOW, ANY							
TASKFLAG	BINARY	CMF	4	AVG	No	Transaction error flags		21
TCALWTT	SCLOCK12	STAT	12	AVG	No	Delay time waiting for session allocation		435
TCB	CVDAS	INQ	4	LIKE	No	CICS TCB type		181
TCB Output valid values	CKOPEN, UKOPEN, QR, INTERNAL							
TCBATTCT	BINARY	CMF	4	AVG	No	Number of CICS dispatcher TCB attaches		235
TCC62IN2	BINARY	CMF	4	AVG	No	Number of secondary LU6.2 characters received		115
TCC62OU2	BINARY	CMF	4	AVG	No	Number of secondary LU6.2 characters sent		117
TCIOTIME	SCLOCK12	CMF	12	MAX	No	Terminal I/O wait time		84
TCLDELAY	SCLOCK12	CMF	12	MAX	No	First dispatch delay time caused by TCL		132
TCM62IN2	BINARY	CMF	4	AVG	No	Number of secondary LU6.2 messages received		114
TCM62OU2	BINARY	CMF	4	AVG	No	Number of secondary LU6.2 messages sent		116
TDCCOUNT	BINARY	CMF	4	AVG	No	Total number of transient data requests		64
TDELWTT	SCLOCK12	STAT	12	AVG	No	TD extrapartition lock wait time		432
TDGETCNT	BINARY	CMF	4	AVG	No	Number of transient data get requests		61
TDILWTT	SCLOCK12	STAT	12	AVG	No	TD intrapartition lock wait time		431
TDIOTIME	SCLOCK12	CMF	12	MAX	No	Transient data I/O wait time		89
TDPURCNT	BINARY	CMF	4	AVG	No	Number of transient data purge requests		63
TDPUTCNT	BINARY	CMF	4	AVG	No	Number of transient data put requests		62
TERMCONNAME	CHAR	CMF	4	DIFF	No	Terminal connection name		146
TERMDID	CHAR	CMF	4	DIFF	No	Actual terminal ID or session ID		244
TERMDININFO	HEX	CMF	4	MIN	No	Terminal information		157
TERMSTG	BINARY	CMF	4	AVG	No	Terminal storage	E410+	33

Table 969. TASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
TMRATMSN	CHAR	CMF	8	DIFF	No	Atom Service name	E640 E650	419
TMRBFDGC	BINARY	CMF	4	AVG	No	Total number of BIF DIGEST requests	E640 E650	424
TMRBFTC	BINARY	CMF	4	AVG	No	Total number of BIF requests	E640 E650	425
TMRCBRNM	CHAR	CMF	4	LIKE	No	CorbaServer name	E680+	327
TMRCTFACT	BINARY	STAT	4	AVG	No	Number OO class library API requests		281
TMRICIPOR	BINARY	CMF	4	MAX	No	Client IP Port	E640	401
TMRCMDLY	SCLOCK12	CMF	12	AVG	No	CICS TCB Change Mode delay time		368
TMRDHDLC	BINARY	CMF	4	AVG	No	Number of Document Delete requests	E640	381
TMRDSCWT	SCLOCK12	CMF	12	MAX	No	MVS DS storage constraint wait time		339
TMRDSMWT	SCLOCK12	CMF	12	MAX	No	Dispatcher TCB mismatch wait time		338
TMRDSTHW	BINARY	CMF	4	AVG	No	CICS dispatcher TCB high water mark		328
TMRECEVC	BINARY	CMF	4	AVG	No	Number of EVENTS captured	E640 E650	416
TMRECFOC	BINARY	CMF	4	AVG	No	Number of event filter requests	E640 E650	415
TMRECSEC	BINARY	CMF	4	MAX	No	Number of synchronous emission events captured	E640 E650 E660	430
TMRECSGE	BINARY	CMF	4	AVG	No	Number of SIGNAL EVENT requests	E640 E650	414
TMREICTC	BINARY	CMF	4	AVG	No	Total number of EXEC CICS requests	E640 E650	413
TMREJBAC	BINARY	CMF	4	AVG	No	Number of bean state activation requests	E680+	329
TMREJBCC	BINARY	CMF	4	AVG	No	Number of bean creation requests	E680+	331
TMREJBPC	BINARY	CMF	4	AVG	No	Number of bean state passivation requests	E680+	330
TMREJBRC	BINARY	CMF	4	AVG	No	Number of bean removal requests	E680+	332
TMREJBTC	BINARY	CMF	4	AVG	No	Total number of Enterprise bean requests	E680+	334
TMREJMCT	BINARY	CMF	4	AVG	No	Number of Enterprise bean method calls	E680+	333
TMRHTDLY	SCLOCK12	STAT	12	AVG	No	Maximum Hot-Pooling TCB delay time	E640+	306
TMRICSCC	BINARY	CMF	4	AVG	No	Total local START CHANNEL requests		371
TMRICSCD	BINARY	CMF	4	AVG	No	Data length of all local START CHANNEL requests		372
TMRICSRC	BINARY	CMF	4	AVG	No	Total remote START CHANNEL requests		373
TMRICSRD	BINARY	CMF	4	AVG	No	Data length of all remote START CHANNEL requests		374
TMRISACT	BINARY	CMF	4	MAX	No	Number of IPCONN allocate requests	E640	403
TMRISCNM	CHAR	CMF	8	MAX	No	IPCONN Name	E640	402

Table 969. TASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
TMRISWT	SCLOCK12	CMF	12	MAX	No	IPCONN I/O wait time	E640	404
TMRJ9CPU	SCLOCK12	CMF	12	MAX	No	J9 TCB mode CPU time	E680+	337
TMRJSTWT	SCLOCK12	CMF	12	MAX	No	JVM server thread wait time	E640 E650	405
TMRJTDLY	SCLOCK12	STAT	12	AVG	No	Maximum Java virtual machine (JVM) TCB delay time	E680+	305
TMRJVMIT	SCLOCK12	STAT	12	AVG	No	Java virtual machine elapsed time - initialise		311
TMRJVMRT	SCLOCK12	STAT	12	AVG	No	Java virtual machine elapsed time - resetting		312
TMRKY8CP	SCLOCK12	STAT	12	AVG	No	User task key 8 mode CPU time		304
TMRKY8DS	SCLOCK12	STAT	12	AVG	No	User task key 8 mode dispatch time		303
TMRKY9CP	SCLOCK12	STAT	12	AVG	No	User task key 9 mode CPU time		336
TMRKY9DS	SCLOCK12	STAT	12	AVG	No	User task key 9 mode dispatch time		335
TMRL9CPU	SCLOCK12	CMF	12	MAX	No	User task L9 mode CPU time		375
TMRMLCTM	SCLOCK12	CMF	12	MAX	No	XML System Services CPU time	E640 E650	427
TMRMLTDL	BINARY	CMF	4	AVG	No	Total document length	E640 E650	426
TMRMLXTC	BINARY	CMF	4	AVG	No	Number of EXEC CICS XML TRANSFORM requests	E640 E650	406
TMRMQAST	SCLOCK12	CMF	12	MAX	No	WebSphere MQ API SRB timeme	E640 E650	429
TMRMQGWT	SCLOCK12	CMF	12	MAX	No	Websphere MQ Getwait wait time	E640	400
TMRNETID	CHAR	STAT	8	DIFF	No	Network id		277
TMRNETSX	HEX	CMF	8	DIFF	No	LU6.2 network-wide UOW instance and sequence number		325
TMROIDWT	SCLOCK12	STAT	12	AVG	No	OTS indoubt wait time		310
TMROTSID	CHAR	STAT	128	DIFF	No	OTS transaction id		280
TMRPCDCC	BINARY	CMF	4	AVG	No	Number of DPL program link requests with channel		347
TMRPCDLL	BINARY	CMF	4	AVG	No	Data length of all DPL program links with channel		343
TMRPCDRL	BINARY	CMF	4	AVG	No	Total data length of all DPL returns with channel		344
TMRPCLCC	BINARY	CMF	4	AVG	No	Number of program link requests with channel		345
TMRPCRCC	BINARY	CMF	4	AVG	No	Number of program return requests with channel		348
TMRPCRCL	BINARY	CMF	4	AVG	No	Data length of all program returns with channel		349
TMRPCXCC	BINARY	CMF	4	AVG	No	Number of program XCTL requests with channel		346
TMRPGBCC	BINARY	CMF	4	AVG	No	Number of browse container channel requests		351
TMRPGCCC	BINARY	CMF	4	AVG	No	Number of containers created for channel containers		379
TMRPGCTC	BINARY	CMF	4	AVG	No	Total number of channel data container requests		350

Table 969. TASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
TMRPGGCC	BINARY	CMF	4	AVG	No	Number of get container channel requests		352
TMRPGGCL	BINARY	CMF	8	AVG	No	Data length of all get container channel requests		355
TMRPGMCC	BINARY	CMF	4	AVG	No	Number of move container channel requests		354
TMRPGPCC	BINARY	CMF	4	AVG	No	Number of put container channel requests		353
TMRPGPCL	BINARY	CMF	8	AVG	No	Data length of all put container channel requests		356
TMRPIPLN	CHAR	CMF	8	DIFF	No	Pipeline name	E640 E650	418
TMRPORTN	BINARY	STAT	4	AVG	No	TCP/IP service port number		279
TMRPTPWT	SCLOCK12	STAT	12	AVG	No	Partner wait time		313
TMRRLUNM	CHAR	STAT	8	DIFF	No	Real LUNAME		278
TMRROCPU	SCLOCK12	STAT	12	AVG	No	User task RO mode CPU time		302
TMRRODSP	SCLOCK12	STAT	12	AVG	No	User task RO mode dispatch time		301
TMRROPWT	SCLOCK12	STAT	12	AVG	No	Request processor wait time		309
TMRQRWT	SCLOCK12	STAT	12	AVG	No	Request receiver wait time		308
TMRSOCIN	BINARY	STAT	4	AVG	No	Number characters received		293
TMRSOCNS	BINARY	STAT	4	AVG	No	Number CREATE non-persistent socket requests		288
TMRSOCOT	BINARY	STAT	4	AVG	No	Number characters sent		295
TMRSOCPS	BINARY	STAT	4	AVG	No	Number CREATE persistent socket requests		289
TMRSOERC	BINARY	STAT	4	AVG	No	EXTRACT TCPIP and EXTRACT CERTIFICATE request count		287
TMRSOI1C	BINARY	STAT	4	AVG	No	Number inbound socket characters received		298
TMRSOIMC	BINARY	STAT	4	AVG	No	Number inbound socket receive requests		297
TMRSONHW	BINARY	STAT	4	AVG	No	Non-persistent socket HWM		290
TMRSOO1C	BINARY	STAT	4	AVG	No	Number inbound socket characters sent		300
TMRSOOMC	BINARY	STAT	4	AVG	No	Number inbound socket send requests		299
TMRSOOWT	SCLOCK12	STAT	12	AVG	No	Outbound socket I/O wait time		307
TMRSOPHW	BINARY	STAT	4	AVG	No	Persistent socket HWM		291
TMRSORCT	BINARY	STAT	4	AVG	No	Number socket receive requests		292
TMR SOSCT	BINARY	STAT	4	AVG	No	Number socket send requests		294
TMR SOTC	BINARY	STAT	4	AVG	No	Total number socket requests		296
TMRSTDLY	SCLOCK12	CMF	12	AVG	No	Maximum CICS SSL TCB delay time		366
TMRT8CPU	SCLOCK12	CMF	12	MAX	No	User task T8 mode cpu time	E640 E650	411
TMRTCPV	CHAR	CMF	8	DIFF	No	TCP/IP Service name		326
TMRTGPID	HEX	STAT	28	DIFF	No	Transaction group id		275
TMRTIATC	BINARY	CMF	4	AVG	No	Number of EXEC CICS ASKTIME requests	E640 E650	422

Table 969. TASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
TMRTITC	BINARY	CMF	4	AVG	No	Total number of EXEC CICS xxxTIME requests	E640 E650	423
TMRTSRN	DECIMAL	STAT	4	MAX	No	Transaction sequence number		274
TMRTDLY	SCLOCK12	CMF	12	MAX	No	Maximum thread TCB delay time	E640 E650	412
TMRURIMN	CHAR	CMF	8	DIFF	No	URI map name	E640 E650	417
TMRWBOC	BINARY	CMF	4	AVG	No	Number of web browse requests		365
TMRWBRC	BINARY	STAT	4	AVG	No	Number WEB BROWSE requests		284
TMRWBRC	BINARY	STAT	4	AVG	No	Number WEB EXTRACT requests		283
TMRWBI1C	BINARY	CMF	4	AVG	No	Number of bytes received by web requests		361
TMRWBIRC	BINARY	CMF	4	AVG	No	Number of web receive requests		360
TMRWBIWC	BINARY	CMF	4	AVG	No	Number of invoke web service requests		357
TMRWBO1C	BINARY	CMF	4	AVG	No	Number of bytes sent by web send requests		363
TMRWBOSC	BINARY	CMF	4	AVG	No	Number of web send requests		362
TMRWBPRC	BINARY	CMF	4	AVG	No	Number of web parse requests		364
TMRWBRDL	BINARY	CMF	4	AVG	No	Data length of data read from the repository		377
TMRWBROC	BINARY	CMF	4	AVG	No	Number of web read requests		358
TMRWBRPR	BINARY	STAT	4	AVG	No	Number repository reads		282
TMRWBRRRC	BINARY	STAT	4	AVG	No	Number WEB READ requests		285
TMRWBWDL	BINARY	CMF	4	AVG	No	Data length of data written to the repository		378
TMRWBWOC	BINARY	CMF	4	AVG	No	Number of web write requests		359
TMRWBWRC	BINARY	STAT	4	AVG	No	Number WEB WRITE requests		286
TMRWMQRC	BINARY	CMF	4	MAX	No	Total number Websphere MQ requests	E640	399
TMRWPBMN	CHAR	CMF	8	DIFF	No	Program name	E640 E650	421
TMRWSATC	BINARY	CMF	4	AVG	No	Total number of WS addressing requests	E640 E650	410
TMRWSCBC	BINARY	CMF	4	AVG	No	Number of WSACONTEXT BUILD requests	E640 E650	407
TMRWSCGC	BINARY	CMF	4	AVG	No	Number of WSACONTEXT GET requests	E640 E650	408
TMRWSEPC	BINARY	CMF	4	AVG	No	Number of WSAEPR create requests	E640 E650	409
TMRWSOPN	CHAR	CMF	64	DIFF	No	Web Services Operation name	E640 E650	428
TMRWSVCN	CHAR	CMF	32	DIFF	No	Webservice name	E640 E650	420
TMRX8CPU	SCLOCK12	CMF	12	AVG	No	User task X8 mode CPU time		369
TMRX9CPU	SCLOCK12	CMF	12	AVG	No	User task X9 mode CPU time		370
TMRXTDLY	SCLOCK12	CMF	12	AVG	No	Maximum CICS XPLink TCB delay time		367
TRACING	CVDAS	INQ	4	LIKE	No	Task tracing type		108
TRACING Output valid values	SPECTRACE, STANTRACE, SPRSTRACE							

Table 969. TASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
TRANCLASS	CHAR	INQ	8	DIFF	No	Transaction class		10
TRANFLAGS	HEX	CMF	8	MIN	No	Transaction flags		145
TRANID	CHAR	INQ	4	DIFF	No	Transaction		11
TRANPRIORITY	BINARY	INQ	4	AVG	No	Transaction priority		109
TRANATYPE	CHAR	CMF	4	DIFF	No	Transaction type		14
TRPROF	CHAR	INQ	8	DIFF	No	Transaction routing profile name		110
TSCOUNT	BINARY	CMF	4	AVG	No	Total number of temporary storage requests		68
TSGETCNT	BINARY	CMF	4	AVG	No	Number of temporary storage gets		65
TSGETSCNT	BINARY	CMF	4	AVG	No	Number of TS gets to shared storage	E640 E650 E660 E670 E680 E690	467
TSIOTIME	SCLOCK12	CMF	12	MAX	No	Temporary storage I/O wait time		87
TSPUTACNT	BINARY	CMF	4	AVG	No	Number of TS puts to auxiliary storage		66
TSPUTMCNT	BINARY	CMF	4	AVG	No	Number of TS puts to main storage		67
TSPUTSCNT	BINARY	CMF	4	AVG	No	Number of TS puts to shared storage	E640 E650 E660 E670 E680 E690	468
TWASIZE	BINARY	INQ	4	AVG	No	Size in bytes of transaction work area (TWA)		111
UNITOFWORK	HEX	INQ	16	MIN	No	Local unit of work (UOW) ID		159
UNSHUNTED	EYUDA	CPSM	4	LIKE	No	Recovery manager UOW unshunted		321
UNSHUNTED Output valid values	YES, NO							
UOWID	HEX	CMF	8	MIN	No	Network UOW instance and sequence number		8
USERID	CHAR	INQ	8	DIFF	No	User ID		12
USRPS24HWM	BINARY	CMF	4	AVG	No	Maximum program storage in UDSA		50
USRPS31HWM	BINARY	CMF	4	AVG	No	Maximum program storage in EUDSA		49
USTG24CNT	BINARY	CMF	4	AVG	No	User storage GETMAIN request count below 16MB		34
USTG24HWM	BINARY	CMF	4	AVG	No	Peak number of bytes used by task in UDSA		38
USTG24OCC	BINARY	CMF	8	AVG	No	Average storage usage below 16 MB line		42
USTG31CNT	BINARY	CMF	4	AVG	No	User storage GETMAIN request count above 16MB		35
USTG31HWM	BINARY	CMF	4	AVG	No	Peak number of bytes used by task in EUDSA		39
USTG31OCC	BINARY	CMF	8	AVG	No	Average storage usage above 16 MB line		43
WAITTIME	SCLOCK12	CMF	12	MAX	No	Dispatch wait time		82
WBCHRIN	BINARY	CMF	4	AVG	No	Number of characters received via WEB requests		208

Table 969. TASK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
WBCHROUT	BINARY	CMF	4	AVG	No	Number of characters sent via WEB requests		210
WBISSFCT	BINARY	CMF	4	MAX	No	INVOKE SOAP service faults	E640 E650	464
WBJSNRPL	BINARY	CMF	4	AVG	No	JSON response body length	E640 E650 E660 E670 E680 E690	471
WBJSNRQL	BINARY	CMF	4	AVG	No	JSON request body length	E640 E650 E660 E670 E680 E690	470
WBRCVCT	BINARY	CMF	4	AVG	No	Number of WEB receive requests		207
WBREPWCT	BINARY	CMF	4	AVG	No	Number of WEB repository writes		212
WBSENDCT	BINARY	CMF	4	AVG	No	Number of WEB send requests		209
WBSFCRCT	BINARY	CMF	4	MAX	No	SOAPFAULT CREATE requests	E640 E650	462
WBSFTOCT	BINARY	CMF	4	MAX	No	Total SOAPFAULT CREATE requests	E640 E650	463
WBSREQBL	BINARY	CMF	4	MAX	No	SOAP request body length	E640 E650	465
WBSRSPBL	BINARY	CMF	4	MAX	No	SOAP response body length	E640 E650	466
WBTOTCT	BINARY	CMF	4	AVG	No	Total number of WEB requests		211
WLMRPTRCNAME	CHAR	CMF	8	DIFF	No	Workload manager report class name		144
WLMSRVCNAME	CHAR	CMF	8	DIFF	No	Workload manager service class name		143

Chapter 400. TASKSQ Resource Table

A CICS Resource that describes tasks and the CICS Temporary Storage Queues they have used in an active system being managed by CICSplex SM. Note that for these records to be available, the MAS must be running with the SIT parameter MNRES=ON, and be using an MCT that specifies a value greater than 0 for TSQUEUE on the DFHMCT TYPE=INITIAL macro.

The **Primary** key field for this resource class is MNRTASKNO.

The **Secondary** key field for this resource class is TSQNAME.

There are no object specific actions for this resource class.

External resource name

CICSTaskTSQueueUsage

Length

152

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0146

Table 970. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A

Table 971. TASKSQ resource table attributes

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release		
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved		
GETSHRITEML	BINARY	STAT	4	SUM	Shared TS queue READQ item length	E640 E650 E660 E670 E680 E690	22
MNRSTART	TIMESTP	STAT	8	MAX	Task start time		14
MNRTASKNO-1	DECIMAL	STAT	4	MAX	Task ID		11
MNRTRANID	CHAR	STAT	4	DIFF	Transaction ID		12

Table 971. TASKSQ resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
MNRTSQLIMIT	EYUDA	STAT	4	LIKE	TS queue limit exceeded		15
MNRTSQLIMIT Output valid values	YES, NO						
MNRUSERID	CHAR	STAT	8	DIFF	User ID		13
PUTAUXITEML	BINARY	STAT	4	SUM	Auxiliary TS queue WRITEQ item length		9
PUTMAINITEML	BINARY	STAT	4	SUM	Main TS queue WRITEQ item length		10
PUTSHRITEML	BINARY	STAT	4	SUM	Shared TS queue WRITEQ item length	E640 E650 E660 E670 E680 E690	23
SHRTSQIOWT	SCLOCK	STAT	8	AVG	Shared TS queue I/O wait time		7
TSQGET	SCLOCK	STAT	8	AVG	TS queue READQ time and count		2
TSQGETITEML	BINARY	STAT	4	SUM	TS queue READQ item length		8
TSQGETSHR	SCLOCK	STAT	8	AVG	Shared TS queue READQ time and count	E640 E650 E660 E670 E680 E690	20
TSQIOWT	SCLOCK	STAT	8	AVG	TS queue I/O wait time		6
TSQNAME-2	CHAR	STAT	16	DIFF	TS queue name		1
TSQPUTAUX	SCLOCK	STAT	8	AVG	Auxiliary TS queue WRITEQ time and count		3
TSQPUTMAIN	SCLOCK	STAT	8	AVG	Main TS queue WRITEQ time and count		4
TSQPUTSHR	SCLOCK	STAT	8	AVG	Shared TS queue WRITEQ time and count	E640 E650 E660 E670 E680 E690	21
TSQTOTAL	SCLOCK	STAT	8	AVG	Total TSQ I/O time and count		5

Chapter 401. TCLINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a transaction class definition (TRNCLDEF) in a resource group (RESGROUP). A TRNCLDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is TRNCLGROUP.

The **Secondary** key field for this resource class is TRNCLNAME.

The **Tertiary** key field for this resource class is TRNCLVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6159

Table 972. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 973. TCLINGRP FEEDBACK error codes

Value	Code	Description
1	TCLINGRP_INV_DATA	Attribute data invalid
2	TCLINGRP_REC_NOT_FOUND	Requested resource not found
4	TCLINGRP_REC_EXISTS	Resource already exists
6	TCLINGRP_INV_RESTYPE	Invalid resource type
7	TCLINGRP_INV_VER	Invalid resource version
11	TCLINGRP_NON_MP	Maintenance point CMAS not available

Table 973. TCLINGRP FEEDBACK error codes (continued)

Value	Code	Description
12	TCLINGRP_INV_CONTEXT	Context not found
21	TCLINGRP_INCONSISTENT_SET	Inconsistent set
22	TCLINGRP_DIFF_VERSION	Different version
23	TCLINGRP_INV_NAME	Invalid name
24	TCLINGRP_INV_MINNAME	Invalid minor name

Table 974. TCLINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
TRNCLGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
TRNCLNAME-2	CHAR	CPSM	8	Yes	DIFF	Transaction class definition name	6
TRNCLVER-3	BINARY	CPSM	1	Yes	AVG	Transaction class definition version	7

Chapter 402. TCPDEF Resource Table

A CICS Definition that describes a TCP/IP Service.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL
Install a TCP/IP Service Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name
CICSDefinitionTCPIPService

Length
560

Usage
API or Batch Utility or WUI or CICS Management Client Interface

API view
No

CMAS context
No

SCOPE applies
No

Only query CMASs in workload
No

Object type
CICS Definition

Copybook identifier
EYUt3823

Table 975. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM SET	INSTALL	FORCEINS(YES, NO)	No
		MODE(value)	No

Table 975. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 976. TCPDEF FEEDBACK error codes

Value	Code	Description
1	TCPDEF_INV_DATA	Attribute data invalid
2	TCPDEF_REC_NOT_FOUND	Requested resource not found
4	TCPDEF_REC_EXISTS	Resource already exists
5	TCPDEF_REC_CHANGED	Resource definition already changed
6	TCPDEF_INV_RESTYPE	Invalid resource type
7	TCPDEF_INV_VER	Invalid resource version
11	TCPDEF_NON_MP	Maintenance point CMAS not available
12	TCPDEF_INV_CONTEXT	Context not found
13	TCPDEF_INCONSISTENT_SET	Inconsistent set condition
14	TCPDEF_INV_RESGROUP	Resource group not found
21	TCPDEF_INV_ACTION	Invalid action
22	TCPDEF_INV_RECADDR	Invalid record address
23	TCPDEF_INV_RECLLEN	Invalid record length
24	TCPDEF_DIFF_VERSION	Different version
25	TCPDEF_EARLY_NAMELIST_END	Early name list end
26	TCPDEF_INV_NAMELIST	Invalid name list
27	TCPDEF_INV_NAME	Invalid name
28	TCPDEF_INV_MINNAME	Invalid minor name
29	TCPDEF_NOTIFY	Notify
30	TCPDEF_PARTIAL_INSTALL	Partial install
31	TCPDEF_NOTHING_INSTALLED	Nothing installed

Table 976. TCPDEF FEEDBACK error codes (continued)

Value	Code	Description
32	TCPDEF_NO_TARGETS	No targets
33	TCPDEF_NO_RELATED	No related systems
34	TCPDEF_INV_TSCOPE	Invalid target scope
35	TCPDEF_INV_RSCOPE	Invalid related scope
36	TCPDEF_INV_USAGE	Invalid usage
37	TCPDEF_INV_MODE	Invalid mode
38	TCPDEF_INV_STATECHK	Invalid state check
39	TCPDEF_INV_FORCEINS	Invalid force install
40	TCPDEF_INV_NOTIFY	Invalid notify
41	TCPDEF_INV_OVERTYPE	Invalid oertype
42	TCPDEF_INV_OVRBLOCK	Invalid override block
43	TCPDEF_INV_ORSTRING	Invalid override string
44	TCPDEF_INV_STRNGTERM	Invalid string terminator
45	TCPDEF_INV_EMBEDTERM	Invalid embedded terminator
46	TCPDEF_INV_ATTRIBUTE	Invalid attribute
47	TCPDEF_INV_LITERAL	Invalid literal
48	TCPDEF_INV_ORSTGNA	Invalid override string
49	TCPDEF_SCOPE_REQUIRED	Scope required
50	TCPDEF_USAGE_CONFLICT	Usage conflict
51	TCPDEF_NODEFS_SELECTED	No definitions selected
52	TCPDEF_MORE_THAN_1_RELSYS	More than one related system
53	TCPDEF_MISSING_RELSYSID	Missing related system identifier
54	TCPDEF_SCOPE_CONFLICT	Scope conflict
55	TCPDEF_INV_CSDGROUP	Invalid CSD group
56	TCPDEF_REC_NOT_REMOVED	Record not removed
57	TCPDEF_INV_RESOURCE	Invalid resource
58	TCPDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	TCPDEF_PARTIAL_ACTION	Partial action
60	TCPDEF_NOTHING_ACTIONED	Nothing actioned
61	TCPDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	TCPDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	TCPDEF_CSD_ERROR	CSD access error
64	TCPDEF_INV_MAXPERSIST	Invalid maxpersist value

Table 977. TCPDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
ATTACHSEC	EYUDA	CPSM	4	No	LIKE	Attach-time security	NOTAPPLIC			30
ATTACHSEC Input/output valid values	LOCAL, VERIFY, NOTAPPLIC									
AUTHENTICATE	EYUDA	CPSM	4	Yes	LIKE	Authentication level	NO			25
AUTHENTICATE Input/output valid values	NO, BASIC, CERTIFICATE, AUTOREGISTER, AUTOMATIC, NOTAPPLIC, ASSERTED									
BACKLOG	CHAR	CPSM	8	Yes	DIFF	Queue backlog limit		0-32767		12
CERTIFICATE	CHAR	CPSM	56	No	DIFF	Certificate				15
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	36
CHANGEAGENT Input/output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	38
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	37
CIPHERS	CHAR	CPSM	56	No	LIKE	SSL cipher suite codes				32
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				16
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	41
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		34
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				20
DNSGROUP	CHAR	CPSM	18	No	DIFF	Domain name service (DNS) group			E690 +	27
GRPCRITICAL	EYUDA	CPSM	4	No	LIKE	Critical domain name service (DNS) group member	NOTAPPLIC		E690 +	29
GRPCRITICAL Input/output valid values	NO, YES, NOTAPPLIC									
HOST	CHAR	CPSM	11 6	Yes	DIFF	Incoming connections listening address			E640 E650	40
IPADDRESS	CHAR	CPSM	15	No	DIFF	IPv4 address				22
MAXDATALEN	CHAR	CPSM	6	No	DIFF	Maximum length of data to be received or sent	32	3-524288		33
MAXPERSIST	CHAR	CPSM	5	No	DIFF	Maximum number of persistent connections	NO	0-65535	E640 E650 E660	42
MAXPERSIST Input/output valid values	NO									
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
PORTNUMBER	CHAR	CPSM	8	Yes	DIFF	Port number		1-65535		8
PRIVACY	CVDAS	CPSM	4	No	LIKE	Privacy	NOTAPPLIC		E640 +	31
PRIVACY Input/output valid values	REQUIRED, SUPPORTED, NOTSUPPORTED, NOTAPPLIC									
PROTOCOL	CVDAS	CPSM	4	No	LIKE	Protocol				26
PROTOCOL Input/output valid values	HTTP, IIOP, ECI, USER, NOTAPPLIC, IPIC									

Table 977. TCPDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
REALM	CHAR	CPSM	56	No	DIFF	Basic authentication realm name			E640	35
SOCKETCLOSE	CHAR	CPSM	6	No	DIFF	Timeout for socket close (HHMMSS)				23
SPECIFTCPS	CHAR	CPSM	8	No	DIFF	Specific TCPIPService			E640 E650 E660 E670 E680	43
SSL	EYUDA	CPSM	4	Yes	LIKE	Secure sockets layer (SSL) type	NO			13
SSL Input/output valid values	YES, NO, CLIENTAUTH, ATTLISAWARE									
STATUS	CVDAS	CPSM	4	Yes	LIKE	TCP/IP service status	OPEN			9
STATUS Input/output valid values	OPEN, CLOSED									
TRANSACTION	CHAR	CPSM	4	Yes	DIFF	CICS transaction ID				10
TSQPREFIX	CHAR	CPSM	6	No	DIFF	TS queue prefix				21
URM	CHAR	CPSM	8	No	DIFF	User-replaceable module name				11
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				17
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				18
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				19

Chapter 403. TCPINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a TCP/IP Service definition (TCPDEF) in a resource group (RESGROUP). A TCPDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is TCPGROUP.

The **Secondary** key field for this resource class is TCPNAME.

The **Tertiary** key field for this resource class is TCPVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6168

Table 978. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 979. TCPINGRP FEEDBACK error codes		
Value	Code	Description
1	TCPINGRP_INV_DATA	Attribute data invalid
2	TCPINGRP_REC_NOT_FOUND	Requested resource not found
4	TCPINGRP_REC_EXISTS	Resource already exists
6	TCPINGRP_INV_RESTYPE	Invalid resource type
7	TCPINGRP_INV_VER	Invalid resource version
11	TCPINGRP_NON_MP	Maintenance point CMAS not available

Table 979. TCPINGRP FEEDBACK error codes (continued)

Value	Code	Description
12	TCPINGRP_INV_CONTEXT	Context not found
21	TCPINGRP_INCONSISTENT_SET	Inconsistent set
22	TCPINGRP_DIFF_VERSION	Different version
23	TCPINGRP_INV_NAME	Invalid name
24	TCPINGRP_INV_MINNAME	Invalid minor name

Table 980. TCPINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
TCPGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource Group name	5
TCPNAME-2	CHAR	CPSM	8	Yes	DIFF	TCP/IP service definition name	6
TCPVER-3	BINARY	CPSM	1	Yes	AVG	TCP/IP service definition version	7

Chapter 404. TCPIPGBL Resource Table

A CICS Resource that provides information about CICS internal TCP/IP sockets support.

There are no object specific actions for this resource class.

External resource name

CICSTCPIPStatistics

Length

680

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0113

Table 981. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A

Table 982. TCPIPGBL resource table attributes								
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release		
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved		
ACTSOCKETS	BINARY	INQ	4	AVG	No	Number of active TCP/IP sockets		3
CDELMAXSOCKS	BINARY	STAT	4	AVG	No	Current number of requests delayed at maximum sockets		17
CINSCKSNPERS	BINARY	STAT	4	AVG	No	Current number of non-persistent inbound sockets	E640 E650 E660 E670 E680 E690 E700	36
CINSOCKETS	BINARY	STAT	4	AVG	No	Number of inbound sockets		4
COUTSOCKETS	BINARY	STAT	4	AVG	No	Number of non-persistent outbound sockets		6

Table 982. TCPIPGBL resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
CPERSOCKETS	BINARY	STAT	4	AVG	No	Number of persistent outbound sockets		8
CQTMASOCKS	BINARY	STAT	4	AVG	No	Current delay time at maximum sockets (seconds)		19
CRLPROFILE	CHAR	INQ	246	LIKE	No	Certificate Revocation List (CRL) Profile Name		21
CRLSERVER	CHAR	INQ	255	LIKE	No	CRL server name		21
DELMASOCKS	BINARY	STAT	4	AVG	No	Total number of requests delayed at maximum sockets		14
INSCKSNPERS	BINARY	STAT	4	AVG	No	Total number of non-persistent inbound sockets created	E640 E650 E660 E670 E680 E690 E700	37
INOCKETSCR	BINARY	STAT	4	AVG	No	Number of inbound sockets created		10
LTIMPAUSLIST	TIMESTP	STAT	8	MAX	No	Last time socket listener paused listening for HTTP connections	E640 E650 E660 E670 E680 E690	26
LTIMSTOPPERS	TIMESTP	STAT	8	MAX	No	Last time stopped HTTP connection persistence	E640 E650 E660 E670 E680 E690	29
MAXSOCKETS	BINARY	INQ	4	AVG	Yes	Maximum number of TCP/IP sockets		2
OUTSCKSREUSE	BINARY	STAT	4	AVG	No	Total number of times outbound sockets reused	E640 E650 E660 E670 E680 E690 E700	38
OUTSOCKETSC	BINARY	STAT	4	AVG	No	Number of outbound sockets closed		12
OUTSOCKETSCR	BINARY	STAT	4	AVG	No	Number of outbound sockets created		11
OUTSOCKSPERS	BINARY	STAT	4	AVG	No	Total number of persistent outbound sockets	E640 E650 E660 E670 E680 E690 E700	33
PAUSINGLIST	EYUDA	STAT	4	LIKE	No	Socket listener has paused listening for HTTP connections	E640 E650 E660 E670 E680 E690	32
PAUSINGLIST Input/output valid values	YES, NO							
PDELMASOCKS	BINARY	STAT	4	MAX	No	Peak number of requests delayed at maximum sockets		18

Table 982. TCPIPGBL resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
PINSCKSNPERS	BINARY	STAT	4	MAX	No	Peak number of non-persistent inbound sockets	E640 E650 E660 E670 E680 E690 E700	35
PINSCKSPERS	BINARY	STAT	4	MAX	No	Peak number of persistent inbound sockets	E640 E650 E660 E670 E680 E690 E700	39
PINOCKETS	BINARY	STAT	4	MAX	No	Peak number of inbound sockets		5
POUTCKSBOTH	BINARY	STAT	4	MAX	No	Peak number of outbound sockets	E640 E650 E660 E670 E680 E690 E700	34
POUTOCKETS	BINARY	STAT	4	MAX	No	Peak number of non-persistent outbound sockets		7
PPEROCKETS	BINARY	STAT	4	MAX	No	Peak number of persistent outbound sockets		9
QTMAXSOCKS	BINARY	STAT	4	AVG	No	Total delay time at maximum sockets (seconds)		15
RSVD1	CHAR	CPSM	9	LIKE	No	Reserved area	EALL	22
SOTUNING	EYUDA	STAT	4	LIKE	No	Performance tuning for HTTP connections	E640 E650 E660 E670 E680 E690	24
SOTUNING Input/output valid values	YES, 520							
SSLCACHE	CVDAS	INQ	4	LIKE	No	SSL cache type		20
SSLCACHE Output valid values	CICS, SYSPLEX							
STATUS	CVDAS	INQ	4	LIKE	Yes	TCP/IP status		1
STATUS Input/output valid values	OPEN, CLOSED, IMMCLOSE							
STATUS Output valid values	CLOSING, IMMCLOSING, OPENING							
STOPPINGPERS	EYUDA	STAT	4	LIKE	No	Region stopping HTTP connection persistence	E640 E650 E660 E670 E680 E690	27
STOPPINGPERS Input/output valid values	YES, NO							
TDOMAXSOCKS	BINARY	STAT	4	AVG	No	Number of timeouts at maximum sockets		16
TIMATACCLIM	BINARY	STAT	4	AVG	No	Number of times socket listener notified at task accept limit	E640 E650 E660 E670 E680 E690	25

Table 982. TCPIPGBL resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
TIMDISCATMAX	BINARY	STAT	4	AVG	No	Number of times disconnected an HTTP connection at maximum uses	E640 E650 E660 E670 E680 E690	31
TIMMAXSOCKS	BINARY	STAT	4	AVG	No	Number of times maximum sockets reached		13
TIMMNONPERS	BINARY	STAT	4	AVG	No	Number of persistent HTTP connections made non-persistent	E640 E650 E660 E670 E680 E690	30
TIMSTOPPERS	BINARY	STAT	4	AVG	No	Number of times region stopped HTTP connection persistence	E640 E650 E660 E670 E680 E690	28

Chapter 405. TCPIPS Resource Table

A CICS Resource that describes a TCP/IP Service in an active CICS system being managed by CICSPlex SM.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

CLOSE

Close a TCP/IP Service

DISCARD

Discard a TCP/IP Service

IMMCLOSE

Close a TCP/IP Service immediately

OPEN

Open a TCP/IP Service

These actions require no unique parameter data.

External resource name

CICSTCPIPService

Length

624

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0103

Table 983. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	DISCARD	None	N/A
	OPEN	None	N/A
	CLOSE	None	N/A
	IMMCLOSE	None	N/A

Table 983. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
DEREGISTER		None	N/A

Table 984. TCPIPS resource table attributes									
Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
ATTACHSEC	CVDAS	INQ	4	LIKE	No	Attach-time security			32
ATTACHSEC Input/output valid values	NOTAPPLIC								
ATTACHSEC Output valid values	LOCAL, VERIFY								
AUTHENTICATE	CVDAS	INQ	4	LIKE	No	Authentication level			24
AUTHENTICATE Output valid values	AUTOAUTH, AUTOREGISTER, BASICAUTH, CERTIFICAUTH, NOAUTHENTIC, ASSERTED								
BACKLOG	BINARY	INQ	4	AVG	Yes	Queue backlog setting			3
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0	E640 E650	48
BYTERCVD	BINARY	STAT	8	AVG	No	Number of bytes received across all sockets			21
BYTESENT	BINARY	STAT	8	AVG	No	Number of bytes sent across all sockets			19
CERTIFICATE	CHAR	INQ	32	DIFF	No	Certificate			25
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent		E640 E650	40
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, SYSTEM, CREATESPI, NOTAPPLIC								
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release		E640 E650	41
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time		E640 E650	43
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID		E640 E650	39
CIPHERS	CHAR	INQ	56	LIKE	No	SSL cipher suite codes			34
CLOSETIMEOUT	BINARY	INQ	4	AVG	No	Timeout for socket close (seconds)			23
CMAXBACKLOG	BINARY	STAT	4	AVG	No	Current maximum backlog		E640 E650 E660 E670 E680 E690 E700	65
CONNECTIONS	BINARY	INQ	4	AVG	No	Number of connections			8
CONNLASTDROP	TIMESTP	STAT	8	MAX	No	Time connection last dropped		E640 E650 E660 E670 E680 E690 E700	64

Table 984. TCPIPS resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
CONNSDROPPED	BINARY	STAT	4	AVG	No	Connections dropped		E640 E650 E660 E670 E680 E690 E700	63
CURRBACKLOG	BINARY	STAT	4	AVG	No	Current backlog		E640 E650 E660 E670 E680 E690 E700	62
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition		E640 E650	44
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time		E640 E650	45
DISCATTLIM	BINARY	STAT	4	AVG	No	Times disconnected a persistent connection at task limit		E640 E650 E660 E670 E680 E690 E700	60
DISCATUSELIM	BINARY	STAT	4	AVG	No	Times disconnected an connection at max uses		E640 E650 E660 E670 E680 E690 E700	61
DNSGROUP	CHAR	INQ	18	DIFF	No	Domain name service (DNS) group		E690+	28
DNSSTATUS	CVDAS	INQ	4	LIKE	Yes	Domain name service (DNS) status		E690+	30
DNSSTATUS Input/output valid values	DEREGISTERED								
DNSSTATUS Output valid values	UNAVAILABLE, UNREGISTERED, REGISTERED, REGERROR, DEREGERROR, NOTAPPLIC								
GENERICTCPS	CHAR	INQ	8	DIFF	No	Generic TCIPService		E640 E650 E660 E670 E680	56
GMTSERVOPN	DATETIME	STAT	8	MAX	No	GMT service open time			14
GRPCRITICAL	CVDAS	INQ	4	LIKE	No	Critical domain name service (DNS) group member		E690+	31
GRPCRITICAL Output valid values	NONCRITICAL, CRITICAL								
HOST	CHAR	INQ	116	DIFF	No	Server address to listen on		E640 E650	52
HOSTTYPE	CVDAS	INQ	4	LIKE	No	The listening server's address format		E640 E650	50
HOSTTYPE Output valid values	ANY, DEFAULT, HOSTNAME, IPV4, IPV6, NOTAPPLIC								
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent		E640 E650	42
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, GRPLIST, BUNDLE								

Table 984. TCPIPS resource table attributes (continued)									
Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time		E640 E650	47
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID		E640 E650	46
IPADDRESS	CHAR	INQ	15	DIFF	No	IPv4 address of the service			10
IPFAMILY	CVDAS	INQ	4	LIKE	No	Resolved IP address format		E640 E650	51
IPFAMILY Output valid values	IPv4, IPv6, UNKNOWN								
IPRESOLVED	CHAR	INQ	39	DIFF	No	Resolved IP address		E640 E650	49
MAXDATALEN	BINARY	INQ	4	AVG	Yes	Maximum length of data that may be received			37
MAXPERSIST	BINARY	INQ	4	DIFF	No	Maximum persistent connections		E640 E650 E660	53
NAME-1	CHAR	INQ	8	DIFF	No	TCP/IP service name			1
NONPERSIST	BINARY	STAT	4	DIFF	No	Number of non-persisted connections		E640 E650 E660	54
NPERSATMAXP	BINARY	STAT	4	AVG	No	Times a connection was made non-persistent because MAXPERSIST was reached		E640 E650 E660 E670 E680 E690 E700	58
NPERSATTLIM	BINARY	STAT	4	AVG	No	Times a connection made non-persistent at task limit		E640 E650 E660 E670 E680 E690 E700	59
NUMCIPHERS	BINARY	INQ	2	LIKE	No	Number of SSL cipher suite codes			35
OPENSTATUS	CVDAS	INQ	4	LIKE	Yes	TCP/IP service status			4
OPENSTATUS Input/output valid values	OPEN, CLOSED, IMMCLOSE								
OPENSTATUS Output valid values	OPENING, CLOSING, IMMCLOSING								
PEAKCONNS	BINARY	STAT	4	AVG	No	Peak number of connections			13
PORT	BINARY	INQ	4	MAX	No	Port number			2
PRIVACY	CVDAS	INQ	4	LIKE	No	Privacy for clients using this service		E640+	33
PRIVACY Output valid values	REQUIRED, SUPPORTED, NOTSUPPORTED								
PROTOCOL	CVDAS	INQ	4	LIKE	No	Protocol			27
PROTOCOL Output valid values	HTTP, IIOP, USER, ECI, IPIC								
REALM	CHAR	INQ	56	DIFF	No	Basic authentication realm name		E640	38
RECEIVES	BINARY	STAT	4	AVG	No	Number of receives across all sockets			20

Table 984. TCPIPS resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
REQUESTS	BINARY	STAT	4	AVG	No	Requests		E640 E650 E660 E670 E680 E690 E700	66
SENDS	BINARY	STAT	4	AVG	No	Number of sends across all sockets			18
SOCKETCLOSE	CVDAS	INQ	4	LIKE	No	Socket close action			22
SOCKETCLOSE Output valid values	WAIT, TIMEOUT								
SPECIFTCPS	CHAR	INQ	8	DIFF	No	Specific TCIPService		E640 E650 E660 E670 E680	55
SSLTYPE	CVDAS	INQ	4	LIKE	No	Secure sockets layer (SSL) type			7
SSLTYPE Output valid values	SSL, NOSSL, CLIENTAUTH, ATTLSAWARE								
TIMEOPEN	DATETIME	STAT	8	MAX	No	Local service open time			15
TOTALCONNS	BINARY	STAT	4	AVG	No	Total connections		E640 E650 E660 E670 E680 E690 E700	57
TRANATTACH	BINARY	STAT	4	AVG	No	Number of transactions attached			12
TRANSID	CHAR	INQ	4	DIFF	No	CICS transaction ID			5
TSQPREFIX	CHAR	INQ	6	DIFF	No	TS queue prefix			9
URM	CHAR	INQ	8	DIFF	Yes	User-replaceable module name			6

Chapter 406. TDQDEF Resource Table

A CICS Definition that describes an intrapartition, extrapartition, indirect or remote transient data queue.

The **Primary** key field for this resource class is NAME. Note that a TDQ name can be only 4 characters long. The remainder of the 8-character NAME field should be padded with blank spaces.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install a Transient Data Queue Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionTDQueue

Length

400

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3811

Table 985. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM SET	INSTALL	FORCEINS(YES, NO)	No

Table 985. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		MODE(INTRA, EXTRA, IND)	No
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL, REMOTE)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 986. TDQDEF FEEDBACK error codes

Value	Code	Description
1	TDQDEF_INV_DATA	Attribute data invalid
2	TDQDEF_REC_NOT_FOUND	Requested resource not found
4	TDQDEF_REC_EXISTS	Resource already exists
5	TDQDEF_REC_CHANGED	Resource definition already changed
6	TDQDEF_INV_RESTYPE	Invalid resource type
7	TDQDEF_INV_VER	Invalid resource version
11	TDQDEF_NON_MP	Maintenance point CMAS not available
12	TDQDEF_INV_CONTEXT	Context not found
13	TDQDEF_INCONSISTENT_SET	Inconsistent set condition
14	TDQDEF_INV_RESGROUP	Resource group not found
21	TDQDEF_INV_ACTION	Invalid action
22	TDQDEF_INV_RECADDR	Invalid record address
23	TDQDEF_INV_RECLEN	Invalid record length
24	TDQDEF_DIFF_VERSION	Different version
25	TDQDEF_EARLY_NAMELIST_END	Early name list end
26	TDQDEF_INV_NAMELIST	Invalid name list
27	TDQDEF_INV_NAME	Invalid name
28	TDQDEF_INV_MINNAME	Invalid minor name
29	TDQDEF_NOTIFY	Notify
30	TDQDEF_PARTIAL_INSTALL	Partial install

Table 986. TDQDEF FEEDBACK error codes (continued)

Value	Code	Description
31	TDQDEF_NOTHING_INSTALLED	Nothing installed
32	TDQDEF_NO_TARGETS	No targets
33	TDQDEF_NO_RELATED	No related systems
34	TDQDEF_INV_TSCOPE	Invalid target scope
35	TDQDEF_INV_RSCOPE	Invalid related scope
36	TDQDEF_INV_USAGE	Invalid usage
37	TDQDEF_INV_MODE	Invalid mode
38	TDQDEF_INV_STATECHK	Invalid state check
39	TDQDEF_INV_FORCEINS	Invalid force install
40	TDQDEF_INV_NOTIFY	Invalid notify
41	TDQDEF_INV_OVERTYPE	Invalid oertype
42	TDQDEF_INV_OVRBLOCK	Invalid override block
43	TDQDEF_INV_ORSTRING	Invalid override string
44	TDQDEF_INV_STRNGTERM	Invalid string term
45	TDQDEF_INV_EMBEDTERM	Invalid embedded terminator
46	TDQDEF_INV_ATTRIBUTE	Invalid attribute
47	TDQDEF_INV_LITERAL	Invalid literal
48	TDQDEF_INV_ORSTGNA	Invalid override string
49	TDQDEF_SCOPE_REQUIRED	Scope required
50	TDQDEF_USAGE_CONFLICT	Usage conflict
51	TDQDEF_NODEFS_SELECTED	No definitions selected
52	TDQDEF_MORE_THAN_1_RELSYS	More than one related system
53	TDQDEF_MISSING_RELSYSID	Missing related system identifier
54	TDQDEF_SCOPE_CONFLICT	Scope conflict
55	TDQDEF_INV_CSDGROUP	Invalid CSD group
56	TDQDEF_REC_NOT_REMOVED	Record not removed
57	TDQDEF_INV_RESOURCE	Invalid resource
58	TDQDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	TDQDEF_PARTIAL_ACTION	Partial action
60	TDQDEF_NOTHING_ACTIONED	Nothing actioned
61	TDQDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	TDQDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	TDQDEF_CSD_ERROR	CSD access error

Table 987. TDQDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
ATIFACILITY	EYUDA	CPSM	4	Yes	LIKE	Destination type	TERMINAL			16
ATIFACILITY Input/output valid values	TERMINAL, FILE, SYSTEM									
BLOCKFORMAT	CVDAS	CPSM	4	No	LIKE	Block option	NOTAPPLIC			9
BLOCKFORMAT Input/output valid values	BLOCKED, UNBLOCKED, NOTAPPLIC									
BLOCKSIZE	CHAR	CPSM	8	No	DIFF	Block size	0	0-32767		21
BUFNO	CHAR	CPSM	4	No	DIFF	Number of buffers	1	1-255	E510 +	46
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	54
CHANGEAGENT Input/output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	56
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	55
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				48
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	58
DATABUFFERS	CHAR	CPSM	4	No	DIFF	Number of buffers	1	1-255		23
DDNAME	CHAR	CPSM	8	Yes	DIFF	DD name				29
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		53
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				52
DEVFILENAME	CHAR	CPSM	40	Yes	DIFF	Device file name			EALL	37
DEVICEINIT	EYUDA	CPSM	4	Yes	LIKE	Open at initialization	INITIAL		E330 +	47
DEVICEINIT Input/output valid values	INITIAL, DEFERRED									
DEVICETYPE	EYUDA	CPSM	4	Yes	LIKE	Type of device	DISK		E330 +	44
DEVICETYPE Input/output valid values	DISK, TAPE, PRINTER									
DISPOSITION	EYUDA	CPSM	4	Yes	LIKE	Disposition	SHR			11
DISPOSITION Input/output valid values	SHR, OLD, MOD									
DSNAME	CHAR	CPSM	44	No	DIFF	DS name				30
ERROROPTION	EYUDA	CPSM	4	Yes	LIKE	Error option	IGNORE			12
ERROROPTION Input/output valid values	IGNORE, SKIP									
FACILITYID	CHAR	CPSM	4	No	DIFF	Facility identifier				31
FILELABEL	EYUDA	CPSM	4	Yes	LIKE	Write a standard label	NO		EALL	43
FILELABEL Input/output valid values	YES, NO									
INDIRECTNAME	CHAR	CPSM	4	No	DIFF	Indirect transient data queue (TDQ) name				34
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7

Table 987. TDQDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
OPENTIME	EYUDA	CPSM	4	Yes	LIKE	Data set open time	INITIAL			13
OPENTIME Input/output valid values	INITIAL, DEFERRED									
PRINTCONTROL	EYUDA	CPSM	4	No	LIKE	Printer control	N_A			14
PRINTCONTROL Input/output valid values	ASA, MACHINE, N_A									
PRINTERNUM	CHAR	CPSM	4	No	DIFF	Printer number	1403	1403-5203	E330 +	45
RECORDFORMAT	CVDAS	CPSM	4	No	LIKE	Record format	UNDEFINED			10
RECORDFORMAT Input/output valid values	UNDEFINED, VARIABLE, FIXED									
RECORDSIZE	CHAR	CPSM	8	No	DIFF	Record size	1	0-32767		22
RECOVSTATUS	EYUDA	CPSM	4	Yes	LIKE	Recovery option	NO			17
RECOVSTATUS Input/output valid values	NO, PHYSICAL, LOGICAL									
REMOLENGTH	CHAR	CPSM	8	No	DIFF	Remote length	1	0-32767		25
REMOTENAME	CHAR	CPSM	4	No	DIFF	Remote transient data queue (TDQ) name				35
REMOTESYSTEM	CHAR	CPSM	4	No	DIFF	System identifier of remote destination				36
RESIDENT	EYUDA	CPSM	4	Yes	LIKE	Queue is resident or non-resident	YES		E330 +	41
RESIDENT Input/output valid values	YES, NO									
REUSE	EYUDA	CPSM	4	Yes	LIKE	Reuse control intervals	YES		E330 +	40
REUSE Input/output valid values	YES, NO									
REWIND	EYUDA	CPSM	4	Yes	LIKE	Tape disposition	LEAVE			15
REWIND Input/output valid values	LEAVE, REREAD, NOTAPPLIC									
RSL	CHAR	CPSM	8	No	DIFF	Resource security value	PUBLIC	1-24	E330 +	39
RSL Input/output valid values	PUBLIC									
SYSOUTCLASS	CHAR	CPSM	1	No	DIFF	System output (SYSOUT) class				27
TAPEMARK	EYUDA	CPSM	4	Yes	LIKE	Write a file tapemark	NO		EALL	42
TAPEMARK Input/output valid values	YES, NO									
TDQTYPE	EYUDA	CPSM	4	Yes	LIKE	Transient data queue (TDQ) type	EXTRA			26
TDQTYPE Input/output valid values	EXTRA, INTRA, INDIRECT, REMOTE									
TERMID	CHAR	CPSM	4	No	DIFF	Terminal name				38
TRANSID	CHAR	CPSM	4	No	DIFF	Transaction started at trigger level				32
TRIGGERLEVEL	CHAR	CPSM	8	No	DIFF	Trigger level	1	0-32767		24
TYPEFILE	CVDAS	CPSM	4	Yes	LIKE	Data set type	INPUT			20
TYPEFILE Input/output valid values	INPUT, OUTPUT, RDBACK									

Table 987. TDQDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				49
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				50
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				51
USERID	CHAR	CPSM	8	No	DIFF	User ID on the triggered transaction				33
WAIT	EYUDA	CPSM	4	Yes	LIKE	Wait for UOW resynchronization	N_A			18
WAIT Input/output valid values	YES, NO, N_A									
WAITACTION	EYUDA	CPSM	4	Yes	LIKE	In-doubt UOW wait action	N_A			19
WAITACTION Input/output valid values	REJECT, QUEUE, N_A									

Chapter 407. TDQGBL Resource Table

A CICS Resource that describes the general characteristics of transient data usage in an active CICS system being managed by CICSplex SM .

The **TDQGBL** resource class does not provide an explicit key attribute. The set of object instances returned is a function of the current scope in effect when the request is made.

There are no object specific actions for this resource class.

External resource name

CICSGlobalTDQueueStatistics

Length

120

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0025

Table 988. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 989. TDQGBL resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	3
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ACCESSCNT	BINARY	STAT	4	AVG	Number of intrapartition accesses	1
BUFFERS	BINARY	STAT	4	AVG	Number of intrapartition buffers	5
BUFFWAITS	BINARY	STAT	4	AVG	Number of intrapartition buffer waits	8
CINUM	BINARY	STAT	4	AVG	Number of control intervals	7
CISIZE	BINARY	STAT	4	AVG	Control interval size	21
CURBUFFWAIT	BINARY	STAT	4	AVG	Number of current buffer waits	22
CURBUFVALDA	BINARY	STAT	4	AVG	Number of current buffers with valid data	20
CURCONBUFAC	BINARY	STAT	4	AVG	Number of current concurrent buffer accesses	

Table 989. TDQGBL resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
CURCONSTRAC	BINARY	STAT	4	AVG	Number of current concurrent string accesses	23
CURSTRWAITS	BINARY	STAT	4	AVG	Number of current string waits	24
FMTWRITE	BINARY	STAT	4	AVG	Number of formatting writes	13
IOERRS	BINARY	STAT	4	AVG	Number of I/O errors	14
NOSPACECNT	BINARY	STAT	4	AVG	Number of times NOSPACE occurred	10
NUMCTRLINTV	BINARY	STAT	4	AVG	Number of control intervals in use	25
PEAKBWAIT	BINARY	STAT	4	AVG	Peak number of intrapartition buffer waits	6
PEAKCACCESS	BINARY	STAT	4	AVG	Peak number of concurrent intrapartition accesses	4
PEAKCIUSE	BINARY	STAT	4	AVG	Peak number of control intervals used	9
PEAKQACTV	BINARY	STAT	4	AVG	Peak number of queues that contain data	2
PEAKSTRACC	BINARY	STAT	4	AVG	Peak number of concurrent string accesses	17
PEAKSTRWAIT	BINARY	STAT	4	AVG	Peak number of string waits	19
READS	BINARY	STAT	4	AVG	Number of data set reads	12
STRACCESS	BINARY	STAT	4	AVG	Number of times string accessed	16
STRINGS	BINARY	STAT	4	AVG	Number of strings	15
STRNGWAITS	BINARY	STAT	4	AVG	Number of string waits	18
WRITES	BINARY	STAT	4	AVG	Number of writes to data set	11

Chapter 408. TDQINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a transient data queue definition (TDQDEF) in a resource group (RESGROUP). A TDQDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is TDQGROUP.

The **Secondary** key field for this resource class is TDQNAME.

The **Tertiary** key field for this resource class is TDQVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6156

Table 990. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 991. TDQINGRP FEEDBACK error codes		
Value	Code	Description
1	TDQINGRP_INV_DATA	Attribute data invalid
2	TDQINGRP_REC_NOT_FOUND	Requested resource not found
4	TDQINGRP_REC_EXISTS	Resource already exists
6	TDQINGRP_INV_RESTYPE	Invalid resource type
7	TDQINGRP_INV_VER	Invalid resource version
11	TDQINGRP_NON_MP	Maintenance point CMAS not available

Table 991. TDQINGRP FEEDBACK error codes (continued)

Value	Code	Description
12	TDQINGRP_INV_CONTEXT	Context not found
21	TDQINGRP_INCONSISTENT_SET	Inconsistent set
22	TDQINGRP_DIFF_VERSION	Different version
23	TDQINGRP_INV_NAME	Invalid name
24	TDQINGRP_INV_MINNAME	Invalid minor name

Table 992. TDQINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
TDQGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
TDQNAME-2	CHAR	CPSM	8	Yes	DIFF	TDQ definition name	6
TDQVER-3	BINARY	CPSM	1	Yes	AVG	TDQ definition version	7

Chapter 409. TERMDEF Resource Table

A CICS Definition that describes a terminal device with which CICS is to communicate.

The **Primary** key field for this resource class is NAME. A terminal name can be only 4 characters long. The remainder of the 8-character NAME field should be padded with blank spaces.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install a Terminal Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionTerminal

Length

640

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3812

Table 993. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM SET	INSTALL	FORCEINS(YES, NO)	No

Table 993. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		MODE(value)	No
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 994. TERMDEF FEEDBACK error codes

Value	Code	Description
1	TERMDEF_INV_DATA	Attribute data invalid
2	TERMDEF_REC_NOT_FOUND	Requested resource not found
4	TERMDEF_REC_EXISTS	Resource already exists
5	TERMDEF_REC_CHANGED	Resource definition already changed
6	TERMDEF_INV_RESTYPE	Invalid resource type
7	TERMDEF_INV_VER	Invalid resource version
11	TERMDEF_NON_MP	Maintenance point CMAS not available
12	TERMDEF_INV_CONTEXT	Context not found
13	TERMDEF_INCONSISTENT_SET	Inconsistent set condition
14	TERMDEF_INV_RESGROUP	Resource group not found
21	TERMDEF_INV_ACTION	Invalid action
22	TERMDEF_INV_RECADDR	Invalid record address
23	TERMDEF_INV_RECLEN	Invalid record length
24	TERMDEF_DIFF_VERSION	Different version
25	TERMDEF_EARLY_NAMELIST_END	Early name list end
26	TERMDEF_INV_NAMELIST	Invalid name list
27	TERMDEF_INV_NAME	Invalid name
28	TERMDEF_INV_MINNAME	Invalid minor name
29	TERMDEF_NOTIFY	Notify
30	TERMDEF_PARTIAL_INSTALL	Partial install

Table 994. TERMDEF FEEDBACK error codes (continued)

Value	Code	Description
31	TERMDEF_NOTHING_INSTALLED	Nothing installed
32	TERMDEF_NO_TARGETS	No targets
33	TERMDEF_NO_RELATED	No related systems
34	TERMDEF_INV_TSCOPE	Invalid target scope
35	TERMDEF_INV_RSCOPE	Invalid related scope
36	TERMDEF_INV_USAGE	Invalid usage
37	TERMDEF_INV_MODE	Invalid mode
38	TERMDEF_INV_STATECHK	Invalid state check
39	TERMDEF_INV_FORCEINS	Invalid force install
40	TERMDEF_INV_NOTIFY	Invalid notify
41	TERMDEF_INV_OVERTYPE	Invalid oertype
42	TERMDEF_INV_OVRBLOCK	Invalid override block
43	TERMDEF_INV_ORSTRING	Invalid override string
44	TERMDEF_INV_STRNGTERM	Invalid string terminator
45	TERMDEF_INV_EMBEDTERM	Invalid embedded terminator
46	TERMDEF_INV_ATTRIBUTE	Invalid attribute
47	TERMDEF_INV_LITERAL	Invalid literal
48	TERMDEF_INV_ORSTGNA	Invalid override string
49	TERMDEF_SCOPE_REQUIRED	Scope required
50	TERMDEF_USAGE_CONFLICT	Usage conflict
51	TERMDEF_NODEFS_SELECTED	No definitions selected
52	TERMDEF_MORE_THAN_1_RELSYS	More than one related system
53	TERMDEF_MISSING_RELSYSID	Missing related system identifier
54	TERMDEF_SCOPE_CONFLICT	Scope conflict
55	TERMDEF_INV_CSDGROUP	Invalid CSD group
56	TERMDEF_REC_NOT_REMOVED	Record not removed
57	TERMDEF_INV_RESOURCE	Invalid resource
58	TERMDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	TERMDEF_PARTIAL_ACTION	Partial action
60	TERMDEF_NOTHING_ACTIONED	Nothing actioned
61	TERMDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	TERMDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	TERMDEF_CSD_ERROR	CSD access error

Table 995. TERMDEF resource table attributes										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
ALTPRINTCOPY	EYUDA	CPSM	4	Yes	LIKE	Hardware COPY feature for alternate printer	NO			10
ALTPRINTCOPY Input/output valid values	YES, NO									
ALTPRINTER	CHAR	CPSM	4	No	DIFF	Alternate printer name				9
ASSOCPNTR	CHAR	CPSM	4	No	DIFF	Associated printer				58
ASYNCBPS	CHAR	CPSM	8	No	DIFF	OS/2 asynchronous line speed (bits per second)			EALL	78
ASYNCBPS Input/output valid values	110, 150, 300, 600, 1200, 1800, 2400, 3600, 4800, 9600, 19200									
ASYNCPORT	EYUDA	CPSM	4	No	LIKE	3151 asynchronous port (OS/2)			EALL	77
ASYNCPORT Input/output valid values	COM1, COM2, COM3, COM4, COM5, COM6, COM7, COM8									
ATI	EYUDA	CPSM	4	No	LIKE	Automatic transaction initialization allowed	NO		EALL	68
ATI Input/output valid values	YES, NO									
ATTACHSEC	EYUDA	CPSM	4	Yes	LIKE	Level of attach-time security	LOCAL			11
ATTACHSEC Input/output valid values	LOCAL, IDENTIFY, VERIFY, PERSISTENT, MIXIDPE									
AUTOCONNECT	EYUDA	CPSM	4	No	LIKE	Autoconnect to occur for terminal	NO		EALL	69
AUTOCONNECT Input/output valid values	YES, NO, ALL									
AUTOINSMODEL	EYUDA	CPSM	4	Yes	LIKE	Model for autoinstall option	NO			12
AUTOINSMODEL Input/output valid values	YES, NO, ONLY									
AUTOINSNAME	CHAR	CPSM	8	No	DIFF	Name of autoinstall model definition				13
BINDPASSWORD	HIDCHAR	CPSM	16	No	DIFF	Bind password				28
BINDSECURITY	EYUDA	CPSM	4	Yes	LIKE	Bind-time security	NO			14
BINDSECURITY Input/output valid values	YES, NO									
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	87
CHANGEAGENT Input/output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	89
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	88
CODEPAGE	CHAR	CPSM	8	No	DIFF	Code page		1-65534	EALL	76
COLOR	EYUDA	CPSM	4	No	LIKE	Extended color feature	NO		EALL	71
COLOR Input/output valid values	YES, NO									
CONSNAME	CHAR	CPSM	8	No	DIFF	Console name				16
CONSOLE	CHAR	CPSM	4	No	DIFF	Console ID		0-250	E640 +	15

Table 995. TERMDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
CONSOLE Input/output valid values	NO									
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				59
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	91
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		86
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				63
FULLSCREEN	EYUDA	CPSM	4	No	LIKE	Window style (OS/2)			EALL	75
FULLSCREEN Input/output valid values	PMWINDOW, FULLSCREEN									
GCHARCODE	CHAR	CPSM	8	No	DIFF	Graphic character set code	0	0-65535	EALL	70
HIGHLITE	EYUDA	CPSM	4	No	LIKE	Extended highlight supported	NO		EALL	72
HIGHLITE Input/output valid values	YES, NO									
INSERVICE	EYUDA	CPSM	4	Yes	LIKE	Terminal inservice	YES			32
INSERVICE Input/output valid values	YES, NO									
KATAKANA	EYUDA	CPSM	4	No	LIKE	Katakana feature supported	NO		EALL	73
KATAKANA Input/output valid values	YES, NO									
MODENAME	CHAR	CPSM	8	No	DIFF	Logmode name				17
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
NATLANG	CHAR	CPSM	1	No	DIFF	Language for NLS-enabled messages				46
NETNAME	CHAR	CPSM	8	No	DIFF	VTAM network name				18
OPERID	CHAR	CPSM	3	No	DIFF	Operator identifier for BMS			E330 +	47
OPERPRIORITY	CHAR	CPSM	4	No	DIFF	Operator priority	0	0-255	E330 +	33
OPERRSL	CHAR	CPSM	50	No	DIFF	Operator resource security keys			E330 +	64
OPERSEC	CHAR	CPSM	150	No	DIFF	Operator transaction security keys			E330 +	65
OS2TERMTYP	EYUDA	CPSM	4	No	LIKE	Terminal type (OS/2)			EALL	83
OS2TERMTYP Input/output valid values	3270TERM, 3270PRNT, 3151TERM, 3270DBTM, 3270DBPR, SEQTERM									
POOL	CHAR	CPSM	8	No	DIFF	Pool name for pipeline terminal				19
PRINCLSMODE	EYUDA	CPSM	4	No	LIKE	Printer close mode			EALL	84
PRINCLSMODE Input/output valid values	EOF, EOT									
PRINTEDMSG	EYUDA	CPSM	4	No	LIKE	Send messages to printer	NO		EALL	56
PRINTEDMSG Input/output valid values	YES, NO									
PRINTER	CHAR	CPSM	4	No	DIFF	Printer name				20
PRINTERCOPY	EYUDA	CPSM	4	Yes	LIKE	Hardware copy feature	NO			31

Table 995. TERMDEF resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
PRINTERCOPY Input/output valid values	YES, NO									
PRINTIMMED	EYUDA	CPSM	4	No	LIKE	Send end of report indicator	NO		EALL	57
PRINTIMMED Input/output valid values	YES, NO									
REMOTENAME	CHAR	CPSM	8	No	DIFF	Terminal name in the remote system				23
REMOTESYSNET	CHAR	CPSM	8	No	DIFF	Remote system network name				22
REMOTESYSTEM	CHAR	CPSM	4	No	DIFF	Remote system name				21
SCRHIGH	CHAR	CPSM	4	No	DIFF	Screen height	24	1-66	EALL	80
SCRWIDTH	CHAR	CPSM	4	No	DIFF	Screen width	80	1-132	EALL	81
SECURITYNAME	CHAR	CPSM	8	No	DIFF	Security name of the remote system				24
SOLICITED	EYUDA	CPSM	4	No	LIKE	Solicited messages	NO		EALL	85
SOLICITED Input/output valid values	NO, YES									
SPOOLDEST	CHAR	CPSM	8	No	DIFF	Spool destination			EALL	54
SPOOLPRTRSL	CHAR	CPSM	8	No	DIFF	Spool print resource security level (RSL)	PUBLIC	1-24	EALL	52
SPOOLPRTRSL Input/output valid values	PUBLIC									
SPOOLPRTTO	CHAR	CPSM	4	No	DIFF	Spool printer inactive time allowed	0	0-59	EALL	53
SPOOLTO	CHAR	CPSM	8	No	DIFF	Default spool printer name			EALL	55
TASKLIMIT	CHAR	CPSM	8	No	DIFF	Concurrent task limit for pipeline session		1-32767		29
TASKLIMIT Input/output valid values	NO									
TERMPRIORITY	CHAR	CPSM	4	No	DIFF	Terminal priority	0	0-255		30
TRANSACTION	CHAR	CPSM	4	No	DIFF	Fixed transaction ID				25
TYPETERM	CHAR	CPSM	8	Yes	DIFF	Typeterm definition name				26
UPCASETR	EYUDA	CPSM	4	No	LIKE	Uppercase translation			EALL	82
UPCASETR Input/output valid values	YES, NO, TRANID									
USEDFTUSER	EYUDA	CPSM	4	No	LIKE	Use default user	N_A			67
USEDFTUSER Input/output valid values	NO, YES, N_A									
USERAREALEN	CHAR	CPSM	4	No	DIFF	Length of the user area for the terminal	0	0-255	EALL	74
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				60
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				61
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				62
USERID	CHAR	CPSM	8	No	DIFF	User ID				27
WSSETUP	CHAR	CPSM	8	No	DIFF	Workstation setup (OS/2)			EALL	79

Chapter 410. TERMNL Resource Table

A CICS Resource that describes a terminal in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is TERMID.

The following actions are supported:

ACQUIRE

Acquire a terminal.

CANCEL

Cancel AID queuing for a terminal.

DISCARD

Discard a terminal.

FORCEPURGE

Force transactions associated with a terminal to be purged immediately.

INSERVICE

Set a terminal in service.

KILL

Kill the transactions associated with the terminal.

Note: Kill can lead to unpredictable results and should be used only in exceptional circumstances.

OUTSERVICE

Set a terminal out of service.

PURGE

Purge transactions associated with a terminal.

RELEASE

Release a terminal.

These actions require no unique parameter data.

External resource name

CICSTerminal

Length

456

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0019

Table 996. Valid CPSM operations				
Operations	Actions	Parameters	Required	
GET		None	N/A	
SET		None	N/A	
PERFORM SET	DISCARD	None	N/A	
	ACQUIRE	None	N/A	
	INSERVICE	None	N/A	
	OUTSERVICE	None	N/A	
	PURGE	None	N/A	
	FORCEPURGE	None	N/A	
	CANCEL	None	N/A	
	RELEASE	None	N/A	
	KILL	None	N/A	

Table 997. TERMNL FEEDBACK error codes		
Value	Code	Description
21	TERMNL_ACTNOT_SUPPORTED	Action not supported

Table 998. TERMNL resource table attributes								
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name		5
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release		
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved		
ACCESSMETHOD	CVDAS	INQ	4	LIKE	No	Access method		
ACCESSMETHOD Output valid values	VTAM, BSAM, BTAMES, BGAM, TCAM, TCAMSNA, CONSOLE, NETBIOS, TCPIP, RPC, NOTAPPLIC							
ACQSTATUS	CVDAS	INQ	4	LIKE	Yes	Acquire status		2
ACQSTATUS Input/output valid values	ACQUIRED, RELEASED, NOTAPPLIC							
ACQSTATUS Input valid values	COLDACQ							
ACQSTATUS Output valid values	ACQUIRING, RELEASING							
ALTPAGEHT	BINARY	INQ	2	AVG	No	Alternate page height		48
ALTPAGEWD	BINARY	INQ	2	AVG	No	Alternate page width		49
ALTPRINTER	CHAR	INQ	4	DIFF	Yes	Alternate printer		50
ALTPRTCOPYST	CVDAS	INQ	4	LIKE	Yes	Hardware COPY feature for alternate printer		51
ALTPRTCOPYST Input/output valid values	ALTPRTCOPY, NOALTPRTCOPY							
ALTPRTCOPYST Output valid values	NOTAPPLIC							
ALTSCRNHT	BINARY	INQ	2	AVG	No	Alternate screen height		52
ALTSCRNWD	BINARY	INQ	2	AVG	No	Alternate screen width		53
ALTSUFFIX	CHAR	INQ	1	DIFF	No	Alternate-map-set suffix		92

Table 998. TERMNL resource table attributes (continued)								
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
APLKYBDST	CVDAS	INQ	4	LIKE	No	APL keyboard feature		54
APLKYBDST Output valid values	APLKYBD, NOAPLKYBD							
APLTEXTST	CVDAS	INQ	4	LIKE	No	APL text feature		55
APLTEXTST Output valid values	APLTEXT, NOAPLTEXT							
ASCII	CVDAS	INQ	4	LIKE	No	ASCII data stream type		95
ASCII Output valid values	ASCII7, ASCII8, NOTAPPLIC							
ATISTATUS	CVDAS	INQ	4	LIKE	Yes	Automatic transaction initiation (ATI) status		3
ATISTATUS Input/output valid values	ATI, NOATI							
AUDALARMST	CVDAS	INQ	4	LIKE	No	Audible alarm feature		56
AUDALARMST Output valid values	AUDALARM, NOAUDALARM							
AUTOCONNECT	CVDAS	INQ	4	LIKE	No	Session binding status		96
AUTOCONNECT Output valid values	AUTOCONN, NONAUTOCONN, ALLCONN, NOTAPPLIC							
BACKTRANSST	CVDAS	INQ	4	LIKE	No	Background transparency feature		57
BACKTRANSST Output valid values	BACKTRANS, NOBACKTRANS							
COLORST	CVDAS	INQ	4	LIKE	No	Extended color feature		58
COLORST Output valid values	COLOR, NOCOLOR							
CONSOLE	CHAR	INQ	12	DIFF	No	Console ID		105
COPYST	CVDAS	INQ	4	LIKE	No	Copy feature in control unit		59
COPYST Output valid values	COPY, NOCOPY							
CORRELID	CHAR	INQ	8	DIFF	No	Correlation ID		102
CREATESESS	CVDAS	INQ	4	LIKE	Yes	Session creation status		4
CREATESESS Input/output valid values	CREATE, NOCREATE							
CREATESESS Output valid values	NOTAPPLIC							
DATASTREAM	CVDAS	INQ	4	LIKE	No	Device data stream type		97
DATASTREAM Output valid values	DS3270, SCS, NOTAPPLIC							
DEFPAGEHT	BINARY	INQ	2	AVG	No	Default page height		60
DEFPAGEWD	BINARY	INQ	2	AVG	No	Default page width		61
DEFSCRNHT	BINARY	INQ	2	AVG	No	Default screen height		62
DEFSCRNWD	BINARY	INQ	2	AVG	No	Default screen width		63
DEVICE	CVDAT	INQ	4	LIKE	No	Device type		7
DEVICE Output valid values	BATCHLU, BIPROG, BISYNCH, CDRDLPR, CONTNLU, HARDCOPY, INTACTLU, ISCMCONV, LUCMODGRP, LUCSESS, LUTYPE4, LUTYPE6, MAGTAPE, RESSYS, SDLC, SEQDISK, SYSTEM3, SYSTEM7, SYS7BSA, TCONSOLE, TELETYPE, TTCAM, TWX3335, T1050, T1053, T2260L, T2260R, T2265, T2740, T2741BCD, T2741COR, T2770, T2780, T3275R, T3277L, T3277R, T3284L, T3284R, T3286L, T3286R, T3600BI, T3601, T3614, T3650ATT, T3735, T3650PIPE, T3650USER, T3653HOST, T3740, T3780, T3790, T3790SCSP, T3790UP, T7770, VIDEOTERM							
DEVICEST	CVDAS	INQ	4	LIKE	No	Device busy status	E330+	98
DEVICEST Output valid values	BUSY, NOTBUSY							
DISCREQST	CVDAS	INQ	4	LIKE	Yes	Disconnect Requests status		64
DISCREQST Input/output valid values	DISCREQ, NODISCREQ, NOTAPPLIC							
DUALCASEST	CVDAS	INQ	4	LIKE	No	Dual-case keyboard status		65
DUALCASEST Output valid values	DUALCASE, NODUALCASE							

Table 998. TERMNL resource table attributes (continued)								
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
EXITTRACING	CVDAS	INQ	4	LIKE	Yes	Exit tracing status		8
EXITTRACING Input/output valid values	EXITTRACE, NOEXITTRACE							
EXITTRACING Output valid values	NOTAPPLIC							
EXTENDEDSSST	CVDAS	INQ	4	LIKE	No	Extended data stream support		66
EXTENDEDSSST Output valid values	EXTENDEDSS, NOEXTENDEDSS							
FMHPARMST	CVDAS	INQ	4	LIKE	No	Function management header (FMH) option		67
FMHPARMST Output valid values	FMHPARM, NOFMHPARM							
FORMFEEDST	CVDAS	INQ	4	LIKE	No	Forms feed feature		68
FORMFEEDST Output valid values	FORMFEED, NOFORMFEED							
GCHARS	BINARY	INQ	2	AVG	No	Graphic character set global ID		9
GCODES	BINARY	INQ	2	AVG	No	Code page global ID		10
HFORMST	CVDAS	INQ	4	LIKE	No	Horizontal form feature		70
HFORMST Output valid values	HFORM, NOHFORM							
HILIGHTST	CVDAS	INQ	4	LIKE	No	Extended highlight feature		69
HILIGHTST Output valid values	HILIGHT, NOHILIGHT							
INMSGCNT	BINARY	STAT	4	AVG	No	Number of input messages		37
KATAKANAST	CVDAS	INQ	4	LIKE	No	Katakana terminal		71
KATAKANAST Output valid values	KATAKANA, NOKATAKANA							
LIGHTPENST	CVDAS	INQ	4	LIKE	No	Selector pen feature		72
LIGHTPENST Output valid values	LIGHTPEN, NOLIGHTPEN							
LINKSYSTEM	CHAR	INQ	4	DIFF	No	Real link connection for remote TOR		104
MAPNAME	CHAR	INQ	7	DIFF	Yes	Last map referenced in SEND MAP command		100
MAPSETNAME	CHAR	INQ	8	DIFF	Yes	Last map set referenced in SEND MAP command		99
MODENAME	CHAR	INQ	8	DIFF	No	Mode name		11
MSRCONTROLST	CVDAS	INQ	4	LIKE	No	Magnetic slot reader		73
MSRCONTROLST Output valid values	MSRCONTROL, NOMSRCONTROL							
NATLANG	CHAR	INQ	1	AVG	No	National language ID		13
NATURE	CVDAT	INQ	4	LIKE	No	Terminal definition type		12
NATURE Output valid values	TERMINAL, MODEL, SESSION, SURROGATE							
NETNAME	CHAR	INQ	8	DIFF	No	Network name		14
NEXTTRANSID	CHAR	INQ	4	DIFF	Yes	Next transaction ID		31
NQNAME	CHAR	INQ	17	DIFF	No	Network qualified name		106
OBFORMATST	CVDAS	INQ	4	LIKE	Yes	Outboard formatting support		74
OBFORMATST Input/output valid values	OBFORMAT, NOOBFORMAT							
OBOPERIDST	CVDAS	INQ	4	LIKE	No	Outboard operator IDs used		75
OBOPERIDST Output valid values	OBOPERID, NOOBOPERID							
OPERID	CHAR	INQ	3	DIFF	No	Operator ID		15
OUTLINEST	CVDAS	INQ	4	LIKE	No	Field outlining support		76

Table 998. TERMNL resource table attributes (continued)								
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
OUTLINEST Output valid values	OUTLINE, NOOUTLINE							
OUTMSGCNT	BINARY	STAT	4	AVG	No	Number of output messages		38
PAGEHT	BINARY	INQ	4	AVG	No	Current page height		77
PAGESTATUS	CVDAS	INQ	4	LIKE	Yes	BMS paging status		16
PAGESTATUS Input/output valid values	PAGEABLE, AUTOPAGEABLE							
PAGEWD	BINARY	INQ	4	AVG	No	Current page width		78
PARTITIONSST	CVDAS	INQ	4	LIKE	No	Partitions status		79
PARTITIONSST Output valid values	PARTITIONS, NOPARTITIONS							
PMSGCNT	BINARY	STAT	4	AVG	No	Total pipeline-throwaway count		43
PMSGCONSEC	BINARY	STAT	2	AVG	No	Maximum pipeline-throwaway count		45
PMSGGRPCNT	BINARY	STAT	4	AVG	No	Number of consecutive pipeline-throwaways		44
POLLCNT	DECIMAL	STAT	4	AVG	No	Number of polls sent to terminal		36
PRINTADAPTST	CVDAS	INQ	4	LIKE	No	Printer adaptor feature		80
PRINTADAPTST Output valid values	PRINTADAPT, NOPRINTADAPT							
PRINTER	CHAR	INQ	4	DIFF	Yes	Printer name		81
PROGSYMBOLST	CVDAS	INQ	4	LIKE	No	Programmed symbol facility support		82
PROGSYMBOLST Output valid values	PROGSYMBOL, NOPROGSYMBOL							
PRTCOPYST	CVDAS	INQ	4	LIKE	Yes	Hardware COPY feature for preferred printer		83
PRTCOPYST Input/output valid values	PRTCOPY, NOPRTCOPY							
PRTCOPYST Output valid values	NOTAPPLIC							
QUERYST	CVDAS	INQ	4	LIKE	No	Query option		84
QUERYST Output valid values	ALLQUERY, COLDQUERY, NOQUERY							
RELREQST	CVDAS	INQ	4	LIKE	Yes	Release Request status		85
RELREQST Input/output valid values	RELREQ, NORELREQ, NOTAPPLIC							
REMOTENAME	CHAR	INQ	4	DIFF	No	Name of terminal in remote CICS		34
REMOTESYSNET	CHAR	INQ	8	DIFF	No	Remote TOR net name		103
REMOTESYSTEM	CHAR	INQ	4	DIFF	No	Remote system name		35
SCREENHEIGHT	BINARY	INQ	2	AVG	No	Screen height		17
SCREENWIDTH	BINARY	INQ	2	AVG	No	Screen width		18
SECURITY	CVDAS	INQ	4	LIKE	No	Preset security status		6
SECURITY Output valid values	PRESETSEC, NOPRESETSEC							
SERVSTATUS	CVDAS	INQ	4	LIKE	Yes	Service status		19
SERVSTATUS Input/output valid values	INSERVICE, OUTSERVICE							
SERVSTATUS Output valid values	GOINGOUT							
SESSIONTYPE	CVDAS	INQ	4	LIKE	No	Session type		32
SESSIONTYPE Output valid values	LU61, APPCSINGLE, APPCPARALLEL, NOTAPPLIC							

Table 998. TERMNL resource table attributes (continued)								
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
SIGNONSTATUS	CVDAS	INQ	4	LIKE	No	Sign-on status		20
SIGNONSTATUS Output valid values	SIGNEDON, SIGNEDOFF							
SOSIST	CVDAS	INQ	4	LIKE	No	Mixed EBCDIC/DBCS support		86
SOSIST Output valid values	SOSI, NOSOSI							
STGVCNT	BINARY	STAT	4	AVG	No	Number of storage violations		40
STORAGE	BINARY	STAT	4	AVG	No	Terminal input-output area (TIOA) storage		94
TASKID	BINARY	INQ	4	AVG	No	Id of task currently executing at terminal		21
TCAMCONTROL	HEX	INQ	1	LIKE	Yes	TCAM message control flag		47
TERMID-1	CHAR	INQ	4	DIFF	No	Terminal ID		1
TERMMODEL	CNUMERIC	INQ	2	AVG	No	Terminal model number		27
TERMPRIORITY	BINARY	INQ	4	AVG	Yes	Terminal priority		22
TERMTYPE	BINARY	STAT	1	AVG	No	Terminal type		46
TERRCNT	BINARY	STAT	4	AVG	No	Number of transaction errors		42
TEXTKYBDST	CVDAS	INQ	4	LIKE	No	Text-keyboard feature		87
TEXTKYBDST Output valid values	TEXTKYBD, NOTEXTKYBD							
TEXTPRINTST	CVDAS	INQ	4	LIKE	No	Text-print feature		88
TEXTPRINTST Output valid values	TEXTPRINT, NOTEXTPRINT							
TRACING	CVDAS	INQ	4	LIKE	Yes	Terminal tracing type		23
TRACING Input/output valid values	SPECTRACE, STANTRACE							
TRANCNT	BINARY	STAT	4	AVG	No	Number of transactions		39
TRANSACTION	CHAR	INQ	4	DIFF	No	Current transaction name		24
TTISTATUS	CVDAS	INQ	4	LIKE	Yes	Terminal transaction initiation (TTI) status		25
TTISTATUS Input/output valid values	TTI, NOTTI							
UCTRANST	CVDAS	INQ	4	LIKE	Yes	Uppercase translate option support		89
UCTRANST Input/output valid values	UCTRAN, NOUCTRAN, TRANIDONLY							
USERAREA	ADDRESS	INQ	4	AVG	No	Terminal user area (TCTUA) address		26
USERAREALEN	BINARY	INQ	2	AVG	No	Terminal user area (TCTUA) length		28
USERID	CHAR	INQ	8	DIFF	No	User ID		29
USERNAME	CHAR	INQ	20	DIFF	No	User name		33
VALIDATIONST	CVDAS	INQ	4	LIKE	No	Extended validation feature		90
VALIDATIONST Output valid values	VALIDATION, NOVALIDATION							
VFORMST	CVDAS	INQ	4	LIKE	No	Vertical form feature		91
VFORMST Output valid values	VFORM, NOVFORM							
XERRCNT	BINARY	STAT	4	AVG	No	Number of transmission errors or disconnects		41
ZCPTRACING	CVDAS	INQ	4	LIKE	Yes	ZCP tracing status		30
ZCPTRACING Input/output valid values	ZCPTRACE, NOZCPTRACE							

Table 998. TERMNL resource table attributes (continued)								
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Attr ID
ZCPTRACING Output valid values	NOTAPPLIC							

Chapter 411. TRANCLAS Resource Table

A CICS Resource that describes a transaction class in an active CICS system being managed by CICSplex SM.

The TRANCLAS resource class can be used to request object instances that were identified as TCLASS objects in versions of CICS before 4.1.

The **Primary** key field for this resource class is NAME.

The following action is supported:

DISCARD

Discard a transaction class.

This action requires no unique parameter data.

External resource name

CICSTransactionClass

Length

176

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0051

Table 999. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	DISCARD	None	N/A

Table 1000. TRANCLAS FEEDBACK error codes		
Value	Code	Description
1	TRANCLAS_INV_DATA	Attribute data invalid

Table 1001. TRANCLAS resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
ACCEPTAFTRQD	BINARY	STAT	4	AVG	No	Number of transactions accepted after being queued			10
ACCEPTIMMED	BINARY	STAT	4	AVG	No	Number of transactions accepted immediately			9
ACTIVE	BINARY	INQ	4	AVG	No	Number of transactions currently active in class			3
ACTIVEPEAK	BINARY	STAT	4	AVG	No	Peak number of active transactions			13
ATTACHES	BINARY	STAT	4	AVG	No	Total number of attach requests			6
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0	E640 E650	28
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent		E640 E650	20
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, CREATESPI, NOTAPPLIC								
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release		E640 E650	21
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time		E640 E650	23
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID		E640 E650	19
CURQUEETIME	INTTSTP	STAT	8	MAX	No	Total time transactions currently queued			18
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition		E640 E650	24
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time		E640 E650	25
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent		E640 E650	22
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, GRPLIST								
INSTALLDEFS	BINARY	STAT	4	AVG	No	Number of transaction definitions installed			12
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time		E640 E650	27
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID		E640 E650	26
MAXACTIVE	BINARY	INQ	4	AVG	Yes	Maximum number of transactions allowed in class			2
NAME-1	CHAR	INQ	8	DIFF	No	Transaction class name			1
PURGEIMMED	BINARY	STAT	4	AVG	No	Number of transactions purged due to threshold			7
PURGETHRESH	BINARY	INQ	4	AVG	Yes	Purge threshold			5
PURGEWHILEQD	BINARY	STAT	4	AVG	No	Number of transactions purged while queued			11
PURGTHRTIMES	BINARY	STAT	4	AVG	No	Number of times purge threshold met			16
QUEUED	BINARY	INQ	4	AVG	No	Number of transactions currently queued			4

Table 1001. TRANCLAS resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
QUEUEDPEAK	BINARY	STAT	4	AVG	No	Peak number of queued transactions			14
QUEUE TIME	INTTSTP	STAT	8	MAX	No	Total time transactions queued			17
TIMESATMAX	BINARY	STAT	4	AVG	No	Times maximum active transactions reached			15
TOTQUEDCNT	BINARY	STAT	4	AVG	No	Total number of transactions queued			8

Chapter 412. TRANDEF Resource Table

A CICS Definition that describes how a transaction is to run.

The **Primary** key field for this resource class is NAME. Note that a transaction name can be only 4 characters long. The remainder of the 8-character NAME field should be padded with blank spaces.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install a Transaction Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionTransaction

Length

576

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3813

Table 1002. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM	INSTALL	FORCEINS(YES, NO)	No
SET			

Table 1002. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		MODE(DYNAM, STAT)	No
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL, REMOTE)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 1003. TRANDEF FEEDBACK error codes

Value	Code	Description
1	TRANDEF_INV_DATA	Attribute data invalid
2	TRANDEF_REC_NOT_FOUND	Requested resource not found
4	TRANDEF_REC_EXISTS	Resource already exists
5	TRANDEF_REC_CHANGED	Resource definition already changed
6	TRANDEF_INV_RESTYPE	Invalid resource type
7	TRANDEF_INV_VER	Invalid resource version
11	TRANDEF_NON_MP	Maintenance point CMAS not available
12	TRANDEF_INV_CONTEXT	Context not found
13	TRANDEF_INCONSISTENT_SET	Inconsistent set condition
14	TRANDEF_INV_RESGROUP	Resource group not found
21	TRANDEF_INV_ACTION	Invalid action
22	TRANDEF_INV_RECADDR	Invalid record address
23	TRANDEF_INV_RECLEN	Invalid record length
24	TRANDEF_DIFF_VERSION	Different version
25	TRANDEF_EARLY_NAMELIST_END	Early name list end
26	TRANDEF_INV_NAMELIST	Invalid name list
27	TRANDEF_INV_NAME	Invalid name
28	TRANDEF_INV_MINNAME	Invalid minor name
29	TRANDEF_NOTIFY	Notify
30	TRANDEF_PARTIAL_INSTALL	Partial install

Table 1003. TRANDEF FEEDBACK error codes (continued)

Value	Code	Description
31	TRANDEF_NOTHING_INSTALLED	Nothing installed
32	TRANDEF_NO_TARGETS	No targets
33	TRANDEF_NO_RELATED	No related systems
34	TRANDEF_INV_TSCOPE	Invalid target scope
35	TRANDEF_INV_RSCOPE	Invalid related scope
36	TRANDEF_INV_USAGE	Invalid usage
37	TRANDEF_INV_MODE	Invalid mode
38	TRANDEF_INV_STATECHK	Invalid state check
39	TRANDEF_INV_FORCEINS	Invalid force install
40	TRANDEF_INV_NOTIFY	Invalid notify
41	TRANDEF_INV_OVERTYPE	Invalid oertype
42	TRANDEF_INV_OVRBLOCK	Invalid override block
43	TRANDEF_INV_ORSTRING	Invalid override string
44	TRANDEF_INV_STRNGTERM	Invalid string terminator
45	TRANDEF_INV_EMBEDTERM	Invalid embedded terminator
46	TRANDEF_INV_ATTRIBUTE	Invalid attribute
47	TRANDEF_INV_LITERAL	Invalid literal
48	TRANDEF_INV_ORSTGNA	Invalid override string
49	TRANDEF_SCOPE_REQUIRED	Scope required
50	TRANDEF_USAGE_CONFLICT	Usage conflict
51	TRANDEF_NODEFS_SELECTED	No definitions selected
52	TRANDEF_MORE_THAN_1_RELSYS	More than one related system
53	TRANDEF_MISSING_RELSYSID	Missing related system identifier
54	TRANDEF_SCOPE_CONFLICT	Scope conflict
55	TRANDEF_INV_CSDGROUP	Invalid CSD group
56	TRANDEF_REC_NOT_REMOVED	Record not removed
57	TRANDEF_INV_RESOURCE	Invalid resource
58	TRANDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	TRANDEF_PARTIAL_ACTION	Partial action
60	TRANDEF_NOTHING_ACTIONED	Nothing actioned
61	TRANDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	TRANDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	TRANDEF_CSD_ERROR	CSD access error

Table 1004. TRANDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
ALIAS	CHAR	CPSM	4	No	DIFF	Alias name for transaction				9
BREXIT	CHAR	CPSM	8	No	DIFF	Bridge exit name				61
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	66
CHANGEAGENT Input/output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	68
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	67
CMDSEC	EYUDA	CPSM	4	Yes	LIKE	Command level security option	NO			16
CMDSEC Input/output valid values	YES, NO									
CONFDATA	EYUDA	CPSM	4	No	LIKE	Suppress user data in trace entries	NO			55
CONFDATA Input/output valid values	YES, NO									
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				56
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	70
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		65
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				60
DTIMOUT	CHAR	CPSM	4	No	DIFF	Deadlock timeout value	NO	1-6800		41
DTIMOUT Input/output valid values	NO									
DUMP	EYUDA	CPSM	4	Yes	LIKE	Transaction dump option	YES			37
DUMP Input/output valid values	YES, NO									
DYNAMIC	EYUDA	CPSM	4	Yes	LIKE	Dynamic routing option	NO			38
DYNAMIC Input/output valid values	YES, NO									
EXTSEC	EYUDA	CPSM	4	No	LIKE	External security manager option	N_A		E330 +	50
EXTSEC Input/output valid values	YES, NO, N_A									
FAILACTION	CVDAS	CPSM	4	No	LIKE	CICS failure action	BACKOUT			14
FAILACTION Input/output valid values	BACKOUT, COMMIT									
INDOUBT	CVDAS	CPSM	4	No	LIKE	In-doubt failure processing action	BACKOUT		E510 +	15
INDOUBT Input/output valid values	BACKOUT, COMMIT, WAIT									
ISOLATE	EYUDA	CPSM	4	Yes	LIKE	Transaction isolation option	YES			36
ISOLATE Input/output valid values	YES, NO									
LOCALQ	EYUDA	CPSM	4	No	LIKE	Queueing on local system	N_A			22

Table 1004. TRANDEF resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
LOCALQ Input/output valid values	YES, NO, N_A									
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
OTSTIMEOUT	CHAR	CPSM	6	Yes	DIFF	Object transaction service (OTS) timeout (HHMMSS)	NO			64
PARTITIONSET	CHAR	CPSM	8	No	DIFF	Default application partition set				34
PRIMEDSIZE	CHAR	CPSM	8	No	DIFF	Primed storage allocation	0	0-65520	E330 +	49
PRIORITY	CHAR	CPSM	4	No	DIFF	Transaction priority	1	0-255		39
PROFILE	CHAR	CPSM	8	No	DIFF	Transaction profile	DFHCICST			13
PROGRAM	CHAR	CPSM	8	No	DIFF	First program name				10
REMOTENAME	CHAR	CPSM	8	No	DIFF	Remote transaction name				11
REMOTESYSTEM	CHAR	CPSM	4	No	DIFF	Remote system name				12
RESSEC	EYUDA	CPSM	4	Yes	LIKE	Resource security checking	NO			23
RESSEC Input/output valid values	YES, NO									
RESTART	EYUDA	CPSM	4	Yes	LIKE	Transaction restart facility	NO			25
RESTART Input/output valid values	YES, NO									
ROUTABLE	EYUDA	CPSM	4	Yes	LIKE	Dynamic routing status	NO			63
ROUTABLE Input/output valid values	YES, NO									
RSL	CHAR	CPSM	8	No	DIFF	Resource security value	0	0-24	E330 +	54
RSL Input/output valid values	PUBLIC									
RSLC	EYUDA	CPSM	4	No	LIKE	Resource security level check	NO		E330 +	53
RSLC Input/output valid values	YES, NO									
RUNAWAY	CHAR	CPSM	8	No	DIFF	Runaway timeout value	SYSTEM	0-2700000		40
RUNAWAY Input/output valid values	SYSTEM									
SECURE	EYUDA	CPSM	4	No	LIKE	Operator sign-on required	YES		EALL	51
SECURE Input/output valid values	YES, NO									
SHUTDOWN	CVDAS	CPSM	4	Yes	LIKE	Shutdown run status	DISABLED			17
SHUTDOWN Input/output valid values	ENABLED, DISABLED									
SPURGE	EYUDA	CPSM	4	Yes	LIKE	System purgeable option	YES			26
SPURGE Input/output valid values	YES, NO									
STATUS	CVDAS	CPSM	4	Yes	LIKE	Enabled status	ENABLED			18
STATUS Input/output valid values	ENABLED, DISABLED									
STORAGECLEAR	EYUDA	CPSM	4	Yes	LIKE	Storage clearance status	NO			24
STORAGECLEAR Input/output valid values	YES, NO									

Table 1004. TRANDEF resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
TASKDATAKEY	CVDAS	CPSM	4	Yes	LIKE	Task data key	USER			19
TASKDATAKEY Input/output valid values	USER, CICS									
TASKDATALOC	CVDAS	CPSM	4	Yes	LIKE	Task data location	ANY			20
TASKDATALOC Input/output valid values	BELOW, ANY									
TASKREQ	CHAR	CPSM	4	No	LIKE	Transaction initiation				21
TCLASS	CHAR	CPSM	4	No	DIFF	Transaction class number	NO	1-10	E410+	32
TCLASS Input/output valid values	NO									
TPNAME	CHAR	CPSM	64	No	DIFF	APPC partner transaction name				46
TPURGE	EYUDA	CPSM	4	Yes	LIKE	Purgeable for terminal error option	YES			27
TPURGE Input/output valid values	YES, NO									
TRACE	EYUDA	CPSM	4	Yes	LIKE	Trace transaction activity option	YES			29
TRACE Input/output valid values	YES, NO									
TRANCLASS	CHAR	CPSM	8	No	DIFF	Transaction class name	DFHTCL00			31
TRANSEC	CHAR	CPSM	4	No	DIFF	Transaction security value	1	1-64	E330+	48
TRPROF	CHAR	CPSM	8	No	DIFF	Transaction routing profile	DFHCICSS			30
TWASIZE	CHAR	CPSM	8	No	DIFF	Size in bytes of transaction work area (TWA)	0	0-32767		33
USEALTSCRSIZ	EYUDA	CPSM	4	No	LIKE	Use alternate screen size	NO		EALL	52
USEALTSCRSIZ Input/output valid values	YES, NO									
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				57
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				58
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				59
WAIT	EYUDA	CPSM	4	Yes	LIKE	In-doubt wait option	YES			28
WAIT Input/output valid values	YES, NO									
WAITTIMEDD	CHAR	CPSM	3	No	DIFF	In-doubt wait time (days)	0	0-99		42
WAITTIMEHH	CHAR	CPSM	2	No	DIFF	In-doubt wait time (hours)	0	0-23		43
WAITTIMEMM	CHAR	CPSM	2	No	DIFF	In-doubt wait time (minutes)	0	0-59		44
XTPNAME	CHAR	CPSM	128	No	DIFF	Alternate partner transaction name (in hex)				47
XTRANID	CHAR	CPSM	8	No	DIFF	Alternate name (in hex) for initiating transaction				35

Chapter 413. TRANDUMP Resource Table

A CICS Resource that describes a transaction dump code in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is TRANDUMPCODE.

Valid characters include uppercase characters (A-Z), lowercase characters (a-z), digits (0-9), and the special characters \$ @ # / % & ? ! : | ; , ¢ + * ~ - and _ . In some cases, the characters < > . = and " are also valid depending on where you set them. Any lowercase characters you enter are converted to uppercase.

The following actions are supported:

ADD

Add a transaction dump code.

The parameter data for the ADD action is:

```
PARM('CODE(code) [SCOPE(cvda1)] [MAX(nnn)]  
      [SHUT(cvda2)] [SDUMP(cvda3)] [TDUMP(cvda4)] .')
```

where:

- *code* is required and must be the 1- to 4-character transaction dump code.
- *cvda1* is one of the following valid CVDA values for the dump scope option:

LOCAL
RELATED

- *nnn* is the maximum number of dumps, from 0 - 999.
- *cvda2* is one of the following valid CVDA values for the shutdown option:

SHUTDOWN
NOSHUTDOWN

- *cvda3* is one of the following valid CVDA values for the system dump option:

SYSDUMP
NOSYSDUMP

- *cvda4* is one of the following valid CVDA values for the transaction dump option:

TRANDUMP
NOTRANDUMP

DELETE

Remove a transaction dump code.

RESET

Reset transaction dump code values.

External resource name

CICSTransactionDump

Length

64

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0005

Table 1005. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM	ADD	CODE(value)	Yes
SET		MAX(value)	Yes
		SCOPE(LOCAL, RELATED)	No
		SDUMP(SYSDUMP, NOSYS_DUMP)	No
		SHUT(SHUTDOWN, NOSHUTDOWN)	No
		TDUMP(TRAN_DUMP, NOTRAN_DUMP)	No
	RESET	None	N/A
	DELETE	None	N/A

Table 1006. TRAN_DUMP FEEDBACK error codes		
Value	Code	Description
1	TRAN_DUMP_ADD_FAILED	Add failed

Table 1007. TRAN_DUMP resource table attributes							
Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved	
CURRENT	BINARY	INQ	4	AVG	No	Number of dump calls since last reset	2
MAXIMUM	BINARY	INQ	4	AVG	Yes	Maximum number of dump calls	3
SDMPSUPP	BINARY	STAT	4	AVG	No	Number of system dumps suppressed	10
SDMPTOTL	BINARY	STAT	4	AVG	No	Number of system dumps taken	9
SHUTOPTION	CVDAS	INQ	4	LIKE	Yes	Shutdown option	4
SHUTOPTION Input/output valid values	SHUTDOWN, NOSHUTDOWN						
SYSDUMPING	CVDAS	INQ	4	LIKE	Yes	System dump option	5
SYSDUMPING Input/output valid values	SYSDUMP, NOSYS_DUMP						

Table 1007. TRANDUMP resource table attributes (continued)							
Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
TDMPSUPP	BINARY	STAT	4	AVG	No	Number of transaction dumps suppressed	8
TDMPTOTL	BINARY	STAT	4	AVG	No	Number of transaction dumps taken	7
TDUMPSCOPE	CVDAS	INQ	4	LIKE	Yes	Transaction dump scope type	11
TDUMPSCOPE Input/output valid values	LOCAL, RELATED						
TRANDUMPCODE-1	CHAR	INQ	4	DIFF	No	Transaction dump code	1
TRANDUMPING	CVDAS	INQ	4	LIKE	Yes	Transaction dump option	6
TRANDUMPING Input/output valid values	TRANDUMP, NOTRANDUMP						

Chapter 414. TRANGRP Resource Table

A CPSM Workload Manager Definition that describes the separation and or affinity controls for a set of dynamic transactions. The TRANGRP object is also the binding target for the DTRINGRP associator object.

The **Primary** key field for this resource class is NAME.

External resource name

CICSTransactionGroup

Length

144

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt3509

Table 1008. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
UPDATE		None	N/A
REMOVE		None	N/A
PERFORM	ADDTRAN	PCONV(N_A, START, END)	No
SET		TRANID(value)	Yes

Table 1009. TRANGRP FEEDBACK error codes		
Value	Code	Description
1	TRANGRP_INV_DATA	Attribute data invalid
2	TRANGRP_REC_NOT_FOUND	Requested resource not found
3	TRANGRP_INV_REFERENCE	Trangrp does not exist
4	TRANGRP_REC_EXISTS	Resource already exists
5	TRANGRP_REC_CHANGED	Resource definition already changed

Table 1009. TRANGRP FEEDBACK error codes (continued)

Value	Code	Description
21	TRANGRP_ABEND_COMBINATION	Abend load must be less than abend probability

Table 1010. TRANGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
ABENDCRIT	BINARY	CPSM	1	Yes	AVG	Acceptable level of abend probability	0	2-99	12
ABENDTHRESH	BINARY	CPSM	1	Yes	AVG	Acceptable abend load threshold	0	1-98	13
ABENDTHRESH Input/output valid values	0								
AFFAUTO	EYUDA	CPSM	4	No	LIKE	Automatic affinity creation	N_A		15
AFFAUTO Input/output valid values	YES, NO, N_A								
AFFINITY	EYUDA	CPSM	4	No	LIKE	Affinity relationship			6
AFFINITY Input/output valid values	N_A, GLOBAL, LUNAME, USERID, BAPPL, LOCKED								
AFFLIFE	EYUDA	CPSM	4	No	LIKE	Affinity lifetime			7
AFFLIFE Input/output valid values	N_A, LOGON, PCONV, PERMANENT, SIGNON, SYSTEM, DELIMIT, ACTIVITY, PROCESS, UOW								
ALGTYPE	EYUDA	CPSM	4	No	LIKE	Algorithm type	INHERIT		22
ALGTYPE Input/output valid values	INHERIT, QUEUE, LNQUEUE, GOAL, LGOAL								
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			17
CHANGEAGENT Input/output valid values	DREPAPI								
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			20
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification			1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			19
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created			18
DESC	CHAR	CPSM	58	No	DIFF	Description			10
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999	16
EVENTNAME	CHAR	CPSM	8	No	DIFF	RTA event			11
MATCH	EYUDA	CPSM	4	Yes	LIKE	Primary search criterion			8
MATCH Input/output valid values	LUNAME, USERID								
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name			5
STATE	EYUDA	CPSM	4	Yes	LIKE	Transaction group status			9
STATE Input/output valid values	ACTIVE, DORMANT								

Chapter 415. TRMINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a terminal definition (TERMDEF) in a resource group (RESGROUP). A TERMDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is TERMGROUP.

The **Secondary** key field for this resource class is TERMNAME.

The **Tertiary** key field for this resource class is TERMVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6157

Table 1011. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 1012. TRMINGRP FEEDBACK error codes		
Value	Code	Description
1	TRMINGRP_INV_DATA	Attribute data invalid
2	TRMINGRP_REC_NOT_FOUND	Requested resource not found
4	TRMINGRP_REC_EXISTS	Resource already exists
6	TRMINGRP_INV_RESTYPE	Invalid resource type
7	TRMINGRP_INV_VER	Invalid resource version
11	TRMINGRP_NON_MP	Maintenance point CMAS not available
12	TRMINGRP_INV_CONTEXT	Context not found

Table 1012. TRMINGRP FEEDBACK error codes (continued)

Value	Code	Description
21	TRMINGRP_INCONSISTENT_SET	Inconsistent set
22	TRMINGRP_DIFF_VERSION	Different version
23	TRMINGRP_INV_NAME	Invalid name
24	TRMINGRP_INV_MINNAME	Invalid minor name

Table 1013. TRMINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
TERMGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
TERMNAME-2	CHAR	CPSM	8	Yes	DIFF	Terminal definition name	6
TERMVVER-3	BINARY	CPSM	1	Yes	AVG	Terminal definition version	7

Chapter 416. TRNCLDEF Resource Table

A CICS Definition that describes the operational characteristics for transactions belonging to a given class.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install a Transaction Class Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionTransactionClass

Length

152

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3814

Table 1014. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM SET	INSTALL	FORCEINS(YES, NO)	No

Table 1014. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		MODE(value)	No
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTOGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 1015. TRNCLDEF FEEDBACK error codes

Value	Code	Description
1	TRNCLDEF_INV_DATA	Attribute data invalid
2	TRNCLDEF_REC_NOT_FOUND	Requested resource not found
4	TRNCLDEF_REC_EXISTS	Resource already exists
5	TRNCLDEF_REC_CHANGED	Resource definition already changed
6	TRNCLDEF_INV_RESTYPE	Invalid resource type
7	TRNCLDEF_INV_VER	Invalid resource version
11	TRNCLDEF_NON_MP	Maintenance point CMAS not available
12	TRNCLDEF_INV_CONTEXT	Context not found
13	TRNCLDEF_INCONSISTENT_SET	Inconsistent set condition
14	TRNCLDEF_INV_RESGROUP	Resource group not found
21	TRNCLDEF_INV_ACTION	Invalid action
22	TRNCLDEF_INV_RECADDR	Invalid record address
23	TRNCLDEF_INV_RECLEN	Invalid record length
24	TRNCLDEF_DIFF_VERSION	Different version
25	TRNCLDEF_EARLY_NAMELIST_END	Early name list end
26	TRNCLDEF_INV_NAMELIST	Invalid name list
27	TRNCLDEF_INV_NAME	Invalid name
28	TRNCLDEF_INV_MINNAME	Invalid minor name
29	TRNCLDEF_NOTIFY	Notify
30	TRNCLDEF_PARTIAL_INSTALL	Partial install

Table 1015. TRNCLDEF FEEDBACK error codes (continued)

Value	Code	Description
31	TRNCLDEF_NOTHING_INSTALLED	Nothing installed
32	TRNCLDEF_NO_TARGETS	No targets
33	TRNCLDEF_NO_RELATED	No related systems
34	TRNCLDEF_INV_TSCOPE	Invalid target scope
35	TRNCLDEF_INV_RSCOPE	Invalid related scope
36	TRNCLDEF_INV_USAGE	Invalid usage
37	TRNCLDEF_INV_MODE	Invalid mode
38	TRNCLDEF_INV_STATECHK	Invalid state check
39	TRNCLDEF_INV_FORCEINS	Invalid force install
40	TRNCLDEF_INV_NOTIFY	Invalid notify
41	TRNCLDEF_INV_OVERTYPE	Invalid oertype
42	TRNCLDEF_INV_OVRBLOCK	Invalid override block
43	TRNCLDEF_INV_ORSTRING	Invalid override string
44	TRNCLDEF_INV_STRNGTERM	Invalid string terminator
45	TRNCLDEF_INV_EMBEDTERM	Invalid embedded terminator
46	TRNCLDEF_INV_ATTRIBUTE	Invalid attribute
47	TRNCLDEF_INV_LITERAL	Invalid literal
48	TRNCLDEF_INV_ORSTGNA	Invalid override string
49	TRNCLDEF_SCOPE_REQUIRED	Scope required
50	TRNCLDEF_USAGE_CONFLICT	Usage conflict
51	TRNCLDEF_NODEFS_SELECTED	No definitions selected
52	TRNCLDEF_MORE_THAN_1_RELSYS	More than one related system
53	TRNCLDEF_MISSING_RELSYSID	Missing related system identifier
54	TRNCLDEF_SCOPE_CONFLICT	Scope conflict
55	TRNCLDEF_INV_CSDGROUP	Invalid CSD group
56	TRNCLDEF_REC_NOT_REMOVED	Record not removed
57	TRNCLDEF_INV_RESOURCE	Invalid resource
58	TRNCLDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	TRNCLDEF_PARTIAL_ACTION	Partial action
60	TRNCLDEF_NOTHING_ACTIONED	Nothing actioned
61	TRNCLDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	TRNCLDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	TRNCLDEF_CSD_ERROR	CSD access error

Table 1016. TRNCLDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	16
CHANGEAGENT Input/ output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	18
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	17
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				10
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	20
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		15
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				14
MAXACTIVE	CHAR	CPSM	4	Yes	DIFF	Maximum number of active transactions allowed in class	0	0-999		8
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
PURGETHRESH	CHAR	CPSM	8	No	DIFF	Purge threshold	NO	1-1000000		9
PURGETHRESH Input/ output valid values	NO									
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				11
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				12
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				13

Chapter 417. TRNINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a transaction definition (TRANDEF) in a resource group (RESGROUP). A TRANDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is TRANGROUP.

The **Secondary** key field for this resource class is TRANNAME.

The **Tertiary** key field for this resource class is TRANVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6158

Table 1017. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 1018. TRNINGRP FEEDBACK error codes		
Value	Code	Description
1	TRNINGRP_INV_DATA	Attribute data invalid
2	TRNINGRP_REC_NOT_FOUND	Requested resource not found
4	TRNINGRP_REC_EXISTS	Resource already exists
6	TRNINGRP_INV_RESTYPE	Invalid resource type
7	TRNINGRP_INV_VER	Invalid resource version
11	TRNINGRP_NON_MP	Maintenance point CMAS not available

Table 1018. TRNINGRP FEEDBACK error codes (continued)

Value	Code	Description
12	TRNINGRP_INV_CONTEXT	Context not found
21	TRNINGRP_INCONSISTENT_SET	Inconsistent set
22	TRNINGRP_DIFF_VERSION	Different version
23	TRNINGRP_INV_NAME	Invalid name
24	TRNINGRP_INV_MINNAME	Invalid minor name

Table 1019. TRNINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
TRANGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
TRANNAME-2	CHAR	CPSM	8	Yes	DIFF	Transaction definition name	6
TRANVER-3	BINARY	CPSM	1	Yes	AVG	Transaction definition version	7

Chapter 418. TSKSPOLS Resource Table

A CICS Resource that describes all the CICS task storage subpools in an active system being managed by CICSplex SM.

The TSKSPOLS resource does not provide an explicit key attribute. The set of object instances returned is a function of the scope in effect when the request is made.

There are no object specific actions for this resource class.

External resource name

CICSAllTaskSubpools

Length

256

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0147

Table 1020. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 1021. TSKSPOLS resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
DSAELEMPCTC	PERCENT3	CPSM	4	AVG	CDSA percentage of DSA used by elements	39
DSAELEMPCTEC	PERCENT3	CPSM	4	AVG	ECDSA percentage of DSA used by elements	42
DSAELEMPCTEU	PERCENT3	CPSM	4	AVG	EUDSA percentage of DSA used by elements	52
DSAELEMPCTU	PERCENT3	CPSM	4	AVG	UDSA percentage of DSA used by elements	49
DSAPAGPPCTC	PERCENT3	CPSM	4	AVG	CDSA peak percentage of page pool use	41
DSAPAGPPCTEC	PERCENT3	CPSM	4	AVG	ECDSA peak percentage of page pool use	46

Table 1021. TSKSPOLS resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
DSAPAGPPCTEU	PERCENT3	CPSM	4	AVG	EUDSA peak percentage of page pool use	56
DSAPAGPPCTU	PERCENT3	CPSM	4	AVG	UDSA peak percentage of page pool use	51
FREEMAINRTC	RATE3	CPSM	8	AVG	CDSA FREEMAIN rate since last reset	38
FREEMAINRTEC	RATE3	CPSM	8	AVG	ECDSA FREEMAIN rate since last reset	44
FREEMAINRTEU	RATE3	CPSM	8	AVG	EUDSA FREEMAIN rate since last reset	54
FREEMAINRTU	RATE3	CPSM	8	AVG	UDSA FREEMAIN rate since last reset	48
GETMAINRTC	RATE3	CPSM	8	AVG	CDSA GETMAIN rate since last reset	37
GETMAINRTEC	RATE3	CPSM	8	AVG	ECDSA GETMAIN rate since last reset	43
GETMAINRTEU	RATE3	CPSM	8	AVG	EUDSA GETMAIN rate since last reset	53
GETMAINRTU	RATE3	CPSM	8	AVG	UDSA GETMAIN rate since last reset	47
PAGEPLPCTC	PERCENT3	CPSM	4	AVG	CDSA current percentage of page pool use	40
PAGEPLPCTEC	PERCENT3	CPSM	4	AVG	ECDSA current percentage of page pool use	45
PAGEPLPCTEU	PERCENT3	CPSM	4	AVG	EUDSA current percentage of page pool use	55
PAGEPLPCTU	PERCENT3	CPSM	4	AVG	UCDSA current percentage of page pool use	50
SMTACCESSC	EYUDA	STAT	4	LIKE	CDSA subpool access type	6
SMTACCESSC Output valid values	CICS, USER					
SMTACCESSSEC	EYUDA	STAT	4	LIKE	ECDSA subpool access type	14
SMTACCESSSEC Output valid values	CICS, USER					
SMTACCESSSEU	EYUDA	STAT	4	LIKE	EUDSA subpool access type	30
SMTACCESSSEU Output valid values	CICS, USER					
SMTACCESSSU	EYUDA	STAT	4	LIKE	UDSA subpool access type	22
SMTACCESSSU Output valid values	CICS, USER					
SMTCESCDSA	BINARY	STAT	4	AVG	CDSA sum of all element lengths	9
SMTCESECDSA	BINARY	STAT	4	AVG	ECDSA sum of all element lengths	17
SMTCESEUDSA	BINARY	STAT	4	AVG	EUDSA sum of all element lengths	33
SMTCESUDSA	BINARY	STAT	4	AVG	UDSA sum of all element lengths	25
SMTCNECDSA	BINARY	STAT	4	AVG	CDSA current number of elements	11
SMTCNEECDSA	BINARY	STAT	4	AVG	ECDSA current number of elements	19
SMTCNEEUDSA	BINARY	STAT	4	AVG	EUDSA current number of elements	35
SMTCNEUDSA	BINARY	STAT	4	AVG	UDSA current number of elements	27
SMTCPSCDSA	BINARY	STAT	4	AVG	CDSA current page storage	10
SMTCPSECDSA	BINARY	STAT	4	AVG	ECDSA current page storage	18
SMTCPSEUDSA	BINARY	STAT	4	AVG	EUDSA current page storage	34
SMTCPSUUDSA	BINARY	STAT	4	AVG	UDSA current page storage	26
SMTFMREQCDSA	BINARY	STAT	4	AVG	CDSA number of FREEMAIN requests	8
SMTFMREQEC	BINARY	STAT	4	AVG	ECDSA number of FREEMAIN requests	16
SMTFMREQEU	BINARY	STAT	4	AVG	EUDSA number of FREEMAIN requests	32
SMTFMREQUDSA	BINARY	STAT	4	AVG	UDSA number of FREEMAIN requests	24
SMTGMREQCDSA	BINARY	STAT	4	AVG	CDSA number of GETMAIN requests	7
SMTGMREQEC	BINARY	STAT	4	AVG	ECDSA number of GETMAIN requests	15

Table 1021. TSKSPOLS resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
SMTGMREQEU	BINARY	STAT	4	AVG	EUDSA number of GETMAIN requests	31
SMTGMREQUDSA	BINARY	STAT	4	AVG	UDSA number of GETMAIN requests	23
SMTHWMPSCDSA	BINARY	STAT	4	AVG	CDSA peak page storage	12
SMTHWMPSEC	BINARY	STAT	4	AVG	ECDSA peak page storage	20
SMTHWMPSEU	BINARY	STAT	4	AVG	EUDSA peak page storage	36
SMTHWMPUDSA	BINARY	STAT	4	AVG	UDSA peak page storage	28
SMTLOCNCDSA	EYUDA	STAT	4	LIKE	CDSA location above/below 16MB line	5
SMTLOCNCDSA Output valid values	ABOVE, BELOW					
SMTLOCNECDSA	EYUDA	STAT	4	LIKE	ECDSA location above/below 16MB line	13
SMTLOCNECDSA Output valid values	ABOVE, BELOW					
SMTLOCNEUDSA	EYUDA	STAT	4	LIKE	EUDSA location above/below 16MB line	29
SMTLOCNEUDSA Output valid values	ABOVE, BELOW					
SMTLOCNUDSA	EYUDA	STAT	4	LIKE	UDSA location above/below 16MB line	21
SMTLOCNUDSA Output valid values	ABOVE, BELOW					

Chapter 419. TSKSPOOL Resource Table

A CICS Resource that describes CICS task storage subpools in an active system being managed by CICSplex SM.

The **Primary** key field for this resource class is SMTDSANAME.

There are no object specific actions for this resource class.

External resource name

CICSTaskSubpool

Length

88

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0119

Table 1022. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 1023. TSKSPOOL resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	17
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
DSAELEMPCT	PERCENT3	CPSM	4	AVG	Percentage of DSA used by elements	19
DSAPAGPPCT	PERCENT3	CPSM	4	AVG	Peak percentage of DSA page use	16
FREEMAINRTE	RATE3	CPSM	8	AVG	FREEMAIN rate since last reset	15
GETMAINRTE	RATE3	CPSM	8	AVG	GETMAIN rate since last reset	18
PAGEPAGEPCT	PERCENT3	CPSM	4	AVG	Percentage of page pools used	7
SMTACCESS	EYUDA	STAT	4	LIKE	Subpool access type	
SMTACCESS Output valid values		CICS, USER				
SMTCES	BINARY	STAT	4	AVG	Sum of all element lengths	10
SMTCNE	BINARY	STAT	4	AVG	Current number of elements	12
SMTCPs	BINARY	STAT	4	AVG	Current page storage	11

Table 1023. TSKSPOOL resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
SMTDSANAME-1	CHAR	STAT	8	DIFF	Name of dynamic storage area (DSA)	5
SMTFMREQ	BINARY	STAT	4	AVG	Number of FREEMAIN requests	9
SMTGMREQ	BINARY	STAT	4	AVG	Number of GETMAIN requests	8
SMTHWMPS	BINARY	STAT	4	AVG	Peak page storage	13
SMTLOCN	EYUDA	STAT	4	LIKE	Location of task subpool above/below 16MB	6
SMTLOCN Output valid values	ABOVE, BELOW					

Chapter 420. TSMDEF Resource Table

A CICS Definition that describes a temporary storage model.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install a Temporary Storage Model Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionTSMModel

Length

280

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3821

Table 1024. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM	INSTALL SET	FORCEINS(YES, NO)	No
SET		MODE(value)	No

Table 1024. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 1025. TSMDEF FEEDBACK error codes

Value	Code	Description
1	TSMDEF_INV_DATA	Attribute data invalid
2	TSMDEF_REC_NOT_FOUND	Requested resource not found
4	TSMDEF_REC_EXISTS	Resource already exists
5	TSMDEF_REC_CHANGED	Resource definition already changed
6	TSMDEF_INV_RESTYPE	Invalid resource type
7	TSMDEF_INV_VER	Invalid resource version
11	TSMDEF_NON_MP	Maintenance point CMAS not available
12	TSMDEF_INV_CONTEXT	Context not found
13	TSMDEF_INCONSISTENT_SET	Inconsistent set condition
14	TSMDEF_INV_RESGROUP	Resource group not found
21	TSMDEF_INV_ACTION	Invalid action
22	TSMDEF_INV_RECADDR	Invalid record address
23	TSMDEF_INV_RECLEN	Invalid record length
24	TSMDEF_DIFF_VERSION	Different version
25	TSMDEF_EARLY_NAMELIST_END	Early name list end
26	TSMDEF_INV_NAMELIST	Invalid name list
27	TSMDEF_INV_NAME	Invalid name
28	TSMDEF_INV_MINNAME	Invalid minor name
29	TSMDEF_NOTIFY	Notify
30	TSMDEF_PARTIAL_INSTALL	Partial install
31	TSMDEF_NOTHING_INSTALLED	Nothing installed

Table 1025. TSMDEF FEEDBACK error codes (continued)

Value	Code	Description
32	TSMDEF_NO_TARGETS	No targets
33	TSMDEF_NO_RELATED	No related systems
34	TSMDEF_INV_TSCOPE	Invalid target scope
35	TSMDEF_INV_RSCOPE	Invalid related scope
36	TSMDEF_INV_USAGE	Invalid usage
37	TSMDEF_INV_MODE	Invalid mode
38	TSMDEF_INV_STATECHK	Invalid state check
39	TSMDEF_INV_FORCEINS	Invalid force install
40	TSMDEF_INV_NOTIFY	Invalid notify
41	TSMDEF_INV_OVERTYPE	Invalid oertype
42	TSMDEF_INV_OVRBLOCK	Invalid override block
43	TSMDEF_INV_ORSTRING	Invalid override string
44	TSMDEF_INV_STRNGTERM	Invalid string terminator
45	TSMDEF_INV_EMBEDTERM	Invalid embedded terminator
46	TSMDEF_INV_ATTRIBUTE	Invalid attribute
47	TSMDEF_INV_LITERAL	Invalid literal
48	TSMDEF_INV_ORSTGNA	Invalid override string
49	TSMDEF_SCOPE_REQUIRED	Scope required
50	TSMDEF_USAGE_CONFLICT	Usage conflict
51	TSMDEF_NODEFS_SELECTED	No definitions selected
52	TSMDEF_MORE_THAN_1_RELSYS	More than one related system
53	TSMDEF_MISSING_RELSYSID	Missing related system identifier
54	TSMDEF_SCOPE_CONFLICT	Scope conflict
55	TSMDEF_INV_CSDGROUP	Invalid CSD group
56	TSMDEF_REC_NOT_REMOVED	Record not removed
57	TSMDEF_INV_RESOURCE	Invalid resource
58	TSMDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	TSMDEF_PARTIAL_ACTION	Partial action
60	TSMDEF_NOTHING_ACTIONED	Nothing actioned
61	TSMDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	TSMDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	TSMDEF_CSD_ERROR	CSD access error

Table 1026. TSMDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	24
CHANGEAGENT Input/output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	26
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	25
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				16
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	28
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		23
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				20
EXPIRYINT	CHAR	CPSM	8	Yes	DIFF	TS Queue expiry interval (hours)	0	0-15000	E640 E650 E660	30
EXPIRYINTMIN	CHAR	CPSM	8	Yes	DIFF	TS Queue expiry interval (minutes)	0	0-900000	E640 E650 E660 E670 E680	31
LOCATION	CVDAS	CPSM	4	Yes	LIKE	Queue location	AUXILIARY			10
LOCATION Input/output valid values	MAIN, AUXILIARY									
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
POOLNAME	CHAR	CPSM	8	No	DIFF	Shared TS pool name				13
PREFIX	CHAR	CPSM	16	Yes	DIFF	TS queue prefix				9
RECOVERY	EYUDA	CPSM	4	Yes	LIKE	Recovery option	NO			11
RECOVERY Input/output valid values	YES, NO									
REMOTEPREFIX	CHAR	CPSM	16	No	DIFF	Remote TS queue prefix				15
REMOTESYSTEM	CHAR	CPSM	4	No	DIFF	Remote system ID				14
SECURITY	EYUDA	CPSM	4	Yes	LIKE	Security option	NO			12
SECURITY Input/output valid values	YES, NO									
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				17
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				18
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				19
XPREFIX	CHAR	CPSM	32	No	DIFF	Hexadecimal TS queue prefix				21
XREMOTEPPFX	CHAR	CPSM	32	No	DIFF	Hexadecimal remote TS queue prefix				22

Chapter 421. TSMINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a temporary storage model definition (TSMDEF) in a resource group (RESGROUP). A TSMDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is TSMGROUP.

The **Secondary** key field for this resource class is TSMNAME.

The **Tertiary** key field for this resource class is TSMVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6166

Table 1027. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 1028. TSMINGRP FEEDBACK error codes

Value	Code	Description
1	TSMINGRP_INV_DATA	Attribute data invalid
2	TSMINGRP_REC_NOT_FOUND	Requested resource not found
4	TSMINGRP_REC_EXISTS	Resource already exists
6	TSMINGRP_INV_RESTYPE	Invalid resource type
7	TSMINGRP_INV_VER	Invalid resource version
11	TSMINGRP_NON_MP	Maintenance point CMAS not available

Table 1028. TSMINGRP FEEDBACK error codes (continued)

Value	Code	Description
12	TSMINGRP_INV_CONTEXT	Context not found
21	TSMINGRP_INCONSISTENT_SET	Inconsistent set
22	TSMINGRP_DIFF_VERSION	Different version
23	TSMINGRP_INV_NAME	Invalid name
24	TSMINGRP_INV_MINNAME	Invalid minor name

Table 1029. TSMINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
TSMGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
TSMNAME-2	CHAR	CPSM	8	Yes	DIFF	TS model definition name	6
TSMVER-3	BINARY	CPSM	1	Yes	AVG	TS model definition version	7

Chapter 422. TSMODEL Resource Table

A CICS Resource that describes a temporary storage model in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

DISCARD

Discard a temporary storage model.

The DISCARD action requires no unique parameter data.

External resource name

CICSTSMModel

Length

152

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0092

Table 1030. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	DISCARD	None	N/A
SET			

Table 1031. TSMODEL resource table attributes								
Name	Datatype	Source	Len	Sum	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved			
BASDEFINEVER	BINARY	CPSM	1	AVG	BAS resource definition version	0	E640 E650	20
CHANGEAGENT	CVDAS	INQ	4	LIKE	Last modification agent		E640 E650	11

Table 1031. TSMODEL resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Default	Get Invalid	Attr ID
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, CREATESPI, NOTAPPLIC							
CHANGEAGREL	CHAR	INQ	4	DIFF	Last modification agent release		E640 E650	13
CHANGETIME	DATETIME	INQ	8	MAX	Last modification time		E640 E650	14
CHANGEUSRID	CHAR	INQ	8	DIFF	Last modification user ID		E640 E650	12
DEFINESOURCE	CHAR	INQ	8	DIFF	Source of the resource definition		E640 E650	15
DEFINETIME	DATETIME	INQ	8	MAX	Creation time		E640 E650	16
EXPIRYINT	BINARY	CPSM	4	AVG	TS Queue expiry interval (hours)	0	E640 E650 E660	22
EXPIRYINTMIN	BINARY	CPSM	4	AVG	TS Queue expiry interval (minutes)	0	E640 E650 E660 E670 E680	23
INSTALLAGENT	CVDAS	INQ	4	LIKE	Installation agent		E640 E650	19
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, GRPLIST							
INSTALLTIME	DATETIME	INQ	8	MAX	Installation time		E640 E650	18
INSTALLUSRID	CHAR	INQ	8	DIFF	Installation user ID		E640 E650	17
LOCATION	CVDAS	INQ	4	LIKE	Queue location	AUXILIARY		3
LOCATION Output valid values	AUXILIARY, MAIN							
NAME-1	CHAR	INQ	8	DIFF	TS model name			1
POOLNAME	CHAR	INQ	8	DIFF	Shared TS pool name			6
PREFIX	CHAR	INQ	16	DIFF	TS queue prefix			2
RECOVSTATUS	CVDAS	INQ	4	LIKE	Recovery status	NO		4
RECOVSTATUS Output valid values	RECOVERABLE, NOTRECOVERABLE							
REMOTEPREFIX	CHAR	INQ	16	DIFF	Remote TS queue prefix			8
REMOTESYSTEM	CHAR	INQ	4	DIFF	Remote system ID			7
SECURITYST	CVDAS	INQ	4	LIKE	Security status	NO		5
SECURITYST Output valid values	EXTSECURITY, NOSECURITY							

Chapter 423. TSPPOOL Resource Table

A CICS Resource that describes a temporary storage pool in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is NAME.

There are no object specific actions for this resource class.

External resource name

CICSTSPool

Length

32

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0094

Table 1032. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 1033. TSPPOOL resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	2
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
CONNSTATUS	CVDAS	CPSM	4	LIKE	Connection status	
CONNSTATUS Output valid values		CONNECTED, UNCONNECTED				
NAME-1	CHAR	CPSM	8	DIFF	Temporary storage pool name	1

Chapter 424. TSQGBL Resource Table

A CICS Resource that describes the general characteristics of temporary storage usage in an active CICS system being managed by CICSplex SM .

The TSQGBL resource class does not provide an explicit key attribute. The set of object instances returned is a function of the current scope in effect when the request is made.

There are no object specific actions for this resource class.

External resource name

CICSGlobalTSQueueStatistics

Length

216

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0030

Table 1034. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A

Table 1035. TSQGBL resource table attributes									
Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Set Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			15
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
AUXFULL	BINARY	STAT	4	AVG	No	Number of times auxiliary storage exhausted			16
BUFFERS	BINARY	STAT	2	AVG	No	Number of temporary storage buffers			18
BUFFWAITS	BINARY	STAT	4	AVG	No	Total number of buffer waits			22
BUFREADS	BINARY	STAT	4	AVG	No	Number of buffer reads			20
BUFWRITES	BINARY	STAT	4	AVG	No	Number of buffer writes			34
BYTESPERCI	BINARY	STAT	4	AVG	No	Number of bytes available in control interval			

Table 1035. TSQGBL resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Set Invalid	Attr ID
BYTESPERSEG	BINARY	STAT	4	AVG	No	Number of bytes per segment			36
CINUM	BINARY	STAT	4	AVG	No	Number of control intervals available			13
CISINUSE	BINARY	STAT	4	AVG	No	Number of control intervals in use			31
CISIZE	BINARY	STAT	4	AVG	No	Control interval size			11
COMPRESSIONS	BINARY	STAT	4	AVG	No	Number of temporary storage compressions			30
CURRSTG	BINARY	STAT	8	AVG	No	Current storage in use (bytes)			4
CURRUWBFR	BINARY	STAT	4	AVG	No	Number of current users waiting on buffers			27
CURRUWSTR	BINARY	STAT	4	AVG	No	Number of current users waiting on strings			26
ENTLGQUE	BINARY	STAT	4	AVG	No	Number of entries in longest queue			8
EXTTHRESHOLD	BINARY	STAT	2	AVG	No	Queue extension threshold	E510+		37
FMTWRT	BINARY	STAT	4	AVG	No	Number of format writes			23
GETQAUX	BINARY	STAT	4	AVG	No	Number of records obtained from auxiliary TS			6
GETQMAIN	BINARY	STAT	4	AVG	No	Number of records obtained from main TS			2
IOERRS	BINARY	STAT	4	AVG	No	Number of I/O errors on data set			28
LONGAUXREC	BINARY	STAT	4	AVG	No	Longest auxiliary record length			33
NAMESINUSE	BINARY	STAT	4	AVG	No	Number of temporary storage names in use			32
PEAKCIUSE	BINARY	STAT	4	AVG	No	Peak number of control intervals used			14
PEAKQUES	BINARY	STAT	4	AVG	No	Peak number of queue names in use			7
PEAKSTG	BINARY	STAT	8	AVG	No	Peak storage in use (bytes)			3
PEAKUSDSTR	BINARY	STAT	4	AVG	No	Peak number of strings in use			24
PEAKUWBUF	BINARY	STAT	4	AVG	No	Peak number of users waiting on buffers			19
PEAKUWSTR	BINARY	STAT	4	AVG	No	Peak number of users waiting on strings			25
PUTQAUX	BINARY	STAT	4	AVG	No	Number of records written to auxiliary TS			5
PUTQMAIN	BINARY	STAT	4	AVG	No	Number of records written to main TS			1
QUECRECNT	BINARY	STAT	4	AVG	No	Number of times queues created			9
QUEXTENDS	BINARY	STAT	4	AVG	No	Number of times queue extensions created	E510+		10
SEGSPERCI	BINARY	STAT	4	AVG	No	Number of segments available in control interval			35
SHRDPOOLCONN	BINARY	STAT	4	AVG	No	Number of shared pools connected to			40
SHRDPOOLDEF	BINARY	STAT	4	AVG	No	Number of shared pools defined			39
SHRDREADREQ	BINARY	STAT	4	AVG	No	Number of shared read requests			41

Table 1035. TSQGBL resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Get Invalid	Set Invalid	Attr ID
SHRDWRITEREQ	BINARY	STAT	4	AVG	No	Number of shared write requests			42
STRINGS	BINARY	STAT	2	AVG	No	Number of temporary storage strings			17
STRINGWAIT	BINARY	STAT	4	AVG	No	Number of times string wait occurred			29
TSMMAINHIT	BINARY	STAT	4	AVG	No	Count of times TSMMAINLIMIT reached	E640 E650 E660		47
TSMMAINUSE	BINARY	STAT	8	AVG	No	Current used above the bar storage for TSMMAIN	E640 E650 E660	E640 E650 E660	44
TSMMAINLIMIT	BINARY	INQ	8	AVG	Yes	Maximum above the bar storage for TSMMAIN	E640 E650 E660	E640 E650 E660	43
TSMMAINMAX	BINARY	STAT	8	AVG	No	Maximum TS MAIN storage used	E640 E650 E660		48
TSMMAINPCT	PERCENT3	CPSM	4	AVG	No	Percentage utilization of TSMMAIN above the bar	E640 E650 E660		45
WRTFRECVR	BINARY	STAT	4	AVG	No	Number of buffer writes forced by recovery			21
WRTGTCISZ	BINARY	STAT	4	AVG	No	Number of records with length greater than CISIZE			12

Chapter 425. TSQNAME Resource Table

A CICS Resource that describes a temporary storage queue in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is NAME.

The following action is supported:

DELETE

Delete a temporary storage queue

The parameter data for the DELETE action is:

```
PARM(' LASTUSEDINT(interval).')  
  
where:  
  
interval = (Optional) Last used interval.
```

External resource name

CICSTSQueue

Length

88

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0107

Table 1036. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	DELETE	LASTUSEDINT(value)	No

Table 1037. TSQNAME resource table attributes

Name	Datatype	Source	Len	Sum	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release			

Table 1037. TSQNAME resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Default	Get Invalid	Attr ID
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved			
EXPIRYINT	BINARY	CPSM	4	DIFF	TS Queue expiry interval (hours)	0	E640 E650 E660	11
EXPIRYINTMIN	BINARY	CPSM	4	DIFF	TS Queue expiry interval (minutes)	0	E640 E650 E660 E670 E680	13
HEXNAME	HEX	INQ	16	MIN	Queue name in hexadecimal			12
LASTUSEDINT	BINARY	INQ	4	AVG	Interval since queue last used (seconds)			8
LOCATION	CVDAS	INQ	4	LIKE	Queue location			2
LOCATION Output valid values	AUXILIARY, MAIN							
MAXITEMLEN	CNUMERIC	INQ	2	AVG	Largest item length (bytes)			4
MINITEMLEN	CNUMERIC	INQ	2	AVG	Smallest item length (bytes)			5
NAME-1	CHAR	INQ	16	DIFF	Queue name			1
NUMITEMS	BINARY	INQ	2	AVG	Number of items in queue			6
QUELENGTH	CNUMERIC	INQ	4	AVG	Total queue length (bytes)			3
RECOVSTATUS	CVDAS	INQ	4	LIKE	Recovery status			10
RECOVSTATUS Output valid values	RECOVERABLE, NOTRECOVERABLE							
TRANSID	CHAR	INQ	4	DIFF	Transaction that created TS queue			9

Chapter 426. TSQSHR Resource Table

A CICS Resource that describes a temporary storage queue in a pool in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is POOLNAME.

The following actions are supported:

DELETE

Delete a temporary storage queue in pool.

The parameter data for the DELETE action is:

```
PARM(' LASTUSEDINT(interval).')  
  
where:  
  
interval = (Optional) Last used interval.
```

External resource name

CICSSharedTSQueue

Length

96

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0100

Table 1038. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	DELETE	LASTUSEDINT(value)	No

Table 1039. TSQSHR resource table attributes

Name	Datatype	Source	Len	Sum	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name			

Table 1039. TSQSHR resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Default	Get Invalid	Attr ID
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release			12
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved			
EXPIRYINT	BINARY	INQ	4	AVG	TS Queue expiry interval (hours)		E640 E650 E660	
EXPIRYINTMIN	BINARY	CPSM	4	DIFF	TS Queue expiry interval (minutes)	0	E640 E650 E660 E670 E680	13
HEXNAME	HEX	INQ	16	MIN	Queue name in hexadecimal			15
LASTUSEDINT	BINARY	INQ	4	AVG	Interval since queue last used (seconds)			9
LOCATION	CVDAS	INQ	4	LIKE	Queue location			3
LOCATION Output valid values	AUXILIARY, MAIN							
MAXITEMLEN	BINARY	INQ	2	AVG	Largest item length (bytes)			5
MINITEMLEN	BINARY	INQ	2	AVG	Smallest item length (bytes)			6
NAME-1	CHAR	INQ	16	DIFF	Queue name			1
NUMITEMS	BINARY	INQ	2	AVG	Number of items in queue			7
POOLNAME-2	CHAR	INQ	8	DIFF	Temporary storage pool name			2
QUELENGTH	BINARY	INQ	4	AVG	Total queue length (bytes)			4
RECOVSTATUS	CVDAS	INQ	4	LIKE	Recovery status			11
RECOVSTATUS Output valid values	RECOVERABLE, NOTRECOVERABLE							
TRANSID	CHAR	INQ	4	DIFF	Transaction that created TS queue			10

Chapter 427. TSQUEUE Resource Table

A CICS Resource that describes a temporary storage queue in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is NAME.

The TSQUEUE resource class only returns objects instances if the target CICS system is running at CICS/ESA 3.3 or later.

The following actions are supported:

DELETE

Delete a temporary storage queue in pool.

The parameter data for the DELETE action is:

```
PARM(' LASTUSEDINT(interval).')
```

where:

```
interval = (Optional) Last used interval.
```

External resource name

Length

64

Usage

API or WUI or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0040

Table 1040. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	DELETE	LASTUSEDINT(value)	No

Table 1041. TSQUEUE resource table attributes								
Name	Datatype	Source	Len	Sum	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved			
EXPIRYINT	BINARY	CPSM	4	DIFF	TS Queue expiry interval (hours)	0	E640 E650 E660	11
EXPIRYINTMIN	BINARY	CPSM	4	DIFF	TS Queue expiry interval (minutes)	0	E640 E650 E660 E670 E680	12
LASTUSEDINT	BINARY	INQ	4	AVG	Interval since queue last used (seconds)			8
LOCATION	CVDAS	INQ	4	LIKE	Queue location			2
LOCATION Output valid values	AUXILIARY, MAIN							
MAXITEMLEN	CNUMERIC	INQ	2	AVG	Largest queue item length (bytes)			4
MINITEMLEN	CNUMERIC	INQ	2	AVG	Smallest queue item length (bytes)			5
NAME-1	CHAR	INQ	8	DIFF	Queue name			1
NUMITEMS	BINARY	INQ	2	AVG	Number of items in queue			6
QUELENGTH	CNUMERIC	INQ	4	AVG	Queue length (bytes)			3
RECOVSTATUS	CVDAS	INQ	4	LIKE	Recovery status			10
RECOVSTATUS Output valid values	RECOVERABLE, NOTRECOVERABLE							
TRANSID	CHAR	INQ	4	DIFF	Transaction that created TS queue			9

Chapter 428. TYPINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a typeterm definition (TYPTMDEF) in a resource group (RESGROUP). A TYPTMDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is TYPTMGROUP.

The **Secondary** key field for this resource class is TYPTMNAME.

The **Tertiary** key field for this resource class is TYPTMVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6161

Table 1042. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 1043. TYPINGRP FEEDBACK error codes		
Value	Code	Description
1	TYPINGRP_INV_DATA	Attribute data invalid
2	TYPINGRP_REC_NOT_FOUND	Requested resource not found
4	TYPINGRP_REC_EXISTS	Resource already exists
6	TYPINGRP_INV_RESTYPE	Invalid resource type
7	TYPINGRP_INV_VER	Invalid resource version
11	TYPINGRP_NON_MP	Maintenance point CMAS not available
12	TYPINGRP_INV_CONTEXT	Context not found

Table 1043. TYPINGRP FEEDBACK error codes (continued)

Value	Code	Description
21	TYPINGRP_INCONSISTENT_SET	Inconsistent set
22	TYPINGRP_DIFF_VERSION	Different version
23	TYPINGRP_INV_NAME	Invalid name
24	TYPINGRP_INV_MINNAME	Invalid minor name

Table 1044. TYPINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
TYPTMGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
TYPTMNAME-2	CHAR	CPSM	8	Yes	DIFF	Typeterm definition name	6
TYPTMVER-3	BINARY	CPSM	1	Yes	AVG	Typeterm definition version	7

Chapter 429. TYPTMDEF Resource Table

A CICS Definition that describes a typeterm, which encompasses attributes that are common to a group of terminals.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install a Typeterm Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

External resource name

CICSDefinitionTypeterm

Length

504

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3816

Table 1045. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM SET	INSTALL	FORCEINS(YES, NO)	No

Table 1045. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
		MODE(value)	No
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 1046. TYPTMDEF FEEDBACK error codes

Value	Code	Description
1	TYPTMDEF_INV_DATA	Attribute data invalid
2	TYPTMDEF_REC_NOT_FOUND	Requested resource not found
4	TYPTMDEF_REC_EXISTS	Resource already exists
5	TYPTMDEF_REC_CHANGED	Resource definition already changed
6	TYPTMDEF_INV_RESTYPE	Invalid resource type
7	TYPTMDEF_INV_VER	Invalid resource version
11	TYPTMDEF_NON_MP	Maintenance point CMAS not available
12	TYPTMDEF_INV_CONTEXT	Context not found
13	TYPTMDEF_INCONSISTENT_SET	Inconsistent set condition
14	TYPTMDEF_INV_RESGROUP	Resource group not found
21	TYPTMDEF_INV_ACTION	Invalid action
22	TYPTMDEF_INV_RECADDR	Invalid record address
23	TYPTMDEF_INV_RECLEN	Invalid record length
24	TYPTMDEF_DIFF_VERSION	Different version
25	TYPTMDEF_EARLY_NAMELIST_END	Early name list end
26	TYPTMDEF_INV_NAMELIST	Invalid name list
27	TYPTMDEF_INV_NAME	Invalid name
28	TYPTMDEF_INV_MINNAME	Invalid minor name
29	TYPTMDEF_NOTIFY	Notify
30	TYPTMDEF_PARTIAL_INSTALL	Partial install

Table 1046. TYPTMDEF FEEDBACK error codes (continued)

Value	Code	Description
31	TYPTMDEF_NOTHING_INSTALLED	Nothing installed
32	TYPTMDEF_NO_TARGETS	No targets
33	TYPTMDEF_NO_RELATED	No related systems
34	TYPTMDEF_INV_TSCOPE	Invalid target scope
35	TYPTMDEF_INV_RSCOPE	Invalid related scope
36	TYPTMDEF_INV_USAGE	Invalid usage
37	TYPTMDEF_INV_MODE	Invalid mode
38	TYPTMDEF_INV_STATECHK	Invalid state check
39	TYPTMDEF_INV_FORCEINS	Invalid force install
40	TYPTMDEF_INV_NOTIFY	Invalid notify
41	TYPTMDEF_INV_OVERTYPE	Invalid overtype
42	TYPTMDEF_INV_OVRBLOCK	Invalid override block
43	TYPTMDEF_INV_ORSTRING	Invalid override string
44	TYPTMDEF_INV_STRNGTERM	Invalid string term
45	TYPTMDEF_INV_EMBEDTERM	Invalid embedded terminator
46	TYPTMDEF_INV_ATTRIBUTE	Invalid attribute
47	TYPTMDEF_INV_LITERAL	Invalid literal
48	TYPTMDEF_INV_ORSTGNA	Invalid override string
49	TYPTMDEF_SCOPE_REQUIRED	Scope required
50	TYPTMDEF_USAGE_CONFLICT	Usage conflict
51	TYPTMDEF_NODEFS_SELECTED	No definitions selected
52	TYPTMDEF_MORE_THAN_1_RELSYS	More than one related system
53	TYPTMDEF_MISSING_RELSYSID	Missing related system identifier
54	TYPTMDEF_SCOPE_CONFLICT	Scope conflict
55	TYPTMDEF_INV_CSDGROUP	Invalid CSD group
56	TYPTMDEF_REC_NOT_REMOVED	Record not removed
57	TYPTMDEF_INV_RESOURCE	Invalid resource
58	TYPTMDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	TYPTMDEF_PARTIAL_ACTION	Partial action
60	TYPTMDEF_NOTHING_ACTIONED	Nothing actioned
61	TYPTMDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	TYPTMDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	TYPTMDEF_CSD_ERROR	CSD access error

Table 1047. TYPTMDEF resource table attributes										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
ALTPAGECOL	CHAR	CPSM	4	No	DIFF	Alternate BMS page size (number of columns)	0	0-255		8
ALTPAGEROW	CHAR	CPSM	4	No	DIFF	Alternate BMS page size (number of rows)	0	0-255		9
ALTSCREENCOL	CHAR	CPSM	4	No	DIFF	Alternate screen size (number of columns)	0	0-255		10
ALTSCREENROW	CHAR	CPSM	4	No	DIFF	Alternate screen size (number of rows)	0	0-255		11
ALTSUFFIX	CHAR	CPSM	1	No	DIFF	Map set name suffix				82
APLKYBD	EYUDA	CPSM	4	Yes	LIKE	APL keyboard feature	NO			12
APLKYBD Input/output valid values	YES, NO									
APLTEXT	EYUDA	CPSM	4	Yes	LIKE	APL text feature	NO			13
APLTEXT Input/output valid values	YES, NO									
ASCII	CHAR	CPSM	4	No	DIFF	ASCII feature	NO	7-8		14
ASCII Input/output valid values	NO									
ASYNCBPS	CHAR	CPSM	8	No	DIFF	Asynchronous line speed (OS/2)			EALL	80
ASYNCBPS Input/output valid values	0, 110, 150, 300, 600, 1200, 1800, 2400, 3600, 4800, 9600, 19200									
ASYNCPRT3151	CHAR	CPSM	4	No	DIFF	3151 asynchronous port name (OS/2)			EALL	79
ATI	EYUDA	CPSM	4	Yes	LIKE	Automatic transaction initiation option	NO			15
ATI Input/output valid values	YES, NO									
AUDIBLEALARM	EYUDA	CPSM	4	Yes	LIKE	Audible alarm feature	NO			16
AUDIBLEALARM Input/output valid values	YES, NO									
AUTOCONNECT	EYUDA	CPSM	4	Yes	LIKE	Autoconnect for terminal option	NO			17
AUTOCONNECT Input/output valid values	YES, NO, ALL									
AUTOPAGE	EYUDA	CPSM	4	Yes	LIKE	BMS autopaging option	NO			18
AUTOPAGE Input/output valid values	YES, NO									
BACKTRANS	EYUDA	CPSM	4	Yes	LIKE	Background transparency option	NO			19
BACKTRANS Input/output valid values	YES, NO									
BRACKET	EYUDA	CPSM	4	Yes	LIKE	Bracket protocol enforced	YES			20
BRACKET Input/output valid values	YES, NO									
BUILDCHAIN	EYUDA	CPSM	4	Yes	LIKE	CICS chain assembly performed	NO			21
BUILDCHAIN Input/output valid values	YES, NO									
CGCSGIDCODE	CHAR	CPSM	8	No	DIFF	Graphic character set global code	0	0-65535		22

Table 1047. TYPTMDEF resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
CGCSGIDGBLID	CHAR	CPSM	8	No	DIFF	Graphic character set global ID	0	0-65535		23
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	92
CHANGEAGENT Input/output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	94
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	93
CODEPAGE	CHAR	CPSM	8	No	DIFF	Code page value		0-65534	EALL	78
COLOR	EYUDA	CPSM	4	Yes	LIKE	Extended color feature	NO			24
COLOR Input/output valid values	YES, NO									
COPY	EYUDA	CPSM	4	Yes	LIKE	Copy feature	NO			25
COPY Input/output valid values	YES, NO									
CREATESESS	EYUDA	CPSM	4	Yes	LIKE	Sessions to be created	NO			26
CREATESESS Input/output valid values	YES, NO									
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				84
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	96
DEFSCREENCOL	CHAR	CPSM	4	No	DIFF	Default screen size (number of columns)	0	0-255		27
DEFSCREENROW	CHAR	CPSM	4	No	DIFF	Default screen size (number of rows)	0	0-255		28
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		91
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				88
DEVICE	CHAR	CPSM	8	Yes	DIFF	Device type				29
DISCREQ	EYUDA	CPSM	4	Yes	LIKE	Disconnect requests honored	YES			30
DISCREQ Input/output valid values	YES, NO									
DUALCASEKYBD	EYUDA	CPSM	4	Yes	LIKE	Dual case keyboard supported	NO			31
DUALCASEKYBD Input/output valid values	YES, NO									
ERRCOLOR	EYUDA	CPSM	4	Yes	LIKE	Color of error messages	NO			32
ERRCOLOR Input/output valid values	NO, BLUE, RED, PINK, GREEN, TURQUOISE, YELLOW, NEUTRAL									
ERRHILIGHT	EYUDA	CPSM	4	Yes	LIKE	Error messages highlighted	NO			33
ERRHILIGHT Input/output valid values	BLINK, REVERSE, UNDERLINE, NO									
ERRINTENSIFY	EYUDA	CPSM	4	Yes	LIKE	Error message display intensified	NO			34
ERRINTENSIFY Input/output valid values	YES, NO									

Table 1047. TYPTMDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
ERRLASTLINE	EYUDA	CPSM	4	Yes	LIKE	Display error messages on last line	NO			35
ERRLASTLINE Input/output valid values	YES, NO									
EXTENDEDDES	EYUDA	CPSM	4	Yes	LIKE	Extended 3270 data stream	NO			36
EXTENDEDDES Input/output valid values	YES, NO									
FMHPARM	EYUDA	CPSM	4	Yes	LIKE	Accept user-supplied data in function management header (FMH)	NO			37
FMHPARM Input/output valid values	YES, NO									
FORMFEED	EYUDA	CPSM	4	Yes	LIKE	Formfeed feature	NO			38
FORMFEED Input/output valid values	YES, NO									
FULLSCREEN	EYUDA	CPSM	4	Yes	LIKE	Full screen option (OS/2)	YES		EALL	77
FULLSCREEN Input/output valid values	YES, NO									
HILIGHT	EYUDA	CPSM	4	Yes	LIKE	Extended highlight supported	NO			39
HILIGHT Input/output valid values	YES, NO									
HORIZFORM	EYUDA	CPSM	4	Yes	LIKE	BMS is to use horizontal tabbing	NO			40
HORIZFORM Input/output valid values	YES, NO									
IOAREALEN	CHAR	CPSM	8	No	DIFF	I/O buffer length	0	0-32767		41
IOAREALENALT	CHAR	CPSM	8	No	DIFF	Alternate I/O buffer length	0	0-32767		42
KATAKANA	EYUDA	CPSM	4	Yes	LIKE	Katakana feature	NO			43
KATAKANA Input/output valid values	YES, NO									
LDCLIST	CHAR	CPSM	8	No	DIFF	Name of logical device code list				44
LIGHTPEN	EYUDA	CPSM	4	Yes	LIKE	Selector pen feature	NO			45
LIGHTPEN Input/output valid values	YES, NO									
LOGMODE	CHAR	CPSM	8	No	DIFF	Logmode name				46
LOGONMSG	EYUDA	CPSM	4	Yes	LIKE	Good Morning transaction autoinitiation	NO			47
LOGONMSG Input/output valid values	YES, NO									
MSRCONTROL	EYUDA	CPSM	4	Yes	LIKE	Magnetic slot reader supported	NO			48
MSRCONTROL Input/output valid values	YES, NO									
NAME=1	CHAR	CPSM	8	Yes	DIFF	Name				7
NEPCCLASS	CHAR	CPSM	4	No	DIFF	Node error program transaction class	0	0-255		49
OBFORMAT	EYUDA	CPSM	4	Yes	LIKE	Outboard formatting to be used	NO			50

Table 1047. TYPTMDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
OBFORMAT Input/output valid values	YES, NO									
OOPERID	EYUDA	CPSM	4	Yes	LIKE	Outboard operator ID BMS routing	NO			51
OOPERID Input/output valid values	YES, NO									
OUTLINE	EYUDA	CPSM	4	Yes	LIKE	Device supports field outline	NO			52
OUTLINE Input/output valid values	YES, NO									
PAGESIZECOL	CHAR	CPSM	4	No	DIFF	Page size (number of columns)	0	0-255		53
PAGESIZEROW	CHAR	CPSM	4	No	DIFF	Page size (number of rows)	0	0-255		54
PARTITIONS	EYUDA	CPSM	4	Yes	LIKE	Device uses partitions	YES			55
PARTITIONS Input/output valid values	YES, NO									
PRINTADAPTER	EYUDA	CPSM	4	Yes	LIKE	Printer adapter feature	NO			56
PRINTADAPTER Input/output valid values	YES, NO									
PROGSYMBOLS	EYUDA	CPSM	4	Yes	LIKE	Programmed symbols can be used	NO			57
PROGSYMBOLS Input/output valid values	YES, NO									
QUERY	EYUDA	CPSM	4	Yes	LIKE	Query structured field to be used	NO			58
QUERY Input/output valid values	NO, COLD, ALL									
RECEIVESIZE	CHAR	CPSM	8	No	DIFF	Maximum size of request unit	256	0-30720		59
RECOVNOTIFY	EYUDA	CPSM	4	Yes	LIKE	XRF recovery notification option	NONE			60
RECOVNOTIFY Input/output valid values	NONE, MESSAGE, TRANSACTION									
RECOVOPTION	EYUDA	CPSM	4	Yes	LIKE	Session recovery option	SYSDEFAULT			61
RECOVOPTION Input/output valid values	SYSDEFAULT, CLEARCONV, RELEASESESS, UNCONDREL, NONE									
RELREQ	EYUDA	CPSM	4	Yes	LIKE	Honor release requests	NO			62
RELREQ Input/output valid values	YES, NO									
ROUTEDMSGS	EYUDA	CPSM	4	Yes	LIKE	Messages routed to terminal support				63
ROUTEDMSGS Input/output valid values	ALL, NONE, SPECIFIC									
RSTSIGNOFF	EYUDA	CPSM	4	Yes	LIKE	Sign-on characteristics	NOFORCE			90
RSTSIGNOFF Input/output valid values	NOFORCE, FORCE									
SENDSIZE	CHAR	CPSM	8	No	DIFF	Maximum send size	0	0-30720		64
SESSIONTYPE	CHAR	CPSM	8	No	DIFF	Type of session				65
SHIPPABLE	EYUDA	CPSM	4	Yes	LIKE	Definition shipped to a remote system	NO			66

Table 1047. TYPTMDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
SHIPPABLE Input/output valid values	NO, YES									
SIGNOFF	EYUDA	CPSM	4	Yes	LIKE	Automatic timeout	YES			67
SIGNOFF Input/output valid values	YES, NO, LOGOFF									
SOSI	EYUDA	CPSM	4	Yes	LIKE	Mixed EBCDIC/DBCS supported	NO			68
SOSI Input/output valid values	YES, NO									
TERMMODEL	CHAR	CPSM	4	No	DIFF	Terminal model number	1	1-2		83
TEXTKYBD	EYUDA	CPSM	4	Yes	LIKE	Text-keyboard feature	NO			69
TEXTKYBD Input/output valid values	YES, NO									
TEXTPRINT	EYUDA	CPSM	4	Yes	LIKE	Text-print feature	NO			70
TEXTPRINT Input/output valid values	YES, NO									
TTI	EYUDA	CPSM	4	Yes	LIKE	Transactions started via user	YES			71
TTI Input/output valid values	YES, NO									
UCTRAN	EYUDA	CPSM	4	Yes	LIKE	Input translated to uppercase	NO			72
UCTRAN Input/output valid values	YES, NO, TRANID									
USERAREALEN	CHAR	CPSM	4	No	DIFF	User area length	0	0-255		76
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				85
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				86
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				87
VALIDATION	EYUDA	CPSM	4	Yes	LIKE	Device supports extended validation	NO			73
VALIDATION Input/output valid values	YES, NO									
VERTICALFORM	EYUDA	CPSM	4	Yes	LIKE	BMS to use vertical tabbing	NO			74
VERTICALFORM Input/output valid values	YES, NO									
WRKSTATIONSU	CHAR	CPSM	8	No	DIFF	Workstation setup (OS/2)			EALL	81
XRFSIGNOFF	EYUDA	CPSM	4	No	LIKE	Replaced by RSTSIGNOFF. XRFSIGNOFF can be used in compatibility mode	NOFORCE		E620 +	75
XRFSIGNOFF Input/output valid values	NOFORCE, FORCE									

Chapter 430. UOWDSNF Resource Table

A CICS Resource that describes a shunted unit of work due to a failed data set in an active system running the CICS TS for z/OS and being managed by CICSplex SM.

The **Primary** key field for this resource class is UOWID.

The **Secondary** key field for this resource class is DSNAME.

There are no object specific actions for this resource class.

External resource name

CICSUOWShuntedAndHoldingLocks

Length

104

Usage

API or WUI or CICS Management Client Interface

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0084

Table 1048. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 1049. UOWDSNF resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	3
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
CAUSE	CVDAS	INQ	4	LIKE	Failed component which caused this failure	
CAUSE Output valid values		CACHE, RLSSERVER, CONNECTION, DATASET, UNDEFINED				
DSNAME-2	CHAR	INQ	44	DIFF	Data set name with retained locks	2
NETNAME	CHAR	INQ	8	DIFF	Netname of remote system where connection lost	7
REASON	CVDAS	INQ	4	LIKE	Specific reason for error	6
REASON Output valid values		RLSGONE, COMMITFAIL, IOERROR, FAILEDBKOUT, DATASETFULL, DEADLOCK, INDEXRECFULL, OPENERERROR, DELEXITERERROR, BACKUPNONBWO, NOTAPPLIC, LCKSTRUCFULL, INDOUBT, RRINDOUBT, RRCOMMITFAIL				
RLSACCESS	CVDAS	INQ	4	LIKE	Mode in which data set last opened	4

Table 1049. UOWDSNF resource table attributes (continued)						
Name	Datatype	Source	Len	Sum	Description	Attr ID
RLSACCESS Output valid values	RLS, NOTRLS					
SYSID	CHAR	INQ	4	DIFF	Name of remote system where connection lost	5
UOWID-1	HEX	INQ	16	MIN	Unit of work (UOW) ID	1

Chapter 431. UOWENQ Resource Table

A CICS Resource that describes an enqueue held by a unit of work in an active system running the CICS TS for z/OS and being managed by CICSplex SM.

The **Primary** key field for this resource class is UOWID.

The **Secondary** key field for this resource class is RESOURCE.

There are no object specific actions for this resource class.

External resource name

CICSUOWEnqueue

Length

608

Usage

API or WUI or CICS Management Client Interface

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0080

Table 1050. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A

Table 1051. UOWENQ resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
ENQADDRESS	HEX	INQ	4	MIN	Address of EXEC enqueue argument	14
ENQFAILS	BINARY	INQ	4	AVG	Number of enqueue failures since last acquire	7
ENQSCOPE	CHAR	INQ	4	DIFF	ENQ scope name	13
NETUOWID	HEX	INQ	27	MIN	Network-wide LU6.2 unit of work (UOW) id	12
QUALIFIER	CHAR	INQ	255	DIFF	Resource name qualifier	11
QUALLEN	BINARY	INQ	2	AVG	Length of resource qualifier (bytes)	8
RELATION	CVDAS	INQ	4	LIKE	Owner or task waiting	6

Table 1051. UOWENQ resource table attributes (continued)						
Name	Datatype	Source	Len	Sum	Description	Attr ID
RELATION Output valid values	OWNER, WAITER					
RESLEN	BINARY	INQ	2	AVG	Length of resource name (bytes)	9
RESOURCE-2	CHAR	INQ	255	DIFF	Resource name	10
STATE	CVDAS	INQ	4	LIKE	Enqueue type	4
STATE Output valid values	ACTIVE, RETAINED					
TASKID	DECIMAL	INQ	4	AVG	Task number associated with UOW	3
TRANSID	CHAR	INQ	4	DIFF	Transaction ID associated with UOW	2
TYPE	CVDAS	INQ	4	LIKE	Resource type	5
TYPE Output valid values	DATASET, EXECENQ, EXECENQADDR, FILE, TDQUEUE, TSQUEUE					
UOWID-1	HEX	INQ	16	MIN	Unit of work (UOW) ID	1

Chapter 432. UOWLINK Resource Table

A CICS Resource that describes a connection used by a unit of work in an active system running the CICS TS for z/OS and being managed by CICSplex SM.

The **Primary** key field for this resource class is LINK.

The following actions are supported:

DELETE

Delete the UOW link.

The DELETE action requires no unique parameter data.

External resource name

CICSUOWLink

Length

520

Usage

API or WUI or CICS Management Client Interface

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0081

Table 1052. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	DELETE	None	N/A

Table 1053. UOWLINK resource table attributes							
Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release		
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved		
BRANCHQUAL	HEX	INQ	64	DIFF	XID Branch Qualifier	E640 E650 E660 E670 E680	16

Table 1053. UOWLINK resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
HOST	CHAR	INQ	255	DIFF	TCP/IP host address		12
LINK-1	HEX	INQ	4	MIN	Link token		1
LINKNAME	CHAR	INQ	8	DIFF	Netname of remote system, global user exit name or JVM server name		3
NETUOWID	HEX	INQ	27	MIN	Network-wide LU 6.2 name of UOW		10
PORT	BINARY	INQ	4	DIFF	TCP/IP port number	E640 E650 E660 E670 E680	15
PROTOCOL	CVDAS	INQ	4	LIKE	Link protocol		9
PROTOCOL Output valid values	APPC, IRC, LU61, RRMS, IPIC, OTS, NOTAPPLIC						
RESYNCSTATUS	CVDAS	INQ	4	LIKE	Resynchronization status		8
RESYNCSTATUS Output valid values	COLD, OK, STARTING, UNAVAILABLE, UNCONNECTED, NOTAPPLIC						
RMIQFY	CHAR	INQ	8	DIFF	Entry qualifier of task related user exit		6
ROLE	CVDAS	INQ	4	LIKE	Role of connection		7
ROLE Output valid values	COORDINATOR, SUBORDINATE, UNKNOWN						
RRMSURID	CHAR	CMF	32	DIFF	RRMS Unit of recoverable work ID		11
SYSID	CHAR	INQ	4	DIFF	Name of remote system		5
TYPE	CVDAS	INQ	4	LIKE	Resource type		4
TYPE Output valid values	CONNECTION, RMI, CFTABLE, IPCONN, JVMSERVER						
UOWID	HEX	INQ	16	MIN	Unit of work (UOW) ID		2
XID	HEX	INQ	64	DIFF	XID Global Transaction Identifier	E640	13

Chapter 433. UOW Resource Table

A CICS Resource that describes a unit of work in an active system running the CICS TS for z/OS and being managed by CICSplex SM.

The **Primary** key field for this resource class is UOWID.

The following actions are supported for units of work that are shunted indoubt:

BACKOUT

Perform syncpoint backout processing.

COMMIT

Perform syncpoint commit processing.

FORCE

Force UOW to backout or commit.

These actions require no unique parameter data.

External resource name

CICSUOW

Length

248

Usage

API or WUI or CICS Management Client Interface

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0079

Table 1054. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	FORCE	None	N/A
	BACKOUT	None	N/A
	COMMIT	None	N/A

Table 1055. UOW resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name	
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved	
AGE	BINARY	INQ	4	AVG	No	Time in current wait state (seconds)	5
LINK	CHAR	INQ	8	DIFF	No	Netname of remote system that caused wait	12
NETNAME	CHAR	INQ	8	DIFF	No	Netname of link causing UOW wait/shunt	6
NETUOWID	HEX	INQ	27	MIN	No	LU 6.2 network-wide name for UOW	13
OTSTID	CHAR	INQ	128	DIFF	No	Object transaction service (OTS) transaction ID	14
SYSID	CHAR	INQ	4	DIFF	No	System ID of connection that caused wait	7
TASKID	DECIMAL	INQ	4	AVG	No	Task originally associated with UOW	10
TERMID	CHAR	INQ	4	DIFF	No	Terminal from which this UOW was started	8
TRANSID	CHAR	INQ	4	DIFF	No	Transaction that started UOW	9
UOWID-1	HEX	INQ	16	MIN	No	Local unit of work (UOW) ID	1
UOWSTATE	CVDAS	INQ	4	LIKE	Yes	UOW status	2
UOWSTATE Input/output valid values	BACKOUT, COMMIT, FORCE						
UOWSTATE Output valid values	INDOUBT, INFLIGHT, HEURCOMMIT, HEURBACKOUT, FORCE						
USERID	CHAR	INQ	8	DIFF	No	User that started transaction	11
WAITCAUSE	CVDAS	INQ	4	LIKE	No	Cause of wait	4
WAITCAUSE Output valid values	NOTAPPLIC, CONNECTION, DATASET, WAITCOMMIT, WAITFORGET, RLSSERVER, WAITRMI, WAITRRMS						
WAITSTATE	CVDAS	INQ	4	LIKE	No	Wait status	3
WAITSTATE Output valid values	ACTIVE, SHUNTED, WAITING						

Chapter 434. URIINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a universal resource identifier map definition (URIMPDEF) in a resource group (RESGROUP). A URIMPDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is URIGROUP.

The **Secondary** key field for this resource class is URINAME.

The **Tertiary** key field for this resource class is URIVER.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6178

Table 1056. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 1057. URIINGRP FEEDBACK error codes		
Value	Code	Description
1	URIINGRP_INV_DATA	Attribute data invalid
2	URIINGRP_REC_NOT_FOUND	Requested resource not found
4	URIINGRP_REC_EXISTS	Resource already exists
6	URIINGRP_INV_RESTYPE	Invalid resource type
7	URIINGRP_INV_VER	Invalid resource version
11	URIINGRP_NON_MP	Maintenance point CMAS not available
12	URIINGRP_INV_CONTEXT	Context not found

Table 1057. URIINGRP FEEDBACK error codes (continued)

Value	Code	Description
21	URIINGRP_INCONSISTENT_SET	Inconsistent set
22	URIINGRP_DIFF_VERSION	Different version
23	URIINGRP_INV_NAME	Invalid name
24	URIINGRP_INV_MINNAME	Invalid minor name

Table 1058. URIINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
URIGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
URINAME-2	CHAR	CPSM	8	Yes	DIFF	URIMAP definition name	6
URIVER-3	BINARY	CPSM	1	Yes	AVG	URIMAP definition version	7

Chapter 435. URIMAP Resource Table

A CICS resource that describes the universal resource identifier (URI) of requests from web clients or requests to a remote server.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

ENABLE

Enable access to the URIMAP definition by programs.

DISABLE

Disable program access to the URIMAP definition. A URIMAP definition has to be disabled before it can be reinstalled or discarded.

DISCARD

Remove a URIMAP definition from the system.

External resource name

CICSURIMap

Length

1616

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0162

Table 1059. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM SET	ENABLE	None	N/A
	DISABLE	None	N/A
	DISCARD	None	N/A

Table 1060. URIMAP resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
ANALYZERSTAT	CVDAS	INQ	4	LIKE	No	Use an analyzer program to process HTTP request			13
ANALYZERSTAT Output valid values	ANALYZER, NOANALYZER								
APPLICATION	CHAR	INQ	64	DIFF	No	Application Name		E640 E650 E660 E670 E680	52
APPLMAJORVER	BINARY	INQ	4	MAX	No	Major Version		E640 E650 E660 E670 E680	55
APPLMICROVER	BINARY	INQ	4	MAX	No	Micro Version		E640 E650 E660 E670 E680	57
APPLMINORVER	BINARY	INQ	4	MAX	No	Minor Version		E640 E650 E660 E670 E680	56
ATOMSERVICE	CHAR	CPSM	8	DIFF	No	Atomservice that will process the request.		E640 E650	44
AUTHENTICATE	CVDAS	INQ	4	LIKE	No	Authentication level		E640 E650	46
AUTHENTICATE Output valid values	BASICAUTH, NOAUTHENTIC								
AVAILSTATUS	CVDAS	INQ	4	LIKE	No	Availability status		E640 E650 E660 E670 E680	58
AVAILSTATUS Output valid values	AVAILABLE, UNAVAILABLE, NONE								
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0	E640 E650	39
CERTIFICATE	CHAR	INQ	32	DIFF	No	SSL client certificate for outbound HTTPS request			20
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent		E640 E650	31
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, DYNAMIC, CREATESPI, NOTAPPLIC, SYSTEM								
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release		E640 E650	32
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time		E640 E650	34
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID		E640 E650	30
CHARACTERSET	CHAR	INQ	40	DIFF	No	Character set of CICS response to the HTTP request			8
CIPHERS	CHAR	INQ	56	DIFF	No	SSL cipher suite codes			21

Table 1060. URIMAP resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
CONVERTER	CHAR	INQ	8	DIFF	No	Converter program to process request content			14
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition		E640 E650	35
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time		E640 E650	36
ENABLESTATUS	CVDAS	INQ	4	LIKE	Yes	Status			2
ENABLESTATUS Input/output valid values	ENABLED, DISABLED								
ENABLESTATUS Output valid values	DISABLEDHOST								
HFSFILE	CHAR	INQ	255	DIFF	No	Qualified zFS file to form the static response			11
HOST	CHAR	INQ	116	DIFF	No	Host component of the URI			5
HOSTCODEPAGE	CHAR	INQ	10	DIFF	No	Code page in which the static response is encoded			9
HOSTTYPE	CVDAS	INQ	4	LIKE	No	The format of the host name or address		E640 E650	42
HOSTTYPE Output valid values	HOSTNAME, IPV4, IPV6, NOTAPPLIC								
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent		E640 E650	33
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, DYNAMIC, GRPLIST, BUNDLE								
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time		E640 E650	38
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID		E640 E650	37
IPFAMILY	CVDAS	INQ	4	LIKE	No	The format of the resolved IP address		E640 E650	41
IPFAMILY Output valid values	IPV4, IPV6, UNKNOWN								
IPRESOLVED	CHAR	INQ	39	DIFF	No	The resolved IP address of this URIMAP		E640 E650	40
LOCATION	CHAR	INQ	255	DIFF	Yes	URI to which to redirect the inbound HTTP request			22
MAPREFCOUNT	BINARY	STAT	4	AVG	No	URI map reference count			24
MATCHDISABLD	BINARY	STAT	4	AVG	No	URI map host or path disabled			25
MATCHREDIREC	BINARY	STAT	4	AVG	No	URI map host or path redirect			26
MEDIATYPE	CHAR	INQ	56	DIFF	No	Media type of CICS response to the HTTP request			7
NAME-1	CHAR	INQ	8	DIFF	No	Name			1
NUMCIPHERS	BINARY	INQ	2	LIKE	No	Number of SSL cipher suite codes			27
OPERATION	CHAR	INQ	64	DIFF	No	Operation Name		E640 E650 E660 E670 E680	54
PATH	CHAR	INQ	255	DIFF	No	Path component of URI to which the map applies			6
PIPELINE	CHAR	INQ	8	DIFF	No	Pipeline that will process the request			17

Table 1060. URIMAP resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
PLATFORM	CHAR	INQ	64	DIFF	No	Platform Name		E640 E650 E660 E670 E680	53
PORT	BINARY	INQ	4	DIFF	No	Port number for USAGE(CLIENT)		E640 E650	43
PROGRAM	CHAR	INQ	8	DIFF	No	Application program that will process the request			16
REDIRECTTYPE	CVDAS	INQ	4	LIKE	Yes	Type of redirection			29
REDIRECTTYPE Input/output valid values	NONE, TEMPORARY, PERMANENT								
SCHEME	CVDAS	INQ	4	LIKE	No	Scheme component of URI to which the map applies			4
SCHEME Output valid values	HTTP, HTTPS								
SOCKETCLOSE	BINARY	INQ	4	DIFF	No	Time out for pooled sockets (secs)		E640 E650 E660	47
SOCKPLSZPEAK	BINARY	STAT	4	MAX	No	Peak number of pooled sockets			49
SOCKPOOLSIZE	BINARY	INQ	4	DIFF	No	Number of pooled sockets		E640 E650 E660	48
SOCKRECLAIMD	BINARY	STAT	4	MAX	No	Number of reclaimed sockets			50
SOCKTIMEDOUT	BINARY	STAT	4	MAX	No	Number of timed out sockets			51
TCPIPSERVICE	CHAR	INQ	8	DIFF	No	Inbound TCP/IP service relating to this URI map			12
TEMPLATENAME	CHAR	INQ	48	DIFF	No	Document template to form the static response			10
TRANSACTION	CHAR	INQ	4	DIFF	No	Alias transaction to run application for response			15
USAGE	CVDAS	INQ	4	LIKE	No	URI map usage			3
USAGE Output valid values	SERVER, CLIENT, PIPELINE, ATOM, JVMSERVER								
USERID	CHAR	INQ	8	DIFF	No	User ID to attach the alias transaction			19
WEBSERVICE	CHAR	INQ	32	DIFF	No	Web service that will process the request			18

Chapter 436. URIMPDEF Resource Table

A CICS definition that describes the universal resource identifier (URI) of requests from web clients or requests to a remote server.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install a Connection Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

ADDTGRP

Add to resource group

PARM(' [ERRQUEUE] RESGROUP(value) .')

Note: When creating this resource you should consider specifying the HOST attribute in lower case as CICS will convert this attribute name to lower case at install time. If you have not used a lower case name, you may subsequently have difficulty finding your host.

External resource name

CICSDefinitionURIMap

Length

1392

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3833

Table 1061. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No

Table 1061. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
CREATE		CSD	No
		RESGROUP(value)	No
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM SET	INSTALL	FORCEINS(YES, NO)	No
		MODE(value)	No
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 1062. URIMPDEF FEEDBACK error codes		
Value	Code	Description
1	URIMPDEF_INV_DATA	Attribute data invalid
2	URIMPDEF_REC_NOT_FOUND	Requested resource not found
4	URIMPDEF_REC_EXISTS	Resource already exists
5	URIMPDEF_REC_CHANGED	Resource definition already changed
6	URIMPDEF_INV_RESTYPE	Invalid resource type
7	URIMPDEF_INV_VER	Invalid resource version
11	URIMPDEF_NON_MP	Maintenance point CMAS not available
12	URIMPDEF_INV_CONTEXT	Context not found
13	URIMPDEF_INCONSISTENT_SET	Inconsistent set condition
14	URIMPDEF_INV_RESGROUP	Resource group not found
21	URIMPDEF_INV_ACTION	Invalid action
22	URIMPDEF_INV_RECADDR	Invalid record address
23	URIMPDEF_INV_RECLEN	Invalid record length
24	URIMPDEF_DIFF_VERSION	Different version

Table 1062. URIMPDEF FEEDBACK error codes (continued)

Value	Code	Description
25	URIMPDEF_EARLY_NAMELIST_END	Early name list end
26	URIMPDEF_INV_NAMELIST	Invalid name list
27	URIMPDEF_INV_NAME	Invalid name
28	URIMPDEF_INV_MINNAME	Invalid minor name
29	URIMPDEF_NOTIFY	Notify
30	URIMPDEF_PARTIAL_INSTALL	Partial install
31	URIMPDEF_NOTHING_INSTALLED	Nothing installed
32	URIMPDEF_NO_TARGETS	No targets
33	URIMPDEF_NO_RELATED	No related systems
34	URIMPDEF_INV_TSCOPE	Invalid target scope
35	URIMPDEF_INV_RSCOPE	Invalid related scope
36	URIMPDEF_INV_USAGE	Invalid usage
37	URIMPDEF_INV_MODE	Invalid mode
38	URIMPDEF_INV_STATECHK	Invalid state check
39	URIMPDEF_INV_FORCEINS	Invalid force install
40	URIMPDEF_INV_NOTIFY	Invalid notify
41	URIMPDEF_INV_OVERTYPE	Invalid over type
42	URIMPDEF_INV_OVRBLOCK	Invalid override block
43	URIMPDEF_INV_ORSTRING	Invalid override string
44	URIMPDEF_INV_STRNGTERM	Invalid string term
45	URIMPDEF_INV_EMBEDTERM	Invalid embedded terminator
46	URIMPDEF_INV_ATTRIBUTE	Invalid attribute
47	URIMPDEF_INV_LITERAL	Invalid literal
48	URIMPDEF_INV_ORSTGNA	Invalid override string
49	URIMPDEF_SCOPE_REQUIRED	Scope required
50	URIMPDEF_USAGE_CONFLICT	Usage conflict
51	URIMPDEF_NODEFS_SELECTED	No definitions selected
52	URIMPDEF_MORE_THAN_1_RELSYS	More than one related system
53	URIMPDEF_MISSING_RELSYSID	Missing related system identifier
54	URIMPDEF_SCOPE_CONFLICT	Scope conflict
55	URIMPDEF_INV_CSDGROUP	Invalid CSD group
56	URIMPDEF_REC_NOT_REMOVED	Record not removed
57	URIMPDEF_INV_RESOURCE	Invalid resource
58	URIMPDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	URIMPDEF_PARTIAL_ACTION	Partial action
60	URIMPDEF_NOTHING_ACTIONED	Nothing actioned

Table 1062. URIMPDEF FEEDBACK error codes (continued)

Value	Code	Description
61	URIMPDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive
62	URIMPDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	URIMPDEF_CSD_ERROR	CSD access error
64	URIMPDEF_INVALID_PATH	Invalid PATH for USAGE(CLIENT).

Table 1063. URIMPDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
ANALYZER	EYUDA	CPSM	4	No	LIKE	Use an analyzer program to process HTTP request	NO			26
ANALYZER Input/output valid values	NO, YES									
ATOMSERVICE	CHAR	CPSM	8	No	AVG	Atomservice that will process the request.			E640 E650	44
AUTHENTICATE	EYUDA	CPSM	4	Yes	LIKE	Authentication level	N_A		E640 E650	45
AUTHENTICATE Input/output valid values	N_A, NO, BASIC									
CERTIFICATE	CHAR	CPSM	32	No	DIFF	SSL client certificate for outbound HTTPS request				33
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	39
CHANGEAGENT Input/output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	41
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	40
CHARACTERSET	CHAR	CPSM	40	No	DIFF	Character set of CICS response to the HTTP request				21
CIPHERS	CHAR	CPSM	56	No	DIFF	Cipher suite codes to be used for outbound SSL				34
CONVERTER	CHAR	CPSM	8	No	DIFF	Converter program to process request content				27
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				9
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	46
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		38
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				13
HFSFILE	CHAR	CPSM	255	No	DIFF	Qualified zFS file to form the static response				24
HOST	CHAR	CPSM	116	Yes	DIFF	Host component of URI to which the map applies				18
HOSTCODEPAGE	CHAR	CPSM	10	No	DIFF	Code page in which the static response is encoded				22

Table 1063. URIMPDEF resource table attributes (continued)										
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
LOCATION	CHAR	CPSM	255	No	DIFF	URI to which to redirect the inbound HTTP request				35
MEDIATYPE	CHAR	CPSM	56	No	DIFF	Media type of CICS response to the HTTP request				20
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
PATH	CHAR	CPSM	255	Yes	DIFF	Path component of URI to which the map applies				19
PIPELINE	CHAR	CPSM	8	No	DIFF	Pipeline that will process the request				30
PORT	CHAR	CPSM	8	No	DIFF	Port number	NO	1-65535	E640 E650	43
PORT Input/output valid values	NO									
PROGRAM	CHAR	CPSM	8	No	DIFF	Application program that will process the request				29
REDIRECTTYPE	CVDAS	CPSM	4	Yes	LIKE	Type of redirection	NONE			37
REDIRECTTYPE Input/output valid values	NONE, TEMPORARY, PERMANENT									
SCHEME	CVDAS	CPSM	4	Yes	LIKE	Scheme component of URI to which the map applies	HTTP			17
SCHEME Input/output valid values	HTTP, HTTPS									
SOCKETCLOSE	CHAR	CPSM	6	No	DIFF	Time out for pooled sockets (HHMMSS)			E640 E650 E660	47
STATUS	CVDAS	CPSM	4	Yes	LIKE	Enabled status	ENABLED			15
STATUS Input/output valid values	ENABLED, DISABLED									
TCPIPSERVICE	CHAR	CPSM	8	No	DIFF	Inbound TCP/IP service relating to this URI map				25
TEMPLATENAME	CHAR	CPSM	48	No	DIFF	Document template to form the static response				23
TRANSACTION	CHAR	CPSM	4	No	DIFF	Alias transaction to run application for response				28
USAGE	CVDAS	CPSM	4	Yes	LIKE	URI map usage type	SERVER			16
USAGE Input/output valid values	SERVER, CLIENT, PIPELINE, ATOM, JVMSERVER									
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				10
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				11
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				12
USERID	CHAR	CPSM	8	No	DIFF	The user ID to attach the alias transaction				32
WEBSERVICE	CHAR	CPSM	32	No	DIFF	Web service that will process the request				31

Chapter 437. URIMPGBL Resource Table

A CICS resource, with no key, that describes the global statistics returned by CICS extract statistics for the URIMAP resource.

External resource name

CICSGlobalURIMapStatistics

Length

72

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0166

<i>Table 1064. Valid CPSM operations</i>			
Operations	Actions	Parameters	Required
GET		None	N/A

<i>Table 1065. URIMPGBL resource table attributes</i>							
Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name		
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release		16
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved		
DRCTATTCOUNT	BINARY	STAT	4	SUM	Direct attach count	E640 E650 E660 E670 E680 E690	
DYNAMCONTENT	BINARY	STAT	4	SUM	URI map dynamic content		8
EPREFCOUNT	BINARY	STAT	4	SUM	Entry point reference count	E640 E650 E660 E670 E680	15
HOSTDISABLED	BINARY	STAT	4	SUM	Host disabled count		13
MAPREFCOUNT	BINARY	STAT	4	SUM	URI map reference count		1
MATCHANALYZE	BINARY	STAT	4	SUM	URI map host or path match analyzer		6

Table 1065. URIMPGBL resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Get Invalid	Attr ID
MATCHCOUNT	BINARY	STAT	4	SUM	URI map host or path match count		4
MATCHDISABLD	BINARY	STAT	4	SUM	URI map host or path disabled		2
MATCHREDIREC	BINARY	STAT	4	SUM	URI map host or path redirect		5
NOMATCHCOUNT	BINARY	STAT	4	SUM	URI map host or path no match count		3
PIPELINEREQS	BINARY	STAT	4	SUM	URI map pipeline requests		10
SCHEMEHTTP	BINARY	STAT	4	SUM	URI map SCHEME(HTTP) requests		11
SCHEMEHTTPS	BINARY	STAT	4	SUM	URI map SCHEME(HTTPS) requests		12
STATICCONTENT	BINARY	STAT	4	SUM	URI map static content		7

Chapter 438. VOLUME Resource Table

A CICS Resource that describes a tape volume used by a tape journal in an active CICS system being managed by CICSplex SM.

The **Primary** key field for this resource class is VOLUME.

The following actions are supported:

ADD

Add a volume.

The parameter data for the ADD action is:

```
PARM('VOLSER(volser) JOURNAL(jrn1)
      [AVAILSTAT(cvda)].')
```

where:

volser = (Required) 6-character volume serial number
jrn1 = (Required) Journal number, from 1 - 99
cvda = Valid CVDA for the volume availability condition

REMOVE

Remove a volume.

External resource name

Length

64

Usage

EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0016

Table 1066. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM	ADD	AVAILSTAT(NOWRITE, OK)	No
SET		JOURNAL(value)	Yes
		VOLSER(value)	Yes

Table 1066. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
REMOVE		None	N/A

Table 1067. VOLUME resource table attributes								
Name	Datatype	Source	Len	Sum	Set	Description	Attr ID	
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name	6	
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release		
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved		
AVAILSTATUS	CVDAS	INQ	4	LIKE	Yes	Availability status		
AVAILSTATUS Input/output valid values	OK, NOWRITE							
AVAILSTATUS Output valid values	FINPUT, FOUTPUT, FOPEN, FCLOSE							
DATE	CHAR	INQ	5	DIFF	No	Date when earliest data written	8	
EMPTYSTATUS	CVDAS	INQ	4	LIKE	No	Empty status	3	
EMPTYSTATUS Output valid values	EMPTY, NOTEMPTY							
JOURNALNUM	BINARY	INQ	2	AVG	Yes	Journal number	2	
LONGDATE	CHAR	INQ	7	DIFF	No	Date with 4-digit year	9	
OPENSTATUS	CVDAS	INQ	4	LIKE	No	Open status	5	
OPENSTATUS Output valid values	OPEN, CLOSED, OPENING							
PART	BINARY	INQ	4	AVG	No	Sequence number in volume series	4	
TIME	CHAR	INQ	6	DIFF	No	Time when earliest data written	7	
VOLUME-1	CHAR	INQ	6	DIFF	No	Volume serial number	1	

Chapter 439. WEBINGRP Resource Table

A CPSM Business Application Services Definition that describes the membership of a web services definition (WEBSVDEF) in a resource group (RESGROUP). A WEBSVDEF can be a member of multiple RESGROUPs.

The **Primary** key field for this resource class is WEBGROUP.

The **Secondary** key field for this resource class is WEBNAME.

The **Tertiary** key field for this resource class is WEBVER.

There are no object specific actions for this resource class.

External resource name

Length

56

Usage

API or Batch Utility or WUI

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt6180

Table 1068. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 1069. WEBINGRP FEEDBACK error codes		
Value	Code	Description
1	WEBINGRP_INV_DATA	Attribute data invalid
2	WEBINGRP_REC_NOT_FOUND	Requested resource not found
4	WEBINGRP_REC_EXISTS	Resource already exists
6	WEBINGRP_INV_RESTYPE	Invalid resource type
7	WEBINGRP_INV_VER	Invalid resource version
11	WEBINGRP_NON_MP	Maintenance point CMAS not available

Table 1069. WEBINGRP FEEDBACK error codes (continued)

Value	Code	Description
12	WEBINGRP_INV_CONTEXT	Context not found
21	WEBINGRP_INCONSISTENT_SET	Inconsistent set
22	WEBINGRP_DIFF_VERSION	Different version
23	WEBINGRP_INV_NAME	Invalid name
24	WEBINGRP_INV_MINNAME	Invalid minor name

Table 1070. WEBINGRP resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	8
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last time the definition was changed	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	9
WEBGROUP-1	CHAR	CPSM	8	Yes	DIFF	Resource group name	5
WEBNAME-2	CHAR	CPSM	8	Yes	DIFF	WebService definition name	6
WEBVER-3	BINARY	CPSM	1	Yes	AVG	WebService definition version	7

Chapter 440. WEBSERV Resource Table

A CICS resource that defines aspects of the runtime environment for a CICS application program deployed as a web service, where the mapping between application data structure and SOAP messages has been generated using CICS-supplied tools.

The **Primary** key field for this resource class is NAME.

External resource name

CICSWebService

Length

1496

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0165

Table 1071. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A
PERFORM	DISCARD	None	N/A
SET			

Table 1072. WEBSERV resource table attributes									
Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
ARCHIVEFILE	CHAR	INQ	255	DIFF	No	Fully-qualified archive file on zFS		E640 E650 E660	38
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0	E640 E650	37
BINDING	CHAR	INQ	255	DIFF	No	The WSDL binding that this web service represents			10
CCSID	BINARY	INQ	4	LIKE	No	Coded character set ID		E640	17

Table 1072. WEBSERV resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent		E640 E650	29
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DREPBATCH, DYNAMIC, CREATESPI, NOTAPPLIC								
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release		E640 E650	30
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time		E640 E650	32
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID		E640 E650	27
CONTAINER	CHAR	INQ	16	DIFF	No	Container used if the program input is CHANNEL			13
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition		E640 E650	33
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time		E640 E650	34
ENDPOINT	CHAR	INQ	255	DIFF	No	The endpoint URI of a remote web service			9
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent		E640 E650	31
INSTALLAGENT Input/output valid values	CSDAPI, CREATESPI, DYNAMIC, GRPLIST, BUNDLE								
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time		E640 E650	36
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID		E640 E650	35
LASTMODTIME	DATETIME	INQ	8	MAX	No	Time the WSBIND file on zFS was last updated			14
MAPPINGLEVEL	CHAR	INQ	8	DIFF	No	Mapping level used in WSBIND file		E640	18
MAPPINGRNUM	BINARY	INQ	4	LIKE	No	Mapping release number part of MAPLEVEL		E640	20
MAPPINGVNUM	BINARY	INQ	4	LIKE	No	Mapping version number part of MAPLEVEL		E640	19
MINRUNLEVEL	CHAR	INQ	8	DIFF	No	Minimum runtime level required by WSBIND file		E640	21
MINRUNRNUM	BINARY	INQ	4	LIKE	No	Minimum runtime release number part of MINRUNLVL		E640	23
MINRUNVNUM	BINARY	INQ	4	LIKE	No	Minimum runtime version number part of MINRUNLVL		E640	22
NAME-1	CHAR	INQ	32	DIFF	No	Name			1
PGMINTERFACE	CVDAS	INQ	4	LIKE	No	Where the specified program expects input			12
PGMINTERFACE Output valid values	CHANNEL, COMMAREA, NOTAPPLIC								
PIPELINE	CHAR	INQ	8	DIFF	No	Pipeline in which this web service is installed			5
PROGRAM	CHAR	INQ	8	DIFF	No	Application program to implement this web service			8
STATE	CVDAS	INQ	4	LIKE	No	Web service status			15
STATE Output valid values	INITING, DISCARDING, INSERVICE, UNUSABLE, UPDATING, DISABLED, DISABLING								
URIMAP	CHAR	INQ	8	DIFF	No	Dynamically installed URI map for this web service			7

Table 1072. WEBSERV resource table attributes (continued)									
Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
VALIDATIONST	CVDAS	INQ	4	LIKE	Yes	Perform validation of SOAP messages against WSDL	NOVALIDATION		6
VALIDATIONST Input/output valid values	VALIDATION, NOVALIDATION								
WEBUSECOUNT	BINARY	STAT	4	SUM	No	Number of times web service used			16
WSBIND	CHAR	INQ	255	DIFF	No	Fully-qualified WSBind file on zFS			2
WSDLFILE	CHAR	INQ	255	DIFF	No	Fully-qualified WSDL file on zFS			3
XOPDIRECTST	EYUDA	INQ	4	LIKE	No	Current web service direct mode XOP status		E640	25
XOPDIRECTST Output valid values	SUPPORTED, NOTSUPPORTED								
XOPSUPPORTST	EYUDA	INQ	4	LIKE	No	Web service XOP capability		E640	24
XOPSUPPORTST Output valid values	SUPPORTED, NOTSUPPORTED								

Chapter 441. WEBSVDEF Resource Table

A CICS definition that describes aspects of the run-time environment for a CICS application program deployed in a web services setting, where the mapping between application data structure and SOAP messages has been generated using CICS-supplied tools.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is DEFVER.

The **Tertiary** key field for this resource class is CSDGROUP.

The following actions are supported:

INSTALL

Install a Connection Definition.

The parameter data for the INSTALL action is described in [Parameters for installing CICS definitions using BAS](#).

ADDTGRP

Add to resource group

PARM(' [ERRQUEUE] RESGROUP(value) .')

External resource name

CICSDefinitionWebService

Length

920

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICS Definition

Copybook identifier

EYUt3835

Table 1073. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		CICSSYS(value)	No
		CSDGROUP(value)	No
		RESGROUP(value)	No
CREATE		CSD	No
		RESGROUP(value)	No

Table 1073. Valid CPSM operations (continued)

Operations	Actions	Parameters	Required
UPDATE		CSD	No
REMOVE		CSD	No
PERFORM SET	INSTALL	FORCEINS(YES, NO)	No
		MODE(value)	No
		NOTIFY(NO, INACTIVE, RELEASE, FULL)	No
		OVERRIDE	No
		OVERTYPE(TARGET, RELATED, BOTH, NONE)	No
		RELATED(value)	No
		STATECHK(YES, NO)	No
		TARGET(value)	Yes
		USAGE(LOCAL)	Yes
	ADDTGRP	RESGROUP(value)	Yes
	CSDINSTALL	None	N/A
	CSDCOPY	AS_RESOURCE(value)	No
		DUPACTION(DUPERROR, DUPNOREPLACE, DUPREPLACE)	No
		TO_CSDGROUP(value)	No

Table 1074. WEBSVDEF FEEDBACK error codes

Value	Code	Description
1	WEBSVDEF_INV_DATA	Attribute data invalid
2	WEBSVDEF_REC_NOT_FOUND	Requested resource not found
4	WEBSVDEF_REC_EXISTS	Resource already exists
5	WEBSVDEF_REC_CHANGED	Resource definition already changed
6	WEBSVDEF_INV_RESTYPE	Invalid resource type
7	WEBSVDEF_INV_VER	Invalid resource version
11	WEBSVDEF_NON_MP	Maintenance point CMAS not available
12	WEBSVDEF_INV_CONTEXT	Context not found
13	WEBSVDEF_INCONSISTENT_SET	Inconsistent set condition
14	WEBSVDEF_INV_RESGROUP	Resource group not found
21	WEBSVDEF_INV_ACTION	Invalid action
22	WEBSVDEF_INV_RECADDR	Invalid record address
23	WEBSVDEF_INV_RECLLEN	Invalid record length
24	WEBSVDEF_DIFF_VERSION	Different version
25	WEBSVDEF_EARLY_NAMELIST_END	Early name list end
26	WEBSVDEF_INV_NAMELIST	Invalid name list

Table 1074. WEBSVDEF FEEDBACK error codes (continued)

Value	Code	Description
27	WEBSVDEF_INV_NAME	Invalid name
28	WEBSVDEF_INV_MINNAME	Invalid minor name
29	WEBSVDEF_NOTIFY	Notify
30	WEBSVDEF_PARTIAL_INSTALL	Partial install
31	WEBSVDEF_NOTHING_INSTALLED	Nothing installed
32	WEBSVDEF_NO_TARGETS	No targets
33	WEBSVDEF_NO_RELATED	No related systems
34	WEBSVDEF_INV_TSCOPE	Invalid target scope
35	WEBSVDEF_INV_RSCOPE	Invalid related scope
36	WEBSVDEF_INV_USAGE	Invalid usage
37	WEBSVDEF_INV_MODE	Invalid mode
38	WEBSVDEF_INV_STATECHK	Invalid state check
39	WEBSVDEF_INV_FORCEINS	Invalid force install
40	WEBSVDEF_INV_NOTIFY	Invalid notify
41	WEBSVDEF_INV_OVERTYPE	Invalid over type
42	WEBSVDEF_INV_OVRBLOCK	Invalid override block
43	WEBSVDEF_INV_ORSTRING	Invalid override string
44	WEBSVDEF_INV_STRNGTERM	Invalid string term
45	WEBSVDEF_INV_EMBEDTERM	Invalid embedded terminator
46	WEBSVDEF_INV_ATTRIBUTE	Invalid attribute
47	WEBSVDEF_INV_LITERAL	Invalid literal
48	WEBSVDEF_INV_ORSTGNA	Invalid override string
49	WEBSVDEF_SCOPE_REQUIRED	Scope required
50	WEBSVDEF_USAGE_CONFLICT	Usage conflict
51	WEBSVDEF_NODEFS_SELECTED	No definitions selected
52	WEBSVDEF_MORE_THAN_1_RELSYS	More than one related system
53	WEBSVDEF_MISSING_RELSYSID	Missing related system identifier
54	WEBSVDEF_SCOPE_CONFLICT	Scope conflict
55	WEBSVDEF_INV_CSDGROUP	Invalid CSD group
56	WEBSVDEF_REC_NOT_REMOVED	Record not removed
57	WEBSVDEF_INV_RESOURCE	Invalid resource
58	WEBSVDEF_INV_CICS_RESTYPE	Invalid CICS restype
59	WEBSVDEF_PARTIAL_ACTION	Partial action
60	WEBSVDEF_NOTHING_ACTIONED	Nothing actioned
61	WEBSVDEF_INV_BOTHTOAS	TO_CSDGROUP and AS_RESOURCE are mutually exclusive

Table 1074. WEBSVDEF FEEDBACK error codes (continued)

Value	Code	Description
62	WEBSVDEF_INV_NOTTOAS	Either TO_CSDGROUP or AS_RESOURCE is required
63	WEBSVDEF_CSD_ERROR	CSD access error

Table 1075. WEBSVDEF resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Get Invalid	Attr ID
ARCHIVEFILE	CHAR	CPSM	255	No	DIFF	Fully-qualified archive file on zFS			E640 E650 E660	25
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			E640 E650	20
CHANGEAGENT Input/output valid values	DREPAPI									
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			E640 E650	22
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification time				1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			E640 E650	21
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created				9
CSDGROUP-3	CHAR	CPSM	8	Yes	DIFF	CSD group			E640 E650	24
DEFVER-2	BINARY	CPSM	1	Yes	AVG	Version	0	0-15		5
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999		18
DESCRIPTION	CHAR	CPSM	58	No	DIFF	Description				13
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name				7
PIPELINE	CHAR	CPSM	8	Yes	DIFF	Pipeline in which to install this web service				14
USERDATA1	CHAR	CPSM	8	No	DIFF	User data area 1				10
USERDATA2	CHAR	CPSM	8	No	DIFF	User data area 2				11
USERDATA3	CHAR	CPSM	8	No	DIFF	User data area 3				12
VALIDATION	EYUDA	CPSM	4	No	LIKE	Perform validation of SOAP messages against WSDL	NO			17
VALIDATION Input/output valid values	NO, YES									
WSBIND	CHAR	CPSM	255	Yes	DIFF	Fully-qualified WSBIND file on zFS				15
WSDLFILE	CHAR	CPSM	255	No	DIFF	Fully-qualified WSDL file on zFS				16

Chapter 442. WLMAROUT Resource Table

A CICSplex SM Workload Manager object that describes a CICS router region in an active workload. WLMAROUT returns a router status record from every CMAS in the workload.

The **Primary** key field for this resource class is WORKLOAD.

The **Secondary** key field for this resource class is WRKLOWNER.

The **Tertiary** key field for this resource class is TOR.

The **Fourth** key field for this resource class is RPTINGCMAS.

There are no object specific actions for this resource class.

External resource name

CICSWLMActiveRouter

Length

80

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2660

Table 1076. Valid CPSM operations						
Operations	Actions	Parameters				Required
GET		WORKLOAD(value)				No

Table 1077. WLMAROUT resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
ABDCMPSTATE	EYUDA	CPSM	4	LIKE	Abend compensation status	16
ABDCMPSTATE Output valid values						
YES, NO						
CON_STATUS	EYUDA	CPSM	4	LIKE	Routing region contact status	7
CON_STATUS Output valid values						
LOSTCON, N_A						
FMIDSEQ	CHAR	INQ	4	DIFF	FMID sequence number	13
MVSSYSNAME	CHAR	CPSM	8	DIFF	MVS system name	12
OWSTATE	EYUDA	CPSM	4	LIKE	Optimization status	10
OWSTATE Output valid values						
ACTIVE, INACTIVE, N_A						
RELEASE	CHAR	CPSM	3	DIFF	CICS Release	15

Table 1077. WLMAROUT resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Description	Attr ID
RPTINGCMAS-4	CHAR	CPSM	8	DIFF	Reporting CMAS name	17
RTUOWEND	BINARY	CPSM	8	SUM	Unit of work completes	11
STRTTIME	TIMESTP	CPSM	8	MAX	Local time at which router was started	14
TOR-3	CHAR	CPSM	8	DIFF	Routing region name	5
TOROWNER	CHAR	CPSM	8	DIFF	Name of controlling CMAS	9
WORKLOAD-1	CHAR	CPSM	8	DIFF	Workload name	4
WRKLOWNER-2	CHAR	CPSM	4	DIFF	System ID of workload owner	8

Chapter 443. WLMATAFF Resource Table

A CICSplex SM Workload Manager object that describes an active affinity relationship for a dynamic transaction. An instance of this object exists for the duration of the affinity, which in many cases is a very short period of time.

This object is referenced within the scope of a workload. The workload name must be explicitly identified in the PARM option of the API GET command by coding the following text string:

```
PARM('WORKLOAD(workload).')
```

workload is the name of an active workload and is required. Alternatively, you can code the following text string:

```
PARM('WORKLOAD(*)').')
```

You can specify a workload name of * as a wildcard. Using this wildcard returns a WLMATAFF record for every workload with which the target region is associated. No other generic form of workload name can be specified. You must use an explicit workload name or the wildcard.

The **Primary** key field for this resource class is WORKLOAD.

The **Secondary** key field for this resource class is WRKLOWNER.

The **Tertiary** key field for this resource class is TRANGRP.

The **Fourth** key field for this resource class is USERID.

The **Fifth** key field for this resource class is LUNAME.

The **Sixth** key field for this resource class is TORNAME.

The **Seventh** key field for this resource class is TERMID.

The **Eighth** key field for this resource class is RESERVD2.

The **Ninth** key field for this resource class is AFFKEY.

The following action is supported:

FORCE

Force an affinity to be broken.

This action is provided for use when system failures occur and manual recovery of a workload is required. It is not intended for general use and may cause damage if used in an inappropriate manner. CICSplex SM makes no checks before the forced removal of an affinity relation.

External resource name

CICSWLMActiveAffinity

Length

240

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

Yes

Object type

CICSplex SM Manager

Copybook identifier

EYUt2487

Table 1078. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		WORKLOAD(value)	No
PERFORM SET	FORCE	None	N/A

Table 1079. WLMATAFF FEEDBACK error codes

Value	Code	Description
21	WLMATAFF_AFFINITY_NOT_FOUND	Affinity not found
22	WLMATAFF_WORKLOAD_NOT_FOUND	Workload not found
23	WLMATAFF_TRANGRP_NOT_FOUND	Transaction group not found
24	WLMATAFF_NO_WORKLOAD	No workload
25	WLMATAFF_NO_TRANGRP	No transaction group
26	WLMATAFF_WORKLOAD_FROZEN	Workload frozen

Table 1080. WLMATAFF resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
AFFINITY	EYUDA	CPSM	4	LIKE	Affinity relationship	6
AFFINITY Input/output valid values	LOCKED					
AFFINITY Output valid values	GLOBAL, LUNAME, USERID, BAPPL					
AFFKEY-9	HEX	CPSM	64	LIKE	Key that identifies creator of affinity	19
AOR	CHAR	CPSM	8	DIFF	Target region	13
CBTSKEY	HEX	CPSM	52	LIKE	BTS activity ID	16
LIFETIME	EYUDA	CPSM	4	LIKE	Affinity lifetime	7
LIFETIME Input/output valid values	UOW					
LIFETIME Output valid values	LOGON, PCONV, PERMANENT, SIGNON, SYSTEM, DELIMIT, ACTIVITY, PROCESS					
LOCUOWID	HEX	CPSM	8	LIKE	Local unit-of-work ID	17
LUNAME-5	CHAR	CPSM	17	DIFF	Terminal LU name	10
NETUOWID	HEX	CPSM	27	LIKE	Network unit-of-work ID	18
RESERVD2-8	CHAR	CPSM	11	DIFF	The activity ID of the CBTS activity	15
TERMID-7	CHAR	CPSM	8	DIFF	Routing region terminal	12
TORNAME-6	CHAR	CPSM	8	DIFF	Routing region	11
TRANGRP-3	CHAR	CPSM	8	DIFF	Transaction group	4
USERID-4	CHAR	CPSM	8	DIFF	User identifier	9
WORKLOAD-1	CHAR	CPSM	8	DIFF	Workload name	5
WRKLOWNER-2	CHAR	CPSM	4	DIFF	System ID of workload owner	14

Chapter 444. WLMATARG Resource Table

A CICSplex SM Workload Manager object that describes a CICS system used as a target region for one or more active workloads.

This object is referenced by its target region name only - it has no referential affinities to any explicitly named workloads.

The **Primary** key field for this resource class is AOR.

The **Secondary** key field for this resource class is RPTINGCMAS.

The following actions are supported:

RESET

Force the dynamic routing statistics counters to be reset to zero.

This action requires no unique parameter data.

External resource name

CICSWLMTarget

Length

184

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2659

Table 1081. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
PERFORM	RESET	None	N/A
SET			

Table 1082. WLMATARG FEEDBACK error codes		
Value	Code	Description
21	WLMATARG_NO_AOR	Target region not defined

Table 1083. WLMATARG resource table attributes

Name	Datatype	Source	Len	Sum	Description	Default	Attr ID
AOR-1	CHAR	CPSM	8	DIFF	Target region name		4
BOTRSUPD	BINARY	CPSM	1	MAX	RS server bottom tier	10	34
CFREADCT	BINARY	CPSM	8	SUM	Coupling Facility read count		39
CFUPDCNT	BINARY	CPSM	8	MAX	Coupling Facility update count		26
CON_STATUS	EYUDA	CPSM	4	LIKE	Target region contact status		6
CON_STATUS Output valid values	LOSTCON, N_A						
CPSMVER	CHAR	CPSM	4	SUM	CICSplex SM version		38
EVENTS	BINARY	CPSM	4	MAX	RTA event count for target region		10
HLTHDUMP	EYUDA	CPSM	4	LIKE	Region is dumping		22
HLTHDUMP Output valid values	NO, YES						
HLTHMAXT	EYUDA	CPSM	4	LIKE	Region is at MAXTASKS		23
HLTHMAXT Output valid values	NO, YES						
HLTHNRM	EYUDA	CPSM	4	LIKE	MAS non responsive		37
HLTHNRM Output valid values	NO, YES						
HLTHSOS	EYUDA	CPSM	4	LIKE	Short on storage		20
HLTHSOS Output valid values	NO, YES						
HLTHSTALL	EYUDA	CPSM	4	LIKE	Region has stalled		21
HLTHSTALL Output valid values	NO, YES						
MAXTASKS	BINARY	CPSM	4	MAX	Maximum task count for region		25
OWNINGCMAS	CHAR	CPSM	8	DIFF	Owning CMAS name		28
OWSTATE	EYUDA	CPSM	4	LIKE	Optimization status		7
OWSTATE Output valid values	ACTIVE, INACTIVE, N_A						
READRS	BINARY	CPSM	2	MAX	RS server read interval	200	30
ROUTEWGHT	BINARY	CPSM	4	MAX	WLM routing weight for region		8
ROUTINGLOAD	BINARY	CPSM	4	MAX	Routing Load		24
RPTINGCMAS-2	CHAR	CPSM	8	DIFF	Reporting CMAS name		36
RSPPOOLID	CHAR	CPSM	8	DIFF	RS server pool name		27
RTABEND	BINARY	CPSM	8	SUM	Route abends		17
RTCOMPLETE	BINARY	CPSM	8	SUM	Route completes		19
RTERROR	BINARY	CPSM	8	SUM	Route errors		14
RTINITIATE	BINARY	CPSM	8	SUM	Route initiates		18
RTNOTIFY	BINARY	CPSM	8	SUM	Route notifies		16
RTSELECT	BINARY	CPSM	8	SUM	Route selections		13
RTTERMINATE	BINARY	CPSM	8	SUM	Route terminates		15
STATUS	EYUDA	CPSM	4	LIKE	Target region status		5
STATUS Input/output valid values	ACTIVE, QUIESCE						
STATUS Output valid values	QUIESCING, QUIESCED						
TASKINC	BINARY	CPSM	2	MAX	Task count increment value		29
TASKLOAD	BINARY	CPSM	4	MAX	Task load percentage		12
TOPRSUPD	BINARY	CPSM	1	MAX	RS server top tier	5	33
UPDATERS	BINARY	CPSM	1	MAX	RS Server update frequency	15	31
WLMHLTH	BINARY	CPSM	1	MAX	z/OS WLM health		40
WLMOPTEN	EYUDA	CPSM	4	LIKE	Optimization enablement state		35

Table 1083. WLMATARG resource table attributes (continued)							
Name	Datatype	Source	Len	Sum	Description	Default	Attr ID
WLMOPTEN Output valid values	ENABLED, DISABLED						
WLMQMODE	EYUDA	CPSM	4	LIKE	Task load queue mode	ALL	11
WLMQMODE Input/output valid values	ALL, MAXTASK, N_A						
WLMTHRSH	BINARY	CPSM	1	MAX	Task load health threshold	60	32
WRKLCNT	BINARY	CPSM	4	MAX	Workload count		9

Chapter 445. WLMATGRP Resource Table

A CICSplex SM Workload Manager object that describes a transaction group installed in an active workload.

This object is referenced within the scope of a workload. The workload name must be explicitly identified in the PARM option of the API GET command by coding the following text string:

```
PARM('WORKLOAD(workload).')
```

workload is the name of an active workload and is required. Alternatively, you can code the following text string:

```
PARM('WORKLOAD(*)').')
```

You can specify a workload name of * as a wildcard. Using this wildcard returns a WLMATGRP record for every workload with which the target region is associated. No other generic form of workload name can be specified - it must be an explicit workload name or the wildcard.

You can specify other parameters, but the workload name is required.

The **Primary** key field for this resource class is WORKLOAD.

The **Secondary** key field for this resource class is WRKLOWNER.

The **Tertiary** key field for this resource class is TRANGRP.

The following actions are supported:

ACTIVE

Activate the Transaction Group.

DORMANT

Make the Transaction Group dormant.

SET

Modify attributes of the Active Transaction Group.

These actions require no unique parameter data.

A transaction group in the dormant state does not make affinity relation decisions about AOR target selection. It does, however, record static affinity relations. This allows a transaction group to be installed before activating dynamic transaction routing to record affinities based on the existing static routing configuration. When the transaction group is made active, it then has a valid representation of affinities created using static facilities.

External resource name

CICSWLMActiveTransactionGroup

Length

64

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

Yes

Object type

CICSplex SM Manager

Copybook identifier

EYUt2486

Table 1084. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		WORKLOAD(value)	No
PERFORM SET	ACTIVE	WORKLOAD(value)	No
	DORMANT	WORKLOAD(value)	No
SET		None	N/A

Table 1085. WLMATGRP FEEDBACK error codes

Value	Code	Description
21	WLMATGRP_NO_WORKLOAD	No workload
22	WLMATGRP_NO_TRANGRP	No transaction group
23	WLMATGRP_WORKLOAD_FROZEN	Workload frozen
24	WLMATGRP_INVALID_ALGORITHM	Invalid algorithm type

Table 1086. WLMATGRP resource table attributes

Name	Datatype	Source	Len	Sum	Set	Description	Default	Attr ID
ABENDCRIT	BINARY	CPSM	1	AVG	No	Acceptable abend level		10
ABENDTHRESH	BINARY	CPSM	1	AVG	No	Acceptable target region load level		11
AFFAUTO	EYUDA	CPSM	4	LIKE	No	Automatic affinity creation		15
AFFAUTO Input/output valid values	YES, NO, N_A							
AFFINITY	EYUDA	CPSM	4	LIKE	No	Affinity relationship		8
AFFINITY Input/output valid values	GLOBAL, LUNAME, USERID, NONE, N_A, BAPPL, LOCKED							
AFFLIFE	EYUDA	CPSM	4	LIKE	No	Affinity lifetime		9
AFFLIFE Input/output valid values	LOGON, PCONV, PERMANENT, SIGNON, SYSTEM, DELIMIT, NONE, N_A, ACTIVITY, PROCESS, UOW							
ALGTYPE	EYUDA	CPSM	4	LIKE	Yes	Algorithm type	INHERIT	16
ALGTYPE Input/output valid values	INHERIT, QUEUE, LNQUEUE, GOAL, LNGOAL							
EVENTNAME	CHAR	CPSM	8	DIFF	No	Event name		12
FILTER	EYUDA	CPSM	4	LIKE	No	Primary search criterion		7
FILTER Input/output valid values	LUNAME, USERID							
STATUS	EYUDA	CPSM	4	LIKE	Yes	Transaction group status		6
STATUS Input/output valid values	ACTIVE, DORMANT							
TRANCNT	BINARY	CPSM	4	AVG	No	Active transaction count		17

Table 1086. WLMATGRP resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Attr ID
TRANGRP-3	CHAR	CPSM	8	DIFF	No	Transaction group		4
WORKLOAD-1	CHAR	CPSM	8	DIFF	No	Workload		5
WRKLOWNER-2	CHAR	CPSM	4	DIFF	No	Workload owner		13

Chapter 446. WLMATRAN Resource Table

A CICSplex SM Workload Manager object that describes a dynamic transaction defined explicitly to CICSplex SM. Dynamic transactions have to be defined only if they have specific separation or affinity criteria.

This object is referenced within the scope of a workload. The workload name must be explicitly identified in the PARM option of the API GET command by coding the following text string:

```
PARM('WORKLOAD(workload).')
```

workload is the name of an active workload and is required. Alternatively, you can code the following text string:

```
PARM('WORKLOAD(*)').')
```

You can specify a workload name of * as a wildcard. Using this wildcard returns a WLMATRAN record for every workload with which the target region is associated. No other generic form of workload name can be specified. You must use an explicit workload name or the wildcard.

You can specify other parameters, but the workload name is required.

The **Primary** key field for this resource class is WORKLOAD.

The **Secondary** key field for this resource class is WRKLOWNER.

The **Tertiary** key field for this resource class is TRANID.

The following action is supported:

FORCE
Force removal of a transaction.

The FORCE action requires no unique parameter data.

External resource name
CICSWLMAActiveTransaction

Length
32

Usage
API or WUI or CICS Management Client Interface

API view
No

CMAS context
No

SCOPE applies
No

Only query CMASs in workload
Yes

Object type
CICSplex SM Manager

Copybook identifier
EYUt2488

Table 1087. Valid CPSM operations				
Operations	Actions	Parameters	Required	
GET		WORKLOAD(value)	No	
PERFORM SET	FORCE	None	N/A	

Table 1088. WLMATRAN FEEDBACK error codes		
Value	Code	Description
21	WLMATRAN_NO_WORKLOAD	No workload
22	WLMATRAN_NO_TRANSID	No transaction ID
23	WLMATRAN_WORKLOAD_FROZEN	Workload frozen
24	WLMATRAN_MAL_PENDING	MAL pending

Table 1089. WLMATRAN resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
PSEUDOMODE	EYUDA	CPSM	4	LIKE	Start or end of pseudo-conversation	5
PSEUDOMODE Output valid values	START, END, N_A					
TRANGRP	CHAR	CPSM	8	DIFF	Transaction group	6
TRANID-3	CHAR	CPSM	8	DIFF	Transaction	4
WORKLOAD-1	CHAR	CPSM	8	DIFF	Workload name	7
WRKLOWNER-2	CHAR	CPSM	4	DIFF	System ID of workload owner	8

Chapter 447. WLMAWAOR Resource Table

A CICSplex SM Workload Manager object that describes a CICS system used as an AOR in an active workload.

This object is referenced within the scope of a workload. The workload name must be explicitly identified in the PARM option of the API GET command by coding the following text string:

```
PARM('WORKLOAD(workload).')
```

workload is the name of an active workload and is required. Alternatively, you can code the following text string:

```
PARM('WORKLOAD(*)').')
```

You can specify a workload name of * as a wildcard. Using this wildcard returns a WLMAWAOR record for every workload with which the target region is associated. No other generic form of workload name can be specified. You must use an explicit workload name or the wildcard.

You can specify other parameters, but the workload name is required.

The **Primary** key field for this resource class is WORKLOAD.

The **Secondary** key field for this resource class is WRKLOWNER.

The **Tertiary** key field for this resource class is AOR.

The following actions are supported:

ACTIVATE

Allow transactions to be routed to an AOR.

QUIESCE

Do not route new transactions to an AOR.

These actions require no unique parameter data.

When an AOR QUIESCE is requested, no new transactions are routed to the AOR. Existing tasks are not affected. Only transactions with an affinity to the AOR continue to be routed. When all affinities have been removed, the AOR no longer receives any new transactions.

Note: 2147483647 is a special value for *ROUTEWGHT* indicating that the target is quiesced.

External resource name

CICSWLMActiveAOR

Length

120

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

Yes

Object type
CICSplex SM Manager

Copybook identifier
EYUt2484

Table 1090. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		EXPLODE(YES, NO)	No
		TRANNAME(value)	No
		WORKLOAD(value)	No
PERFORM SET	ACTIVATE	None	N/A
	QUIESCE	None	N/A

Table 1091. WLMWAOR FEEDBACK error codes		
Value	Code	Description
21	WLMWAOR_NO_AOR	Target region not defined

Table 1092. WLMWAOR resource table attributes							
Name	Datatype	Source	Len	Sum	Description	Default	Attr ID
AOR-3	CHAR	CPSM	8	DIFF	Target region name		5
CFUPDCNT	BINARY	CPSM	8	AVG	Coupling Facility update count		24
CON_STATUS	EYUDA	CPSM	4	LIKE	Target region contact status		7
CON_STATUS Output valid values	LOSTCON, N_A						
CPSMVER	CHAR	CPSM	4	DIFF	CICSplex SM version		28
EVENTS	EYUDA	CPSM	4	AVG	RTA event active		25
EVENTS Output valid values	NO, YES						
HLTHDUMP	EYUDA	CPSM	4	LIKE	Region is dumping		19
HLTHDUMP Output valid values	NO, YES						
HLTHMAXT	EYUDA	CPSM	4	LIKE	Region is at MAXTASKS		20
HLTHMAXT Output valid values	NO, YES						
HLTHNRM	EYUDA	CPSM	4	LIKE	MAS non responsive		27
HLTHNRM Output valid values	NO, YES						
HLTHSOS	EYUDA	CPSM	4	LIKE	Short on storage		17
HLTHSOS Output valid values	NO, YES						
HLTHSTALL	EYUDA	CPSM	4	LIKE	Region has stalled		18
HLTHSTALL Output valid values	NO, YES						
MAXTASKS	BINARY	CPSM	4	AVG	Maximum task count for region		22
OWSTATE	EYUDA	CPSM	4	LIKE	Optimization status		16
OWSTATE Output valid values	ACTIVE, INACTIVE, N_A						
READRS	BINARY	CPSM	2	AVG	RS server read interval	200	9
ROUTEWGHT	BINARY	CPSM	4	AVG	WLM routing weight for region		23
ROUTINGLOAD	BINARY	CPSM	4	AVG	Routing Load		21
RPTCMAS-4	CHAR	CPSM	8	DIFF	Reporting CMAS		29
RSPOOLID	CHAR	CPSM	8	DIFF	RS server pool name		26

Table 1092. WLMWAOR resource table attributes (continued)							
Name	Datatype	Source	Len	Sum	Description	Default	Attr ID
STATUS	EYUDA	CPSM	4	LIKE	Target region status		6
STATUS Input/output valid values	ACTIVE, QUIESCE						
STATUS Output valid values	QUIESCING, QUIESCED						
TASKINC	BINARY	CPSM	2	AVG	Task count increment value		13
TASKLOAD	BINARY	CPSM	4	AVG	Task load percentage		15
UPDATERS	BINARY	CPSM	1	AVG	RS Server update frequency	15	10
WLMHLTH	BINARY	CPSM	1	MAX	z/OS WLM health		30
WLMQMODE	EYUDA	CPSM	4	DIFF	Task load queue mode	ALL	12
WLMQMODE Input/output valid values	ALL, MAXTASK, N_A						
WLMTHRSH	BINARY	CPSM	1	AVG	Task load health threshold	60	11
WORKLOAD-1	CHAR	CPSM	8	DIFF	Workload name		4
WRKLOWNER-2	CHAR	CPSM	4	DIFF	System ID of workload owner		8

Chapter 448. WLMWDEF Resource Table

A CPSM Workload Manager object that describes a workload definition installed in an active workload.

This object is referenced within the scope of a workload. The workload name must be explicitly identified in the PARM option of the API GET command by coding the following text string:

```
PARM('WORKLOAD(workload).')
```

workload is the name of an active workload and is required. Alternatively, you can code the following text string:

```
PARM('WORKLOAD(*)').')
```

You can specify a workload name of * as a wildcard. Using this wildcard returns a WLMWDEF record for every workload with which the target region is associated. No other generic form of workload name can be specified. You must use an explicit workload name or the wildcard.

You can specify other parameters, but the workload name is required.

The **Primary** key field for this resource class is WORKLOAD.

The **Secondary** key field for this resource class is WRKLOWNER.

The **Tertiary** key field for this resource class is NAME.

The following action is supported:

DISCARD

Remove the installed definition.

The DISCARD action requires no unique parameter data.

External resource name

CICSWLMActiveDefinition

Length

128

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

Yes

Object type

CICSplex SM Manager

Copybook identifier

EYUt2489

Table 1093. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		WORKLOAD(value)	No

Table 1093. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
PERFORM SET	DISCARD	None	N/A

Table 1094. WLMWDEF FEEDBACK error codes		
Value	Code	Description
21	WLMWDEF_WLMDEF_NOT_FOUND	Workload management definition not found
22	WLMWDEF_NO_WORKLOAD	No workload
23	WLMWDEF_NO_WLMDEF	No workload management definition (WLMDEF)
24	WLMWDEF_WORKLOAD_FROZEN	Workload frozen
25	WLMWDEF_MAL_PENDING	Request scheduled for execution later

Table 1095. WLMWDEF resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
AORSCOPE	CHAR	CPSM	8	DIFF	Scope name of set of target systems	9
DESC	CHAR	CPSM	58	DIFF	Description	10
LUNAME	CHAR	CPSM	17	DIFF	Terminal LU name	7
NAME-3	CHAR	CPSM	8	DIFF	Workload definition	4
PROCESSTYPE	CHAR	CPSM	8	DIFF	Process type	12
TRANGRP	CHAR	CPSM	8	DIFF	Transaction group	6
USERID	CHAR	CPSM	8	DIFF	User ID	8
WORKLOAD-1	CHAR	CPSM	8	DIFF	Workload name	5
WRKLOWNER-2	CHAR	CPSM	4	DIFF	System ID of workload owner	11

Chapter 449. WLMAWORK Resource Table

A CICSplex SM Workload Manager object that describes an active workload.

The **Primary** key field for this resource class is WORKLOAD.

The **Secondary** key field for this resource class is WRKLOWNER.

The following action is supported:

SET

Modify attributes of the Active Workload. This action requires no unique parameter data.

The WLMAWORK object does not exist until the first CICS region that is defined as a router has initialized and created the workload. The creation of the workload is indicated in the CMAS EYULOG by message EYUWM0400I.

Update the entry for the ALGTYPE attribute in Table 440, WLMAWORK resource table attributes, changing the value in the Set column to YES.

External resource name

CICSWLMActiveWorkload

Length

152

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Manager

Copybook identifier

EYUt2483

Table 1096. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		EXPLODE(YES, NO)	No
SET		None	N/A

Table 1097. WLMAWORK FEEDBACK error codes		
Value	Code	Description
21	WLMAWORK_NO_WORKLOAD	No workload
22	WLMAWORK_WORKLOAD_FROZEN	Workload frozen
23	WLMAWORK_INVALID_ALGORITHM	Invalid algorithm type

Table 1098. WLMWORK resource table attributes							
Name	Datatype	Source	Len	Sum	Set	Description	Attr ID
ABENDCRIT	BINARY	CPSM	1	AVG	No	Acceptable level of abend probability	15
ABENDTHRESH	BINARY	CPSM	1	AVG	No	Acceptable target region load level	16
AFFAUTO	EYUDA	CPSM	4	LIKE	No	Automatic affinity creation	20
AFFAUTO Output valid values	YES, NO, N_A						
AFFINITY	EYUDA	CPSM	4	LIKE	No	Default affinity relation	5
AFFINITY Output valid values	GLOBAL, LUNAME, USERID, NONE, N_A, BAPPL, LOCKED						
AFFLIFE	EYUDA	CPSM	4	LIKE	No	Default affinity lifetime	6
AFFLIFE Output valid values	LOGON, PCONV, PERMANENT, SIGNON, SYSTEM, DELIMIT, NONE, N_A, ACTIVITY, PROCESS, UOW						
ALGTYPE	EYUDA	CPSM	4	LIKE	Yes	Default algorithm type	14
ALGTYPE Input/output valid values	QUEUE, GOAL, LNQUEUE, Lngoal						
AORCNT	BINARY	CPSM	2	AVG	No	Active target regions	8
AORSCOPE	CHAR	CPSM	8	DIFF	No	Default target scope	9
DESC	CHAR	CPSM	58	DIFF	No	Description	10
EVENTNAME	CHAR	CPSM	8	DIFF	No	Event name	17
OWSTATE	EYUDA	CPSM	4	LIKE	No	Optimization status	22
OWSTATE Output valid values	ACTIVE, PARTIAL, INACTIVE						
RPTCMAS-3	CHAR	CPSM	8	DIFF	No	Reporting CMAS	27
SHARED	EYUDA	CPSM	4	LIKE	No	Shared status	21
SHARED Output valid values	YES, NO						
STATUS	EYUDA	CPSM	4	LIKE	No	Workload status	12
STATUS Output valid values	ACTIVE, FROZEN						
TORCNT	BINARY	CPSM	2	AVG	No	Active routing regions	7
WAFFCNT	BINARY	CPSM	4	AVG	No	Active transaction group affinities	26
WDFECNT	BINARY	CPSM	4	AVG	No	Active workload definitions	23
WORKLOAD-1	CHAR	CPSM	8	DIFF	No	Name	4
WRKLOWNER-2	CHAR	CPSM	4	DIFF	No	Owning system ID	18
WTGPCNT	BINARY	CPSM	4	AVG	No	Active transaction groups	25
WTRNCNT	BINARY	CPSM	4	AVG	No	Active dynamic transactions	24

Chapter 450. WLMAWTOR Resource Table

A CICSplex SM Workload Manager object that describes a CICS system used as a TOR in an active workload.

This object is referenced within the scope of a workload. The workload name must be explicitly identified in the PARM option of the API GET command by coding the following text string:

```
PARM('WORKLOAD(workload).')
```

workload is the name of an active workload and is required. Alternatively, you can code the following text string:

```
PARM('WORKLOAD(*)').')
```

You can specify a workload name of * as a wildcard. Using this wildcard returns a WLMAWTOR record for every workload with which the target region is associated. No other generic form of workload name can be specified. You must use an explicit workload name or the wildcard.

You can specify other parameters, but the workload name is required.

The **Primary** key field for this resource class is WORKLOAD.

The **Secondary** key field for this resource class is WRKLOWNER.

The **Tertiary** key field for this resource class is TOR.

There are no object specific actions for this resource class.

External resource name

CICSWLMActiveTOR

Length

48

Usage

API or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

Yes

Object type

CICSplex SM Manager

Copybook identifier

EYUt2485

Table 1099. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		EXPLODE(YES, NO)	No
		WORKLOAD(value)	No

Table 1100. WLMAWTOR resource table attributes						
Name	Datatype	Source	Len	Sum	Description	Attr ID
CON_STATUS	EYUDA	CPSM	4	LIKE	Routing region contact status	7
CON_STATUS Output valid values	LOSTCON, N_A					
OWSTATE	EYUDA	CPSM	4	LIKE	Optimization status	10
OWSTATE Output valid values	ACTIVE, INACTIVE, N_A					
RPTCMAS-4	CHAR	CPSM	8	DIFF	Reporting CMAS	11
TOR-3	CHAR	CPSM	8	DIFF	Routing region name	5
TOROWNER	CHAR	CPSM	8	DIFF	Name of controlling CMAS	9
WORKLOAD-1	CHAR	CPSM	8	DIFF	Workload name	4
WRKLOWNER-2	CHAR	CPSM	4	DIFF	System ID of workload owner	8

Chapter 451. WLMDEF Resource Table

A CPSM Workload Manager Definition that describes the separation and affinity requirements for a set of dynamic transactions.

The **Primary** key field for this resource class is NAME.

The following action is supported:

INSTALL

Install the definition into a workload.

The parameter data for the INSTALL action is:

```
PARM('WORKLOAD(workload) OWNER(owner).')

where:

workload = (Required) Name of an active workload to process
           definition.
owner    = (Required) System ID of CMAS that created
workload, as identified by WLMWORK.
```

External resource name

CICSWLMDefinition

Length

160

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

Yes

Object type

CICSplex SM Definition

Copybook identifier

EYUt3508

Table 1101. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
UPDATE		None	N/A
REMOVE		None	N/A
PERFORM	INSTALL	OWNER(value)	Yes
SET		WORKLOAD(value)	Yes

Table 1101. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
	ADDTOGRP	RESGROUP(value)	Yes

Table 1102. WLMDEF FEEDBACK error codes		
Value	Code	Description
1	WLMDEF_INV_DATA	Attribute data invalid
2	WLMDEF_REC_NOT_FOUND	Requested resource not found
3	WLMDEF_INV_REFERENCE	not found
4	WLMDEF_REC_EXISTS	Resource already exists
5	WLMDEF_REC_CHANGED	Resource definition already changed
21	WLMDEF_NO_WLMDEF	No workload management definition
22	WLMDEF_NO_WORKLOAD	No workload
23	WLMDEF_WORKLOAD_FROZEN	Workload frozen
24	WLMDEF_MAL_PENDING	Request scheduled for execution later
25	WLMDEF_PARMS_IGNORED	Parameters ignored
26	WLMDEF_NODEFS_INSTALLED	No definitions installed
27	WLMDEF_AORSCOPE_NOT_FOUND	AOR scope not found
28	WLMDEF_TRANGRP_NOT_FOUND	Transaction group not found

Table 1103. WLMDEF resource table attributes									
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
AORSCOPE	CHAR	CPSM	8	Yes	DIFF	Scope name of set of target systems			9
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			14
CHANGEAGENT Input/output valid values	DREPAPI								
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			17
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification			1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			16
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created			15
DESC	CHAR	CPSM	58	No	DIFF	Description			10
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999	13
LUNAME	CHAR	CPSM	17	Yes	DIFF	Terminal LU name			7
NAME-1	CHAR	CPSM	8	Yes	DIFF	Workload management definition			5
PROCESSTYPE	CHAR	CPSM	8	Yes	DIFF	BTS process type	*		11
TRANGRP	CHAR	CPSM	8	No	DIFF	Transaction group			6
USERID	CHAR	CPSM	8	Yes	DIFF	User ID			8

Chapter 452. WLMGROUP Resource Table

A CPSM Workload Manager Definition that provides the association anchor for a set of WLMDEF definitions. References to a WLMGROUP are inferred to be references to the set of associated WLMDEF instances.

The **Primary** key field for this resource class is NAME.

The following action is supported:

INSTALL

Install the set of WLMDEF definitions.

The parameter data for the INSTALL action is:

```
PARM('WORKLOAD(workload) OWNER(owner).')  
  
where:  
  
workload = (Required) Name of an active workload to process group.  
owner    = (Required) System ID of CMAS that created  
workload, as identified by WLMAWORK.
```

External resource name

CICSWLMGroup

Length

112

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

Yes

Object type

CICSplex SM Definition

Copybook identifier

EYUt3506

Table 1104. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
UPDATE		None	N/A
REMOVE		None	N/A
PERFORM	INSTALL	OWNER(value)	Yes
SET		WORKLOAD(value)	Yes

Table 1104. Valid CPSM operations (continued)			
Operations	Actions	Parameters	Required
	ADDTOSPC	SPEC(value)	Yes

Table 1105. WLMGROUP FEEDBACK error codes		
Value	Code	Description
1	WLMGROUP_INV_DATA	Attribute data invalid
2	WLMGROUP_REC_NOT_FOUND	Requested resource not found
3	WLMGROUP_INV_REF	Not found
4	WLMGROUP_REC_EXISTS	Resource already exists
5	WLMGROUP_REC_CHANGED	Resource definition already changed
21	WLMGROUP_NO_WLMGROUP	No workload management group
22	WLMGROUP_NO_WORKLOAD	No workload
23	WLMGROUP_WORKLOAD_FROZEN	Workload frozen
24	WLMGROUP_MAL_PENDING	Request scheduled for execution later
25	WLMGROUP_PARM_IGNORED	Parameters ignored
26	WLMGROUP_NODEFS_INSTALLED	No definitions installed
27	WLMGROUP_NODEFS_ASSOCIATED	No definitions in group

Table 1106. WLMGROUP resource table attributes									
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
CHANGEAGENT	CV DAS	CPSM	4	No	LIKE	Last modification agent			8
CHANGEAGENT Input/ output valid values	DREPAPI								
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			11
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification			1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			10
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created			9
DESC	CHAR	CPSM	58	No	DIFF	Description			6
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999	7
NAME-1	CHAR	CPSM	8	Yes	DIFF	Workload management group			5

Chapter 453. WLMINGRP Resource Table

A CPSM Workload Manager Definition that describes the membership of a workload definition (WLMDEF) in a workload group (WLMGROUP). A WLMDEF can be a member of multiple WLMGROUPs.

The **Primary** key field for this resource class is GROUP.

The **Secondary** key field for this resource class is DEF.

There are no object specific actions for this resource class.

External resource name
CICSWLMResourceInGroup

Length
56

Usage
API or Batch Utility or WUI or CICS Management Client Interface

API view
No

CMAS context
No

SCOPE applies
No

Only query CMASs in workload
No

Object type
CICSplex SM Definition

Copybook identifier
EYUt5378

Table 1107. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 1108. WLMINGRP FEEDBACK error codes		
Value	Code	Description
1	WLMINGRP_INV_DATA	Attribute data invalid
2	WLMINGRP_REC_NOT_FOUND	Requested resource not found
3	WLMINGRP_INV_REFERENCE	Attribute references an invalid resource
4	WLMINGRP_REC_EXISTS	Resource already exists

Table 1109. WLMINGRP resource table attributes							
Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	7

Table 1109. WLMINGRP resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	10
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	9
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	8
DEF-2	CHAR	CPSM	8	Yes	DIFF	Name of workload management (WLM) definition	6
GROUP-1	CHAR	CPSM	8	Yes	DIFF	Workload management (WLM) group	5

Chapter 454. WLMINSPC Resource Table

A CPSM Workload Manager Definition that describes the membership of a workload group (WLMGROUP) in a workload specification (WLMSPEC). A WLMGROUP can be a member of multiple WLMSEPCs.

The **Primary** key field for this resource class is NAME.

The **Secondary** key field for this resource class is GROUP.

There are no object specific actions for this resource class.

External resource name

CICSWLMGroupInSpecification

Length

56

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSplex SM Definition

Copybook identifier

EYUt5123

Table 1110. Valid CPSM operations

Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
REMOVE		None	N/A

Table 1111. WLMINSPC FEEDBACK error codes

Value	Code	Description
1	WLMINSPC_INV_DATA	Attribute data invalid
2	WLMINSPC_REC_NOT_FOUND	Requested resource not found
3	WLMINSPC_INV_REFERENCE	Attribute references an invalid resource
4	WLMINSPC_REC_EXISTS	Resource already exists

Table 1112. WLMINSPC resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent	7

Table 1112. WLMINSPC resource table attributes (continued)

Name	Datatype	Source	Len	Req	Sum	Description	Attr ID
CHANGEAGENT Input/output valid values	DREPAPI						
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release	10
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification	1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID	9
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created	8
GROUP-2	CHAR	CPSM	8	Yes	DIFF	Workload management (WLM) group	6
NAME-1	CHAR	CPSM	8	Yes	DIFF	Workload management specification	5

Chapter 455. WLMSPEC Resource Table

A CPSM Workload Manager Definition that describes the control directives for generating a workload. Using group associators a WLMSPEC object can determine which WLMDEF instances are to be installed into the workload. Using scope link associators (LNKSWSCS), a WLMSPEC object can determine which CICS systems are to be referenced as TORs. A CICS system acting as a TOR can have a scope link associator to only one WLMSPEC.

The **Primary** key field for this resource class is NAME.

External resource name

CICSWLMSpecification

Length

144

Usage

API or Batch Utility or WUI or CICS Management Client Interface

API view

No

CMAS context

No

SCOPE applies

No

Only query CMASs in workload

No

Object type

CICSPlex SM Definition

Copybook identifier

EYUt3513

Table 1113. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
CREATE		None	N/A
UPDATE		None	N/A
REMOVE		None	N/A
PERFORM SET	ADDSYSGRP	FORCE	Yes
		GROUP(value)	Yes
		NONE	Yes
		NULL	Yes
	ADDSYSDEF	SYSTEM(value)	Yes

Table 1114. WLMSPEC FEEDBACK error codes		
Value	Code	Description
1	WLMSPEC_INV_DATA	Attribute data invalid

Table 1114. WLMSPEC FEEDBACK error codes (continued)

Value	Code	Description
2	WLMSPEC_REC_NOT_FOUND	Requested resource not found
3	WLMSPEC_INV_REFERENCE	Does not exist
4	WLMSPEC_REC_EXISTS	Resource already exists
5	WLMSPEC_REC_CHANGED	Resource definition already changed
21	WLMSPEC_ABEND_COMBINATION	Abend load must be less than abend probability
22	WLMSPEC_AORSCOPE_NOT_FOUND	AOR scope not found
23	WLMSPEC_LNKASSOC_EXISTS	Association already exists

Table 1115. WLMSPEC resource table attributes

Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
ABENDCRIT	BINARY	CPSM	1	Yes	AVG	Acceptable level of abend probability	0	2-99	14
ABENDCRIT Input/output valid values	0								
ABENDTHRESH	BINARY	CPSM	1	Yes	AVG	Acceptable abend load threshold	0	1-98	15
ABENDTHRESH Input/output valid values	0								
AFFAUTO	EYUDA	CPSM	4	No	LIKE	Automatic affinity creation option	N_A		17
AFFAUTO Input/output valid values	YES, NO, N_A								
AFFINITY	EYUDA	CPSM	4	No	LIKE	Default affinity relationship			7
AFFINITY Input/output valid values	N_A, GLOBAL, LUNAME, USERID, BAPPL, LOCKED								
AFFLIFE	EYUDA	CPSM	4	No	LIKE	Default affinity lifetime			8
AFFLIFE Input/output valid values	N_A, LOGON, PCONV, DELIMIT, PERMANENT, SIGNON, SYSTEM, ACTIVITY, PROCESS, UOW								
ALGTYPE	EYUDA	CPSM	4	Yes	LIKE	Algorithm type			10
ALGTYPE Input/output valid values	GOAL, QUEUE, LNQUEUE, LNGOAL								
AORSCOPE	CHAR	CPSM	8	Yes	DIFF	Default target scope			6
CHANGEAGENT	CVDAS	CPSM	4	No	LIKE	Last modification agent			19
CHANGEAGENT Input/output valid values	DREPAPI								
CHANGEAGREL	CHAR	CPSM	4	No	DIFF	Last modification agent release			22
CHANGETIME	DATETIME	CPSM	8	Yes	MAX	Last modification			1
CHANGEUSRID	CHAR	CPSM	8	No	DIFF	Last modification user ID			21
CREATETIME	DATETIME	CPSM	8	Yes	MAX	Time created			20
DESC	CHAR	CPSM	58	No	DIFF	Description			12
DESCCODEPAGE	BINARY	CPSM	4	No	DIFF	Description code page	37	0-99999999	18
EVENTNAME	CHAR	CPSM	8	No	DIFF	RTA event			13
MATCH	EYUDA	CPSM	4	Yes	LIKE	Primary search criterion			9

Table 1115. WLMSPEC resource table attributes (continued)									
Name	Datatype	Source	Len	Req	Sum	Description	Default	Value Range	Attr ID
MATCH Input/output valid values	LUNAME, USERID								
NAME-1	CHAR	CPSM	8	Yes	DIFF	Name			5

Chapter 456. WLPSErv Resource Table

This is reserved for future use. A CICS Resource that allows you to browse the LINK enabled services installed into a Liberty JVM server.

The **Primary** key field for this resource class is WLPSERVICE.

The **Secondary** key field for this resource class is JVMSERVER.

External resource name

CICSWLPService

Length

1064

Usage

API or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0218

Table 1116. Valid CPSM operations

Operations	Actions	Parameters	Required
Not applicable			

Table 1117. WLPSErv resource table attributes

Name	Datatype	Source	Len	Sum	Description	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	CICS System Name	4
EYU_CICSREL	CHAR	CPSM	4	DIFF	CICS Release	
EYU_RESERVED	CHAR	CPSM	4	N/A	Reserved	
BUNDLE	CHAR	INQ	8	SUM	CICS BUNDLE name	
BUNDLEPART	CHAR	INQ	255	DIFF	CICS BUNDLEPART name	5
JVMSERVER-2	CHAR	CPSM	8	AVG	JVM server	3
SRVCNAME	CHAR	INQ	255	DIFF	Name of the service reference	8
SRVCSTATUS	CVDAS	INQ	4	LIKE	Service status	2
SRVCSTATUS Input/output valid values		ACTIVE, INACTIVE				
WLPAPPL	CHAR	INQ	255	DIFF	Name of the Liberty application	6
WLPCCLASS	CHAR	INQ	255	DIFF	Name of the Java implementation class	7
WLPSERVICE-1	BINARY	INQ	8	DIFF	Numeric service ID	1

Chapter 457. WORKREQ Resource Table

A CICS Resource that describes EJB work requests and the transactions associated with them.

The **Primary** key for this resource class is NAME.

The following actions are supported:

PURGE

Purge a selected work request.

FORCEPURGE

Forcepurge a selected work request.

External resource name

CICSWorkRequest

Length

176

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0136

Table 1118. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		WORKTYPE(IIOP, SOAP)	No
PERFORM	PURGE	WORKTYPE(IIOP, SOAP)	No
SET	FORCEPURGE	WORKTYPE(IIOP, SOAP)	No

Table 1119. WORKREQ resource table attributes									
Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			2
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
CLIENTIPADDR	CHAR	INQ	39	DIFF	No	Client IP address			

Table 1119. WORKREQ resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
CLNTIPFAMILY	CVDAS	INQ	4	LIKE	No	The format of the Client IP address		E640 E650	17
CLNTIPFAMILY Output valid values	IPV4, IPV6, NOTAPPLIC								
CORBASERVER	CHAR	INQ	4	DIFF	No	Associated CorbaServer			15
LISTENERPORT	BINARY	INQ	4	AVG	No	Host port that received the request			5
NAME-1	CHAR	INQ	8	DIFF	No	Work request			1
OAPPLID	CHAR	INQ	8	DIFF	No	Originating tasks application ID			7
OTASK	DECIMAL	INQ	4	AVG	No	Task that received the request			8
OTRANSID	CHAR	INQ	4	DIFF	No	Transaction ID that received the request			9
PURGETYPE	CVDAS	INQ	4	LIKE	Yes	Purge type		EALL	16
PURGETYPE Input/output valid values	PURGE, FORCEPURGE								
REQUESTID	BINARY	INQ	4	AVG	No	Current request ID			12
STACK	BINARY	INQ	4	AVG	No	Stack level of call			13
TASK	DECIMAL	INQ	4	AVG	No	Local task number			4
TRANSID	CHAR	INQ	4	DIFF	No	Local transaction ID			6
TSYSTEM	CHAR	INQ	50	DIFF	No	Address of target CICS system			10
TSYSTYPE	CVDAS	INQ	4	LIKE	No	Format of the Target system address		E640 E650	18
TSYSTYPE Output valid values	APPLID, IPV4, IPV6, NOTAPPLIC								
WORKTYPE	CVDAS	INQ	4	LIKE	No	Type of work being performed	IIOP		14
WORKTYPE Input/output valid values	IIOP, SOAP								

Chapter 458. XMLTRANS Resource Table

A CICS resource that provides information about transformations between XML and application data.

The **Primary** key field for this resource class is NAME.

The following actions are supported:

INQUIRE

Inquire about an XMLTRANSFORM resource. The resource must be installed in the CICS region.

External resource name

CICSXmltransform

Length

688

Usage

API or WUI or CICS Management Client Interface or EVALDEF

API view

Yes

CMAS context

No

SCOPE applies

Yes

Only query CMASs in workload

No

Object type

CICS Resource

Copybook identifier

EYUt0196

Table 1120. Valid CPSM operations			
Operations	Actions	Parameters	Required
GET		None	N/A
SET		None	N/A

Table 1121. XMLTRANS resource table attributes									
Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
EYU_CICSNAME	CHAR	CPSM	8	DIFF	No	CICS System Name			
EYU_CICSREL	CHAR	CPSM	4	DIFF	No	CICS Release			
EYU_RESERVED	CHAR	CPSM	4	N/A	No	Reserved			
BASDEFINEVER	BINARY	CPSM	1	AVG	No	BAS resource definition version	0		16
BUNDLE	CHAR	INQ	8	DIFF	No	Bundle name			4
CCSID	BINARY	INQ	4	LIKE	No	Coded character set ID		E640 E650	3
CHANGEAGENT	CVDAS	INQ	4	LIKE	No	Last modification agent			6
CHANGEAGENT Input/output valid values	CSDAPI, CSDBATCH, DREPAPI, DYNAMIC, CREATESPI, NOTAPPLIC								

Table 1121. XMLTRANS resource table attributes (continued)

Name	Datatype	Source	Len	Sum	Set	Description	Default	Get Invalid	Attr ID
CHANGEAGREL	CHAR	INQ	4	DIFF	No	Last modification agent release			7
CHANGETIME	DATETIME	INQ	8	MAX	No	Last modification time			14
CHANGEUSRID	CHAR	INQ	8	DIFF	No	Last modification user ID			8
DEFINESOURCE	CHAR	INQ	8	DIFF	No	Source of the resource definition			9
DEFINETIME	DATETIME	INQ	8	MAX	No	Creation time			13
ENABLESTATUS	CVDAS	CPSM	4	LIKE	No	Enabled status			2
ENABLESTATUS Input/output valid values	ENABLED, DISABLED								
ENABLESTATUS Output valid values	ENABLING, DISABLING								
INSTALLAGENT	CVDAS	INQ	4	LIKE	No	Installation agent			10
INSTALLAGENT Input/output valid values	BUNDLE, DYNAMIC								
INSTALLTIME	DATETIME	INQ	8	MAX	No	Installation time			15
INSTALLUSRID	CHAR	INQ	8	DIFF	No	Installation user ID			11
MAPPINGLEVEL	CHAR	INQ	8	MAX	No	Mapping level			24
MAPPINGRNUM	BINARY	INQ	4	MAX	No	Mapping release number			23
MAPPINGVNUM	BINARY	INQ	4	MAX	No	Mapping version number			22
MINRUNLEVEL	CHAR	INQ	8	MAX	No	Minimum runtime level			25
MINRUNRNUM	BINARY	INQ	4	MAX	No	Minimum runtime release number			27
MINRUNVNUM	BINARY	INQ	4	MAX	No	Minimum runtime version number			26
NAME-1	CHAR	INQ	32	DIFF	No	Name			1
USECOUNT	BINARY	STAT	4	MAX	No	Use count			28
VALIDATIONST	CVDAS	INQ	4	LIKE	Yes	Validation status			18
VALIDATIONST Input/output valid values	VALIDATION, NOVALIDATION								
XMLSCHEMA	CHAR	INQ	255	MAX	No	XML schema			20
XSDBIND	CHAR	INQ	255	MAX	No	XSD binding			19

Notices

This information was developed for products and services offered in the United States of America. This material might be available from IBM® in other languages. However, you may be required to own a copy of the product or product version in that language in order to access it.

IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property rights may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not grant you any license to these patents. You can send license inquiries, in writing, to:

*IBM Director of Licensing
IBM Corporation
North Castle Drive, MD-NC119
Armonk, NY 10504-1785
United States of America*

For license inquiries regarding double-byte character set (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

*Intellectual Property Licensing
Legal and Intellectual Property Law
IBM Japan Ltd.
19-21, Nihonbashi-Hakozakicho, Chuo-ku
Tokyo 103-8510, Japan*

INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION “AS IS” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-IBM websites are provided for convenience only and do not in any manner serve as an endorsement of those websites. The materials at those websites are not part of the materials for this IBM product and use of those websites is at your own risk.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who want to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact

*IBM Director of Licensing
IBM Corporation
North Castle Drive, MD-NC119 Armonk,
NY 10504-1785
United States of America*

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this document and all licensed material available for it are provided by IBM under terms of the IBM Client Relationship Agreement, IBM International Programming License Agreement, or any equivalent agreement between us.

The performance data discussed herein is presented as derived under specific operating conditions. Actual results may vary.

Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to actual people or business enterprises is entirely coincidental.

COPYRIGHT LICENSE:

This information contains sample application programs in source language, which illustrate programming techniques on various operating platforms. You may copy, modify, and distribute these sample programs in any form without payment to IBM, for the purposes of developing, using, marketing or distributing application programs conforming to the application programming interface for the operating platform for which the sample programs are written. These examples have not been thoroughly tested under all conditions. IBM, therefore, cannot guarantee or imply reliability, serviceability, or function of these programs. The sample programs are provided "AS IS", without warranty of any kind. IBM shall not be liable for any damages arising out of your use of the sample programs.

Programming interface information

IBM CICS supplies some documentation that can be considered to be Programming Interfaces, and some documentation that cannot be considered to be a Programming Interface.

Programming Interfaces that allow the customer to write programs to obtain the services of CICS Transaction Server for z/OS, Version 5 Release 4 (CICS TS 5.4) are included in the following sections of the online product documentation:

- [Developing applications](#)
- [Developing system programs](#)
- [Securing overview](#)
- [Developing for external interfaces](#)
- [Application development reference](#)
- [Reference: system programming](#)
- [Reference: connectivity](#)

Information that is NOT intended to be used as a Programming Interface of CICS TS 5.4, but that might be misconstrued as Programming Interfaces, is included in the following sections of the online product documentation:

- [Troubleshooting and support](#)
- [Reference: diagnostics](#)

If you access the CICS documentation in manuals in PDF format, Programming Interfaces that allow the customer to write programs to obtain the services of CICS TS 5.4 are included in the following manuals:

- Application Programming Guide and Application Programming Reference
- Business Transaction Services

- Customization Guide
- C++ OO Class Libraries
- Debugging Tools Interfaces Reference
- Distributed Transaction Programming Guide
- External Interfaces Guide
- Front End Programming Interface Guide
- IMS Database Control Guide
- Installation Guide
- Security Guide
- CICS Transactions
- CICSplex System Manager (CICSplex SM) Managing Workloads
- CICSplex SM Managing Resource Usage
- CICSplex SM Application Programming Guide and Application Programming Reference
- Java™ Applications in CICS

If you access the CICS documentation in manuals in PDF format, information that is NOT intended to be used as a Programming Interface of CICS TS 5.4, but that might be misconstrued as Programming Interfaces, is included in the following manuals:

- Data Areas
- Diagnosis Reference
- Problem Determination Guide
- CICSplex SM Problem Determination Guide

Trademarks

IBM, the IBM logo, and ibm.com® are trademarks or registered trademarks of International Business Machines Corp., registered in many jurisdictions worldwide. Other product and service names might be trademarks of IBM or other companies. A current list of IBM trademarks is available on the Web at [Copyright and trademark information at www.ibm.com/legal/copytrade.shtml](http://www.ibm.com/legal/copytrade.shtml).

Adobe, the Adobe logo, PostScript, and the PostScript logo are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States, and/or other countries.

Apache, Apache Axis2, Apache Maven, Apache Ivy, the Apache Software Foundation (ASF) logo, and the ASF feather logo are trademarks of Apache Software Foundation.

Gradle and the Gradlephant logo are registered trademark of Gradle, Inc. and its subsidiaries in the United States and/or other countries.

Intel, Intel logo, Intel Inside, Intel Inside logo, Intel Centrino, Intel Centrino logo, Celeron, Intel Xeon, Intel SpeedStep, Itanium, and Pentium are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

Java and all Java-based trademarks and logos are trademarks or registered trademarks of Oracle and/or its affiliates.

The registered trademark Linux® is used pursuant to a sublicense from the Linux Foundation, the exclusive licensee of Linus Torvalds, owner of the mark on a worldwide basis.

Microsoft, Windows, Windows NT, and the Windows logo are trademarks of Microsoft Corporation in the United States, other countries, or both.

Red Hat®, and Hibernate® are trademarks or registered trademarks of Red Hat, Inc. or its subsidiaries in the United States and other countries.

Spring Boot is a trademark of Pivotal Software, Inc. in the United States and other countries.

UNIX is a registered trademark of The Open Group in the United States and other countries.

Zowe™, the Zowe logo and the Open Mainframe Project™ are trademarks of The Linux Foundation.

The Stack Exchange name and logos are trademarks of Stack Exchange Inc.

Terms and conditions for product documentation

Permissions for the use of these publications are granted subject to the following terms and conditions.

Applicability

These terms and conditions are in addition to any terms of use for the IBM website.

Personal use

You may reproduce these publications for your personal, noncommercial use provided that all proprietary notices are preserved. You may not distribute, display or make derivative work of these publications, or any portion thereof, without the express consent of IBM.

Commercial use

You may reproduce, distribute and display these publications solely within your enterprise provided that all proprietary notices are preserved. You may not make derivative works of these publications, or reproduce, distribute or display these publications or any portion thereof outside your enterprise, without the express consent of IBM.

Rights

Except as expressly granted in this permission, no other permissions, licenses or rights are granted, either express or implied, to the publications or any information, data, software or other intellectual property contained therein.

IBM reserves the right to withdraw the permissions granted herein whenever, in its discretion, the use of the publications is detrimental to its interest or, as determined by IBM, the above instructions are not being properly followed.

You may not download, export or re-export this information except in full compliance with all applicable laws and regulations, including all United States export laws and regulations.

IBM MAKES NO GUARANTEE ABOUT THE CONTENT OF THESE PUBLICATIONS. THE PUBLICATIONS ARE PROVIDED "AS-IS" AND WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT, AND FITNESS FOR A PARTICULAR PURPOSE.

IBM online privacy statement

IBM Software products, including software as a service solutions, (*Software Offerings*) may use cookies or other technologies to collect product usage information, to help improve the end user experience, to tailor interactions with the end user or for other purposes. In many cases no personally identifiable information (PII) is collected by the Software Offerings. Some of our Software Offerings can help enable you to collect PII. If this Software Offering uses cookies to collect PII, specific information about this offering's use of cookies is set forth below:

For the CICSplex SM Web User Interface (main interface):

Depending upon the configurations deployed, this Software Offering may use session and persistent cookies that collect each user's user name and other PII for purposes of session management, authentication, enhanced user usability, or other usage tracking or functional purposes. These cookies cannot be disabled.

For the CICSplex SM Web User Interface (data interface):

Depending upon the configurations deployed, this Software Offering may use session cookies that collect each user's user name and other PII for purposes of session management, authentication, or other usage tracking or functional purposes. These cookies cannot be disabled.

For the CICSplex SM Web User Interface ("hello world" page):

Depending upon the configurations deployed, this Software Offering may use session cookies that do not collect PII. These cookies cannot be disabled.

For CICS Explorer:

Depending upon the configurations deployed, this Software Offering may use session and persistent preferences that collect each user's user name and password, for purposes of session management, authentication, and single sign-on configuration. These preferences cannot be disabled, although storing a user's password on disk in encrypted form can only be enabled by the user's explicit action to check a check box during sign-on.

If the configurations deployed for this Software Offering provide you, as customer, the ability to collect PII from end users via cookies and other technologies, you should seek your own legal advice about any laws applicable to such data collection, including any requirements for notice and consent.

For more information about the use of various technologies, including cookies, for these purposes, see [IBM Privacy Policy](#) and [IBM Online Privacy Statement](#), the section entitled *Cookies, Web Beacons and Other Technologies* and the [IBM Software Products and Software-as-a-Service Privacy Statement](#).

Index

A

- ABCODE field
 - in RULE resource table [1079](#)
- ABCODEC field
 - in HTASK resource table [655](#)
 - in TASK resource table [1123](#)
- ABCODEO field
 - in HTASK resource table [655](#)
 - in TASK resource table [1123](#)
- ABDCMPSTATE field
 - in WLMAROUT resource table [1281](#)
- ABENDCNT field
 - in MLOCTRAN resource table [837](#)
- ABENDCRIT field
 - in TRANGRP resource table [1201](#)
 - in WLMATGRP resource table [1289](#)
 - in WLMAWORK resource table [1301](#)
 - in WLMSPEC resource table [1313](#)
- ABENDTHRESH field
 - in TRANGRP resource table [1201](#)
 - in WLMATGRP resource table [1289](#)
 - in WLMAWORK resource table [1301](#)
 - in WLMSPEC resource table [1313](#)
- ABORTCNT field
 - in DB2THRD resource table [323](#)
 - in MDB2THRD resource table [815](#)
- ABORTS field
 - in DB2ENTRY resource table [311](#)
- ACAPPLNAME field
 - in HTASK resource table [655](#)
 - in TASK resource table [1123](#)
 - in TASKASSC resource table [1113](#)
- ACCEPTAFTRQD field
 - in MTRANCLS resource table [911](#)
 - in TRANCLAS resource table [1187](#)
- ACCEPTIMMED field
 - in MTRANCLS resource table [911](#)
 - in TRANCLAS resource table [1187](#)
- ACCESSCNT field
 - in MTDQGBL resource table [907](#)
 - in TDQGBL resource table [1169](#)
- ACCESSMETH field
 - in FILEDEF resource table [617](#)
- ACCESSMETHOD field
 - in CONNDEF resource table [157](#)
 - in CONNECT resource table [164](#)
 - in DSNAME resource table [345](#)
 - in LOCFILE resource table [757](#)
 - in MCONNECT resource table [811](#)
 - in MLOCFILE resource table [833](#)
 - in TERMNL resource table [1179](#)
- ACCESSTYPE field
 - in CICSDSA resource table [79](#)
 - in CICSPLX resource table [87](#)
 - in CMASLIST resource table [125](#)
 - in MCICSDSA resource table [799](#)
- ACCOUNTREC field
 - in DB2CDEF resource table [295](#)
 - in DB2CONN resource table [301](#)
 - in DB2EDEF resource table [307](#)
 - in DB2ENTRY resource table [311](#)
- ACMAJORVER field
 - in HTASK resource table [655](#)
 - in TASK resource table [1123](#)
 - in TASKASSC resource table [1113](#)
- ACMICROVER field
 - in HTASK resource table [655](#)
 - in TASK resource table [1123](#)
 - in TASKASSC resource table [1113](#)
- ACMINORVER field
 - in HTASK resource table [655](#)
 - in TASK resource table [1123](#)
 - in TASKASSC resource table [1113](#)
- ACOPERNAME field
 - in HTASK resource table [655](#)
 - in TASK resource table [1123](#)
 - in TASKASSC resource table [1113](#)
- ACPLATNAME field
 - in HTASK resource table [655](#)
 - in TASK resource table [1123](#)
 - in TASKASSC resource table [1113](#)
- ACQNUM field
 - in FEPINODE resource table [595](#)
- ACQSTATUS field
 - in CRESFECO resource table [207](#)
 - in CRESTERM resource table [253](#)
 - in FENODDEF resource table [589](#)
 - in FEPICONN resource table [593](#)
 - in FEPINODE resource table [595](#)
 - in FEPOODEF resource table [605](#)
 - in MFEPICON resource table [823](#)
 - in MTERMNL resource table [909](#)
 - in TERMNL resource table [1179](#)
- ACQUIRES field
 - in FEPICONN resource table [593](#)
 - in MFEPICON resource table [823](#)
- ACTDEF field
 - in EACTNTFN resource table [357](#)
- ACTHPTCBS field
 - in CICSRRGN resource table [89](#)
- ACTION field
 - in AACTV resource table [21](#)
 - in EACTNTFN resource table [357](#)
 - in ECSYSCHG resource table [359](#)
 - in EPLEXCHG resource table [441](#)
 - in ERMCAIMD resource table [445](#)
 - in ERMCATOM resource table [447](#)
 - in ERMCBUND resource table [449](#)
 - in ERMCCONN resource table [451](#)
 - in ERMCDDB2C resource table [453](#)
 - in ERMCDDB2E resource table [455](#)
 - in ERMCDDB2P resource table [457](#)
 - in ERMCDDB2T resource table [459](#)

AFFINITY field (*continued*)
 in WLMWORK resource table [1301](#)
 in WLMSPEC resource table [1313](#)

AFFKEY field
 in WLMATAFF resource table [1283](#)

AFFLIFE field
 in TRANGRP resource table [1201](#)
 in WLMATGRP resource table [1289](#)
 in WLMWORK resource table [1301](#)
 in WLMSPEC resource table [1313](#)

AGE field
 in JVM resource table [713](#)
 in UOW resource table [1253](#)

AIDS field
 in CONNECT resource table [164](#)
 in MCONNECT resource table [811](#)

AIMODEL resource table [19](#)

AINSCREQ field
 in CICSRRN resource table [89](#)
 in MCICSRRN resource table [803](#)

AINSFALL field
 in CSYSDEF resource table [281](#)
 in MAS resource table [787](#)

AINSMREQ field
 in CICSRRN resource table [89](#)
 in MCICSRRN resource table [803](#)

AINSPROG field
 in CICSRRN resource table [89](#)

AINSSTAT field
 in CICSRRN resource table [89](#)
 in MCICSRRN resource table [803](#)

AIXCNT field
 in CPLEXDEF resource table [169](#)
 in CPLXCMAS resource table [173](#)

AKP field
 in CICSRRN resource table [89](#)

ALERTMSGEND field
 in ACTION resource table [17](#)

ALERTMSGSTRT field
 in ACTION resource table [17](#)

ALGTYPE field
 in TRANGRP resource table [1201](#)
 in WLMATGRP resource table [1289](#)
 in WLMWORK resource table [1301](#)
 in WLMSPEC resource table [1313](#)

ALIAS field
 in RASPROC resource table [1019](#)
 in RDSCPROC resource table [1021](#)
 in SYSRES resource table [1109](#)
 in TRANDEF resource table [1191](#)

ALLCFAILLINK field
 in IPCONN resource table [687](#)

ALLCFAILOTH field
 in IPCONN resource table [687](#)

ALLOCAGE field
 in JVM resource table [713](#)

ALLOCATES field
 in CONNECT resource table [164](#)
 in FEPITRGT resource table [603](#)
 in HTASK resource table [655](#)
 in MCONNECT resource table [811](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)

ALLOCQLIMIT field

ALLOCQLIMIT field (*continued*)
 in CONNECT resource table [164](#)
 in MCONNECT resource table [811](#)

ALOADTIME field
 in LOADACT resource table [751](#)
 in LOADER resource table [753](#)
 in PROGRAM resource table [1001](#)

ALOADWAIT field
 in LOADACT resource table [751](#)
 in LOADER resource table [753](#)

ALTKEY01 field
 in FSEGDEF resource table [633](#)

ALTKEY02 field
 in FSEGDEF resource table [633](#)

ALTKEY03 field
 in FSEGDEF resource table [633](#)

ALTKEY04 field
 in FSEGDEF resource table [633](#)

ALTKEY05 field
 in FSEGDEF resource table [633](#)

ALTKEY06 field
 in FSEGDEF resource table [633](#)

ALTKEY07 field
 in FSEGDEF resource table [633](#)

ALTKEY08 field
 in FSEGDEF resource table [633](#)

ALTKEY09 field
 in FSEGDEF resource table [633](#)

ALTKEY10 field
 in FSEGDEF resource table [633](#)

ALTKEY11 field
 in FSEGDEF resource table [633](#)

ALTKEY12 field
 in FSEGDEF resource table [633](#)

ALTKEY13 field
 in FSEGDEF resource table [633](#)

ALTKEY14 field
 in FSEGDEF resource table [633](#)

ALTKEY15 field
 in FSEGDEF resource table [633](#)

ALTKEY16 field
 in FSEGDEF resource table [633](#)

ALTKEY17 field
 in FSEGDEF resource table [633](#)

ALTKEY18 field
 in FSEGDEF resource table [633](#)

ALTKEY19 field
 in FSEGDEF resource table [633](#)

ALTKEY20 field
 in FSEGDEF resource table [633](#)

ALTKEY21 field
 in FSEGDEF resource table [633](#)

ALTKEY22 field
 in FSEGDEF resource table [633](#)

ALTKEY23 field
 in FSEGDEF resource table [633](#)

ALTKEY24 field
 in FSEGDEF resource table [633](#)

ALTPAGECOL field
 in TYPTMDEF resource table [1239](#)

ALTPAGEHT field
 in TERMNL resource table [1179](#)

ALTPAGEROW field
 in TYPTMDEF resource table [1239](#)

ALTPAGEWD field
 in TERMNL resource table [1179](#)
 ALTPRINTCOPY field
 in TERMDEF resource table [1173](#)
 ALTPRINTER field
 in TERMDEF resource table [1173](#)
 in TERMNL resource table [1179](#)
 ALTPRTCOPYST field
 in TERMNL resource table [1179](#)
 ALTSCREENCOL field
 in TYPTMDEF resource table [1239](#)
 ALTSCREENROW field
 in TYPTMDEF resource table [1239](#)
 ALTSCRNHT field
 in TERMNL resource table [1179](#)
 ALTSCRNWD field
 in TERMNL resource table [1179](#)
 ALTSUFFIX field
 in TERMNL resource table [1179](#)
 in TYPTMDEF resource table [1239](#)
 AMAXTASK field
 in CMAS resource table [131](#)
 AMAXTASKS field
 in CICSGRN resource table [89](#)
 in EMSTATUS resource table [415](#)
 in MCICSGRN resource table [803](#)
 ANALYZER field
 in URIMPDEF resource table [1261](#)
 ANALYZERSTAT field
 in URIMAP resource table [1257](#)
 ANCHORADDR field
 in BATCHREP resource table [53](#)
 ANCHORLEN field
 in BATCHREP resource table [53](#)
 ANIUQCDSA field
 in LOADER resource table [753](#)
 ANIUQDSA field
 in LOADACT resource table [751](#)
 ANIUQECDSA field
 in LOADER resource table [753](#)
 ANIUQERDSA field
 in LOADER resource table [753](#)
 ANIUQESDSA field
 in LOADER resource table [753](#)
 ANIUQRDSA field
 in LOADER resource table [753](#)
 ANIUQSDSA field
 in LOADER resource table [753](#)
 AOR field
 in WLMATAFF resource table [1283](#)
 in WLMATARG resource table [1285](#)
 in WLMAWAOR resource table [1295](#)
 AORCNT field
 in WLMAWORK resource table [1301](#)
 AORSCOPE field
 in WLMAWDEF resource table [1299](#)
 in WLMAWORK resource table [1301](#)
 in WLMDEF resource table [1305](#)
 in WLMSPEC resource table [1313](#)
 APACTV resource table [21](#)
 API field
 in PROGDEF resource table [995](#)
 APIPERFORM field
 in OBJACT resource table [929](#)

APIPREFIX field
 in OBJECT resource table [931](#)
 APIST field
 in EXITTRUE resource table [577](#)
 in PROGRAM resource table [1001](#)
 APLKYBD field
 in TYPTMDEF resource table [1239](#)
 APLKYBDST field
 in TERMNL resource table [1179](#)
 APLTEXT field
 in TYPTMDEF resource table [1239](#)
 APLTEXTST field
 in TERMNL resource table [1179](#)
 APPENDCRLF field
 in DOCDEF resource table [331](#)
 in DOCTEMP resource table [337](#)
 APPLCTN resource table [23](#)
 APPLDATA field
 in TASKASSC resource table [1113](#)
 APPLDEF field
 in APPLCTN resource table [23](#)
 in MGMTPART resource table [825](#)
 APPLDEF resource table [27](#)
 APPLDIR field
 in APPLCTN resource table [23](#)
 in APPLDEF resource table [27](#)
 APPLICATION field
 in APPLCTN resource table [23](#)
 in EVALDEF resource table [549](#)
 in LOCTRAN resource table [763](#)
 in MGMTPART resource table [825](#)
 in PROGRAM resource table [1001](#)
 in REMTRAN resource table [1029](#)
 in URIMAP resource table [1257](#)
 APPLICATNL field
 in EVALDEF resource table [549](#)
 APPLID field
 in CICSGRN resource table [89](#)
 in CMAS resource table [131](#)
 in CMTMCLNK resource table [151](#)
 in CMTMPLNK resource table [153](#)
 in CSYSDEF resource table [281](#)
 in FEPITRGT resource table [603](#)
 in IPCONDEF resource table [681](#)
 in IPCONN resource table [687](#)
 in TASKASSC resource table [1113](#)
 APPLLIST field
 in FETRDEF resource table [613](#)
 APPLMAJORVER field
 in EVALDEF resource table [549](#)
 in LOCTRAN resource table [763](#)
 in MGMTPART resource table [825](#)
 in PROGRAM resource table [1001](#)
 in REMTRAN resource table [1029](#)
 in URIMAP resource table [1257](#)
 APPLMICROVER field
 in EVALDEF resource table [549](#)
 in LOCTRAN resource table [763](#)
 in MGMTPART resource table [825](#)
 in PROGRAM resource table [1001](#)
 in REMTRAN resource table [1029](#)
 in URIMAP resource table [1257](#)
 APPLMINORVER field
 in EVALDEF resource table [549](#)

APPLMINORVER field (*continued*)
 in LOCTRAN resource table [763](#)
 in MGMTPART resource table [825](#)
 in PROGRAM resource table [1001](#)
 in REMTRAN resource table [1029](#)
 in URIMAP resource table [1257](#)
 APPLNAMEPROG field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 APPLNAMEST field
 in MONITOR resource table [867](#)
 APPLNAMETRAN field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 APPLTOKEN field
 in APPLCTN resource table [23](#)
 in BUNDDEF resource table [65](#)
 in CRESDB2P resource table [189](#)
 in CRESLIBR resource table [227](#)
 in CRESPRGM resource table [237](#)
 in ERMADB2P resource table [457](#)
 in ERMCLIBR resource table [491](#)
 in ERMCPRGM resource table [503](#)
 in MGMTPART resource table [825](#)
 APSPEC field
 in APACTV resource table [21](#)
 APSPEC resource table [31](#)
 APSTATUS field
 in CICSplex resource table [87](#)
 in CMASplex resource table [129](#)
 ARCHIVEFILE field
 in WEBSERV resource table [1273](#)
 in WEBSVDEF resource table [1277](#)
 ARCHSTAT field
 in DSKJRNl resource table [343](#)
 ARCHSTATUS field
 in JRNlDEF resource table [701](#)
 ARCHSUBCNT field
 in DSKJRNl resource table [343](#)
 in MJOURNl resource table [829](#)
 ARCHWCNT field
 in DSKJRNl resource table [343](#)
 in MJOURNl resource table [829](#)
 ARRAYEND field
 in RESDESC resource table [1035](#)
 AS4CNT field
 in CPLEXDEF resource table [169](#)
 in CPLXCMAS resource table [173](#)
 ASACTIVE field
 in CICSDSA resource table [79](#)
 ASCII field
 in TERMNL resource table [1179](#)
 in TYPTMDEF resource table [1239](#)
 ASFREET field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 ASFTCHCT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 ASFTCHWT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 ASRNATWT field
 in HTASK resource table [655](#)

ASRNATWT field (*continued*)
 in TASK resource table [1123](#)
 ASRUNCT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 ASSERTED field
 in EJCODEF resource table [365](#)
 in EJCOSE resource table [371](#)
 ASSOCPRNTR field
 in TERMDEF resource table [1173](#)
 ASTOTCT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 ASUBTOTL field
 in CICSDSA resource table [79](#)
 in MCICSDSA resource table [799](#)
 ASYNCBPS field
 in TERMDEF resource table [1173](#)
 in TYPTMDEF resource table [1239](#)
 ASYNCPORT field
 in TERMDEF resource table [1173](#)
 ASYNCPRT3151 field
 in TYPTMDEF resource table [1239](#)
 ASYNCREQ resource table [33](#)
 ATBCUSHLIMIT field
 in CICSDSA resource table [79](#)
 ATBCUSHRELS field
 in CICSDSA resource table [79](#)
 ATI field
 in TERMDEF resource table [1173](#)
 in TYPTMDEF resource table [1239](#)
 ATIFACILITY field
 in INTRATDQ resource table [675](#)
 in MNTRATDQ resource table [853](#)
 in TDQDEF resource table [1163](#)
 ATISBPRI field
 in CONNECT resource table [164](#)
 in MCONNECT resource table [811](#)
 ATISBSEC field
 in CONNECT resource table [164](#)
 in MCONNECT resource table [811](#)
 ATISTATUS field
 in TERMNL resource table [1179](#)
 ATITERMID field
 in INTRATDQ resource table [675](#)
 in MNTRATDQ resource table [853](#)
 ATITRANID field
 in INTRATDQ resource table [675](#)
 in MNTRATDQ resource table [853](#)
 ATIUSERID field
 in INTRATDQ resource table [675](#)
 in MNTRATDQ resource table [853](#)
 ATMDEFRG field
 in RESDESC resource table [1035](#)
 ATMDEFRS field
 in RESDESC resource table [1035](#)
 ATMDEFTS field
 in RESDESC resource table [1035](#)
 ATMGROUP field
 in ATMINGRP resource table [37](#)
 ATMINGRP resource table [37](#)
 ATMNAME field
 in ATMINGRP resource table [37](#)
 ATMSRVDELENT field

ATMSRVDELENT field (*continued*)
 in ATOMSERV resource table [45](#)
 ATMSRVGETENT field
 in ATOMSERV resource table [45](#)
 ATMSRVGETFED field
 in ATOMSERV resource table [45](#)
 ATMSRV PSTFED field
 in ATOMSERV resource table [45](#)
 ATMSRVPUTENT field
 in ATOMSERV resource table [45](#)
 ATMSRVREFCT field
 in ATOMSERV resource table [45](#)
 ATMSRVREFDIS field
 in ATOMSERV resource table [45](#)
 ATMVER field
 in ATMINGRP resource table [37](#)
 ATOMDEF resource table [39](#)
 ATOMSERV resource table [45](#)
 ATOMSERVICE field
 in URIMAP resource table [1257](#)
 in URIMPDEF resource table [1261](#)
 ATOMTYPE field
 in ATOMDEF resource table [39](#)
 in ATOMSERV resource table [45](#)
 ATTACHES field
 in MTRANCLS resource table [911](#)
 in TRANCLAS resource table [1187](#)
 ATTACHSEC field
 in CONNDEF resource table [157](#)
 in TCPDEF resource table [1145](#)
 in TCPIPS resource table [1157](#)
 in TERMDEF resource table [1173](#)
 ATTACHTIME field
 in TASK resource table [1123](#)
 ATTR resource table [49](#)
 ATTR_DTYP1 field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 ATTR_DTYP2 field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 ATTR_DTYP3 field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 ATTR_DTYP4 field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 ATTR_DTYP5 field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 ATTR_DTYP6 field
 in FEEDBACK resource table [585](#)
 ATTR_LEN1 field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 ATTR_LEN2 field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 ATTR_LEN3 field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 ATTR_LEN4 field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 ATTR_LEN5 field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 ATTR_LEN6 field
 in FEEDBACK resource table [585](#)
 ATTR_NM1 field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 ATTR_NM2 field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 ATTR_NM3 field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 ATTR_NM4 field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 ATTR_NM5 field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 ATTR_NM6 field
 in FEEDBACK resource table [585](#)
 ATTR_OFF1 field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 ATTR_OFF2 field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 ATTR_OFF3 field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 ATTR_OFF4 field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 ATTR_OFF5 field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 ATTR_OFF6 field
 in FEEDBACK resource table [585](#)
 ATTR_RID1 field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 ATTR_RID2 field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 ATTR_RID3 field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 ATTR_RID4 field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 ATTR_RID5 field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 ATTR_RID6 field
 in FEEDBACK resource table [585](#)
 ATTRAVA resource table [47](#)
 ATTRDATAVAL field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 AUDALARMST field
 in TERMNL resource table [1179](#)
 AUDIBLEALARM field
 in TYPTMDEF resource table [1239](#)

AUDITLEV field
 in PROCTYP resource table [985](#)
 AUDITLEVEL field
 in PROCDEF resource table [981](#)
 AUDITLOG field
 in PROCDEF resource table [981](#)
 in PROCTYP resource table [985](#)
 AUTHCNT field
 in DB2THRD resource table [323](#)
 in MDB2THRD resource table [815](#)
 AUTHENTICATE field
 in TCPDEF resource table [1145](#)
 in TCPIPS resource table [1157](#)
 in URIMAP resource table [1257](#)
 in URIMPDEF resource table [1261](#)
 AUTHID field
 in DB2CDEF resource table [295](#)
 in DB2CONN resource table [301](#)
 in DB2EDEF resource table [307](#)
 in DB2ENTRY resource table [311](#)
 AUTHORITY field
 in EPADAPT resource table [435](#)
 AUTHTYPE field
 in DB2CDEF resource table [295](#)
 in DB2CONN resource table [301](#)
 in DB2EDEF resource table [307](#)
 in DB2ENTRY resource table [311](#)
 in DB2THRD resource table [323](#)
 in MDB2THRD resource table [815](#)
 AUTHUSERID field
 in EPADAPT resource table [435](#)
 AUTOCONN field
 in MODENAME resource table [855](#)
 AUTOCONNECT field
 in CONNDEF resource table [157](#)
 in IPCONDEF resource table [681](#)
 in IPCONN resource table [687](#)
 in SESSDEF resource table [1085](#)
 in TERMDEF resource table [1173](#)
 in TERMNL resource table [1179](#)
 in TYPTMDEF resource table [1239](#)
 AUTODEL field
 in STREAMNM resource table [1097](#)
 AUTOINSMODEL field
 in TERMDEF resource table [1173](#)
 AUTOINSNAME field
 in TERMDEF resource table [1173](#)
 AUTOINST field
 in CSYSDEF resource table [281](#)
 in MAS resource table [787](#)
 in RESDESC resource table [1035](#)
 AUTOPAGE field
 in TYPTMDEF resource table [1239](#)
 AUTOPUBLISH field
 in EJCODEF resource table [365](#)
 in EJCOSE resource table [371](#)
 AUTOSTART field
 in MQMONDEF resource table [897](#)
 AUTOSTARTST field
 in CLCACHE resource table [123](#)
 AUTOSTATUS field
 in CONNECT resource table [164](#)
 in MQMON resource table [893](#)
 AUXFULL field

AUXFULL field (*continued*)
 in MTSQGBL resource table [913](#)
 in TSQGBL resource table [1227](#)
 AUXSTATUS field
 in CICSRRN resource table [89](#)
 in CMAS resource table [131](#)
 AUXSWITCH field
 in CMAS resource table [131](#)
 AVAAVAIL field
 in ATTR resource table [49](#)
 AVACOUNT field
 in ATTR resource table [49](#)
 AVAILABILITY field
 in DSNNAME resource table [345](#)
 AVAILSTATUS field
 in APPLCTN resource table [23](#)
 in BUNDDEF resource table [65](#)
 in BUNDLE resource table [69](#)
 in BUNDPART resource table [73](#)
 in LOCTRAN resource table [763](#)
 in MGMTPART resource table [825](#)
 in REMTRAN resource table [1029](#)
 in URIMAP resource table [1257](#)
 in VOLUME resource table [1269](#)
 AVAVALUE field
 in ATTRAVA resource table [47](#)
 AVGSIZE field
 in DSKJRNL resource table [343](#)
 in MJOURNL resource table [829](#)
 in SMFJRNL resource table [1089](#)
 in TAPEJRNL resource table [1111](#)
 AVGTIMESOS field
 in CICSPAGP resource table [83](#)

B

BAACDCCT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 BAACQPCT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 BACKLOG field
 in TCPDEF resource table [1145](#)
 in TCPIPS resource table [1157](#)
 BACKOUTSTAT field
 in CRESDSNM resource table [195](#)
 BACKTRANS field
 in TYPTMDEF resource table [1239](#)
 BACKTRANSST field
 in TERMNL resource table [1179](#)
 BACKUPTYPE field
 in DSNNAME resource table [345](#)
 in FILEDEF resource table [617](#)
 BAD_SYNC field
 in CPLXCMAS resource table [173](#)
 BADACTCT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 BADCPACT field
 in HTASK resource table [655](#)

BADCPACT field (*continued*)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)

BADFIECT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)

BADPROCT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)

BALKPACT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)

BAPRDCCT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)

BARASYCT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)

BARATECT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)

BARMPACT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)

BARSPACT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)

BARSYNCT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)

BASDEFINEVER field
 in ATOMSERV resource table [45](#)
 in BUNDLE resource table [69](#)
 in CMDT resource table [141](#)
 in CONNECT resource table [164](#)
 in DB2CONN resource table [301](#)
 in DB2ENTRY resource table [311](#)
 in DB2TRN resource table [327](#)
 in DOCTEMP resource table [337](#)
 in EJCOSE resource table [371](#)
 in EJDJAR resource table [377](#)
 in ENQMODEL resource table [431](#)
 in EXTRATDQ resource table [581](#)
 in INDTDQ resource table [673](#)
 in INTRATDQ resource table [675](#)
 in IPCONN resource table [687](#)
 in JRNLMODL resource table [705](#)
 in JMVMSERV resource table [719](#)
 in LIBRARY resource table [737](#)
 in LOCFILE resource table [757](#)
 in LOCTRAN resource table [763](#)
 in MQCON resource table [879](#)
 in MQINI resource table [889](#)
 in MQMON resource table [893](#)
 in PIPELINE resource table [959](#)

BASDEFINEVER field (*continued*)
 in PROCTYP resource table [985](#)
 in PROFILE resource table [993](#)
 in PROGRAM resource table [1001](#)
 in REMFILE resource table [1025](#)
 in REMTDQ resource table [1027](#)
 in REMTRAN resource table [1029](#)
 in RQMODEL resource table [1059](#)
 in TCPIPS resource table [1157](#)
 in TRANCLAS resource table [1187](#)
 in TSMODEL resource table [1223](#)
 in URIMAP resource table [1257](#)
 in WEBSERV resource table [1273](#)
 in XMLTRANS resource table [1321](#)

BASDTE field
 in ECSYSCHG resource table [359](#)

BASEAPMAJVER field
 in DB2PKGST resource table [315](#)
 in RULE resource table [1079](#)

BASEAPMICVER field
 in DB2PKGST resource table [315](#)
 in RULE resource table [1079](#)

BASEAPMINVER field
 in DB2PKGST resource table [315](#)
 in RULE resource table [1079](#)

BASEAPPLICTN field
 in DB2PKGST resource table [315](#)
 in RULE resource table [1079](#)

BASEDSNAME field
 in DSNAME resource table [345](#)
 in LOCFILE resource table [757](#)

BASELEVEL field
 in RULE resource table [1079](#)

BASENAME field
 in FILEDEF resource table [617](#)

BASEOPERATN field
 in RULE resource table [1079](#)

BASEPLATFORM field
 in DB2PKGST resource table [315](#)
 in RULE resource table [1079](#)

BASESCOPE field
 in BUNDDEF resource table [65](#)
 in BUNDLE resource table [69](#)

BASTRACE field
 in CMAS resource table [131](#)
 in MAS resource table [787](#)

BASUPACT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)

BATCHREP resource table [53](#)

BATIAECT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)

BATOTCCT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)

BATOTECT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)

BATOTPCT field

BATOTPCT field (*continued*)
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 BEANACTIVATE field
 in EJCOBEAN resource table [363](#)
 in EJDJBEAN resource table [379](#)
 BEANCREATES field
 in EJCOBEAN resource table [363](#)
 in EJDJBEAN resource table [379](#)
 BEANMETHCALL field
 in EJCOBEAN resource table [363](#)
 in EJDJBEAN resource table [379](#)
 BEANNAME field
 in EJCOBEAN resource table [363](#)
 in EJDJBEAN resource table [379](#)
 in RQMDEF resource table [1053](#)
 in RQMODEL resource table [1059](#)
 BEANPASSIVAT field
 in EJCOBEAN resource table [363](#)
 in EJDJBEAN resource table [379](#)
 BEANREMOVES field
 in EJCOBEAN resource table [363](#)
 in EJDJBEAN resource table [379](#)
 BEGINSSESSION field
 in FEPIPOOL resource table [597](#)
 in FEPIPROP resource table [601](#)
 in FEPRODEF resource table [609](#)
 BIDSSSENT field
 in CONNECT resource table [164](#)
 in MCONNECT resource table [811](#)
 BINCONRS resource table [57](#)
 BINCONSC resource table [59](#)
 BINDDIR field
 in APPLCTN resource table [23](#)
 in APPLDEF resource table [27](#)
 BINDFILE field
 in ATOMDEF resource table [39](#)
 in ATOMSERSV resource table [45](#)
 BINDING field
 in WEBSERV resource table [1273](#)
 BINDPASSWORD field
 in CONNDEF resource table [157](#)
 in TERMDEF resource table [1173](#)
 BINDSECURITY field
 in CONNDEF resource table [157](#)
 in TERMDEF resource table [1173](#)
 BINKEY01 field
 in FSEGDEF resource table [633](#)
 BINKEY02 field
 in FSEGDEF resource table [633](#)
 BINKEY03 field
 in FSEGDEF resource table [633](#)
 BINKEY04 field
 in FSEGDEF resource table [633](#)
 BINKEY05 field
 in FSEGDEF resource table [633](#)
 BINKEY06 field
 in FSEGDEF resource table [633](#)
 BINKEY07 field
 in FSEGDEF resource table [633](#)
 BINKEY08 field
 in FSEGDEF resource table [633](#)
 BINKEY09 field

BINKEY09 field (*continued*)
 in FSEGDEF resource table [633](#)
 BINKEY10 field
 in FSEGDEF resource table [633](#)
 BINKEY11 field
 in FSEGDEF resource table [633](#)
 BINKEY12 field
 in FSEGDEF resource table [633](#)
 BINKEY13 field
 in FSEGDEF resource table [633](#)
 BINKEY14 field
 in FSEGDEF resource table [633](#)
 BINKEY15 field
 in FSEGDEF resource table [633](#)
 BINKEY16 field
 in FSEGDEF resource table [633](#)
 BINKEY17 field
 in FSEGDEF resource table [633](#)
 BINKEY18 field
 in FSEGDEF resource table [633](#)
 BINKEY19 field
 in FSEGDEF resource table [633](#)
 BINKEY20 field
 in FSEGDEF resource table [633](#)
 BINKEY21 field
 in FSEGDEF resource table [633](#)
 BINKEY22 field
 in FSEGDEF resource table [633](#)
 BINKEY23 field
 in FSEGDEF resource table [633](#)
 BINKEY24 field
 in FSEGDEF resource table [633](#)
 BINSTERR resource table [61](#)
 BKOUTSTATUS field
 in DSNAME resource table [345](#)
 BLKWRCNT field
 in DSKJRNL resource table [343](#)
 in MJOURNL resource table [829](#)
 in SMFJRNL resource table [1089](#)
 in TAPEJRNL resource table [1111](#)
 BLOCKFORMAT field
 in EXTRATDQ resource table [581](#)
 in LOCFILE resource table [757](#)
 in TDQDEF resource table [1163](#)
 BLOCKKEYLN field
 in LOCFILE resource table [757](#)
 BLOCKSIZE field
 in EXTRATDQ resource table [581](#)
 in LOCFILE resource table [757](#)
 in MLOCFILE resource table [833](#)
 in TDQDEF resource table [1163](#)
 BMSCOUNT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 BMSINCNT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 BMSMAPCNT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 BMSOUTCNT field

BMSOUTCNT field (*continued*)
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 BMSVALABCNT field
 in CICSRRGN resource table [89](#)
 BMSVALIDATE field
 in CICSRRGN resource table [89](#)
 BMSVALIGCNT field
 in CICSRRGN resource table [89](#)
 BMSVALLGCNT field
 in CICSRRGN resource table [89](#)
 BOTRSUPD field
 in CICSRRGN resource table [87](#)
 in CMASRRGN resource table [129](#)
 in CPLEXDEF resource table [169](#)
 in CPLXCMAS resource table [173](#)
 in CSYSDEF resource table [281](#)
 in EPLEXCHG resource table [441](#)
 in MAS resource table [787](#)
 in WLMATARG resource table [1285](#)
 BRACKET field
 in TYPTMDEF resource table [1239](#)
 BRANCHQUAL field
 in UOWLINK resource table [1251](#)
 BRDGTRAN field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 BREXIT field
 in LOCTRAN resource table [763](#)
 in TRANDEF resource table [1191](#)
 BRFACIL resource table [63](#)
 BRIDGE field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 BROWSE field
 in CMDT resource table [141](#)
 in FILEDEF resource table [617](#)
 in LOCFIL resource table [757](#)
 BROWSECNT field
 in CMDT resource table [141](#)
 in LOCFIL resource table [757](#)
 in MCMDT resource table [807](#)
 in MLOCFIL resource table [833](#)
 in MREMFIL resource table [901](#)
 in REMFIL resource table [1025](#)
 BROWUPDCNT field
 in LOCFIL resource table [757](#)
 in MLOCFIL resource table [833](#)
 BRTOKEN field
 in TASK resource table [1123](#)
 BRWREAD field
 in STREAMNM resource table [1097](#)
 BRWSTRT field
 in STREAMNM resource table [1097](#)
 BTECOMP field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 BUFAPPNDRQ field
 in STREAMNM resource table [1097](#)
 BUFFERS field
 in MTDQGBL resource table [907](#)
 in MTSQGBL resource table [913](#)
 in TDQGBL resource table [1169](#)

BUFFERS field (*continued*)
 in TSQGBL resource table [1227](#)
 BUFFERSIZE field
 in JRNLEDF resource table [701](#)
 BUFWAIT field
 in STREAMNM resource table [1097](#)
 BUFWAITS field
 in MTDQGBL resource table [907](#)
 in MTSQGBL resource table [913](#)
 in TDQGBL resource table [1169](#)
 in TSQGBL resource table [1227](#)
 BUFNO field
 in TDQDEF resource table [1163](#)
 BUFREADS field
 in MTSQGBL resource table [913](#)
 in TSQGBL resource table [1227](#)
 BUFSUV field
 in JRNLEDF resource table [701](#)
 BUFULLCNT field
 in DSKJRNL resource table [343](#)
 in MJOURNAL resource table [829](#)
 in SMFJRNL resource table [1089](#)
 in TAPEJRNL resource table [1111](#)
 BUFWITES field
 in MTSQGBL resource table [913](#)
 in TSQGBL resource table [1227](#)
 BUILDCHAIN field
 in SESSDEF resource table [1085](#)
 in TYPTMDEF resource table [1239](#)
 BUNDEF resource table [65](#)
 BUNDEFRG field
 in RESDESC resource table [1035](#)
 BUNDEFRS field
 in RESDESC resource table [1035](#)
 BUNDEFTS field
 in RESDESC resource table [1035](#)
 BUNDLE field
 in BUNDPART resource table [73](#)
 in EPADAPT resource table [435](#)
 in EVNTBIND resource table [567](#)
 in MGMTPART resource table [825](#)
 in OSGIBUND resource table [937](#)
 in OSGISERV resource table [939](#)
 in RULE resource table [1079](#)
 in WLPSEVR resource table [1317](#)
 in XMLTRANS resource table [1321](#)
 BUNDLE resource table [69](#)
 BUNDLEDIR field
 in BUNDEF resource table [65](#)
 in BUNDLE resource table [69](#)
 in RULE resource table [1079](#)
 BUNDLEID field
 in BUNDEF resource table [65](#)
 in BUNDLE resource table [69](#)
 in CRESBUND resource table [181](#)
 in ERMCBUND resource table [449](#)
 in RULE resource table [1079](#)
 BUNDLEMAJVER field
 in RULE resource table [1079](#)
 BUNDLEMICVER field
 in RULE resource table [1079](#)
 BUNDLEMINVER field
 in RULE resource table [1079](#)
 BUNDLEPART field

BUNDLEPART field (*continued*)
 in BUNDPART resource table [73](#)
 in OSGIBUND resource table [937](#)
 in OSGISERV resource table [939](#)
 in WLPSEVR resource table [1317](#)
 BUNDMAJORVER field
 in MGMTPART resource table [825](#)
 BUNDMICROVER field
 in MGMTPART resource table [825](#)
 BUNDMINORVER field
 in MGMTPART resource table [825](#)
 BUNDPART resource table [73](#)
 BUNGROUP field
 in BUNINGRP resource table [75](#)
 BUNINGRP resource table [75](#)
 BUNNAME field
 in BUNINGRP resource table [75](#)
 BUNVER field
 in BUNINGRP resource table [75](#)
 BYTERCVD field
 in TCPIPS resource table [1157](#)
 BYTES field
 in STREAMNM resource table [1097](#)
 BYTESENT field
 in TCPIPS resource table [1157](#)
 BYTESPERCI field
 in MTSQGBL resource table [913](#)
 in TSQGBL resource table [1227](#)
 BYTESPERSEG field
 in MTSQGBL resource table [913](#)
 in TSQGBL resource table [1227](#)

C

CACHEDEL field
 in DOCTEMP resource table [337](#)
 CACHEFREE field
 in CLCACHE resource table [123](#)
 CACHESIZE field
 in CLCACHE resource table [123](#)
 in DOCTEMP resource table [337](#)
 CACHEUSED field
 in DOCTEMP resource table [337](#)
 CALLS field
 in DB2ENTRY resource table [311](#)
 CANDASGOVR field
 in BINCONRS resource table [57](#)
 CANDNAME field
 in BINCONRS resource table [57](#)
 CANDRASG field
 in BINCONRS resource table [57](#)
 CANDRDSC field
 in BINCONRS resource table [57](#)
 CANDRGRP field
 in BINCONRS resource table [57](#)
 CANDSGRP field
 in BINCONRS resource table [57](#)
 CANDTYPE field
 in BINCONRS resource table [57](#)
 CANDUSAGE field
 in BINCONRS resource table [57](#)
 CANDVER field
 in BINCONRS resource table [57](#)
 CAPTUREPOINT field

CAPTUREPOINT field (*continued*)
 in EVCSPEC resource table [553](#)
 CAPTURESPEC field
 in EVCSDATA resource table [555](#)
 in EVCSINFO resource table [557](#)
 in EVCSOPT resource table [559](#)
 in EVCSPEC resource table [553](#)
 CAPTURETYPE field
 in EVCSPEC resource table [553](#)
 CASID field
 in CMAS resource table [131](#)
 CASSTATUS field
 in CMAS resource table [131](#)
 CATNAME field
 in FILEDEF resource table [617](#)
 CAUSE field
 in UOWDSNF resource table [1247](#)
 CAVGTIMESOS field
 in CICSSTOR resource table [101](#)
 CBTSKEY field
 in WLMATAFF resource table [1283](#)
 CBYTRCVD field
 in CMTCMLNK resource table [151](#)
 in CMTPMLNK resource table [153](#)
 CBYTSENT field
 in CMTCMLNK resource table [151](#)
 in CMTPMLNK resource table [153](#)
 CCALLS field
 in DB2CONN resource table [301](#)
 CCSID field
 in WEBSERV resource table [1273](#)
 in XMLTRANS resource table [1321](#)
 CCURPROFUSE field
 in JVMPROF resource table [717](#)
 CDELMAXSOCKS field
 in TCPIPGBL resource table [1153](#)
 CDSAGETM field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 CDSAPSHWM field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 CDSASHWM field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 CDSASIZE field
 in LOADER resource table [753](#)
 in TSKSPOLS resource table [1211](#)
 CDSASOCC field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 CDSSUF field
 in MASHIST resource table [793](#)
 CECMCHTP field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 CECMDLID field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 CECNAME field

CECNAME field (*continued*)

- in EMASJOIN resource table [387](#)
- in EMASSTOP resource table [393](#)
- in EMASSTRT resource table [395](#)

CEDF field

- in PROGDEF resource table [995](#)

CEDFSTATUS field

- in PROGRAM resource table [1001](#)

CEIBDATAVAL field

- in ASYNCREQ resource table [33](#)
- in FEEDBACK resource table [585](#)

CEIBFN field

- in ASYNCREQ resource table [33](#)
- in BINSTERR resource table [61](#)
- in FEEDBACK resource table [585](#)

CEIBRESP field

- in ASYNCREQ resource table [33](#)
- in FEEDBACK resource table [585](#)

CEIBRESP1 field

- in ASYNCREQ resource table [33](#)
- in FEEDBACK resource table [585](#)

CERTIFICATE field

- in EJCODEF resource table [365](#)
- in EJCOSE resource table [371](#)
- in IPCONDEF resource table [681](#)
- in IPCONN resource table [687](#)
- in TCPDEF resource table [1145](#)
- in TCPIPS resource table [1157](#)
- in URIMAP resource table [1257](#)
- in URIMPDEF resource table [1261](#)

CFDTPPOOL resource table [77](#)

CFDTPWAIT field

- in HTASK resource table [655](#)
- in TASK resource table [1123](#)

CFDTPWC field

- in MLOCTRAN resource table [837](#)

CFDTPWT field

- in MLOCTRAN resource table [837](#)

CFREADCT field

- in WLMATARG resource table [1285](#)

CFUPDCNT field

- in WLMATARG resource table [1285](#)
- in WLMAWAOR resource table [1295](#)

CGCSGIDCODE field

- in TYPTMDEF resource table [1239](#)

CGCSGIDGBLID field

- in TYPTMDEF resource table [1239](#)

CHAINCONTROL field

- in PROFDEF resource table [987](#)

CHANGEAGENT field

- in ACTION resource table [17](#)
- in APPLCTN resource table [23](#)
- in APPLDEF resource table [27](#)
- in APSPEC resource table [31](#)
- in ATMINGRP resource table [37](#)
- in ATOMDEF resource table [39](#)
- in ATOMSERV resource table [45](#)
- in BUNDEF resource table [65](#)
- in BUNDLE resource table [69](#)
- in BUNINGRP resource table [75](#)
- in CMDMPAPS resource table [137](#)
- in CMDMSAPS resource table [139](#)
- in CMDT resource table [141](#)
- in CMTCMDEF resource table [147](#)

CHANGEAGENT field (*continued*)

- in CONINGRP resource table [155](#)
- in CONNDEF resource table [157](#)
- in CONNECT resource table [164](#)
- in CPLEXDEF resource table [169](#)
- in CPLXCMAS resource table [173](#)
- in CSGLCGCG resource table [275](#)
- in CSGLCGCS resource table [277](#)
- in CSYSDEF resource table [281](#)
- in CSYSGRP resource table [287](#)
- in D2CINGRP resource table [289](#)
- in D2EINGRP resource table [291](#)
- in D2TINGRP resource table [293](#)
- in DB2CDEF resource table [295](#)
- in DB2CONN resource table [301](#)
- in DB2EDEF resource table [307](#)
- in DB2ENTRY resource table [311](#)
- in DB2PKGST resource table [315](#)
- in DB2TDEF resource table [319](#)
- in DB2TRN resource table [327](#)
- in DOCDEF resource table [331](#)
- in DOCINGRP resource table [335](#)
- in DOCTEMP resource table [337](#)
- in DTRINGRP resource table [355](#)
- in EJCINGRP resource table [361](#)
- in EJCODEF resource table [365](#)
- in EJCOSE resource table [371](#)
- in EJDINGRP resource table [375](#)
- in EJDJAR resource table [377](#)
- in EJDJDEF resource table [381](#)
- in ENQINGRP resource table [425](#)
- in ENQMDEF resource table [427](#)
- in ENQMODEL resource table [431](#)
- in EPADAPT resource table [435](#)
- in EPADSET resource table [437](#)
- in EVALDEF resource table [549](#)
- in EVNTBIND resource table [567](#)
- in EXTRATDQ resource table [581](#)
- in FENODDEF resource table [589](#)
- in FEPOODEF resource table [605](#)
- in FEPRODEF resource table [609](#)
- in FETRDEF resource table [613](#)
- in FILEDEF resource table [617](#)
- in FILINGRP resource table [625](#)
- in FNOINGRP resource table [627](#)
- in FPOINGRP resource table [629](#)
- in FPRINGRP resource table [631](#)
- in FSEGDEF resource table [633](#)
- in FSGINGRP resource table [649](#)
- in FTRINGRP resource table [651](#)
- in INDTDQ resource table [673](#)
- in INTRATDQ resource table [675](#)
- in IPCINGRP resource table [679](#)
- in IPCONDEF resource table [681](#)
- in IPCONN resource table [687](#)
- in JMSINGRP resource table [695](#)
- in JRMINGRP resource table [697](#)
- in JRNINGRP resource table [699](#)
- in JRNLMODL resource table [705](#)
- in JRNMDEF resource table [709](#)
- in JVMSERV resource table [719](#)
- in JVMSVDEF resource table [723](#)
- in LIBDEF resource table [727](#)
- in LIBINGRP resource table [735](#)

CHANGEAGENT field (*continued*)

in LIBRARY resource table [737](#)
in LNKSMSCG resource table [739](#)
in LNKSMSCS resource table [741](#)
in LNKSRS CG resource table [743](#)
in LNKSRS CS resource table [745](#)
in LNKSWSCG resource table [747](#)
in LNKSWSCS resource table [749](#)
in LOCFIL resource table [757](#)
in LOCTRAN resource table [763](#)
in LSRDEF resource table [769](#)
in LSRINGRP resource table [775](#)
in MAPDEF resource table [781](#)
in MAPINGRP resource table [785](#)
in MGMTPART resource table [825](#)
in MONDEF resource table [857](#)
in MONGROUP resource table [861](#)
in MONINGRP resource table [863](#)
in MONINSPC resource table [865](#)
in MONSPEC resource table [873](#)
in MQCINGRP resource table [877](#)
in MQCON resource table [879](#)
in MQCONDEF resource table [883](#)
in MQINI resource table [889](#)
in MQMINGRP resource table [891](#)
in MQMON resource table [893](#)
in MQMONDEF resource table [897](#)
in OSGIBUND resource table [937](#)
in PARINGRP resource table [941](#)
in PARTDEF resource table [945](#)
in PERIODEF resource table [951](#)
in PGMINGRP resource table [953](#)
in PIPEDEF resource table [955](#)
in PIPELINE resource table [959](#)
in PIPINGRP resource table [963](#)
in PLATDEF resource table [965](#)
in PLATFORM resource table [970](#)
in PRCINGRP resource table [977](#)
in PRNINGRP resource table [979](#)
in PROCDEF resource table [981](#)
in PROCTYP resource table [985](#)
in PROFDEF resource table [987](#)
in PROFILE resource table [993](#)
in PROGDEF resource table [995](#)
in PROGRAM resource table [1001](#)
in PROINGRP resource table [1007](#)
in PRTNDEF resource table [1009](#)
in RASGNDEF resource table [1013](#)
in RASINDSC resource table [1017](#)
in REMFILE resource table [1025](#)
in REMTDQ resource table [1027](#)
in REMTRAN resource table [1029](#)
in RESDESC resource table [1035](#)
in RESGROUP resource table [1043](#)
in RESINDSC resource table [1047](#)
in RESINGRP resource table [1049](#)
in RQMDEF resource table [1053](#)
in RQMINGRP resource table [1057](#)
in RQMODEL resource table [1059](#)
in RTADEF resource table [1063](#)
in RTAGROUP resource table [1067](#)
in RTAINAPS resource table [1069](#)

CHANGEAGENT field (*continued*)

in RTAINGRP resource table [1071](#)
in RTAINSPC resource table [1073](#)
in RTASPEC resource table [1075](#)
in RULE resource table [1079](#)
in SESINGRP resource table [1083](#)
in SESSDEF resource table [1085](#)
in STAINGRP resource table [1091](#)
in STATDEF resource table [1093](#)
in SYSLINK resource table [1103](#)
in TCLINGRP resource table [1143](#)
in TCPDEF resource table [1145](#)
in TCPINGRP resource table [1151](#)
in TCPIPS resource table [1157](#)
in TDQDEF resource table [1163](#)
in TDQINGRP resource table [1171](#)
in TERMDEF resource table [1173](#)
in TRANCLAS resource table [1187](#)
in TRANDEF resource table [1191](#)
in TRANGRP resource table [1201](#)
in TRMINGRP resource table [1203](#)
in TRNCLDEF resource table [1205](#)
in TRNINGRP resource table [1209](#)
in TSMDEF resource table [1217](#)
in TSMINGRP resource table [1221](#)
in TSMODEL resource table [1223](#)
in TYPINGRP resource table [1237](#)
in TYPTMDEF resource table [1239](#)
in URIINGRP resource table [1255](#)
in URIMAP resource table [1257](#)
in URIMPDEF resource table [1261](#)
in WEBINGRP resource table [1271](#)
in WEBSERV resource table [1273](#)
in WEBSVDEF resource table [1277](#)
in WLMDEF resource table [1305](#)
in WLMGROUP resource table [1307](#)
in WLMINGRP resource table [1309](#)
in WLMINSPC resource table [1311](#)
in WLMSPEC resource table [1313](#)
in XMLTRANS resource table [1321](#)

CHANGEAGREL field

in ACTION resource table [17](#)
in APPLCTN resource table [23](#)
in APPLDEF resource table [27](#)
in APSPEC resource table [31](#)
in ATMINGRP resource table [37](#)
in ATOMDEF resource table [39](#)
in ATOMSERV resource table [45](#)
in BUNDEF resource table [65](#)
in BUNDLE resource table [69](#)
in BUNINGRP resource table [75](#)
in CMDMPAPS resource table [137](#)
in CMDMSAPS resource table [139](#)
in CMDT resource table [141](#)
in CMTCMDEF resource table [147](#)
in CONINGRP resource table [155](#)
in CONNDEF resource table [157](#)
in CONNECT resource table [164](#)
in CPLEXDEF resource table [169](#)

CHANGEAGREL field (*continued*)

in CPLXCMAS resource table [173](#)
 in CSGLCGCG resource table [275](#)
 in CSGLCGCS resource table [277](#)
 in CSYSDEF resource table [281](#)
 in CSYSGRP resource table [287](#)
 in D2CINGRP resource table [289](#)
 in D2EINGRP resource table [291](#)
 in D2TINGRP resource table [293](#)
 in DB2CDEF resource table [295](#)
 in DB2CONN resource table [301](#)
 in DB2EDEF resource table [307](#)
 in DB2ENTRY resource table [311](#)
 in DB2PKGST resource table [315](#)
 in DB2TDEF resource table [319](#)
 in DB2TRN resource table [327](#)
 in DOCDEF resource table [331](#)
 in DOCINGRP resource table [335](#)
 in DOCTEMP resource table [337](#)
 in DTRINGRP resource table [355](#)
 in EJCINGRP resource table [361](#)
 in EJCODEF resource table [365](#)
 in EJCOSE resource table [371](#)
 in EJDINGRP resource table [375](#)
 in EJDJAR resource table [377](#)
 in EJDJDEF resource table [381](#)
 in ENQINGRP resource table [425](#)
 in ENQMDEF resource table [427](#)
 in ENQMODEL resource table [431](#)
 in EPADAPT resource table [435](#)
 in EPADSET resource table [437](#)
 in EVALDEF resource table [549](#)
 in EVNTBIND resource table [567](#)
 in EXTRATDQ resource table [581](#)
 in FENODDEF resource table [589](#)
 in FEPODEF resource table [605](#)
 in FEPRODEF resource table [609](#)
 in FETRGDEF resource table [613](#)
 in FILEDEF resource table [617](#)
 in FILINGRP resource table [625](#)
 in FNOINGRP resource table [627](#)
 in FPOINGRP resource table [629](#)
 in FPRINGRP resource table [631](#)
 in FSEGDEF resource table [633](#)
 in FSGINGRP resource table [649](#)
 in FTRINGRP resource table [651](#)
 in INDTDQ resource table [673](#)
 in INTRATDQ resource table [675](#)
 in IPCINGRP resource table [679](#)
 in IPCONDEF resource table [681](#)
 in IPCONN resource table [687](#)
 in JMSINGRP resource table [695](#)
 in JRMINGRP resource table [697](#)
 in JRNINGRP resource table [699](#)
 in JRNLMODL resource table [705](#)
 in JRNMDEF resource table [709](#)
 in JMVMSERV resource table [719](#)
 in JVMSVDEF resource table [723](#)
 in LIBDEF resource table [727](#)
 in LIBINGRP resource table [735](#)
 in LIBRARY resource table [737](#)
 in LNKSMSCG resource table [739](#)
 in LNKSMSCS resource table [741](#)
 in LNKSRSCG resource table [743](#)

CHANGEAGREL field (*continued*)

in LNKSRSCS resource table [745](#)
 in LNKSWSCG resource table [747](#)
 in LNKSWSCS resource table [749](#)
 in LOCFILE resource table [757](#)
 in LOCTRAN resource table [763](#)
 in LSRDEF resource table [769](#)
 in LSRINGRP resource table [775](#)
 in MAPDEF resource table [781](#)
 in MAPINGRP resource table [785](#)
 in MGMTPART resource table [825](#)
 in MONDEF resource table [857](#)
 in MONGROUP resource table [861](#)
 in MONINGRP resource table [863](#)
 in MONINSPC resource table [865](#)
 in MONSPEC resource table [873](#)
 in MQCINGRP resource table [877](#)
 in MQCON resource table [879](#)
 in MQCONDEF resource table [883](#)
 in MQINI resource table [889](#)
 in MQMINGRP resource table [891](#)
 in MQMON resource table [893](#)
 in MQMONDEF resource table [897](#)
 in OSGIBUND resource table [937](#)
 in PARINGRP resource table [941](#)
 in PARTDEF resource table [945](#)
 in PERIODEF resource table [951](#)
 in PGMINGRP resource table [953](#)
 in PIPEDEF resource table [955](#)
 in PIPELINE resource table [959](#)
 in PIPINGRP resource table [963](#)
 in PLATDEF resource table [965](#)
 in PLATFORM resource table [970](#)
 in PRCINGRP resource table [977](#)
 in PRNINGRP resource table [979](#)
 in PROCDEF resource table [981](#)
 in PROCTYP resource table [985](#)
 in PROFDEF resource table [987](#)
 in PROFILE resource table [993](#)
 in PROGDEF resource table [995](#)
 in PROGRAM resource table [1001](#)
 in PROINGRP resource table [1007](#)
 in PRTNDEF resource table [1009](#)
 in RASGNDEF resource table [1013](#)
 in RASINDSC resource table [1017](#)
 in REMFILE resource table [1025](#)
 in REMTDQ resource table [1027](#)
 in REMTRAN resource table [1029](#)
 in RESDESC resource table [1035](#)
 in RESGROUP resource table [1043](#)
 in RESINDSC resource table [1047](#)
 in RESINGRP resource table [1049](#)
 in RQMDEF resource table [1053](#)
 in RQMINGRP resource table [1057](#)
 in RQMODEL resource table [1059](#)
 in RTADEF resource table [1063](#)
 in RTAGROUP resource table [1067](#)
 in RTAINAPS resource table [1069](#)
 in RTAINGRP resource table [1071](#)
 in RTAINSPC resource table [1073](#)
 in RTASPEC resource table [1075](#)
 in RULE resource table [1079](#)

CHANGEAGREL field (*continued*)

in SESINGRP resource table [1083](#)
in SESSDEF resource table [1085](#)
in STAINGRP resource table [1091](#)
in STATDEF resource table [1093](#)
in SYSLINK resource table [1103](#)
in TCLINGRP resource table [1143](#)
in TCPDEF resource table [1145](#)
in TCPINGRP resource table [1151](#)
in TCPIPS resource table [1157](#)
in TDQDEF resource table [1163](#)
in TDQINGRP resource table [1171](#)
in TERMDEF resource table [1173](#)
in TRANCLAS resource table [1187](#)
in TRANDEF resource table [1191](#)
in TRANGRP resource table [1201](#)
in TRMINGRP resource table [1203](#)
in TRNCLDEF resource table [1205](#)
in TRNINGRP resource table [1209](#)
in TSMDEF resource table [1217](#)
in TSMINGRP resource table [1221](#)
in TSMODEL resource table [1223](#)
in TYPINGRP resource table [1237](#)
in TYPTMDEF resource table [1239](#)
in URIINGRP resource table [1255](#)
in URIMAP resource table [1257](#)
in URIMPDEF resource table [1261](#)
in WEBINGRP resource table [1271](#)
in WEBSERV resource table [1273](#)
in WEBSVDEF resource table [1277](#)
in WLMDEF resource table [1305](#)
in WLMGROUP resource table [1307](#)
in WLMINGRP resource table [1309](#)
in WLMINSPC resource table [1311](#)
in WLMSPEC resource table [1313](#)
in XMLTRANS resource table [1321](#)

CHANGETIME field

in ACTION resource table [17](#)
in APPLCTN resource table [23](#)
in APPLDEF resource table [27](#)
in APSPEC resource table [31](#)
in ATMINGRP resource table [37](#)
in ATOMDEF resource table [39](#)
in ATOMSERV resource table [45](#)
in BUNDEF resource table [65](#)
in BUNDLE resource table [69](#)
in BUNINGRP resource table [75](#)
in CMDMPAPS resource table [137](#)
in CMDMSAPS resource table [139](#)
in CMDT resource table [141](#)
in CMTCMDEF resource table [147](#)
in CONINGRP resource table [155](#)
in CONNDEF resource table [157](#)
in CONNECT resource table [164](#)
in CPLEXDEF resource table [169](#)
in CPLXCMAS resource table [173](#)
in CSGLCGCG resource table [275](#)
in CSGLCGCS resource table [277](#)
in CSYSDEF resource table [281](#)

CHANGETIME field (*continued*)

in CSYSGRP resource table [287](#)
in D2CINGRP resource table [289](#)
in D2EINGRP resource table [291](#)
in D2TINGRP resource table [293](#)
in DB2CDEF resource table [295](#)
in DB2CONN resource table [301](#)
in DB2EDEF resource table [307](#)
in DB2ENTRY resource table [311](#)
in DB2PKGST resource table [315](#)
in DB2TDEF resource table [319](#)
in DB2TRN resource table [327](#)
in DOCDEF resource table [331](#)
in DOCINGRP resource table [335](#)
in DOCTEMP resource table [337](#)
in DTRINGRP resource table [355](#)
in EJCINGRP resource table [361](#)
in EJCODEF resource table [365](#)
in EJCOSE resource table [371](#)
in EJDINGRP resource table [375](#)
in EJDJAR resource table [377](#)
in EJDJDEF resource table [381](#)
in ENQINGRP resource table [425](#)
in ENQMDEF resource table [427](#)
in ENQMODEL resource table [431](#)
in EPADAPT resource table [435](#)
in EPADSET resource table [437](#)
in EVALDEF resource table [549](#)
in EVNTBIND resource table [567](#)
in EXTRATDQ resource table [581](#)
in FENODDEF resource table [589](#)
in FEPOODEF resource table [605](#)
in FEPRODEF resource table [609](#)
in FETRGDEF resource table [613](#)
in FILEDEF resource table [617](#)
in FILINGRP resource table [625](#)
in FNOINGRP resource table [627](#)
in FPOINGRP resource table [629](#)
in FPRINGRP resource table [631](#)
in FSEGDEF resource table [633](#)
in FSGINGRP resource table [649](#)
in FTRINGRP resource table [651](#)
in INDTDQ resource table [673](#)
in INTRATDQ resource table [675](#)
in IPCINGRP resource table [679](#)
in IPCONDEF resource table [681](#)
in IPCONN resource table [687](#)
in JMSINGRP resource table [695](#)
in JRMINGRP resource table [697](#)
in JRNINGRP resource table [699](#)
in JRNLDEF resource table [701](#)
in JRNLMODL resource table [705](#)
in JRNMDEF resource table [709](#)
in JVMSERV resource table [719](#)
in JVMSVDEF resource table [723](#)
in LIBDEF resource table [727](#)
in LIBINGRP resource table [735](#)
in LIBRARY resource table [737](#)
in LNKSMSCG resource table [739](#)
in LNKSMSCS resource table [741](#)
in LNKSRSCG resource table [743](#)
in LNKSRSCS resource table [745](#)
in LNKSWSCG resource table [747](#)
in LNKSWSCS resource table [749](#)

CHANGETIME field (*continued*)

in LOCFILE resource table [757](#)
in LOCTRAN resource table [763](#)
in LSRDEF resource table [769](#)
in LSRINGRP resource table [775](#)
in MAPDEF resource table [781](#)
in MAPINGRP resource table [785](#)
in MGMTPART resource table [825](#)
in MONDEF resource table [857](#)
in MONGROUP resource table [861](#)
in MONINGRP resource table [863](#)
in MONINSPC resource table [865](#)
in MONSPEC resource table [873](#)
in MQCINGRP resource table [877](#)
in MQCON resource table [879](#)
in MQCONDEF resource table [883](#)
in MQINI resource table [889](#)
in MQMINGRP resource table [891](#)
in MQMON resource table [893](#)
in MQMONDEF resource table [897](#)
in OSGIBUND resource table [937](#)
in PARINGRP resource table [941](#)
in PARTDEF resource table [945](#)
in PERIODEF resource table [951](#)
in PGMINGRP resource table [953](#)
in PIPEDEF resource table [955](#)
in PIPELINE resource table [959](#)
in PIPINGRP resource table [963](#)
in PLATDEF resource table [965](#)
in PLATFORM resource table [970](#)
in PRCINGRP resource table [977](#)
in PRNINGRP resource table [979](#)
in PROCDEF resource table [981](#)
in PROCTYP resource table [985](#)
in PROFDEF resource table [987](#)
in PROFILE resource table [993](#)
in PROGDEF resource table [995](#)
in PROGRAM resource table [1001](#)
in PROINGRP resource table [1007](#)
in PRTNDEF resource table [1009](#)
in RASGNDEF resource table [1013](#)
in RASINDSC resource table [1017](#)
in REMFILE resource table [1025](#)
in REMTDQ resource table [1027](#)
in REMTRAN resource table [1029](#)
in RESDESC resource table [1035](#)
in RESGROUP resource table [1043](#)
in RESINDSC resource table [1047](#)
in RESINGRP resource table [1049](#)
in RQMDEF resource table [1053](#)
in RQMINGRP resource table [1057](#)
in RQMODEL resource table [1059](#)
in RTADEF resource table [1063](#)
in RTAGROUP resource table [1067](#)
in RTAINAPS resource table [1069](#)
in RTAINGRP resource table [1071](#)
in RTAINSPC resource table [1073](#)
in RTASPEC resource table [1075](#)
in RULE resource table [1079](#)
in SESINGRP resource table [1083](#)
in SESSDEF resource table [1085](#)
in STAINGRP resource table [1091](#)

CHANGETIME field (*continued*)

in STATDEF resource table [1093](#)
in SYSLINK resource table [1103](#)
in TCLINGRP resource table [1143](#)
in TCPDEF resource table [1145](#)
in TCPINGRP resource table [1151](#)
in TCPIPS resource table [1157](#)
in TDQDEF resource table [1163](#)
in TDQINGRP resource table [1171](#)
in TERMDEF resource table [1173](#)
in TRANCLAS resource table [1187](#)
in TRANDEF resource table [1191](#)
in TRANGRP resource table [1201](#)
in TRMINGRP resource table [1203](#)
in TRNCLDEF resource table [1205](#)
in TRNINGRP resource table [1209](#)
in TSMDEF resource table [1217](#)
in TSMINGRP resource table [1221](#)
in TSMODEL resource table [1223](#)
in TYPINGRP resource table [1237](#)
in TYPTMDEF resource table [1239](#)
in URIINGRP resource table [1255](#)
in URIMAP resource table [1257](#)
in URIMPDEF resource table [1261](#)
in WEBINGRP resource table [1271](#)
in WEBSERV resource table [1273](#)
in WEBSVDEF resource table [1277](#)
in WLMDEF resource table [1305](#)
in WLMGROUP resource table [1307](#)
in WLMINGRP resource table [1309](#)
in WLMINSPC resource table [1311](#)
in WLMSPEC resource table [1313](#)
in XMLTRANS resource table [1321](#)

CHANGEUSRID field

in ACTION resource table [17](#)
in APPLCTN resource table [23](#)
in APPLDEF resource table [27](#)
in APSPEC resource table [31](#)
in ATMINGRP resource table [37](#)
in ATOMDEF resource table [39](#)
in ATOMSERV resource table [45](#)
in BUNDDEF resource table [65](#)
in BUNDLE resource table [69](#)
in BUNINGRP resource table [75](#)
in CMDMPAPS resource table [137](#)
in CMDMSAPS resource table [139](#)
in CMDT resource table [141](#)
in CMTCMDEF resource table [147](#)
in CONINGRP resource table [155](#)
in CONNDEF resource table [157](#)
in CONNECT resource table [164](#)
in CPLEXDEF resource table [169](#)
in CPLXCMAS resource table [173](#)
in CSGLCGCG resource table [275](#)
in CSGLCGCS resource table [277](#)
in CSYSDEF resource table [281](#)
in CSYSGRP resource table [287](#)
in D2CINGRP resource table [289](#)
in D2EINGRP resource table [291](#)

CHANGEUSRID field (*continued*)

in D2TINGRP resource table [293](#)
 in DB2CDEF resource table [295](#)
 in DB2CONN resource table [301](#)
 in DB2EDEF resource table [307](#)
 in DB2ENTRY resource table [311](#)
 in DB2PKGST resource table [315](#)
 in DB2TDEF resource table [319](#)
 in DB2TRN resource table [327](#)
 in DOCDEF resource table [331](#)
 in DOCINGRP resource table [335](#)
 in DOCTEMP resource table [337](#)
 in DTRINGRP resource table [355](#)
 in EJCINGRP resource table [361](#)
 in EJCODEF resource table [365](#)
 in EJCOSE resource table [371](#)
 in EJDINGRP resource table [375](#)
 in EJDJAR resource table [377](#)
 in EJDJDEF resource table [381](#)
 in ENQINGRP resource table [425](#)
 in ENQMDEF resource table [427](#)
 in ENQMODEL resource table [431](#)
 in EPADAPT resource table [435](#)
 in EPADSET resource table [437](#)
 in EVALDEF resource table [549](#)
 in EVNTBIND resource table [567](#)
 in EXTRATDQ resource table [581](#)
 in FENODDEF resource table [589](#)
 in FEPOODEF resource table [605](#)
 in FEPRODEF resource table [609](#)
 in FETRGDEF resource table [613](#)
 in FILEDEF resource table [617](#)
 in FILINGRP resource table [625](#)
 in FNOINGRP resource table [627](#)
 in FPOINGRP resource table [629](#)
 in FPRINGRP resource table [631](#)
 in FSEGDEF resource table [633](#)
 in FSGINGRP resource table [649](#)
 in FTRINGRP resource table [651](#)
 in INDTDQ resource table [673](#)
 in INTRATDQ resource table [675](#)
 in IPCINGRP resource table [679](#)
 in IPCONDEF resource table [681](#)
 in IPCONN resource table [687](#)
 in JMSINGRP resource table [695](#)
 in JRMINGRP resource table [697](#)
 in JRNINGRP resource table [699](#)
 in JRNLMODL resource table [705](#)
 in JRNMDEF resource table [709](#)
 in JVMSERV resource table [719](#)
 in JVMSVDEF resource table [723](#)
 in LIBDEF resource table [727](#)
 in LIBINGRP resource table [735](#)
 in LIBRARY resource table [737](#)
 in LNKSMSG resource table [739](#)
 in LNKSMSCS resource table [741](#)
 in LNKSRSRG resource table [743](#)
 in LNKSRSRG resource table [745](#)
 in LNKSWSRG resource table [747](#)
 in LNKSWSRG resource table [749](#)
 in LOCFIL resource table [757](#)
 in LOCTRAN resource table [763](#)
 in LSRDEF resource table [769](#)
 in LSRINGRP resource table [775](#)

CHANGEUSRID field (*continued*)

in MAPDEF resource table [781](#)
 in MAPINGRP resource table [785](#)
 in MGMTPART resource table [825](#)
 in MONDEF resource table [857](#)
 in MONGROUP resource table [861](#)
 in MONINGRP resource table [863](#)
 in MONINSPC resource table [865](#)
 in MONSPEC resource table [873](#)
 in MQCINGRP resource table [877](#)
 in MQCON resource table [879](#)
 in MQCONDEF resource table [883](#)
 in MQINI resource table [889](#)
 in MQMINGRP resource table [891](#)
 in MQMON resource table [893](#)
 in MQMONDEF resource table [897](#)
 in OSGIBUND resource table [937](#)
 in PARINGRP resource table [941](#)
 in PARTDEF resource table [945](#)
 in PERIODEF resource table [951](#)
 in PGMINGRP resource table [953](#)
 in PIPEDEF resource table [955](#)
 in PIPELINE resource table [959](#)
 in PIPINGRP resource table [963](#)
 in PLATDEF resource table [965](#)
 in PLATFORM resource table [970](#)
 in PRCINGRP resource table [977](#)
 in PRNINGRP resource table [979](#)
 in PROCDEF resource table [981](#)
 in PROCTYP resource table [985](#)
 in PROFDEF resource table [987](#)
 in PROFILE resource table [993](#)
 in PROGDEF resource table [995](#)
 in PROGRAM resource table [1001](#)
 in PROINGRP resource table [1007](#)
 in PRTNDEF resource table [1009](#)
 in RASGNDEF resource table [1013](#)
 in RASINDSC resource table [1017](#)
 in REMFILE resource table [1025](#)
 in REMTDQ resource table [1027](#)
 in REMTRAN resource table [1029](#)
 in RESDESC resource table [1035](#)
 in RESGROUP resource table [1043](#)
 in RESINDSC resource table [1047](#)
 in RESINGRP resource table [1049](#)
 in RQMDEF resource table [1053](#)
 in RQMINGRP resource table [1057](#)
 in RQMODEL resource table [1059](#)
 in RTADEF resource table [1063](#)
 in RTAGROUP resource table [1067](#)
 in RTAINAPS resource table [1069](#)
 in RTAINGRP resource table [1071](#)
 in RTAINSPC resource table [1073](#)
 in RTASPEC resource table [1075](#)
 in RULE resource table [1079](#)
 in SESINGRP resource table [1083](#)
 in SESSDEF resource table [1085](#)
 in STAINGRP resource table [1091](#)
 in STATDEF resource table [1093](#)
 in SYSLINK resource table [1103](#)
 in TCLINGRP resource table [1143](#)
 in TCPDEF resource table [1145](#)

CHANGEUSRID field (*continued*)

- in TCPINGRP resource table [1151](#)
- in TCPIPS resource table [1157](#)
- in TDQDEF resource table [1163](#)
- in TDQINGRP resource table [1171](#)
- in TERMDEF resource table [1173](#)
- in TRANCLAS resource table [1187](#)
- in TRANDEF resource table [1191](#)
- in TRANGRP resource table [1201](#)
- in TRMINGRP resource table [1203](#)
- in TRNCLDEF resource table [1205](#)
- in TRNINGRP resource table [1209](#)
- in TSMDEF resource table [1217](#)
- in TSMINGRP resource table [1221](#)
- in TSMODEL resource table [1223](#)
- in TYPINGRP resource table [1237](#)
- in TYPTMDEF resource table [1239](#)
- in URIINGRP resource table [1255](#)
- in URIMAP resource table [1257](#)
- in URIMPDEF resource table [1261](#)
- in WEBINGRP resource table [1271](#)
- in WEBSERV resource table [1273](#)
- in WEBSVDEF resource table [1277](#)
- in WLMDEF resource table [1305](#)
- in WLMGROUP resource table [1307](#)
- in WLMINGRP resource table [1309](#)
- in WLMINSPC resource table [1311](#)
- in WLMSPEC resource table [1313](#)
- in XMLTRANS resource table [1321](#)

CHARACTERSET field

- in URIMAP resource table [1257](#)
- in URIMPDEF resource table [1261](#)

CHARIN field

- in HTASK resource table [655](#)
- in MLOCTAN resource table [837](#)
- in TASK resource table [1123](#)

CHARINSEC field

- in HTASK resource table [655](#)
- in MLOCTAN resource table [837](#)
- in TASK resource table [1123](#)

CHAROUT field

- in HTASK resource table [655](#)
- in MLOCTAN resource table [837](#)
- in TASK resource table [1123](#)

CHAROUTSEC field

- in HTASK resource table [655](#)
- in MLOCTAN resource table [837](#)
- in TASK resource table [1123](#)

CHARSRECVD field

- in FEPICONN resource table [593](#)
- in MFEPICON resource table [823](#)

CHARSENT field

- in FEPICONN resource table [593](#)
- in MFEPICON resource table [823](#)

CHETRACE field

- in CMAS resource table [131](#)
- in MAS resource table [787](#)

CHGSTALL field

- in EMASICK resource table [389](#)

CHGSTALL field (*continued*)

- in EMASWELL resource table [397](#)

CHGSTALL1 field

- in EMASICK resource table [389](#)
- in EMASWELL resource table [397](#)

CHGSTALL2 field

- in EMASICK resource table [389](#)
- in EMASWELL resource table [397](#)

CHGSTALL3 field

- in EMASICK resource table [389](#)
- in EMASWELL resource table [397](#)

CHGSTALL4 field

- in EMASICK resource table [389](#)
- in EMASWELL resource table [397](#)

CHMODECT field

- in HTASK resource table [655](#)
- in MLOCTAN resource table [837](#)
- in TASK resource table [1123](#)

CICS resource tables

- ACTION [17](#)
- AIMODEL [19](#)
- APACTV [21](#)
- APPLCTN [23](#)
- APPLDEF [27](#)
- APSPEC [31](#)
- ASYNCREQ [33](#)
- ATMINGRP [37](#)
- ATOMDEF [39](#)
- ATOMSERV [45](#)
- ATTR [49](#)
- ATTRAVA [47](#)
- BATCHREP [53](#)
- BINCONRS [57](#)
- BINCONSC [59](#)
- BINSTERR [61](#)
- BRFACIL [63](#)
- BUNDEF [65](#)
- BUNDLE [69](#)
- BUNDPART [73](#)
- BUNINGRP [75](#)
- CFDTPPOOL [77](#)
- CICSDSA [79](#)
- CICSPAGP [83](#)
- CICSplex [87](#)
- CICSRGN [89](#)
- CICSSTOR [101](#)
- CLCACHE [123](#)
- CMAS [131](#)
- CMASLIST [125](#)
- CMASPLEX [129](#)
- CMDMPAPS [137](#)
- CMDMSAPS [139](#)
- CMDT [141](#)
- CMTCMDEF [147](#)
- CMTCMLNK [151](#)
- CMTPLNK [153](#)
- CONINGRP [155](#)
- CONNDEF [157](#)
- CONNECT [164](#)
- CPLXDEF [169](#)
- CPLXCMAS [173](#)
- CRESAIMD [177](#)
- CRESATOM [179](#)
- CRESBUND [181](#)

CICS resource tables *(continued)*

[CRESCONN 183](#)
[CRESDB2C 185](#)
[CRESDB2E 187](#)
[CRESDB2P 189](#)
[CRESDB2T 191](#)
[CRESDOCT 193](#)
[CRESDSNM 195](#)
[CRESENQM 197](#)
[CRESEPAD 199](#)
[CRESEPAS 201](#)
[CRESEVBD 203](#)
[CRESEVCS 205](#)
[CRESFECO 207](#)
[CRESFEND 209](#)
[CRESFEPO 211](#)
[CRESFETR 213](#)
[CRESFILE 215](#)
[CRESGLUE 217](#)
[CRESIPCN 219](#)
[CRESJRNL 221](#)
[CRESJRNM 223](#)
[CRESJVMS 225](#)
[CRESLIBR 227](#)
[CRESMODE 229](#)
[CRESMQMN 231](#)
[CRESPART 233](#)
[CRESPIPE 235](#)
[CRESPRGM 237](#)
[CRESPROF 239](#)
[CRESPTY 241](#)
[CRESRQMD 243](#)
[CRESSDMP 245](#)
[CRESTCPS 247](#)
[CRESTDMP 249](#)
[CRESTDQ 251](#)
[CRESTERM 253](#)
[CRESTRAN 255](#)
[CRESTRUE 257](#)
[CRESTSMD 259](#)
[CRESURIM 261](#)
[CRESWEBS 263](#)
[CRESXMLT 265](#)
[CSDGROUP 267](#)
[CSDINGRP 269](#)
[CSDINLST 271](#)
[CSDLIST 273](#)
[CSGLCGCG 275](#)
[CSGLCGCS 277](#)
[CSYSDEF 281](#)
[CSYSGRP 287](#)
[D2CINGRP 289](#)
[D2EINGRP 291](#)
[D2TINGRP 293](#)
[DB2CDEF 295](#)
[DB2CONN 301](#)
[DB2EDEF 307](#)
[DB2ENTRY 311](#)
[DB2PKGST 315](#)
[DB2SS 317](#)
[DB2TDEF 319](#)
[DB2THRD 323](#)
[DB2TRAN 325](#)
[DB2TRN 327](#)

CICS resource tables *(continued)*

[DBCTLSS 329](#)
[DOCDEF 331](#)
[DOCINGRP 335](#)
[DOCTEMP 337](#)
[DOMSPOOL 341](#)
[DSKJRNL 343](#)
[DSNAME 345](#)
[DSPGBL 349](#)
[DSPMODE 351](#)
[DSPPOOL 353](#)
[DTRINGRP 355](#)
[EACTNTFN 357](#)
[ECSYSCHG 359](#)
[EJCINGRP 361](#)
[EJCOBEAN 363](#)
[EJCODEF 365](#)
[EJCOSE 371](#)
[EJDINGRP 375](#)
[EJDJAR 377](#)
[EJDJBAN 379](#)
[EJDJDEF 381](#)
[EL SIGNAL 385](#)
[EMASJOIN 387](#)
[EMASSICK 389](#)
[EMASSTOP 393](#)
[EMASSTRT 395](#)
[EMASWELL 397](#)
[EMCICS 401](#)
[EMCONN 403](#)
[EMDBX 405](#)
[EMFILE 407](#)
[EMGLBL 409](#)
[EMJRNL 411](#)
[EMPROG 413](#)
[EMSTATUS 415](#)
[EMTDQS 419](#)
[EMTERM 421](#)
[EMTRAN 423](#)
[ENQINGRP 425](#)
[ENQMDEF 427](#)
[ENQMODEL 431](#)
[ENQUEUE 433](#)
[EPADAPT 435](#)
[EPADSET 437](#)
[EPAINSET 439](#)
[EPLEXCHG 441](#)
[ERESSTAT 443](#)
[ERMCAIMD 445](#)
[ERMCATOM 447](#)
[ERMCBUND 449](#)
[ERMCCONN 451](#)
[ERMCDDB2C 453](#)
[ERMCDDB2E 455](#)
[ERMCDDB2P 457](#)
[ERMCDDB2T 459](#)
[ERMCDOCT 461](#)
[ERMCDSNM 463](#)
[ERMENQM 465](#)
[ERMCEVBD 467](#)
[ERMCEVCS 469](#)
[ERMCFECO 471](#)
[ERMCFEND 473](#)
[ERMCFEPO 475](#)

CICS resource tables (continued)

[ERMCFETR 477](#)
[ERMCFE 479](#)
[ERMCGLUE 481](#)
[ERMCI PCN 483](#)
[ERM CJRNL 485](#)
[ERM CJRNM 487](#)
[ERM CJVMS 489](#)
[ERMCLIBR 491](#)
[ERMCMODE 493](#)
[ERM COSGB 495](#)
[ERM COSGS 497](#)
[ERMCPART 499](#)
[ERM CPIPE 501](#)
[ERM CPRGM 503](#)
[ERM CPROF 505](#)
[ERM CPRTY 507](#)
[ERM CRQMD 509](#)
[ERM CSDMP 511](#)
[ERM CT CPS 513](#)
[ERM CT DMP 515](#)
[ERM CT DQ 517](#)
[ERM CT ERMS 519](#)
[ERM CT RAN 521](#)
[ERM CT RUE 523](#)
[ERM CT SMD 525](#)
[ERM CURIM 527](#)
[ERM C WEBS 529](#)
[ERM CXMLT 531](#)
[ERM M CONN 533](#)
[ERM M FILE 535](#)
[ERM M JRNL 537](#)
[ERM M PRGM 539](#)
[ERM M TDQ 541](#)
[ERM M TERM 543](#)
[ERM M TRAN 545](#)
[ESGRPCHG 547](#)
[EVALDEF 549](#)
[EVCS DATA 555](#)
[EVCS INFO 557](#)
[EVCS OPT 559](#)
[EVCSPEC 553](#)
[EVENT 563](#)
[EVENTDTL 561](#)
[EVNT BIND 567](#)
[EVNTGBL 569](#)
[EXCI 573](#)
[EXITGLUE 575](#)
[EXITTRUE 577](#)
[EXTGLORD 579](#)
[EXTRATDQ 581](#)
[FEEDBACK 585](#)
[FENODDEF 589](#)
[FEPICONN 593](#)
[FEPINODE 595](#)
[FEPIPOOL 597](#)
[FEPIPROP 601](#)
[FEPITRGT 603](#)
[FEPOODEF 605](#)
[FEPRODEF 609](#)
[FETR GDEF 613](#)
[FILEDEF 617](#)
[FILINGRP 625](#)
[FNOINGRP 627](#)

CICS resource tables (continued)

[FPOINGRP 629](#)
[FPRINGRP 631](#)
[FSEGDEF 633](#)
[FSGINGRP 649](#)
[FTRINGRP 651](#)
[HOST 653](#)
[HTASK 655](#)
[INDTDQ 673](#)
[INTRATDQ 675](#)
[IPCINGRP 679](#)
[IPCONDEF 681](#)
[IPCONN 687](#)
[IPFACIL 693](#)
[JMSINGRP 695](#)
[JRMINGRP 697](#)
[JRNINGRP 699](#)
[JRN LDEF 701](#)
[JRN LMODL 705](#)
[JRN LNAME 707](#)
[JRN MDEF 709](#)
[JVM 713](#)
[JVMPOOL 715](#)
[JVM PROF 717](#)
[JVM SERV 719](#)
[JVM SVDEF 723](#)
[LIBDEF 727](#)
[LIBDSN 733](#)
[LIBINGRP 735](#)
[LIBRARY 737](#)
[LNKSMSCG 739](#)
[LNKSMSCS 741](#)
[LNKSRSCG 743](#)
[LNKSRSCS 745](#)
[LNKSWSCG 747](#)
[LNKSWSCS 749](#)
[LOADACT 751](#)
[LOADER 753](#)
[LOCFILE 757](#)
[LOCTRAN 763](#)
[LSRDEF 769](#)
[LSRINGRP 775](#)
[LSRPBUF 777](#)
[LSRPOOL 779](#)
[MAPDEF 781](#)
[MAPINGRP 785](#)
[MAS 787](#)
[MASHIST 793](#)
[MASQRYER 795](#)
[MASSTAT 797](#)
[MCICSDSA 799](#)
[MCICSRGN 803](#)
[MCMDT 807](#)
[MCONNECT 811](#)
[MDB2THRD 815](#)
[METADESC 817](#)
[METANAME 819](#)
[METAPARM 821](#)
[MFEPICON 823](#)
[MGMT PART 825](#)
[MINDTDQ 827](#)
[MJOURNAL 829](#)
[MJRN LNAM 831](#)
[MLOCFILE 833](#)

CICS resource tables *(continued)*

[MLOCTRAN 837](#)
[MLSRPBUF 845](#)
[MLSRPOOL 847](#)
[MMODNAME 851](#)
[MNTRATDQ 853](#)
[MODENAME 855](#)
[MONDEF 857](#)
[MONGROUP 861](#)
[MONINGRP 863](#)
[MONINSPC 865](#)
[MONITOR 867](#)
[MONSPEC 873](#)
[MPROGRAM 875](#)
[MQCINGRP 877](#)
[MQCON 879](#)
[MQCONDEF 883](#)
[MQCONN 887](#)
[MQINI 889](#)
[MQMINGRP 891](#)
[MQMON 893](#)
[MQMONDEF 897](#)
[MREMFIL 901](#)
[MREMTDQ 903](#)
[MREMTRAN 905](#)
[MTDQGBL 907](#)
[MTERMNL 909](#)
[MTRANCLS 911](#)
[MTSQGBL 913](#)
[MVSESTG 917](#)
[MVSTCB 921](#)
[MVSTCBGL 919](#)
[MVSWLM 923](#)
[MXTRATDQ 927](#)
[OBJACT 929](#)
[OBJECT 931](#)
[OBJSTAT 935](#)
[OSGIBUND 937](#)
[OSGISERV 939](#)
[PARINGRP 941](#)
[PARMAVA 943](#)
[PARTDEF 945](#)
[PARTNER 949](#)
[PERIODEF 951](#)
[PGMINGRP 953](#)
[PIPEDEF 955](#)
[PIPELINE 959](#)
[PIPINGRP 963](#)
[PLATDEF 965](#)
[PLATFORM 970](#)
[POLMON 975](#)
[PRCINGRP 977](#)
[PRNINGRP 979](#)
[PROCDEF 981](#)
[PROCTYP 985](#)
[PROFDEF 987](#)
[PROFILE 993](#)
[PROGDEF 995](#)
[PROGRAM 1001](#)
[PROINGRP 1007](#)
[PRTNDEF 1009](#)
[RASGNDEF 1013](#)
[RASINDSC 1017](#)
[RASPROC 1019](#)

CICS resource tables *(continued)*

[RDSCPROC 1021](#)
[RECOVERY 1023](#)
[REMFIL 1025](#)
[REMTDQ 1027](#)
[REMTRAN 1029](#)
[REQID 1033](#)
[RESDESC 1035](#)
[RESGROUP 1043](#)
[RESINDSC 1047](#)
[RESINGRP 1049](#)
[RPLLIST 1051](#)
[RQMDEF 1053](#)
[RQMINGRP 1057](#)
[RQMODEL 1059](#)
[RTAACTV 1061](#)
[RTADEF 1063](#)
[RTAGROUP 1067](#)
[RTAINAPS 1069](#)
[RTAINGRP 1071](#)
[RTAINSPC 1073](#)
[RTASPEC 1075](#)
[RULE 1079](#)
[SESINGRP 1083](#)
[SESSDEF 1085](#)
[SMFJRN 1089](#)
[STAINGRP 1091](#)
[STATDEF 1093](#)
[STREAMNM 1097](#)
[SYSDUMP 1099](#)
[SYSLINK 1103](#)
[SYSPARM 1107](#)
[SYSRES 1109](#)
[TAPEJRN 1111](#)
[TASK 1123](#)
[TASKASSC 1113](#)
[TASKESTG 1117](#)
[TASKFIL 1119](#)
[TASKRMI 1121](#)
[TASKTSQ 1141](#)
[TCLINGRP 1143](#)
[TCPDEF 1145](#)
[TCPINGRP 1151](#)
[TCPIPGBL 1153](#)
[TCPIPS 1157](#)
[TDQDEF 1163](#)
[TDQGBL 1169](#)
[TDQINGRP 1171](#)
[TERMDEF 1173](#)
[TERMNL 1179](#)
[TRANCLAS 1187](#)
[TRANDEF 1191](#)
[TRANDUMP 1197](#)
[TRANGRP 1201](#)
[TRMINGRP 1203](#)
[TRNCLDEF 1205](#)
[TRNINGRP 1209](#)
[TSKSPOLS 1211](#)
[TSKSPool 1215](#)
[TSMDEF 1217](#)
[TSMINGRP 1221](#)
[TSMODEL 1223](#)

CICS resource tables *(continued)*

[TSPOOL 1225](#)
[TSQGBL 1227](#)
[TSQNAME 1231](#)
[TSQSHR 1233](#)
[TSQUEUE 1235](#)
[TYPINGRP 1237](#)
[TYPTMDEF 1239](#)
[UOW 1253](#)
[UOWDSNF 1247](#)
[UOWENQ 1249](#)
[UOWLINK 1251](#)
[URIINGRP 1255](#)
[URIMAP 1257](#)
[URIMPDEF 1261](#)
[URIMPGBL 1267](#)
[VOLUME 1269](#)
[WEBINGRP 1271](#)
[WEBSERV 1273](#)
[WEBSVDEF 1277](#)
[WLMAROUT 1281](#)
[WLMATAFF 1283](#)
[WLMATARG 1285](#)
[WLMATGRP 1289](#)
[WLMATRAN 1293](#)
[WLMAWAOR 1295](#)
[WLMAWDEF 1299](#)
[WLMAWORK 1301](#)
[WLMAWTOR 1303](#)
[WLMDEF 1305](#)
[WLMGROUP 1307](#)
[WLMINGRP 1309](#)
[WLMINSPC 1311](#)
[WLMSPEC 1313](#)
[WLPSEVR 1317](#)
[WORKREQ 1319](#)
[XMLTRANS 1321](#)

CICSCONN field

[in CMTCMLNK resource table 151](#)
[in CMTPMLNK resource table 153](#)

CICSDSA resource table [79](#)

CICSNAME field

[in BINCONRS resource table 57](#)
[in BINCONSC resource table 59](#)
[in BINSTERR resource table 61](#)
[in CSGLCGCS resource table 277](#)
[in DBCTLSS resource table 329](#)
[in ECSYSCHG resource table 359](#)
[in ERESSTAT resource table 443](#)
[in MAS resource table 787](#)
[in MASQRYER resource table 795](#)
[in MASSTAT resource table 797](#)
[in OBJSTAT resource table 935](#)

CICSPAGP resource table [83](#)

CICSPLEX field

[in CPLEXDEF resource table 169](#)
[in CPLXCMA resource table 173](#)

CICSPLEX field *(continued)*

[in ECSYSCHG resource table 359](#)
[in EPLEXCHG resource table 441](#)

CICSPLEX resource table [87](#)

CICSREL field

[in CICSPAGP resource table 83](#)
[in CICSSTOR resource table 101](#)
[in DOMSPOOL resource table 341](#)
[in DSPGBL resource table 349](#)
[in DSPMODE resource table 351](#)
[in DSPPOOL resource table 353](#)
[in ENQUEUE resource table 433](#)
[in JVMPOOL resource table 715](#)
[in LOADACT resource table 751](#)
[in LOADER resource table 753](#)
[in MONITOR resource table 867](#)
[in MQCON resource table 879](#)
[in MQCONN resource table 887](#)
[in MVSWLM resource table 923](#)
[in OBJSTAT resource table 935](#)
[in RECOVERY resource table 1023](#)
[in STREAMNM resource table 1097](#)
[in TASK resource table 1123](#)
[in TASKFILE resource table 1119](#)
[in TASKRMI resource table 1121](#)
[in TASKTSQ resource table 1141](#)
[in TSKSPOLS resource table 1211](#)
[in TSKSPOOL resource table 1215](#)

CICSRGN resource table [89](#)

CICSSAMP field

[in CSYSDEF resource table 281](#)
[in MAS resource table 787](#)
[in MONSPEC resource table 873](#)

CICSSERV field

[in CMTCMLNK resource table 151](#)
[in CMTPMLNK resource table 153](#)

CICSETAVAIL field

[in ATTR resource table 49](#)

CICSSTATE field

[in MAS resource table 787](#)
[in MASSTAT resource table 797](#)

CICSSTATUS field

[in CICSRGN resource table 89](#)
[in MCICSRGN resource table 803](#)

CICSSTOR resource table [101](#)

CICSSYS field

[in CICSRGN resource table 89](#)
[in CSDGROUP resource table 267](#)
[in CSDINGRP resource table 269](#)
[in CSDINLST resource table 271](#)
[in CSDLIST resource table 273](#)
[in RTAACTV resource table 1061](#)
[in SYSRES resource table 1109](#)

CICSTCBCOUNT field

[in MVSTCBGL resource table 919](#)

CICSTCBSTGA field

[in MVSTCBGL resource table 919](#)

CICSTCBSTGAI field

[in MVSTCBGL resource table 919](#)

CICSTCBSTGB field

[in MVSTCBGL resource table 919](#)

CICSTCBSTGBI field

[in MVSTCBGL resource table 919](#)

CICSTCBTIME field

CICSTCBTIME field (*continued*)
 in MVSTCBGL resource table [919](#)
 CICSTYPE field
 in MASQRYER resource table [795](#)
 CICSVALAVAIL field
 in ATTR resource table [49](#)
 in METAPARM resource table [821](#)
 CICSWAIT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 CICSWC field
 in MLOCTRAN resource table [837](#)
 CICSWT field
 in MLOCTRAN resource table [837](#)
 CIDDOMAIN field
 in PIPELINE resource table [959](#)
 CINSCKSNPERS field
 in TCPIPGBL resource table [1153](#)
 CINSOCKETS field
 in TCPIPGBL resource table [1153](#)
 CINUM field
 in MTDQGBL resource table [907](#)
 in MTSQGBL resource table [913](#)
 in TDQGBL resource table [1169](#)
 in TSQGBL resource table [1227](#)
 CIPHERS field
 in EJCODEF resource table [365](#)
 in EJCOSE resource table [371](#)
 in IPCONDEF resource table [681](#)
 in IPCONN resource table [687](#)
 in TCPDEF resource table [1145](#)
 in TCPIPS resource table [1157](#)
 in URIMAP resource table [1257](#)
 in URIMPDEF resource table [1261](#)
 CISINUSE field
 in MTSQGBL resource table [913](#)
 in TSQGBL resource table [1227](#)
 CISIZE field
 in MTDQGBL resource table [907](#)
 in MTSQGBL resource table [913](#)
 in TDQGBL resource table [1169](#)
 in TSQGBL resource table [1227](#)
 CJVMDESTRSOS field
 in JVMPROF resource table [717](#)
 CJVMHEAPHWM field
 in JVMPROF resource table [717](#)
 CJVMSUNRESET field
 in JVMPROF resource table [717](#)
 CLASSCACHE field
 in JVM resource table [713](#)
 in JVMPROF resource table [717](#)
 CLCACHE resource table [123](#)
 CLEHEAPHWM field
 in JVMPROF resource table [717](#)
 CLIENTCERT field
 in EJCODEF resource table [365](#)
 in EJCOSE resource table [371](#)
 CLIENTIPADDR field
 in TASKASSC resource table [1113](#)
 in WORKREQ resource table [1319](#)
 CLIENTLOC field
 in IPCONN resource table [687](#)
 in TASKASSC resource table [1113](#)
 CLIENTPORT field

CLIENTPORT field (*continued*)
 in TASKASSC resource table [1113](#)
 CLIPADDR field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 CLNTIPFAMILY field
 in TASKASSC resource table [1113](#)
 in WORKREQ resource table [1319](#)
 CLOSETIMEOUT field
 in TCPIPS resource table [1157](#)
 CMAS field
 in APACTV resource table [21](#)
 in EVENT resource table [563](#)
 CMAS resource table [131](#)
 CMASCONTEXT field
 in OBJECT resource table [931](#)
 CMASLIST resource table [125](#)
 CMASNAME field
 in BINCONRS resource table [57](#)
 in BINCONSC resource table [59](#)
 in BINSTERR resource table [61](#)
 in CICSPLX resource table [87](#)
 in CMAS resource table [131](#)
 in CMASLIST resource table [125](#)
 in CMDMPAPS resource table [137](#)
 in CMDMSAPS resource table [139](#)
 in CPLXCMAS resource table [173](#)
 in EMASJOIN resource table [387](#)
 in EMASSTOP resource table [393](#)
 in EMASSTRT resource table [395](#)
 in MAS resource table [787](#)
 in MASSTAT resource table [797](#)
 CMASPLX resource table [129](#)
 CMASTYPE field
 in APACTV resource table [21](#)
 CMAXBACKLOG field
 in TCPIPS resource table [1157](#)
 CMDMPAPS resource table [137](#)
 CMDMSAPS resource table [139](#)
 CMDPROTECT field
 in CICSRGN resource table [89](#)
 CMDSEC field
 in LOCTRAN resource table [763](#)
 in TASK resource table [1123](#)
 in TRANDEF resource table [1191](#)
 CMDT resource table [141](#)
 CMISMAVICTIM field
 in JVMPROF resource table [717](#)
 CMISMSTEALER field
 in JVMPROF resource table [717](#)
 CMTCMDEF resource table [147](#)
 CMTCMLNK resource table [151](#)
 CMTPLNK resource table [153](#)
 CNEWJVMSCRT field
 in JVMPROF resource table [717](#)
 CNONIMMGET field
 in CICSSTOR resource table [101](#)
 CNTLINTRVAL field
 in FILEDEF resource table [617](#)
 CNTLPT field
 in CPLXCMAS resource table [173](#)
 CNTRECORDS field
 in OBJSTAT resource table [935](#)
 COBOLTYPE field

COBOLTYPE field (*continued*)
in PROGRAM resource table [1001](#)

CODEPAGE field
in TERMDEF resource table [1173](#)
in TYPTMDEF resource table [1239](#)

COLDSTATUS field
in CICSRCN resource table [89](#)

COLOR field
in TERMDEF resource table [1173](#)
in TYPTMDEF resource table [1239](#)

COLORST field
in TERMNL resource table [1179](#)

COMAUTHID field
in DB2CDEF resource table [295](#)
in DB2CONN resource table [301](#)

COMAUTHTYPE field
in DB2CDEF resource table [295](#)
in DB2CONN resource table [301](#)

COMDTE field
in ECSYSCHG resource table [359](#)

COMMAND field
in ASYNCREQ resource table [33](#)
in FEEDBACK resource table [585](#)

COMMITTS field
in DB2ENTRY resource table [311](#)

COMPRESSIONS field
in MTSQGBL resource table [913](#)
in TSQGBL resource table [1227](#)

COMPRESSST field
in MONITOR resource table [867](#)

COMTHREADLIM field
in DB2CDEF resource table [295](#)
in DB2CONN resource table [301](#)

COMTHREADS field
in DB2CONN resource table [301](#)

CONTRACE field
in CMAS resource table [131](#)
in MAS resource table [787](#)

CON_STATUS field
in WLMAROUT resource table [1281](#)
in WLMATARG resource table [1285](#)
in WLMAWAOR resource table [1295](#)
in WLMAWTOR resource table [1303](#)

CONCURBIDS field
in CONNECT resource table [164](#)
in MCONNECT resource table [811](#)

CONCURRENCY field
in PROGDEF resource table [995](#)
in PROGRAM resource table [1001](#)

CONCURRENTST field
in EXITTRUE resource table [577](#)
in EXTGLORD resource table [579](#)

CONDEFRG field
in RESDESC resource table [1035](#)

CONDEFRS field
in RESDESC resource table [1035](#)

CONDEFTS field
in RESDESC resource table [1035](#)

CONFDATA field
in TRANDEF resource table [1191](#)

CONFIGDATA1 field
in EPADAPT resource table [435](#)

CONFIGFILE field
in ATOMDEF resource table [39](#)

CONFIGFILE field (*continued*)
in ATOMSERV resource table [45](#)
in PIPEDEF resource table [955](#)
in PIPELINE resource table [959](#)

CONINGRP resource table [155](#)

CONNCREATIME field
in CONNECT resource table [164](#)
in MCONNECT resource table [811](#)

CONNDEF field
in SYSLINK resource table [1103](#)

CONNDEF resource table [157](#)

CONNDEFVER field
in SYSLINK resource table [1103](#)

CONNDELETIME field
in CONNECT resource table [164](#)
in MCONNECT resource table [811](#)

CONNECT resource table [164](#)

CONNECTERROR field
in DB2CDEF resource table [295](#)
in DB2CONN resource table [301](#)

CONNECTION field
in MMODNAME resource table [851](#)
in MODENAME resource table [855](#)
in SESSDEF resource table [1085](#)

CONNECTIONS field
in FEIPIPOOL resource table [597](#)
in TCPIPS resource table [1157](#)

CONNECTST field
in DB2CONN resource table [301](#)
in EXITTRUE resource table [577](#)
in MQCON resource table [879](#)

CONNGROUP field
in CONINGRP resource table [155](#)

CONNLASTDROP field
in TCPIPS resource table [1157](#)

CONNNAME field
in CONINGRP resource table [155](#)
in CRESMODE resource table [229](#)

CONNPRIORITY field
in CONNDEF resource table [157](#)

CONNSAMP field
in CSYSDEF resource table [281](#)
in MAS resource table [787](#)
in MONSPEC resource table [873](#)

CONNSDROPPED field
in TCPIPS resource table [1157](#)

CONNSTATUS field
in CFDTPOOL resource table [77](#)
in CONNECT resource table [164](#)
in CRESCONN resource table [183](#)
in CRESIPCN resource table [219](#)
in CRESMODE resource table [229](#)
in IPCONN resource table [687](#)
in MCONNECT resource table [811](#)
in MMODNAME resource table [851](#)
in MODENAME resource table [855](#)
in TSPOOL resource table [1225](#)

CONNTYPE field
in CONNDEF resource table [157](#)
in CONNECT resource table [164](#)
in ERMCCONN resource table [451](#)
in ERMCI PCN resource table [483](#)

CONNVER field
in CONINGRP resource table [155](#)

CONSNAME field
 in TERMDEF resource table [1173](#)
 CONSOLE field
 in TERMDEF resource table [1173](#)
 in TERMNL resource table [1179](#)
 CONSOLES field
 in CICSRRGN resource table [89](#)
 CONTAINER field
 in EVCSDATA resource table [555](#)
 in EVCSINFO resource table [557](#)
 in WEBSERV resource table [1273](#)
 CONTENTION field
 in CMDT resource table [141](#)
 in FEPIPOOL resource table [597](#)
 in FEPIPROP resource table [601](#)
 in FEPRODEF resource table [609](#)
 in MCMMDT resource table [807](#)
 CONTEXT field
 in CSYSDEF resource table [281](#)
 in EVENT resource table [563](#)
 in EVENTDTL resource table [561](#)
 in OBJSTAT resource table [935](#)
 CONTROLWAIT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 CONVERSATNS field
 in FEPICONN resource table [593](#)
 in MFEPICON resource table [823](#)
 CONVERSEST field
 in CICSRRGN resource table [89](#)
 in MONITOR resource table [867](#)
 CONVERTER field
 in URIMAP resource table [1257](#)
 in URIMPDEF resource table [1261](#)
 COPY field
 in DOCTEMP resource table [337](#)
 in PROGRAM resource table [1001](#)
 in TYPTMDEF resource table [1239](#)
 COPYST field
 in TERMNL resource table [1179](#)
 CORBASERVER field
 in EJDJAR resource table [377](#)
 in EJDJBEAN resource table [379](#)
 in EJDJDEF resource table [381](#)
 in RQMDEF resource table [1053](#)
 in RQMODEL resource table [1059](#)
 in WORKREQ resource table [1319](#)
 CORRELID field
 in TERMNL resource table [1179](#)
 CORREUOW field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 COUNT field
 in ASYNCREQ resource table [33](#)
 in LSRPBUF resource table [777](#)
 in MLSRPBUF resource table [845](#)
 in RULE resource table [1079](#)
 COUTSOCKETS field
 in TCPIPGBL resource table [1153](#)
 CPEAKPROFUSE field
 in JVMPROF resource table [717](#)
 CPERSOCKETS field
 in TCPIPGBL resource table [1153](#)
 CPLEXDEF resource table [169](#)
 CPLXCMAS resource table [173](#)
 CPROFILEREQS field
 in JVMPROF resource table [717](#)
 CPROFXMXVALU field
 in JVMPROF resource table [717](#)
 CPSMCONN field
 in CMTCMLNK resource table [151](#)
 in CMTPMLNK resource table [153](#)
 CPSMTYPE field
 in CSDINGRP resource table [269](#)
 CPSMVER field
 in CMAS resource table [131](#)
 in CMASLIST resource table [125](#)
 in MAS resource table [787](#)
 in WLMATARG resource table [1285](#)
 in WLMAWAOR resource table [1295](#)
 CPUCNT field
 in MLOCTRAN resource table [837](#)
 CPUTIME field
 in CICSRRGN resource table [89](#)
 in CMAS resource table [131](#)
 in HTASK resource table [655](#)
 in MCICSRRGN resource table [803](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 in TASKRMI resource table [1121](#)
 CPUTONCP field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 CQTMASXSOCKS field
 in TCPIPGBL resource table [1153](#)
 CRATECREL field
 in CICSSTOR resource table [101](#)
 CRATEEXTSA field
 in CICSSTOR resource table [101](#)
 CRATEEXTSR field
 in CICSSTOR resource table [101](#)
 CRATEFM field
 in CICSSTOR resource table [101](#)
 CRATEGM field
 in CICSSTOR resource table [101](#)
 CRATESTORV field
 in CICSSTOR resource table [101](#)
 CREADS field
 in LSRPBUF resource table [777](#)
 in MLSRPBUF resource table [845](#)
 CREATEORIGIN field
 in CSGLCGCS resource table [277](#)
 in CSYSDEF resource table [281](#)
 in CSYSGRP resource table [287](#)
 CREATEREL field
 in OBJECT resource table [931](#)
 CREATESESS field
 in TERMNL resource table [1179](#)
 in TYPTMDEF resource table [1239](#)
 CREATETIME field
 in ACTION resource table [17](#)
 in APPLCTN resource table [23](#)
 in APPLDEF resource table [27](#)
 in APSPEC resource table [31](#)
 in ATMINGRP resource table [37](#)
 in ATOMDEF resource table [39](#)
 in BUNDDEF resource table [65](#)
 in BUNINGRP resource table [75](#)

CREATETIME field (*continued*)

in CMDMPAPS resource table [137](#)
 in CMDMSAPS resource table [139](#)
 in CMTCMDEF resource table [147](#)
 in CONINGRP resource table [155](#)
 in CONNDEF resource table [157](#)
 in CPLEXDEF resource table [169](#)
 in CPLXCMAS resource table [173](#)
 in CSGLCGCG resource table [275](#)
 in CSGLCGCS resource table [277](#)
 in CSYSDEF resource table [281](#)
 in CSYSGRP resource table [287](#)
 in D2CINGRP resource table [289](#)
 in D2EINGRP resource table [291](#)
 in D2TINGRP resource table [293](#)
 in DB2CDEF resource table [295](#)
 in DB2EDEF resource table [307](#)
 in DB2TDEF resource table [319](#)
 in DOCDEF resource table [331](#)
 in DOCINGRP resource table [335](#)
 in DTRINGRP resource table [355](#)
 in EJCINGRP resource table [361](#)
 in EJCDEF resource table [365](#)
 in EJDINGRP resource table [375](#)
 in EJDJDEF resource table [381](#)
 in ENQINGRP resource table [425](#)
 in ENQMDEF resource table [427](#)
 in EVALDEF resource table [549](#)
 in FENODDEF resource table [589](#)
 in FEPODEF resource table [605](#)
 in FEPRODEF resource table [609](#)
 in FETRGDEF resource table [613](#)
 in FILEDEF resource table [617](#)
 in FILINGRP resource table [625](#)
 in FNOINGRP resource table [627](#)
 in FPOINGRP resource table [629](#)
 in FPRINGRP resource table [631](#)
 in FSEGDEF resource table [633](#)
 in FSGINGRP resource table [649](#)
 in FTRINGRP resource table [651](#)
 in IPCINGRP resource table [679](#)
 in IPCONDEF resource table [681](#)
 in JMSINGRP resource table [695](#)
 in JRMINGRP resource table [697](#)
 in JRNINGRP resource table [699](#)
 in JRNLDEF resource table [701](#)
 in JRNMDEF resource table [709](#)
 in JVMSVDEF resource table [723](#)
 in LIBDEF resource table [727](#)
 in LIBINGRP resource table [735](#)
 in LNKSMSCG resource table [739](#)
 in LNKSMSCS resource table [741](#)
 in LNKSRS CG resource table [743](#)
 in LNKSRS CS resource table [745](#)
 in LNKSWSCG resource table [747](#)
 in LNKSWSCS resource table [749](#)
 in LSRDEF resource table [769](#)
 in LSRINGRP resource table [775](#)
 in LSRPOOL resource table [779](#)
 in MAPDEF resource table [781](#)
 in MAPINGRP resource table [785](#)
 in MGMTPART resource table [825](#)
 in MLSRPOOL resource table [847](#)
 in MONDEF resource table [857](#)

CREATETIME field (*continued*)

in MONGROUP resource table [861](#)
 in MONINGRP resource table [863](#)
 in MONINSPC resource table [865](#)
 in MONSPEC resource table [873](#)
 in MQCINGRP resource table [877](#)
 in MQCONDEF resource table [883](#)
 in MQMINGRP resource table [891](#)
 in MQMONDEF resource table [897](#)
 in PARINGRP resource table [941](#)
 in PARTDEF resource table [945](#)
 in PERIODEF resource table [951](#)
 in PGMINGRP resource table [953](#)
 in PIPEDEF resource table [955](#)
 in PIPINGRP resource table [963](#)
 in PLATDEF resource table [965](#)
 in PLATFORM resource table [970](#)
 in PRCINGRP resource table [977](#)
 in PRNINGRP resource table [979](#)
 in PROCDEF resource table [981](#)
 in PROFDEF resource table [987](#)
 in PROGDEF resource table [995](#)
 in PROINGRP resource table [1007](#)
 in PRTNDEF resource table [1009](#)
 in RASGNDEF resource table [1013](#)
 in RASINDSC resource table [1017](#)
 in RESDESC resource table [1035](#)
 in RESGROUP resource table [1043](#)
 in RESINDSC resource table [1047](#)
 in RESINGRP resource table [1049](#)
 in RQMDEF resource table [1053](#)
 in RQMINGRP resource table [1057](#)
 in RTADEF resource table [1063](#)
 in RTAGROUP resource table [1067](#)
 in RTAINAPS resource table [1069](#)
 in RTAINGRP resource table [1071](#)
 in RTAINSPC resource table [1073](#)
 in RTASPEC resource table [1075](#)
 in SESINGRP resource table [1083](#)
 in SESSDEF resource table [1085](#)
 in STAINGRP resource table [1091](#)
 in STATDEF resource table [1093](#)
 in SYSLINK resource table [1103](#)
 in TCLINGRP resource table [1143](#)
 in TCPDEF resource table [1145](#)
 in TCPINGRP resource table [1151](#)
 in TDQDEF resource table [1163](#)
 in TDQINGRP resource table [1171](#)
 in TERMDEF resource table [1173](#)
 in TRANDEF resource table [1191](#)
 in TRANGRP resource table [1201](#)
 in TRMINGRP resource table [1203](#)
 in TRNCLDEF resource table [1205](#)
 in TRNINGRP resource table [1209](#)
 in TSMDEF resource table [1217](#)
 in TSMINGRP resource table [1221](#)
 in TYPINGRP resource table [1237](#)
 in TYPTMDEF resource table [1239](#)
 in URIINGRP resource table [1255](#)
 in URIMPDEF resource table [1261](#)
 in WEBINGRP resource table [1271](#)
 in WEBSVDEF resource table [1277](#)
 in WLMDEF resource table [1305](#)

CREATETIME field (*continued*)
 in WLMGROUP resource table [1307](#)
 in WLMINGRP resource table [1309](#)
 in WLMINSPC resource table [1311](#)
 in WLMSPEC resource table [1313](#)
 CRECCNT field
 in MASHIST resource table [793](#)
 CRECVSESS field
 in IPCONN resource table [687](#)
 CRESAIMD resource table [177](#)
 CRESATOM resource table [179](#)
 CRESBUND resource table [181](#)
 CRESCONN resource table [183](#)
 CRESDB2C resource table [185](#)
 CRESDB2E resource table [187](#)
 CRESDB2P resource table [189](#)
 CRESDB2T resource table [191](#)
 CRESDOCT resource table [193](#)
 CRESDSNM resource table [195](#)
 CRESENQM resource table [197](#)
 CRESEPAD resource table [199](#)
 CRESEPAS resource table [201](#)
 CRESEVBD resource table [203](#)
 CRESEVCS resource table [205](#)
 CRESFECO resource table [207](#)
 CRESFEND resource table [209](#)
 CRESFEPO resource table [211](#)
 CRESFETR resource table [213](#)
 CRESFILE resource table [215](#)
 CRESGLUE resource table [217](#)
 CRESIPCN resource table [219](#)
 CRESJRNL resource table [221](#)
 CRESJRNM resource table [223](#)
 CRESJVMS resource table [225](#)
 CRESLIBR resource table [227](#)
 CRESMODE resource table [229](#)
 CRESMQMN resource table [231](#)
 CRESP1 field
 in BINSTERR resource table [61](#)
 CRESP2 field
 in BINSTERR resource table [61](#)
 CRESPART resource table [233](#)
 CRESPIPE resource table [235](#)
 CRESPRGM resource table [237](#)
 CRESPROF resource table [239](#)
 CRESPTY resource table [241](#)
 CRESRQMD resource table [243](#)
 CRESSDMP resource table [245](#)
 CRESTCPS resource table [247](#)
 CRESTDMP resource table [249](#)
 CRESTDQ resource table [251](#)
 CRESTERM resource table [253](#)
 CRESTRAN resource table [255](#)
 CRESTRUE resource table [257](#)
 CRESTSMD resource table [259](#)
 CRESURIM resource table [261](#)
 CRESWEBS resource table [263](#)
 CRESXMLT resource table [265](#)
 CRITICAL field
 in LIBDEF resource table [727](#)
 CRITSTATUS field
 in CRESLIBR resource table [227](#)

CRITSTATUS field (*continued*)
 in LIBRARY resource table [737](#)
 CRLPROFILE field
 in TCPIPGBL resource table [1153](#)
 CRLSERVER field
 in TCPIPGBL resource table [1153](#)
 CRUCIAL field
 in JRNLEDEF resource table [701](#)
 CSACQRATE field
 in MFEPICON resource table [823](#)
 CSDAPI field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 CSDGROUP field
 in ATOMDEF resource table [39](#)
 in BUNDEF resource table [65](#)
 in CONNDEF resource table [157](#)
 in CSDINGRP resource table [269](#)
 in CSDINLST resource table [271](#)
 in DB2CDEF resource table [295](#)
 in DB2EDEF resource table [307](#)
 in DB2TDEF resource table [319](#)
 in DOCDEF resource table [331](#)
 in EJCODEF resource table [365](#)
 in EJDJDEF resource table [381](#)
 in ENQMDEF resource table [427](#)
 in FILEDEF resource table [617](#)
 in IPCONDEF resource table [681](#)
 in JRNMDEF resource table [709](#)
 in JVMSVDEF resource table [723](#)
 in LIBDEF resource table [727](#)
 in LSRDEF resource table [769](#)
 in MAPDEF resource table [781](#)
 in MQCONDEF resource table [883](#)
 in MQMONDEF resource table [897](#)
 in PARTDEF resource table [945](#)
 in PIPEDEF resource table [955](#)
 in PROCDEF resource table [981](#)
 in PROFDEF resource table [987](#)
 in PROGDEF resource table [995](#)
 in PRTNDEF resource table [1009](#)
 in RQMDEF resource table [1053](#)
 in SESSDEF resource table [1085](#)
 in TCPDEF resource table [1145](#)
 in TDQDEF resource table [1163](#)
 in TERMDEF resource table [1173](#)
 in TRANDEF resource table [1191](#)
 in TRNCLDEF resource table [1205](#)
 in TSMDEF resource table [1217](#)
 in TYPTMDEF resource table [1239](#)
 in URIMPDEF resource table [1261](#)
 in WEBSVDEF resource table [1277](#)
 CSDGROUP resource table [267](#)
 CSDINGRP resource table [269](#)
 CSDINLST resource table [271](#)
 CSDLIST field
 in CSDINLST resource table [271](#)
 CSDLIST resource table [273](#)
 CSENDSESS field
 in IPCONN resource table [687](#)
 CSGLCGCG resource table [275](#)
 CSGLCGCS resource table [277](#)
 CSIGNONS field
 in DB2CONN resource table [301](#)

CSYSAPPL field
 in EMASJOIN resource table [387](#)
 in EMASSTOP resource table [393](#)
 in EMASSTRT resource table [395](#)
CSYSDEF resource table [281](#)
CSYSGRP resource table [287](#)
CSYSNAME field
 in ELSIGNAL resource table [385](#)
 in EMASJOIN resource table [387](#)
 in EMASICK resource table [389](#)
 in EMASSTOP resource table [393](#)
 in EMASSTRT resource table [395](#)
 in EMASWELL resource table [397](#)
 in EMCICS resource table [401](#)
 in EMCONN resource table [403](#)
 in EMDBX resource table [405](#)
 in EMFILE resource table [407](#)
 in EMGLBL resource table [409](#)
 in EMJRNL resource table [411](#)
 in EMPROG resource table [413](#)
 in EMSTATUS resource table [415](#)
 in EMTDQS resource table [419](#)
 in EMTERM resource table [421](#)
 in EMTRAN resource table [423](#)
 in ERMCAIMD resource table [445](#)
 in ERMCATOM resource table [447](#)
 in ERMCBUND resource table [449](#)
 in ERMCCONN resource table [451](#)
 in ERMCDDB2C resource table [453](#)
 in ERMCDDB2E resource table [455](#)
 in ERMCDDB2P resource table [457](#)
 in ERMCDDB2T resource table [459](#)
 in ERMCDOCT resource table [461](#)
 in ERMCDSNM resource table [463](#)
 in ERMCCENQM resource table [465](#)
 in ERMCEVBD resource table [467](#)
 in ERMCEVCS resource table [469](#)
 in ERMCFECO resource table [471](#)
 in ERMCFEND resource table [473](#)
 in ERMCFEPO resource table [475](#)
 in ERMCFETR resource table [477](#)
 in ERMCFILE resource table [479](#)
 in ERMCGLUE resource table [481](#)
 in ERMCI PCN resource table [483](#)
 in ERM CJRNL resource table [485](#)
 in ERM CJRNM resource table [487](#)
 in ERM CJVMS resource table [489](#)
 in ERMCLIBR resource table [491](#)
 in ERMCMODE resource table [493](#)
 in ERM COSGB resource table [495](#)
 in ERM COSGS resource table [497](#)
 in ERMCPART resource table [499](#)
 in ERMCPPIPE resource table [501](#)
 in ERMCPRGM resource table [503](#)
 in ERMCPROF resource table [505](#)
 in ERMCPRTY resource table [507](#)
 in ERMCRQMD resource table [509](#)
 in ERMCSDMP resource table [511](#)
 in ERMCTCPS resource table [513](#)
 in ERMCTDMP resource table [515](#)
 in ERMCTDQ resource table [517](#)
 in ERMCTERM resource table [519](#)
 in ERMCTRAN resource table [521](#)
 in ERMCTRUE resource table [523](#)

CSYSNAME field (*continued*)
 in ERMCTSMD resource table [525](#)
 in ERMCURIM resource table [527](#)
 in ERM CWBES resource table [529](#)
 in ERM CXMLT resource table [531](#)
 in ERM MCONN resource table [533](#)
 in ERM MFILE resource table [535](#)
 in ERM MJRNL resource table [537](#)
 in ERM MPRGM resource table [539](#)
 in ERM MTDQ resource table [541](#)
 in ERM MTERM resource table [543](#)
 in ERM MTRAN resource table [545](#)
 in ESRPCHG resource table [547](#)
CTCURR field
 in DB2CONN resource table [301](#)
CTHWM field
 in DB2CONN resource table [301](#)
CTIMEGMT field
 in DB2CONN resource table [301](#)
CTIMELOC field
 in DB2CONN resource table [301](#)
CTLIMIT field
 in DB2CONN resource table [301](#)
CTLWC field
 in MLOCTRAN resource table [837](#)
CTLWT field
 in MLOCTRAN resource table [837](#)
CTOKEN field
 in CPLEXDEF resource table [169](#)
 in CPLXCMAS resource table [173](#)
CTOVERF field
 in DB2CONN resource table [301](#)
CTSLEVEL field
 in CICS RGN resource table [89](#)
 in MCICSRGN resource table [803](#)
CTTERM field
 in DB2CONN resource table [301](#)
CTYPE field
 in CRESCONN resource table [183](#)
 in CRESIPCN resource table [219](#)
CUFWTRS field
 in STREAMNM resource table [1097](#)
CUMCMNSSUSRS field
 in CICSDSA resource table [79](#)
 in MCICSDSA resource table [799](#)
CUMUNQSSUSRS field
 in CICSDSA resource table [79](#)
 in MCICSDSA resource table [799](#)
CURACCCNT field
 in MTDQGBL resource table [907](#)
CURACTVAL field
 in OBJECT resource table [931](#)
CURACTVUSRTR field
 in CICS RGN resource table [89](#)
 in MCICSRGN resource table [803](#)
CURAGETQRATE field
 in MTSQGBL resource table [913](#)
CURALLCS field
 in FEPIPOOL resource table [597](#)
CURALLCWAIT field
 in FEPIPOOL resource table [597](#)
 in FEPITRGT resource table [603](#)
CURAMAXRATE field
 in MCICSRGN resource table [803](#)

CURAPUTQRATE field
 in MTSQGBL resource table [913](#)
 CURAUXDS field
 in CICSRRN resource table [89](#)
 CURAVGCPUT field
 in MLOCTRAN resource table [837](#)
 CURAVGFETCH field
 in MPROGRAM resource table [875](#)
 CURAVGRESF field
 in MLOCTRAN resource table [837](#)
 in MREMTRAN resource table [905](#)
 CURBHITRATE field
 in MTSQGBL resource table [913](#)
 CURBUFFWAIT field
 in MTDQGBL resource table [907](#)
 in TDQGBL resource table [1169](#)
 CURBUFVALDA field
 in MTDQGBL resource table [907](#)
 in TDQGBL resource table [1169](#)
 CURCMNSSUSRS field
 in CICSDSA resource table [79](#)
 in MCICSDSA resource table [799](#)
 CURCONBUFAC field
 in MTDQGBL resource table [907](#)
 in TDQGBL resource table [1169](#)
 CURCONSTRAC field
 in MTDQGBL resource table [907](#)
 in TDQGBL resource table [1169](#)
 CURCOUNT field
 in CMDT resource table [141](#)
 in MCMDT resource table [807](#)
 CURCPSMREL field
 in OBJECT resource table [931](#)
 CURCPUPER field
 in MCICSRRN resource table [803](#)
 CURCREVAL field
 in OBJECT resource table [931](#)
 CURDBHITRATE field
 in MLSPRPOOL resource table [847](#)
 CURDESC field
 in OBJECT resource table [931](#)
 CURDEXCPRATE field
 in MCMDT resource table [807](#)
 in MLOCFILE resource table [833](#)
 CURDHREARATE field
 in MLSPRPOOL resource table [847](#)
 CURDHWIRATE field
 in MLSPRPOOL resource table [847](#)
 CURDREADRATE field
 in MLSPRPOOL resource table [847](#)
 CURDWRITRATE field
 in MLSPRPOOL resource table [847](#)
 CURFCFSRATE field
 in MCONNECT resource table [811](#)
 CURFRESTG field
 in MCICSDSA resource table [799](#)
 CURFULLPER field
 in MJOURNAL resource table [829](#)
 in MTDQGBL resource table [907](#)
 in MTSQGBL resource table [913](#)
 CURGETVAL field
 in OBJECT resource table [931](#)
 CURHREADRATE field
 in MLSPRBUF resource table [845](#)

CURHSEENTRY field
 in EVENT resource table [563](#)
 CURHSEXIT field
 in EVENT resource table [563](#)
 CURHWENTRY field
 in EVENT resource table [563](#)
 CURHWEXIT field
 in EVENT resource table [563](#)
 CURHWIRATE field
 in MLSPRBUF resource table [845](#)
 CURIBHITRATE field
 in MLSPRPOOL resource table [847](#)
 CURIEXCPRATE field
 in MCMDT resource table [807](#)
 in MLOCFILE resource table [833](#)
 CURIHREARATE field
 in MLSPRPOOL resource table [847](#)
 CURIHWIRATE field
 in MLSPRPOOL resource table [847](#)
 CURIMSGRATE field
 in MTERMNL resource table [909](#)
 CURIREADRATE field
 in MLSPRPOOL resource table [847](#)
 CURISTGSIIZE field
 in OBJECT resource table [931](#)
 CURIWRITRATE field
 in MLSPRPOOL resource table [847](#)
 CURLSEENTRY field
 in EVENT resource table [563](#)
 CURLSEXIT field
 in EVENT resource table [563](#)
 CURLWENTRY field
 in EVENT resource table [563](#)
 CURLWEXIT field
 in EVENT resource table [563](#)
 CURMGETQRATE field
 in MTSQGBL resource table [913](#)
 CURMPUTQRATE field
 in MTSQGBL resource table [913](#)
 CURMRQRATE field
 in MCMDT resource table [807](#)
 CURNUMATTR field
 in OBJECT resource table [931](#)
 CUROMSGRATE field
 in MTERMNL resource table [909](#)
 CUROUTQRATE field
 in MINDTDQ resource table [827](#)
 in MNTRATDQ resource table [853](#)
 in MREMTDQ resource table [903](#)
 in MXTRATDQ resource table [927](#)
 CURPAMAXRATE field
 in MCICSRRN resource table [803](#)
 CURPGIRATE field
 in MCICSRRN resource table [803](#)
 CURPGORATE field
 in MCICSRRN resource table [803](#)
 CURPTSKRATE field
 in MCICSRRN resource table [803](#)
 CURQUEDTIME field
 in MTRANCLS resource table [911](#)
 in TRANCLAS resource table [1187](#)
 CURQUEDUSRTR field
 in CICSRRN resource table [89](#)
 in MCICSRRN resource table [803](#)

CURQUETIME field
 in CICSRRGN resource table [89](#)
 in MCICSRGN resource table [803](#)

CURRALLOC field
 in CICSDSA resource table [79](#)
 in MCICSDSA resource table [799](#)

CURRAMAX field
 in CICSRRGN resource table [89](#)
 in MCICSRGN resource table [803](#)

CURRBACKLOG field
 in TCPIPS resource table [1157](#)

CURRDATA field
 in EVENTDTL resource table [561](#)

CURREADRATE field
 in MCMMDT resource table [807](#)
 in MLSRPBUF resource table [845](#)
 in MTDQGBL resource table [907](#)
 in MTSQGBL resource table [913](#)

CURREMVAL field
 in OBJECT resource table [931](#)

CURRENT field
 in SYSDUMP resource table [1099](#)
 in TRANDUMP resource table [1197](#)

CURRENTDDS field
 in CICSRRGN resource table [89](#)

CURRENTHEAP field
 in JVMSERV resource table [719](#)

CURRENTLOC field
 in PROGRAM resource table [1001](#)

CURRENTPROG field
 in TASK resource table [1123](#)

CURREQRATE field
 in MCMMDT resource table [807](#)
 in MLOCFILE resource table [833](#)
 in MREMFIL resource table [901](#)

CURRESDV1 field
 in OBJECT resource table [931](#)

CURRESDV2 field
 in OBJECT resource table [931](#)

CURRPGM field
 in EVCSPEC resource table [553](#)

CURRPGMOP field
 in EVCSPEC resource table [553](#)

CURRQUEUED field
 in IPCONN resource table [687](#)

CURRSCOPE field
 in RTADEF resource table [1063](#)
 in STATDEF resource table [1093](#)

CURRSTG field
 in TSQGBL resource table [1227](#)

CURRTASKS field
 in CICSRRGN resource table [89](#)
 in CMAS resource table [131](#)
 in EMSTATUS resource table [415](#)
 in MCICSRGN resource table [803](#)

CURRTIME field
 in CICSPPAGP resource table [83](#)
 in CICSSTOR resource table [101](#)
 in DOMSPOOL resource table [341](#)
 in LOADACT resource table [751](#)
 in LOADER resource table [753](#)
 in MONITOR resource table [867](#)
 in PROGRAM resource table [1001](#)
 in STREAMNM resource table [1097](#)

CURRTIME field (*continued*)
 in TSKSPOLS resource table [1211](#)
 in TSKSPOOL resource table [1215](#)

CURRTRANID field
 in EVCSPEC resource table [553](#)

CURRTRANIDOP field
 in EVCSPEC resource table [553](#)

CURRUSEPCT field
 in MPROGRAM resource table [875](#)

CURRUSERID field
 in EVCSPEC resource table [553](#)

CURRUSERIDOP field
 in EVCSPEC resource table [553](#)

CURRUWBFR field
 in MTSQGBL resource table [913](#)
 in TSQGBL resource table [1227](#)

CURRUWSTR field
 in MTSQGBL resource table [913](#)
 in TSQGBL resource table [1227](#)

CURSETVAL field
 in OBJECT resource table [931](#)

CURSTORATE field
 in MCICSRGN resource table [803](#)

CURSTALL field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)

CURSTALL1 field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)

CURSTALL2 field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)

CURSTALL3 field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)

CURSTALL4 field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)

CURSTGSIIZE field
 in OBJECT resource table [931](#)

CURSTRWAITS field
 in MTDQGBL resource table [907](#)
 in TDQGBL resource table [1169](#)

CURTASKRATE field
 in MCICSRGN resource table [803](#)

CURTASKS field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)

CURTBLEVER field
 in OBJECT resource table [931](#)

CURTHREAD field
 in DB2SS resource table [317](#)

CURTHREADS field
 in DB2THRD resource table [323](#)
 in MDB2THRD resource table [815](#)

CURTOTATTR field
 in OBJECT resource table [931](#)

CURTRANRATE field
 in MLOCTRAN resource table [837](#)

CURTRANRATE field (*continued*)
 in MREMTRAN resource table [905](#)
 in MTERMNL resource table [909](#)
 CURUNQSSUSRS field
 in CICSDSA resource table [79](#)
 in MCICSDSA resource table [799](#)
 CURUPDVAL field
 in OBJECT resource table [931](#)
 CURUSERATE field
 in MDB2THRD resource table [815](#)
 in MPROGRAM resource table [875](#)
 CURVAL400 field
 in OBJECT resource table [931](#)
 CURVALAIX field
 in OBJECT resource table [931](#)
 CURVALAPI field
 in OBJECT resource table [931](#)
 CURVALATOM field
 in OBJECT resource table [931](#)
 CURVALES2 field
 in OBJECT resource table [931](#)
 CURVALES3 field
 in OBJECT resource table [931](#)
 CURVALESA field
 in OBJECT resource table [931](#)
 CURVALOS2 field
 in OBJECT resource table [931](#)
 CURVALRTA field
 in OBJECT resource table [931](#)
 CURVALSRV1 field
 in OBJECT resource table [931](#)
 CURVALSRV2 field
 in OBJECT resource table [931](#)
 CURVALUTL field
 in OBJECT resource table [931](#)
 CURVALVSE field
 in OBJECT resource table [931](#)
 CURVALWNT field
 in OBJECT resource table [931](#)
 CURVALWUI field
 in OBJECT resource table [931](#)
 CURVHSEENTRY field
 in EVENT resource table [563](#)
 CURVHSEXIT field
 in EVENT resource table [563](#)
 CURVLESEENTRY field
 in EVENT resource table [563](#)
 CURVLESEXIT field
 in EVENT resource table [563](#)
 CURVOL field
 in TAPEJRNL resource table [1111](#)
 CURVOLUME field
 in MJOURNL resource table [829](#)
 CURWRITRATE field
 in MLSRPBUF resource table [845](#)
 in MTDQGBL resource table [907](#)
 in MTSQGBL resource table [913](#)
 CUSHION field
 in CICSDSA resource table [79](#)
 in MCICSDSA resource table [799](#)
 CUTCBCNT field
 in CICSRRGN resource table [89](#)
 in MCICSRGN resource table [803](#)
 CWRAPCNT field

CWRAPCNT field (*continued*)
 in MASHIST resource table [793](#)
 CWRITES field
 in LSRPBUF resource table [777](#)
 in MLSRPBUF resource table [845](#)

D

D2CDEFRG field
 in RESDESC resource table [1035](#)
 D2CDEFRS field
 in RESDESC resource table [1035](#)
 D2CDEFTS field
 in RESDESC resource table [1035](#)
 D2CINGRP resource table [289](#)
 D2EDEFRG field
 in RESDESC resource table [1035](#)
 D2EDEFRS field
 in RESDESC resource table [1035](#)
 D2EDEFTS field
 in RESDESC resource table [1035](#)
 D2EINGRP resource table [291](#)
 D2TDEFRG field
 in RESDESC resource table [1035](#)
 D2TDEFRS field
 in RESDESC resource table [1035](#)
 D2TDEFTS field
 in RESDESC resource table [1035](#)
 D2TINGRP resource table [293](#)
 DACICSG field
 in MONSPEC resource table [873](#)
 DACICSR field
 in MONSPEC resource table [873](#)
 DACONN field
 in MONSPEC resource table [873](#)
 DADBXX field
 in MONSPEC resource table [873](#)
 DAEPTION field
 in SYSDUMP resource table [1099](#)
 DAFILE field
 in MONSPEC resource table [873](#)
 DAJRNL field
 in MONSPEC resource table [873](#)
 DAPROG field
 in MONSPEC resource table [873](#)
 DASDONLY field
 in STREAMNM resource table [1097](#)
 DATA12K field
 in LSRDEF resource table [769](#)
 DATA16K field
 in LSRDEF resource table [769](#)
 DATA1K field
 in LSRDEF resource table [769](#)
 DATA20K field
 in LSRDEF resource table [769](#)
 DATA24K field
 in LSRDEF resource table [769](#)
 DATA28K field
 in LSRDEF resource table [769](#)
 DATA2K field
 in LSRDEF resource table [769](#)
 DATA32K field
 in LSRDEF resource table [769](#)
 DATA4K field

DATA4K field (*continued*)
 in LSRDEF resource table [769](#)
 DATA512 field
 in LSRDEF resource table [769](#)
 DATA8K field
 in LSRDEF resource table [769](#)
 DATABUFFERS field
 in EXTRATDQ resource table [581](#)
 in FILEDEF resource table [617](#)
 in TDQDEF resource table [1163](#)
 DATAEVENT field
 in EVALDEF resource table [549](#)
 DATAFORMAT field
 in EPADAPT resource table [435](#)
 DATALOCATION field
 in PROGDEF resource table [995](#)
 in PROGRAM resource table [1001](#)
 DATALOSTCNT field
 in EMSTATUS resource table [415](#)
 DATASETTYPE field
 in CMDT resource table [141](#)
 in LOCFILE resource table [757](#)
 DATASTREAM field
 in CONNDEF resource table [157](#)
 in TERMNL resource table [1179](#)
 DATATYPE field
 in ATTR resource table [49](#)
 in METADESC resource table [817](#)
 in METAPARM resource table [821](#)
 DATDQ field
 in MONSPEC resource table [873](#)
 DATE field
 in METAPARM resource table [821](#)
 in VOLUME resource table [1269](#)
 DATERM field
 in MONSPEC resource table [873](#)
 DATETIME field
 in EVENT resource table [563](#)
 in EVENTDTL resource table [561](#)
 DATRAN field
 in MONSPEC resource table [873](#)
 DATTRACE field
 in CMAS resource table [131](#)
 in MAS resource table [787](#)
 DAYLGHTSV field
 in CMASPLEX resource table [129](#)
 in CPLEXDEF resource table [169](#)
 in CPLXCMAS resource table [173](#)
 in CSYSDEF resource table [281](#)
 in EMASJOIN resource table [387](#)
 in EMASSTRT resource table [395](#)
 in EPLEXCHG resource table [441](#)
 in MAS resource table [787](#)
 DAYLIGHT field
 in CMAS resource table [131](#)
 DB2CDEF resource table [295](#)
 DB2CGROUP field
 in D2CINGRP resource table [289](#)
 DB2CNAME field
 in D2CINGRP resource table [289](#)
 DB2CONN resource table [301](#)
 DB2CONWC field
 in MLOCTRAN resource table [837](#)
 DB2CONWT field

DB2CONWT field (*continued*)
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 DB2CVER field
 in D2CINGRP resource table [289](#)
 DB2EDEF resource table [307](#)
 DB2EGROUP field
 in D2EINGRP resource table [291](#)
 DB2ENAME field
 in D2EINGRP resource table [291](#)
 DB2ENTRY field
 in DB2TRN resource table [327](#)
 DB2ENTRY resource table [311](#)
 DB2EVER field
 in D2EINGRP resource table [291](#)
 DB2GROUPID field
 in DB2CDEF resource table [295](#)
 in DB2CONN resource table [301](#)
 DB2ID field
 in DB2CDEF resource table [295](#)
 in DB2CONN resource table [301](#)
 DB2PKGST resource table [315](#)
 DB2PLAN field
 in TASK resource table [1123](#)
 DB2RDYQC field
 in MLOCTRAN resource table [837](#)
 DB2RDYQW field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 DB2RELEASE field
 in DB2CONN resource table [301](#)
 DB2REQCT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 DB2SS resource table [317](#)
 DB2TDEF resource table [319](#)
 DB2TGROUP field
 in D2TINGRP resource table [293](#)
 DB2THRD resource table [323](#)
 DB2TNAME field
 in D2TINGRP resource table [293](#)
 DB2TRAN resource table [325](#)
 DB2TRN resource table [327](#)
 DB2TVER field
 in D2TINGRP resource table [293](#)
 DB2WAIT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 DB2WAITC field
 in MLOCTRAN resource table [837](#)
 DBCTLOVERRIDE field
 in DBCTLSS resource table [329](#)
 DBCTLSS resource table [329](#)
 DBLOOKASIDE field
 in LSRPOOL resource table [779](#)
 in MLSRPOOL resource table [847](#)
 DBNUWRITE field
 in LSRPOOL resource table [779](#)
 in MLSRPOOL resource table [847](#)
 DBREAD field

DBREAD field (*continued*)
 in LSRPOOL resource table [779](#)
 in MLRPOOL resource table [847](#)

DBUFFCNT field
 in LSRPOOL resource table [779](#)
 in MLRPOOL resource table [847](#)

DBUIWRITE field
 in LSRPOOL resource table [779](#)
 in MLRPOOL resource table [847](#)

DBXSAMP field
 in CSYSDEF resource table [281](#)
 in MAS resource table [787](#)
 in MONSPEC resource table [873](#)

DCECURREQS field
 in CICSRRGN resource table [89](#)
 in MCICSRGN resource table [803](#)

DCECURREQSWT field
 in CICSRRGN resource table [89](#)
 in MCICSRGN resource table [803](#)

DCEDELAYCT field
 in MLOCTRAN resource table [837](#)

DCEDELAYTIME field
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)

DCEHWMREQS field
 in CICSRRGN resource table [89](#)
 in MCICSRGN resource table [803](#)

DCEHWMREQSWT field
 in CICSRRGN resource table [89](#)
 in MCICSRGN resource table [803](#)

DCEOPENST field
 in CICSRRGN resource table [89](#)

DCESUFFIX field
 in CICSRRGN resource table [89](#)

DCETOTPRTIME field
 in CICSRRGN resource table [89](#)
 in MCICSRGN resource table [803](#)

DCETOTREQS field
 in CICSRRGN resource table [89](#)
 in MCICSRGN resource table [803](#)

DCETOTREQSCS field
 in CICSRRGN resource table [89](#)
 in MCICSRGN resource table [803](#)

DCETOTREQSRV field
 in CICSRRGN resource table [89](#)
 in MCICSRGN resource table [803](#)

DCETOTWTTIME field
 in CICSRRGN resource table [89](#)
 in MCICSRGN resource table [803](#)

DCEWAITCT field
 in MLOCTRAN resource table [837](#)

DCEWAITTIME field
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)

DCEWORKTHRDS field
 in CICSRRGN resource table [89](#)
 in MCICSRGN resource table [803](#)

DCREAD field
 in LSRPOOL resource table [779](#)
 in MLRPOOL resource table [847](#)

DCWRITE field
 in LSRPOOL resource table [779](#)
 in MLRPOOL resource table [847](#)

DDNAME field

DDNAME field (*continued*)
 in DOCDEF resource table [331](#)
 in DOCTEMP resource table [337](#)
 in EXTRATDQ resource table [581](#)
 in TDQDEF resource table [1163](#)

DDSOSTAT field
 in CICSRRGN resource table [89](#)

DDSSSTAT field
 in CICSRRGN resource table [89](#)

DEBUGTOOL field
 in CICSRRGN resource table [89](#)

DEF field
 in WLMINGRP resource table [1309](#)

DEFAULT field
 in ATTR resource table [49](#)

DEFDESC field
 in RESINGRP resource table [1049](#)

DEFINESOURCE field
 in ATOMSERV resource table [45](#)
 in BUNDEF resource table [65](#)
 in BUNDLE resource table [69](#)
 in CMDT resource table [141](#)
 in CONNECT resource table [164](#)
 in DB2CONN resource table [301](#)
 in DB2ENTRY resource table [311](#)
 in DB2PKGST resource table [315](#)
 in DB2TRN resource table [327](#)
 in DOCTEMP resource table [337](#)
 in EJCOSE resource table [371](#)
 in EJDJAR resource table [377](#)
 in ENQMODEL resource table [431](#)
 in EPADAPT resource table [435](#)
 in EPADSET resource table [437](#)
 in EVNTBIND resource table [567](#)
 in EXTRATDQ resource table [581](#)
 in INDTDQ resource table [673](#)
 in INTRATDQ resource table [675](#)
 in IPCONN resource table [687](#)
 in JRNLMDL resource table [705](#)
 in JVMSERV resource table [719](#)
 in LIBRARY resource table [737](#)
 in LOCFIL resource table [757](#)
 in LOCTRAN resource table [763](#)
 in MQCON resource table [879](#)
 in MQINI resource table [889](#)
 in MQMON resource table [893](#)
 in OSGIBUND resource table [937](#)
 in PIPELINE resource table [959](#)
 in PROCTYP resource table [985](#)
 in PROFILE resource table [993](#)
 in PROGRAM resource table [1001](#)
 in REMFILE resource table [1025](#)
 in REMTDQ resource table [1027](#)
 in REMTRAN resource table [1029](#)
 in RQMODEL resource table [1059](#)
 in RULE resource table [1079](#)
 in TCPIPS resource table [1157](#)
 in TRANCLAS resource table [1187](#)
 in TSMODEL resource table [1223](#)
 in URIMAP resource table [1257](#)
 in WEBSERV resource table [1273](#)
 in XMLTRANS resource table [1321](#)

DEFINETIME field
 in ATOMSERV resource table [45](#)

DEFINETIME field (*continued*)

- in BUNDLE resource table [69](#)
- in CMDT resource table [141](#)
- in CONNECT resource table [164](#)
- in DB2CONN resource table [301](#)
- in DB2ENTRY resource table [311](#)
- in DB2PKGST resource table [315](#)
- in DB2TRN resource table [327](#)
- in DOCTEMP resource table [337](#)
- in EJCOSE resource table [371](#)
- in EJDJAR resource table [377](#)
- in ENQMODEL resource table [431](#)
- in EPADAPT resource table [435](#)
- in EPADSET resource table [437](#)
- in EVNTBIND resource table [567](#)
- in EXTRATDQ resource table [581](#)
- in INDTDQ resource table [673](#)
- in INTRATDQ resource table [675](#)
- in IPCONN resource table [687](#)
- in JRNLMODL resource table [705](#)
- in JVMSERV resource table [719](#)
- in LIBRARY resource table [737](#)
- in LOCFIL resource table [757](#)
- in LOCTRAN resource table [763](#)
- in MQCON resource table [879](#)
- in MQINI resource table [889](#)
- in MQMON resource table [893](#)
- in OSGIBUND resource table [937](#)
- in PIPELINE resource table [959](#)
- in PROCTYP resource table [985](#)
- in PROFILE resource table [993](#)
- in PROGRAM resource table [1001](#)
- in REMFILE resource table [1025](#)
- in REMTDQ resource table [1027](#)
- in REMTRAN resource table [1029](#)
- in RQMODEL resource table [1059](#)
- in RULE resource table [1079](#)
- in TCPIPS resource table [1157](#)
- in TRANCLAS resource table [1187](#)
- in TSMODEL resource table [1223](#)
- in URIMAP resource table [1257](#)
- in WEBSERV resource table [1273](#)
- in XMLTRANS resource table [1321](#)

DEFNAME field

- in APACTV resource table [21](#)
- in CSDINGRP resource table [269](#)
- in MONINGRP resource table [863](#)
- in RESINGRP resource table [1049](#)
- in RTAINGRP resource table [1071](#)
- in STAINGRP resource table [1091](#)

DEFPAGEHT field

- in TERMNL resource table [1179](#)

DEFPAGEWD field

- in TERMNL resource table [1179](#)

DEFSCREENCOL field

- in TYPTMDEF resource table [1239](#)

DEFSCREENROW field

- in TYPTMDEF resource table [1239](#)

DEFSCRNHT field

- in TERMNL resource table [1179](#)

DEFSCRNWD field

- in TERMNL resource table [1179](#)

DEFTYPE field

- in CSDINGRP resource table [269](#)

DEFTYPE field (*continued*)

- in EACTNTFN resource table [357](#)

- in RESINGRP resource table [1049](#)

DEFTYPEX field

- in RESINGRP resource table [1049](#)

DEFVER field

- in ATOMDEF resource table [39](#)
- in BUNDDEF resource table [65](#)
- in CONNDEF resource table [157](#)
- in DB2CDEF resource table [295](#)
- in DB2EDEF resource table [307](#)
- in DB2TDEF resource table [319](#)
- in DOCDEF resource table [331](#)
- in EJCODEF resource table [365](#)
- in EJDJDEF resource table [381](#)
- in ENQMDEF resource table [427](#)
- in FENODDEF resource table [589](#)
- in FEPOODEF resource table [605](#)
- in FEPRODEF resource table [609](#)
- in FETRGDEF resource table [613](#)
- in FILEDEF resource table [617](#)
- in FSEGDEF resource table [633](#)
- in IPCONDEF resource table [681](#)
- in JRNLDEF resource table [701](#)
- in JRNMDEF resource table [709](#)
- in JVMSVDEF resource table [723](#)
- in LIBDEF resource table [727](#)
- in LSRDEF resource table [769](#)
- in MAPDEF resource table [781](#)
- in MQCONDEF resource table [883](#)
- in MQMONDEF resource table [897](#)
- in PARTDEF resource table [945](#)
- in PIPEDEF resource table [955](#)
- in PROCDEF resource table [981](#)
- in PROFDEF resource table [987](#)
- in PROGDEF resource table [995](#)
- in PRTNDEF resource table [1009](#)
- in RASPROC resource table [1019](#)
- in RDSCPROC resource table [1021](#)
- in RESINGRP resource table [1049](#)
- in RQMDEF resource table [1053](#)
- in SESSDEF resource table [1085](#)
- in SYSRES resource table [1109](#)
- in TCPDEF resource table [1145](#)
- in TDQDEF resource table [1163](#)
- in TERMDEF resource table [1173](#)
- in TRANDEF resource table [1191](#)
- in TRNCLDEF resource table [1205](#)
- in TSMDEF resource table [1217](#)
- in TYPTMDEF resource table [1239](#)
- in URIMPDEF resource table [1261](#)
- in WEBSVDEF resource table [1277](#)

DELETE field

- in CMDT resource table [141](#)
- in FILEDEF resource table [617](#)
- in LOCFIL resource table [757](#)

DELETEREQ field

- in CMDT resource table [141](#)
- in MCMDET resource table [807](#)

DELETES field

- in STREAMNM resource table [1097](#)

DELETETIME field

- in LSRPOOL resource table [779](#)
- in MLRPOOL resource table [847](#)

DELMAXSOCKS field

in TCPIPGBL resource table [1153](#)

DESC field

in ACTION resource table [17](#)
in APSPEC resource table [31](#)
in ATTR resource table [49](#)
in CMTCMDEF resource table [147](#)
in CPLEXDEF resource table [169](#)
in CSYSDEF resource table [281](#)
in CSYSGRP resource table [287](#)
in EMASJOIN resource table [387](#)
in EMASSTOP resource table [393](#)
in EMASSTRT resource table [395](#)
in EVALDEF resource table [549](#)
in EVENT resource table [563](#)
in MAS resource table [787](#)
in MASSTAT resource table [797](#)
in MONDEF resource table [857](#)
in MONGROUP resource table [861](#)
in MONSPEC resource table [873](#)
in PERIODEF resource table [951](#)
in RTADEF resource table [1063](#)
in RTAGROUP resource table [1067](#)
in RTASPEC resource table [1075](#)
in STATDEF resource table [1093](#)
in TRANGRP resource table [1201](#)
in WLMWDEF resource table [1299](#)
in WLMWORK resource table [1301](#)
in WLMDEF resource table [1305](#)
in WLMGROUP resource table [1307](#)
in WLMSPEC resource table [1313](#)

DESCCODEPAGE field

in ACTION resource table [17](#)
in APPLCTN resource table [23](#)
in APPLDEF resource table [27](#)
in APSPEC resource table [31](#)
in ATOMDEF resource table [39](#)
in BUNDDEF resource table [65](#)
in CMTCMDEF resource table [147](#)
in CONNDEF resource table [157](#)
in CPLEXDEF resource table [169](#)
in CSYSDEF resource table [281](#)
in CSYSGRP resource table [287](#)
in DB2CDEF resource table [295](#)
in DB2EDEF resource table [307](#)
in DB2TDEF resource table [319](#)
in DOCDEF resource table [331](#)
in EJCODEF resource table [365](#)
in EJDJDEF resource table [381](#)
in ENQMDEF resource table [427](#)
in EVALDEF resource table [549](#)
in FENODDEF resource table [589](#)
in FEPOODEF resource table [605](#)
in FEPRODEF resource table [609](#)
in FETRGDEF resource table [613](#)
in FILEDEF resource table [617](#)
in FSEGDEF resource table [633](#)
in IPCONDEF resource table [681](#)
in JRNMDEF resource table [709](#)
in JVMSVDEF resource table [723](#)
in LIBDEF resource table [727](#)
in LSRDEF resource table [769](#)
in MAPDEF resource table [781](#)
in MONDEF resource table [857](#)

DESCCODEPAGE field (*continued*)

in MONGROUP resource table [861](#)
in MONSPEC resource table [873](#)
in MQCONDEF resource table [883](#)
in MQMONDEF resource table [897](#)
in PARTDEF resource table [945](#)
in PERIODEF resource table [951](#)
in PIPEDEF resource table [955](#)
in PLATDEF resource table [965](#)
in PLATFORM resource table [970](#)
in PROCDEF resource table [981](#)
in PROFDEF resource table [987](#)
in PROGDEF resource table [995](#)
in PRTNDEF resource table [1009](#)
in RASGNDEF resource table [1013](#)
in RASINDSC resource table [1017](#)
in RESDESC resource table [1035](#)
in RESGROUP resource table [1043](#)
in RESINDSC resource table [1047](#)
in RQMDEF resource table [1053](#)
in RTADEF resource table [1063](#)
in RTAGROUP resource table [1067](#)
in RTASPEC resource table [1075](#)
in SESSDEF resource table [1085](#)
in STATDEF resource table [1093](#)
in TCPDEF resource table [1145](#)
in TDQDEF resource table [1163](#)
in TERMDEF resource table [1173](#)
in TRANDEF resource table [1191](#)
in TRANGRP resource table [1201](#)
in TRNCLDEF resource table [1205](#)
in TSMDEF resource table [1217](#)
in TYPTMDEF resource table [1239](#)
in URIMPDEF resource table [1261](#)
in WEBSVDEF resource table [1277](#)
in WLMDEF resource table [1305](#)
in WLMGROUP resource table [1307](#)
in WLMSPEC resource table [1313](#)

DESCRIPTION field

in APPLCTN resource table [23](#)
in APPLDEF resource table [27](#)
in ATOMDEF resource table [39](#)
in BUNDDEF resource table [65](#)
in CONNDEF resource table [157](#)
in DB2CDEF resource table [295](#)
in DB2EDEF resource table [307](#)
in DB2TDEF resource table [319](#)
in DOCDEF resource table [331](#)
in EJCODEF resource table [365](#)
in EJDJDEF resource table [381](#)
in ENQMDEF resource table [427](#)
in FENODDEF resource table [589](#)
in FEPOODEF resource table [605](#)
in FEPRODEF resource table [609](#)
in FETRGDEF resource table [613](#)
in FILEDEF resource table [617](#)
in FSEGDEF resource table [633](#)
in IPCONDEF resource table [681](#)
in JRNLDEF resource table [701](#)
in JRNMDEF resource table [709](#)
in JVMSVDEF resource table [723](#)
in LIBDEF resource table [727](#)
in LSRDEF resource table [769](#)
in MAPDEF resource table [781](#)

DESCRIPTION field (*continued*)

- in METANAME resource table [819](#)
- in METAPARM resource table [821](#)
- in MQCONDEF resource table [883](#)
- in MQMONDEF resource table [897](#)
- in OBJECT resource table [929](#)
- in PARTDEF resource table [945](#)
- in PIPEDEF resource table [955](#)
- in PLATDEF resource table [965](#)
- in PLATFORM resource table [970](#)
- in PROCDEF resource table [981](#)
- in PROFDEF resource table [987](#)
- in PROGDEF resource table [995](#)
- in PRTNDEF resource table [1009](#)
- in RASGNDEF resource table [1013](#)
- in RASINDSC resource table [1017](#)
- in RESDESC resource table [1035](#)
- in RESGROUP resource table [1043](#)
- in RESINDSC resource table [1047](#)
- in RQMDEF resource table [1053](#)
- in SESSDEF resource table [1085](#)
- in TCPDEF resource table [1145](#)
- in TDQDEF resource table [1163](#)
- in TERMDEF resource table [1173](#)
- in TRANDEF resource table [1191](#)
- in TRNCLDEF resource table [1205](#)
- in TSMDEF resource table [1217](#)
- in TYPTMDEF resource table [1239](#)
- in URIMPDEF resource table [1261](#)
- in WEBSVDEF resource table [1277](#)

DESIREDAVAIL field

- in APPLCTN resource table [23](#)

DESIREDSTATE field

- in APPLCTN resource table [23](#)
- in PLATFORM resource table [970](#)

DETAIL field

- in EVENT resource table [563](#)

DETTRANSTYPE field

- in HTASK resource table [655](#)
- in TASK resource table [1123](#)

DEVADDR field

- in JRNLDEF resource table [701](#)

DEVFILENAME field

- in TDQDEF resource table [1163](#)

DEVICE field

- in FEPIPOOL resource table [597](#)
- in FEPIPROP resource table [601](#)
- in FEPRODEF resource table [609](#)
- in MTERMNL resource table [909](#)
- in TERMNL resource table [1179](#)
- in TYPTMDEF resource table [1239](#)

DEVICEINIT field

- in TDQDEF resource table [1163](#)

DEVICESCT field

- in TERMNL resource table [1179](#)

DEVICETYPE field

- in TDQDEF resource table [1163](#)

DEXCPCNT field

- in CMDT resource table [141](#)
- in LOCFILE resource table [757](#)
- in MCMMDT resource table [807](#)
- in MLOCFILE resource table [833](#)

DFAILCREAD field

- in LSRPOOL resource table [779](#)

DFAILCREAD field (*continued*)

- in MLSPPOOL resource table [847](#)

DFAILCWRITE field

- in LSRPOOL resource table [779](#)
- in MLSPPOOL resource table [847](#)

DFHCHNL329 field

- in TASK resource table [1123](#)

DFHSOCK292 field

- in TASK resource table [1123](#)

DFHSOCK293 field

- in TASK resource table [1123](#)

DFHSTOR033 field

- in TASK resource table [1123](#)

DFHSTOR087 field

- in TASK resource table [1123](#)

DFHSTOR106 field

- in TASK resource table [1123](#)

DFHSTOR108 field

- in TASK resource table [1123](#)

DFHSTOR116 field

- in TASK resource table [1123](#)

DFHSTOR119 field

- in TASK resource table [1123](#)

DFHSTOR122 field

- in TASK resource table [1123](#)

DFHSTOR139 field

- in TASK resource table [1123](#)

DFHSTOR142 field

- in TASK resource table [1123](#)

DFHSTOR143 field

- in TASK resource table [1123](#)

DFHSTOR160 field

- in TASK resource table [1123](#)

DFHSTOR161 field

- in TASK resource table [1123](#)

DFHSTOR162 field

- in TASK resource table [1123](#)

DFHSTOR442 field

- in TASK resource table [1123](#)

DFHSTOR444 field

- in TASK resource table [1123](#)

DFHTASK252 field

- in TASK resource table [1123](#)

DFLTREMSYS field

- in CICSGRN resource table [89](#)

DFLTUSER field

- in CICSGRN resource table [89](#)

DHCRECT field

- in HTASK resource table [655](#)
- in MLOCTAN resource table [837](#)
- in TASK resource table [1123](#)

DHINSCT field

- in HTASK resource table [655](#)
- in MLOCTAN resource table [837](#)
- in TASK resource table [1123](#)

DHIPERBUF field

- in LSRPOOL resource table [779](#)
- in MLSPPOOL resource table [847](#)

DHRETCT field

- in HTASK resource table [655](#)
- in MLOCTAN resource table [837](#)
- in TASK resource table [1123](#)

DHSETCT field

- in HTASK resource table [655](#)

DHSETCT field (*continued*)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)

DHTOTCT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)

DHTOTDCL field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)

DIAGNOSTIC field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)

DISABLEDACT field
 in DB2ENTRY resource table [311](#)

DISCATTLIM field
 in TCPIPS resource table [1157](#)

DISCATUSELIM field
 in TCPIPS resource table [1157](#)

DISCREQ field
 in SESSDEF resource table [1085](#)
 in TYPTMDEF resource table [1239](#)

DISCREQST field
 in TERMNL resource table [1179](#)

DISKASTATUS field
 in DSKJRNL resource table [343](#)

DISKBSTATUS field
 in DSKJRNL resource table [343](#)

DISKXSTATUS field
 in DSKJRNL resource table [343](#)

DISPCNT field
 in MLOCTRAN resource table [837](#)

DISPOSITION field
 in CMDT resource table [141](#)
 in EXTRATDQ resource table [581](#)
 in FILEDEF resource table [617](#)
 in LOCFILE resource table [757](#)
 in TDQDEF resource table [1163](#)

DISPTIME field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 in TASKRMI resource table [1121](#)

DJAR field
 in EJCOBEAN resource table [363](#)

DJARDIR field
 in EJCODEF resource table [365](#)
 in EJCOSE resource table [371](#)

DLIFUNCSHIP field
 in CONNECT resource table [164](#)
 in MCONNECT resource table [811](#)

DNAME field
 in TASKASSC resource table [1113](#)

DNSGROUP field
 in TCPDEF resource table [1145](#)
 in TCPIPS resource table [1157](#)

DNSSTATUS field
 in TCPIPS resource table [1157](#)

DOCDEF resource table [331](#)

DOCDEFRG field
 in RESDESC resource table [1035](#)

DOCDEFRS field
 in RESDESC resource table [1035](#)

DOCDEFTS field
 in RESDESC resource table [1035](#)

DOCGROUP field
 in DOCINGRP resource table [335](#)

DOCINGRP resource table [335](#)

DOCNAME field
 in DOCINGRP resource table [335](#)

DOCTEMP resource table [337](#)

DOCTYPE field
 in DOCDEF resource table [331](#)
 in DOCTEMP resource table [337](#)

DOCVER field
 in DOCINGRP resource table [335](#)

DOMSPOOL resource table [341](#)

DPLFUNCSHIP field
 in CONNECT resource table [164](#)
 in MCONNECT resource table [811](#)

DPLLIMIT field
 in MONITOR resource table [867](#)

DPMODE field
 in DB2THRD resource table [323](#)
 in MDB2THRD resource table [815](#)

DRCTATTCOUNT field
 in URIMPGBL resource table [1267](#)

DREPDSN field
 in CMAS resource table [131](#)

DREPSTATUS field
 in CMAS resource table [131](#)

DROLLBACK field
 in DB2CDEF resource table [295](#)
 in DB2CONN resource table [301](#)
 in DB2EDEF resource table [307](#)
 in DB2ENTRY resource table [311](#)

DSAELEMPCT field
 in DOMSPOOL resource table [341](#)
 in TSKSPOOL resource table [1215](#)

DSAELEMPCTC field
 in TSKSPOLS resource table [1211](#)

DSAELEMPCTEC field
 in TSKSPOLS resource table [1211](#)

DSAELEMPCTEU field
 in TSKSPOLS resource table [1211](#)

DSAELEMPCTU field
 in TSKSPOLS resource table [1211](#)

DSAHWM field
 in CICSPAGP resource table [83](#)

DSANAME field
 in TASKESTG resource table [1117](#)

DSAPAGEPCT field
 in DOMSPOOL resource table [341](#)

DSAPAGEPPCT field
 in DOMSPOOL resource table [341](#)

DSAPAGPPCT field
 in TSKSPOOL resource table [1215](#)

DSAPAGPPCTC field
 in TSKSPOLS resource table [1211](#)

DSAPAGPPCTEC field
 in TSKSPOLS resource table [1211](#)

DSAPAGPPCTEU field
 in TSKSPOLS resource table [1211](#)

DSAPAGPPCTU field
 in TSKSPOLS resource table [1211](#)

DSAPTHWT field
 in HTASK resource table [655](#)

DSAPTHWT field (*continued*)
 in TASK resource table [1123](#)
 DSASIZE field
 in LOADACT resource table [751](#)
 in TSKSPOOL resource table [1215](#)
 DSATOTAL field
 in CICSPAGP resource table [83](#)
 in TSKSPOOL resource table [1215](#)
 DSGACT field
 in DSPMODE resource table [351](#)
 DSGCMMWS field
 in DSPPOOL resource table [353](#)
 DSGCMMWT field
 in DSPPOOL resource table [353](#)
 DSGCNT field
 in DSPGBL resource table [349](#)
 DSGCNUAT field
 in DSPPOOL resource table [353](#)
 DSGCNUUS field
 in DSPPOOL resource table [353](#)
 DSGCURNW field
 in DSPPOOL resource table [353](#)
 DSGCURWT field
 in DSPPOOL resource table [353](#)
 DSGDSID field
 in DSPGBL resource table [349](#)
 in DSPMODE resource table [351](#)
 in DSPPOOL resource table [353](#)
 DSGDSVER field
 in DSPGBL resource table [349](#)
 in DSPMODE resource table [351](#)
 in DSPPOOL resource table [353](#)
 DSGEJST field
 in DSPGBL resource table [349](#)
 DSGICVRT field
 in DSPGBL resource table [349](#)
 DSGICVSD field
 in DSPGBL resource table [349](#)
 DSGICVT field
 in DSPGBL resource table [349](#)
 DSGLSTRT field
 in DSPGBL resource table [349](#)
 DSGLTCLBL field
 in DSPPOOL resource table [353](#)
 DSGLXSCN field
 in DSPGBL resource table [349](#)
 DSGLXSND field
 in DSPGBL resource table [349](#)
 DSGMBTCH field
 in DSPGBL resource table [349](#)
 DSGMMWTM field
 in DSPPOOL resource table [353](#)
 DSGMMWTS field
 in DSPPOOL resource table [353](#)
 DSGMXTCB field
 in DSPPOOL resource table [353](#)
 DSGNTCBA field
 in DSPMODE resource table [351](#)
 DSGNTCBL field
 in DSPPOOL resource table [353](#)
 DSGPEANW field
 in DSPPOOL resource table [353](#)
 DSGPMMWS field
 in DSPPOOL resource table [353](#)

DSGPNT field
 in DSPGBL resource table [349](#)
 DSGPNUAT field
 in DSPPOOL resource table [353](#)
 DSGPNUUS field
 in DSPPOOL resource table [353](#)
 DSGPRIAG field
 in DSPGBL resource table [349](#)
 DSGSRBT field
 in DSPGBL resource table [349](#)
 DSGSTART field
 in DSPGBL resource table [349](#)
 DSGSTSKS field
 in DSPGBL resource table [349](#)
 DSGSYSW field
 in DSPMODE resource table [351](#)
 DSGTCBAF field
 in DSPMODE resource table [351](#)
 DSGTCBAL field
 in DSPMODE resource table [351](#)
 DSGTCBCA field
 in DSPMODE resource table [351](#)
 DSGTCBCU field
 in DSPMODE resource table [351](#)
 DSGTCBDO field
 in DSPMODE resource table [351](#)
 DSGTCBDS field
 in DSPMODE resource table [351](#)
 DSGTCBDU field
 in DSPMODE resource table [351](#)
 DSGTCBDX field
 in DSPMODE resource table [351](#)
 DSGTCBMD field
 in DSPMODE resource table [351](#)
 DSGTCBMM field
 in DSPMODE resource table [351](#)
 DSGTCBMP field
 in DSPMODE resource table [351](#)
 DSGTCBNM field
 in DSPMODE resource table [351](#)
 DSGTCBPA field
 in DSPMODE resource table [351](#)
 DSGTCBPN field
 in DSPPOOL resource table [353](#)
 DSGTCBPU field
 in DSPMODE resource table [351](#)
 DSGTCBST field
 in DSPMODE resource table [351](#)
 DSGTCT field
 in DSPMODE resource table [351](#)
 DSGTDT field
 in DSPMODE resource table [351](#)
 DSGTMADQ field
 in DSPMODE resource table [351](#)
 DSGTMCDQ field
 in DSPMODE resource table [351](#)
 DSGTMPDQ field
 in DSPMODE resource table [351](#)
 DSGTOTMT field
 in DSPPOOL resource table [353](#)
 in MCICSRGN resource table [803](#)
 DSGTOTMW field
 in DSPPOOL resource table [353](#)
 in MCICSRGN resource table [803](#)

- DSGTOTNW field
 - in DSPPOOL resource table [353](#)
- DSGTOTWL field
 - in DSPPOOL resource table [353](#)
- DSGTWT field
 - in DSPMODE resource table [351](#)
- DSGXSCNN field
 - in DSPGBL resource table [349](#)
- DSGXSCNS field
 - in DSPGBL resource table [349](#)
- DSGXTCBD field
 - in DSPGBL resource table [349](#)
- DSIDLE field
 - in CICSGRN resource table [89](#)
- DSINTERVAL field
 - in CICSGRN resource table [89](#)
- DSKJRNL resource table [343](#)
- DSNAME field
 - in CMDT resource table [141](#)
 - in CRESFILE resource table [215](#)
 - in DOCTEMP resource table [337](#)
 - in DSNAM resource table [345](#)
 - in EXTRATDQ resource table [581](#)
 - in FILEDEF resource table [617](#)
 - in LIBDSN resource table [733](#)
 - in LOCFILE resource table [757](#)
 - in MCMdT resource table [807](#)
 - in MLOCFILE resource table [833](#)
 - in RPLLIST resource table [1051](#)
 - in TASKFILE resource table [1119](#)
 - in TDQDEF resource table [1163](#)
 - in UOWDSNF resource table [1247](#)
- DSNAME resource table [345](#)
- DSNAME01 field
 - in LIBDEF resource table [727](#)
- DSNAME02 field
 - in LIBDEF resource table [727](#)
- DSNAME03 field
 - in LIBDEF resource table [727](#)
- DSNAME04 field
 - in LIBDEF resource table [727](#)
- DSNAME05 field
 - in LIBDEF resource table [727](#)
- DSNAME06 field
 - in LIBDEF resource table [727](#)
- DSNAME07 field
 - in LIBDEF resource table [727](#)
- DSNAME08 field
 - in LIBDEF resource table [727](#)
- DSNAME09 field
 - in LIBDEF resource table [727](#)
- DSNAME10 field
 - in LIBDEF resource table [727](#)
- DSNAME11 field
 - in LIBDEF resource table [727](#)
- DSNAME12 field
 - in LIBDEF resource table [727](#)
- DSNAME13 field
 - in LIBDEF resource table [727](#)
- DSNAME14 field
 - in LIBDEF resource table [727](#)
- DSNAME15 field
 - in LIBDEF resource table [727](#)
- DSNAME16 field

- DSNAME16 field (*continued*)
 - in LIBDEF resource table [727](#)
- DSNAMELIST field
 - in LIBDSN resource table [733](#)
- DSNAMERSVD field
 - in FILEDEF resource table [617](#)
- DSNSEARCHPOS field
 - in LIBDSN resource table [733](#)
- DSNSHARING field
 - in FILEDEF resource table [617](#)
- DSNUM field
 - in LIBDSN resource table [733](#)
- DSOPENCNT field
 - in DSKJRNL resource table [343](#)
 - in MJOURNL resource table [829](#)
- DSPDELAY field
 - in HTASK resource table [655](#)
 - in MLOCTRAN resource table [837](#)
 - in TASK resource table [1123](#)
- DSPDELAYCT field
 - in MLOCTRAN resource table [837](#)
- DSPGBL resource table [349](#)
- DSPLIST field
 - in SYSDUMP resource table [1099](#)
- DSPMODE resource table [351](#)
- DSPPOOL resource table [353](#)
- DSRDSID field
 - in MVSTCB resource table [921](#)
- DSRDSVER field
 - in MVSTCB resource table [921](#)
- DSRTPROGRAM field
 - in CICSGRN resource table [89](#)
- DSTDSID field
 - in MVSTCBGL resource table [919](#)
 - in URIMPGBL resource table [1267](#)
- DSTDSVER field
 - in MVSTCBGL resource table [919](#)
- DSUBTOTL field
 - in CICSDSA resource table [79](#)
 - in MCICSDSA resource table [799](#)
- DTB field
 - in LOCTRAN resource table [763](#)
 - in TASK resource table [1123](#)
- DTIMEGMT field
 - in DB2CONN resource table [301](#)
- DTIMELOC field
 - in DB2CONN resource table [301](#)
- DTIMEOUT field
 - in LOCTRAN resource table [763](#)
 - in TASK resource table [1123](#)
- DTIMOUT field
 - in TRANDEF resource table [1191](#)
- DTRINGRP resource table [355](#)
- DTRPROGRAM field
 - in CICSGRN resource table [89](#)
- DTYPE field
 - in CRESDSNM resource table [195](#)
 - in ERMCDNSM resource table [463](#)
- DUALCASEKYBD field
 - in TYPTMDEF resource table [1239](#)
- DUALCASEST field
 - in TERMNL resource table [1179](#)
- DUMP field
 - in TRANDEF resource table [1191](#)

DUMP_CODE field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)
 DUMP_PROGRAM field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)
 DUMP_TERMID field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)
 DUMP_TRANID field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)
 DUMP_USERID field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)
 DUMPCODE field
 in ELSIGNAL resource table [385](#)
 DUMPING field
 in LOCTRAN resource table [763](#)
 in TASK resource table [1123](#)
 DUMPTERM field
 in ELSIGNAL resource table [385](#)
 DUMPTRAN field
 in ELSIGNAL resource table [385](#)
 DUMPUSER field
 in ELSIGNAL resource table [385](#)
 DUPKEY01 field
 in FSEGDEF resource table [633](#)
 DUPKEY02 field
 in FSEGDEF resource table [633](#)
 DUPKEY03 field
 in FSEGDEF resource table [633](#)
 DUPKEY04 field
 in FSEGDEF resource table [633](#)
 DUPKEY05 field
 in FSEGDEF resource table [633](#)
 DUPKEY06 field
 in FSEGDEF resource table [633](#)
 DUPKEY07 field
 in FSEGDEF resource table [633](#)
 DUPKEY08 field
 in FSEGDEF resource table [633](#)
 DUPKEY09 field
 in FSEGDEF resource table [633](#)
 DUPKEY10 field
 in FSEGDEF resource table [633](#)
 DUPKEY11 field
 in FSEGDEF resource table [633](#)
 DUPKEY12 field
 in FSEGDEF resource table [633](#)
 DUPKEY13 field
 in FSEGDEF resource table [633](#)
 DUPKEY14 field
 in FSEGDEF resource table [633](#)
 DUPKEY15 field
 in FSEGDEF resource table [633](#)
 DUPKEY16 field
 in FSEGDEF resource table [633](#)
 DUPKEY17 field

DUPKEY17 field (*continued*)
 in FSEGDEF resource table [633](#)
 DUPKEY18 field
 in FSEGDEF resource table [633](#)
 DUPKEY19 field
 in FSEGDEF resource table [633](#)
 DUPKEY20 field
 in FSEGDEF resource table [633](#)
 DUPKEY21 field
 in FSEGDEF resource table [633](#)
 DUPKEY22 field
 in FSEGDEF resource table [633](#)
 DUPKEY23 field
 in FSEGDEF resource table [633](#)
 DUPKEY24 field
 in FSEGDEF resource table [633](#)
 DVSUPRT field
 in PROFDEF resource table [987](#)
 DYNAMCONTENT field
 in URIMPGBL resource table [1267](#)
 DYNAMIC field
 in PROGDEF resource table [995](#)
 in TRANDEF resource table [1191](#)
 DYNAMSTATUS field
 in PROGRAM resource table [1001](#)
 DYNROUTE field
 in CSYSDEF resource table [281](#)
 in EMASJOIN resource table [387](#)
 in EMASSTOP resource table [393](#)
 in EMASSTRT resource table [395](#)
 DYNTYPE field
 in EMASJOIN resource table [387](#)
 in EMASSTOP resource table [393](#)
 in EMASSTRT resource table [395](#)

E

EACTNTFN resource table [357](#)
 ECAVGTIMESOS field
 in CICSSTOR resource table [101](#)
 ECDSAGETM field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 ECDSAPSHWM field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 ECDSASHWM field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 ECDSASIZE field
 in LOADER resource table [753](#)
 in TSKSPOLS resource table [1211](#)
 ECDSASOCC field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 ECNONIMMGET field
 in CICSSTOR resource table [101](#)
 ECRATECREL field
 in CICSSTOR resource table [101](#)
 ECRATEEXTSA field

ECRATEEXTSA field (*continued*)
 in CICSSTOR resource table [101](#)
 ECRATEEXTSR field
 in CICSSTOR resource table [101](#)
 ECRATEFM field
 in CICSSTOR resource table [101](#)
 ECRATEGM field
 in CICSSTOR resource table [101](#)
 ECRATESTORV field
 in CICSSTOR resource table [101](#)
 ECSYSCHG resource table [359](#)
 EDEFTIME field
 in EVENTDTL resource table [561](#)
 EJCDEFRG field
 in RESDESC resource table [1035](#)
 EJCDEFRS field
 in RESDESC resource table [1035](#)
 EJCDEFTS field
 in RESDESC resource table [1035](#)
 EJCGRP field
 in EJCINGRP resource table [361](#)
 EJCINGRP resource table [361](#)
 EJCNAME field
 in EJCINGRP resource table [361](#)
 EJCOBEAN resource table [363](#)
 EJCODEF resource table [365](#)
 EJCOSE resource table [371](#)
 EJCVER field
 in EJCINGRP resource table [361](#)
 EJDDEFRG field
 in RESDESC resource table [1035](#)
 EJDDEFRS field
 in RESDESC resource table [1035](#)
 EJDDEFTS field
 in RESDESC resource table [1035](#)
 EJDGRP field
 in EJDINGRP resource table [375](#)
 EJDINGRP resource table [375](#)
 EJDJAR resource table [377](#)
 EJDJBAN resource table [379](#)
 EJDJDEF resource table [381](#)
 EJDNAME field
 in EJDINGRP resource table [375](#)
 EJDVER field
 in EJDINGRP resource table [375](#)
 ELEMENTADDR field
 in MVSESTG resource table [917](#)
 in TASKESTG resource table [1117](#)
 ELEMENTLEN field
 in MVSESTG resource table [917](#)
 in TASKESTG resource table [1117](#)
 ELSIGNAL resource table [385](#)
 EMASJOIN resource table [387](#)
 EMASICK resource table [389](#)
 EMASSTOP resource table [393](#)
 EMASSTRT resource table [395](#)
 EMASWELL resource table [397](#)
 EMCICS resource table [401](#)
 EMCONN resource table [403](#)
 EMDBX resource table [405](#)
 EMFILE resource table [407](#)
 EMGLBL resource table [409](#)
 EMITMODE field
 in EPADAPT resource table [435](#)

EMJRNL resource table [411](#)
 EMPROG resource table [413](#)
 EMPTYSTATUS field
 in EXTRATDQ resource table [581](#)
 in LOCFIL resource table [757](#)
 in VOLUME resource table [1269](#)
 EMRGNCYRSTRT field
 in JRNLEDF resource table [701](#)
 EMSTATUS resource table [415](#)
 EMTDQS resource table [419](#)
 EMTERM resource table [421](#)
 EMTRAN resource table [423](#)
 ENABLEDCOUNT field
 in BUNDLE resource table [69](#)
 ENABLESTATUS field
 in APPLCTN resource table [23](#)
 in ATOMSERV resource table [45](#)
 in BUNDLE resource table [69](#)
 in BUNDPART resource table [73](#)
 in CMDT resource table [141](#)
 in CRESATOM resource table [179](#)
 in CRESBUND resource table [181](#)
 in CRESEPAD resource table [199](#)
 in CRESEPAS resource table [201](#)
 in CRESEVBD resource table [203](#)
 in CRESFILE resource table [215](#)
 in CRESJVMS resource table [225](#)
 in CRESLIBR resource table [227](#)
 in CRESPIPE resource table [235](#)
 in CRESPRGM resource table [237](#)
 in CRESTDQ resource table [251](#)
 in CRESTRAN resource table [255](#)
 in CRESURIM resource table [261](#)
 in CRESXMLT resource table [265](#)
 in DB2ENTRY resource table [311](#)
 in DB2PKGST resource table [315](#)
 in EJCOSE resource table [371](#)
 in EPADAPT resource table [435](#)
 in EPADSET resource table [437](#)
 in EVNTBIND resource table [567](#)
 in EXTRATDQ resource table [581](#)
 in HOST resource table [653](#)
 in JVMSESV resource table [719](#)
 in LIBRARY resource table [737](#)
 in LOCFIL resource table [757](#)
 in MCMDET resource table [807](#)
 in MGMTPART resource table [825](#)
 in MLOCFIL resource table [833](#)
 in MQMON resource table [893](#)
 in MREMFIL resource table [901](#)
 in MXTRATDQ resource table [927](#)
 in PIPELINE resource table [959](#)
 in PLATFORM resource table [970](#)
 in REMFIL resource table [1025](#)
 in URIMAP resource table [1257](#)
 in XMLTRANS resource table [1321](#)
 ENASTAT field
 in PROCTYP resource table [985](#)
 END field
 in PERIODEF resource table [951](#)
 ENDOFDAY field
 in CICSRRN resource table [89](#)
 in MONITOR resource table [867](#)
 ENDPOINT field

ENDPOINT field (*continued*)
 in WEBSERV resource table [1273](#)
 ENDESESSION field
 in FEPIPOOL resource table [597](#)
 in FEPIPROP resource table [601](#)
 in FEPRODEF resource table [609](#)
 ENQADDRESS field
 in UOWENQ resource table [1249](#)
 ENQDEFRG field
 in RESDESC resource table [1035](#)
 ENQDEFRS field
 in RESDESC resource table [1035](#)
 ENQDEFTS field
 in RESDESC resource table [1035](#)
 ENQDELAY field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 ENQDELAYCT field
 in MLOCTRAN resource table [837](#)
 ENQFAILS field
 in UOWENQ resource table [1249](#)
 ENQINGRP resource table [425](#)
 ENQMDEF resource table [427](#)
 ENQMGROUP field
 in ENQINGRP resource table [425](#)
 ENQMNAME field
 in ENQINGRP resource table [425](#)
 ENQMODEL resource table [431](#)
 ENQMVER field
 in ENQINGRP resource table [425](#)
 ENQNAME field
 in ENQMDEF resource table [427](#)
 in ENQMODEL resource table [431](#)
 ENQSCOPE field
 in ENQMDEF resource table [427](#)
 in ENQMODEL resource table [431](#)
 in UOWENQ resource table [1249](#)
 ENQSTATUS field
 in ENQMODEL resource table [431](#)
 ENQUEUE resource table [433](#)
 ENTLGQUE field
 in MTSQGBL resource table [913](#)
 in TSQGBL resource table [1227](#)
 ENTRY field
 in DB2TDEF resource table [319](#)
 in EXITGLUE resource table [575](#)
 in EXITTRUE resource table [577](#)
 in EXTGLORD resource table [579](#)
 ENTRYNAME field
 in EXITGLUE resource table [575](#)
 in EXITTRUE resource table [577](#)
 in EXTGLORD resource table [579](#)
 ENTRYNME field
 in CRESTRUE resource table [257](#)
 in ERMCTRUE resource table [523](#)
 ENTRYPOINT field
 in PROGRAM resource table [1001](#)
 EPADAPT resource table [435](#)
 EPADAPTER field
 in EPAINSET resource table [439](#)
 in EVNTBIND resource table [567](#)
 in RULE resource table [1079](#)
 EPADAPTERRES field

EPADAPTERRES field (*continued*)
 in EVNTBIND resource table [567](#)
 EPADAPTERSET field
 in EPADSET resource table [437](#)
 in EPAINSET resource table [439](#)
 in EVNTBIND resource table [567](#)
 in RULE resource table [1079](#)
 EPADSET resource table [437](#)
 EPAINSET resource table [439](#)
 EPLEXCHG resource table [441](#)
 EPREFCOUNT field
 in URIMPGBL resource table [1267](#)
 EPSTATUS field
 in EVNTGBL resource table [569](#)
 ERAVGTIMESOS field
 in CICSSTOR resource table [101](#)
 ERDSASIZE field
 in LOADER resource table [753](#)
 ERESSTAT resource table [443](#)
 ERMCAIMD resource table [445](#)
 ERMCAATOM resource table [447](#)
 ERMCBUND resource table [449](#)
 ERMCCONN resource table [451](#)
 ERMCDDB2C resource table [453](#)
 ERMCDDB2E resource table [455](#)
 ERMCDDB2P resource table [457](#)
 ERMCDDB2T resource table [459](#)
 ERMCDOCT resource table [461](#)
 ERMCDSNM resource table [463](#)
 ERMCMENQM resource table [465](#)
 ERMCEVBD resource table [467](#)
 ERMCEVCS resource table [469](#)
 ERMCFECO resource table [471](#)
 ERMCFEND resource table [473](#)
 ERMCFEPO resource table [475](#)
 ERMCFETR resource table [477](#)
 ERMCFILE resource table [479](#)
 ERMCGLUE resource table [481](#)
 ERMCIPCN resource table [483](#)
 ERM CJRNL resource table [485](#)
 ERM CJRNM resource table [487](#)
 ERM CJVMS resource table [489](#)
 ERMCLIBR resource table [491](#)
 ERMCMODE resource table [493](#)
 ERM COSGB resource table [495](#)
 ERM COSGS resource table [497](#)
 ERMCPART resource table [499](#)
 ERM CPIPE resource table [501](#)
 ERM CPRGM resource table [503](#)
 ERM CPROF resource table [505](#)
 ERM CPRTY resource table [507](#)
 ERM CRQMD resource table [509](#)
 ERM CSDMP resource table [511](#)
 ERM CTCPS resource table [513](#)
 ERM CTDMP resource table [515](#)
 ERM CTDQ resource table [517](#)
 ERM CTERM resource table [519](#)
 ERM CTRAN resource table [521](#)
 ERM CTRUE resource table [523](#)
 ERM CTSMD resource table [525](#)
 ERM CURIM resource table [527](#)
 ERM CWEBS resource table [529](#)
 ERM CXMLT resource table [531](#)
 ERM MCONN resource table [533](#)

ERMMFILE resource table [535](#)
 ERMMJRNL resource table [537](#)
 ERMMPRGM resource table [539](#)
 ERMMTDQ resource table [541](#)
 ERMMTERM resource table [543](#)
 ERMMTRAN resource table [545](#)
 ERNONIMMGET field
 in CICSSTOR resource table [101](#)
 ERR_COUNT field
 in FEEDBACK resource table [585](#)
 ERR_OBJECT field
 in FEEDBACK resource table [585](#)
 ERR_RESULT field
 in FEEDBACK resource table [585](#)
 ERRATECREL field
 in CICSSTOR resource table [101](#)
 ERRATEEXTSA field
 in CICSSTOR resource table [101](#)
 ERRATEEXTSR field
 in CICSSTOR resource table [101](#)
 ERRATEFM field
 in CICSSTOR resource table [101](#)
 ERRATEGM field
 in CICSSTOR resource table [101](#)
 ERRATESTORV field
 in CICSSTOR resource table [101](#)
 ERRCODE field
 in BINCONSC resource table [59](#)
 in BINSTERR resource table [61](#)
 ERRCODEVAL field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 ERRCOLOR field
 in TYPTMDEF resource table [1239](#)
 ERRDEST1 field
 in DB2SS resource table [317](#)
 ERRDEST2 field
 in DB2SS resource table [317](#)
 ERRDEST3 field
 in DB2SS resource table [317](#)
 ERRHILIGHT field
 in TYPTMDEF resource table [1239](#)
 ERRINTENSIFY field
 in TYPTMDEF resource table [1239](#)
 ERRLASTLINE field
 in TYPTMDEF resource table [1239](#)
 ERROP field
 in BINCONRS resource table [57](#)
 in BINCONSC resource table [59](#)
 ERROR_CODE field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 ERROROPTION field
 in EXTRATDQ resource table [581](#)
 in TDQDEF resource table [1163](#)
 ERRORS field
 in FEPICONN resource table [593](#)
 in MFEPICON resource table [823](#)
 ERRORTYPE field
 in MASQRYER resource table [795](#)
 ESACNT field
 in CPLEXDEF resource table [169](#)
 in CPLXCMAS resource table [173](#)
 ESAVGTIMESOS field

ESAVGTIMESOS field (*continued*)
 in CICSSTOR resource table [101](#)
 ESDSASIZE field
 in LOADER resource table [753](#)
 ESGRPCHG resource table [547](#)
 ESNONIMMGET field
 in CICSSTOR resource table [101](#)
 ESRATECREL field
 in CICSSTOR resource table [101](#)
 ESRATEEXTSA field
 in CICSSTOR resource table [101](#)
 ESRATEEXTSR field
 in CICSSTOR resource table [101](#)
 ESRATEFM field
 in CICSSTOR resource table [101](#)
 ESRATEGM field
 in CICSSTOR resource table [101](#)
 ESRATESTORV field
 in CICSSTOR resource table [101](#)
 ESTICCHNL field
 in CONNECT resource table [164](#)
 ESTICCHNRCVD field
 in CONNECT resource table [164](#)
 ESTICCHNSENT field
 in CONNECT resource table [164](#)
 ESTPCCHNL field
 in CONNECT resource table [164](#)
 ESTPCCHNRCVD field
 in CONNECT resource table [164](#)
 ESTPCCHNSENT field
 in CONNECT resource table [164](#)
 ESTTCCHNL field
 in CONNECT resource table [164](#)
 ESTTCCHNRCVD field
 in CONNECT resource table [164](#)
 ESTTCCHNSENT field
 in CONNECT resource table [164](#)
 ETAVGTIMESOS field
 in CICSSTOR resource table [101](#)
 ETNONIMMGET field
 in CICSSTOR resource table [101](#)
 ETRATECREL field
 in CICSSTOR resource table [101](#)
 ETRATEEXTSA field
 in CICSSTOR resource table [101](#)
 ETRATEEXTSR field
 in CICSSTOR resource table [101](#)
 ETRATEFM field
 in CICSSTOR resource table [101](#)
 ETRATEGM field
 in CICSSTOR resource table [101](#)
 ETRATESTORV field
 in CICSSTOR resource table [101](#)
 EUAVGTIMESOS field
 in CICSSTOR resource table [101](#)
 EUDSASIZE field
 in TSKSPOLS resource table [1211](#)
 EUNONIMMGET field
 in CICSSTOR resource table [101](#)
 EURATECREL field
 in CICSSTOR resource table [101](#)
 EURATEEXTSA field
 in CICSSTOR resource table [101](#)
 EURATEEXTSR field

EURATEEXTSR field *(continued)*
 in CICSSTOR resource table [101](#)
 EURATEFM field
 in CICSSTOR resource table [101](#)
 EURATEGM field
 in CICSSTOR resource table [101](#)
 EURATESTORV field
 in CICSSTOR resource table [101](#)
 EVALBLK field
 in STATDEF resource table [1093](#)
 EVALBLKBID field
 in RTADEF resource table [1063](#)
 EVALBLKID field
 in STATDEF resource table [1093](#)
 EVALBLKLEN field
 in RTADEF resource table [1063](#)
 EVALBLKLL field
 in STATDEF resource table [1093](#)
 EVALBLKOID field
 in STATDEF resource table [1093](#)
 EVALBLKPGM field
 in STATDEF resource table [1093](#)
 EVALBLKVER field
 in RTADEF resource table [1063](#)
 in STATDEF resource table [1093](#)
 EVALBLKXPR field
 in RTADEF resource table [1063](#)
 EVALBLOCK field
 in RTADEF resource table [1063](#)
 EVALCOL field
 in EVALDEF resource table [549](#)
 in EVENTDTL resource table [561](#)
 EVALDATA field
 in EVALDEF resource table [549](#)
 in EVENTDTL resource table [561](#)
 EVALDATAL field
 in EVALDEF resource table [549](#)
 EVALDEF resource table [549](#)
 EVALDLEN field
 in EVENTDTL resource table [561](#)
 EVALEXPRLEN field
 in RTADEF resource table [1063](#)
 EVALEXPRTEXT field
 in RTADEF resource table [1063](#)
 EVALOPER field
 in EVALDEF resource table [549](#)
 in EVENTDTL resource table [561](#)
 EVALTYPE field
 in EVALDEF resource table [549](#)
 in EVENT resource table [563](#)
 in EVENTDTL resource table [561](#)
 EVCSDATA resource table [555](#)
 EVCSINFO resource table [557](#)
 EVCSOPT resource table [559](#)
 EVCSPEC resource table [553](#)
 EVENT field
 in EVENTDTL resource table [561](#)
 EVENT resource table [563](#)
 EVENTBINDING field
 in CRESEVCS resource table [205](#)
 in ERMCEVCS resource table [469](#)
 in EVCSDATA resource table [555](#)
 in EVCSINFO resource table [557](#)
 in EVCSOPT resource table [559](#)

EVENTBINDING field *(continued)*
 in EVCSPEC resource table [553](#)
 EVENTCLASS field
 in CICSRRGN resource table [89](#)
 EVENTDTL resource table [561](#)
 EVENTMSG field
 in ACTION resource table [17](#)
 EVENTNAME field
 in EVCSPEC resource table [553](#)
 in TRANGRP resource table [1201](#)
 in WLMATGRP resource table [1289](#)
 in WLMAWORK resource table [1301](#)
 in WLMSPEC resource table [1313](#)
 EVENTS field
 in WLMATARG resource table [1285](#)
 in WLMAWAOR resource table [1295](#)
 EVNTBACKOUT field
 in EVNTGBL resource table [569](#)
 EVNTBIND resource table [567](#)
 EVNTBNDSTID field
 in EVNTGBL resource table [569](#)
 EVNTCAPFAIL field
 in EVCSPEC resource table [553](#)
 EVNTCAPOPSF field
 in EVNTGBL resource table [569](#)
 EVNTCAPTURED field
 in EVCSPEC resource table [553](#)
 EVNTCOMMIT field
 in EVNTGBL resource table [569](#)
 EVNTCURRDSP field
 in EVNTGBL resource table [569](#)
 EVNTCURREVQ field
 in EVNTGBL resource table [569](#)
 EVNTCURRTRQ field
 in EVNTGBL resource table [569](#)
 EVNTCUSTAD field
 in EVNTGBL resource table [569](#)
 EVNTDISABLE field
 in EVNTGBL resource table [569](#)
 EVNTDOMSTID field
 in EVNTGBL resource table [569](#)
 EVNTDSPFAILC field
 in EVNTGBL resource table [569](#)
 EVNTDSPFAILO field
 in EVNTGBL resource table [569](#)
 EVNTFILTAP field
 in EVNTGBL resource table [569](#)
 EVNTFILTOPS field
 in EVNTGBL resource table [569](#)
 EVNTFILTOPSF field
 in EVNTGBL resource table [569](#)
 EVNTGBL resource table [569](#)
 EVNTHHTPCNT field
 in EVNTGBL resource table [569](#)
 EVNTLOSTAU field
 in EVNTGBL resource table [569](#)
 EVNTLOSTCO field
 in EVNTGBL resource table [569](#)
 EVNTLOSTOT field
 in EVNTGBL resource table [569](#)
 EVNTMQADAPT field
 in EVNTGBL resource table [569](#)
 EVNTNORM field
 in EVNTGBL resource table [569](#)

EVNTPEAKDSP field
 in EVNTGBL resource table [569](#)
 EVNTPEAKEVQ field
 in EVNTGBL resource table [569](#)
 EVNTPEAKTRQ field
 in EVNTGBL resource table [569](#)
 EVNTPRIO field
 in EVNTGBL resource table [569](#)
 EVNTPUT field
 in EVNTGBL resource table [569](#)
 EVNTSEV field
 in EVENTDTL resource table [561](#)
 EVNTSYNCCAP field
 in EVNTGBL resource table [569](#)
 EVNTSYNCFAIL field
 in EVNTGBL resource table [569](#)
 EVNTSYSCAP field
 in EVNTGBL resource table [569](#)
 EVNTTDQSTAT field
 in EVNTGBL resource table [569](#)
 EVNTTRAN field
 in EVNTGBL resource table [569](#)
 EVNTTRANATT field
 in EVNTGBL resource table [569](#)
 EVNTTRANDIS field
 in EVNTGBL resource table [569](#)
 EVNTTRANSAD field
 in EVNTGBL resource table [569](#)
 EVNTTSQSTAT field
 in EVNTGBL resource table [569](#)
 EXCEPTCLASS field
 in CICSRRN resource table [89](#)
 in MONITOR resource table [867](#)
 EXCEPTIONQ field
 in FEPIPOOL resource table [597](#)
 in FEPIPROP resource table [601](#)
 in FEPRODEF resource table [609](#)
 EXCI resource table [573](#)
 EXCLUSIVE field
 in LOCFIL resource table [757](#)
 EXEC_OPS field
 in RTADEF resource table [1063](#)
 EXECCLK field
 in CMTMLNK resource table [151](#)
 in CMTPLNK resource table [153](#)
 EXECKEY field
 in JVM resource table [713](#)
 in MPROGRAM resource table [875](#)
 in PROGDEF resource table [995](#)
 in PROGRAM resource table [1001](#)
 EXECOMP field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 EXECUTIONSET field
 in PROGDEF resource table [995](#)
 in PROGRAM resource table [1001](#)
 EXISTASGOVR field
 in BINCONRS resource table [57](#)
 EXISTNAME field
 in BINCONRS resource table [57](#)
 EXISTRASG field
 in BINCONRS resource table [57](#)
 EXISTRDSC field
 in BINCONRS resource table [57](#)

EXISTRGRP field
 in BINCONRS resource table [57](#)
 EXISTSGRP field
 in BINCONRS resource table [57](#)
 EXISTTYPE field
 in BINCONRS resource table [57](#)
 EXISTUSAGE field
 in BINCONRS resource table [57](#)
 EXISTVER field
 in BINCONRS resource table [57](#)
 EXIT_REJALLC field
 in CONNECT resource table [164](#)
 in MCONNECT resource table [811](#)
 EXITALLCPUR field
 in IPCONN resource table [687](#)
 EXITALLCQPUR field
 in IPCONN resource table [687](#)
 EXITALLCREJ field
 in IPCONN resource table [687](#)
 EXITGLUE resource table [575](#)
 EXITNAME field
 in CRESGLUE resource table [217](#)
 in ERMCGLUE resource table [481](#)
 EXITPGM field
 in DOCDEF resource table [331](#)
 in DOCTEMP resource table [337](#)
 EXITPOINT field
 in EXITGLUE resource table [575](#)
 in EXTGLORD resource table [579](#)
 EXITPOSITION field
 in EXTGLORD resource table [579](#)
 EXITTIME field
 in CICSRRN resource table [89](#)
 EXITTRACING field
 in CONNECT resource table [164](#)
 in TERMNL resource table [1179](#)
 EXITTRUE resource table [577](#)
 EXPANSION field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)
 in FEEDBACK resource table [585](#)
 EXPANTIME field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 EXPANTIME2 field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)
 EXPIRYINT field
 in TSMDEF resource table [1217](#)
 in TSMODEL resource table [1223](#)
 in TSQNAME resource table [1231](#)
 in TSQSHR resource table [1233](#)
 in TSQUEUE resource table [1235](#)
 EXPIRYINTMIN field
 in TSMDEF resource table [1217](#)
 in TSMODEL resource table [1223](#)
 in TSQNAME resource table [1231](#)
 in TSQSHR resource table [1233](#)
 in TSQUEUE resource table [1235](#)
 EXTENDEDSD field
 in TYPTMDEF resource table [1239](#)
 EXTENDEDSDST field

EXTENDEDSSST field (*continued*)
in TERMNL resource table [1179](#)

EXTENTSADDED field
in CICSDSA resource table [79](#)

EXTENTSCURR field
in CICSDSA resource table [79](#)

EXTENTSDELTD field
in CICSDSA resource table [79](#)

EXTERNWAIT field
in HTASK resource table [655](#)
in TASK resource table [1123](#)

EXTERNWC field
in MLOCTAN resource table [837](#)

EXTERNWT field
in MLOCTAN resource table [837](#)

EXTFILEMGR field
in FILEDEF resource table [617](#)

EXTGLORD resource table [579](#)

EXTMSGEND field
in ACTION resource table [17](#)

EXTMSGSTRT field
in ACTION resource table [17](#)

EXTRATDQ resource table [581](#)

EXTSEC field
in CICSGRN resource table [89](#)
in MCICSGRN resource table [803](#)
in TRANDEF resource table [1191](#)

EXTTHRESHOLD field
in MTSQGBL resource table [913](#)
in TSQGBL resource table [1227](#)

EXWAIT field
in HTASK resource table [655](#)
in MLOCTAN resource table [837](#)
in TASK resource table [1123](#)

EXWAITCNT field
in MLOCTAN resource table [837](#)

EYU_RSVD field
in ACTION resource table [17](#)
in APPLCTN resource table [23](#)
in APPLDEF resource table [27](#)
in APSPEC resource table [31](#)
in ATMINGRP resource table [37](#)
in ATOMDEF resource table [39](#)
in BUNDEF resource table [65](#)
in BUNINGRP resource table [75](#)
in CMDMPAPS resource table [137](#)
in CMDMSAPS resource table [139](#)
in CMTCMDEF resource table [147](#)
in CONINGRP resource table [155](#)
in CONNDEF resource table [157](#)
in CPLEXDEF resource table [169](#)
in CPLXCMAS resource table [173](#)
in CSGLCGCG resource table [275](#)
in CSGLCGCS resource table [277](#)
in CSYSDEF resource table [281](#)
in CSYSGRP resource table [287](#)
in D2CINGRP resource table [289](#)
in D2EINGRP resource table [291](#)
in D2TINGRP resource table [293](#)
in DB2CDEF resource table [295](#)
in DB2EDEF resource table [307](#)
in DB2TDEF resource table [319](#)
in DOCDEF resource table [331](#)
in DOCINGRP resource table [335](#)

EYU_RSVD field (*continued*)
in DTRINGRP resource table [355](#)
in EJCINGRP resource table [361](#)
in EJCODEF resource table [365](#)
in EJDINGRP resource table [375](#)
in EJDJDEF resource table [381](#)
in ENQINGRP resource table [425](#)
in ENQMDEF resource table [427](#)
in EVALDEF resource table [549](#)
in FENODEF resource table [589](#)
in FEPOODEF resource table [605](#)
in FEPRODEF resource table [609](#)
in FETRDEF resource table [613](#)
in FILEDEF resource table [617](#)
in FILINGRP resource table [625](#)
in FNOINGRP resource table [627](#)
in FPOINGRP resource table [629](#)
in FPRINGRP resource table [631](#)
in FSEGDEF resource table [633](#)
in FSGINGRP resource table [649](#)
in FTRINGRP resource table [651](#)
in IPCINGRP resource table [679](#)
in IPCONDEF resource table [681](#)
in JMSINGRP resource table [695](#)
in JRMINGRP resource table [697](#)
in JRNINGRP resource table [699](#)
in JRNMDEF resource table [709](#)
in JVMSVDEF resource table [723](#)
in LIBDEF resource table [727](#)
in LIBINGRP resource table [735](#)
in LNKSMSCG resource table [739](#)
in LNKSMSCS resource table [741](#)
in LNKSRSCG resource table [743](#)
in LNKSRSCS resource table [745](#)
in LNKSWSCG resource table [747](#)
in LNKSWSCS resource table [749](#)
in LSRDEF resource table [769](#)
in LSRINGRP resource table [775](#)
in MAPDEF resource table [781](#)
in MAPINGRP resource table [785](#)
in MGMTPART resource table [825](#)
in MONDEF resource table [857](#)
in MONGROUP resource table [861](#)
in MONINGRP resource table [863](#)
in MONINSPC resource table [865](#)
in MONSPEC resource table [873](#)
in MQCINGRP resource table [877](#)
in MQCONDEF resource table [883](#)
in MQMINGRP resource table [891](#)
in MQMONDEF resource table [897](#)
in PARINGRP resource table [941](#)
in PARTDEF resource table [945](#)
in PERIODEF resource table [951](#)
in PGMINGRP resource table [953](#)
in PIPEDEF resource table [955](#)
in PIPINGRP resource table [963](#)
in PLATDEF resource table [965](#)
in PLATFORM resource table [970](#)
in PRCINGRP resource table [977](#)
in PRNINGRP resource table [979](#)
in PROCDEF resource table [981](#)
in PROFDEF resource table [987](#)
in PROGDEF resource table [995](#)
in PROINGRP resource table [1007](#)

EYU_RSVD field (*continued*)

- in PRTNDEF resource table [1009](#)
- in RASGNDEF resource table [1013](#)
- in RASINDSC resource table [1017](#)
- in RESDESC resource table [1035](#)
- in RESGROUP resource table [1043](#)
- in RESINDSC resource table [1047](#)
- in RESINGRP resource table [1049](#)
- in RQMDEF resource table [1053](#)
- in RQMINGRP resource table [1057](#)
- in RTADEF resource table [1063](#)
- in RTAGROUP resource table [1067](#)
- in RTAINAPS resource table [1069](#)
- in RTAINGRP resource table [1071](#)
- in RTAINSPC resource table [1073](#)
- in RTASPEC resource table [1075](#)
- in SESINGRP resource table [1083](#)
- in SESSDEF resource table [1085](#)
- in STAINGRP resource table [1091](#)
- in STATDEF resource table [1093](#)
- in SYSLINK resource table [1103](#)
- in TCLINGRP resource table [1143](#)
- in TCPDEF resource table [1145](#)
- in TCPINGRP resource table [1151](#)
- in TDQDEF resource table [1163](#)
- in TDQINGRP resource table [1171](#)
- in TERMDEF resource table [1173](#)
- in TRANDEF resource table [1191](#)
- in TRANGRP resource table [1201](#)
- in TRMINGRP resource table [1203](#)
- in TRNCLDEF resource table [1205](#)
- in TRNINGRP resource table [1209](#)
- in TSMDEF resource table [1217](#)
- in TSMINGRP resource table [1221](#)
- in TYPINGRP resource table [1237](#)
- in TYPTMDEF resource table [1239](#)
- in URIINGRP resource table [1255](#)
- in URIMPDEF resource table [1261](#)
- in WEBINGRP resource table [1271](#)
- in WEBSVDEF resource table [1277](#)
- in WLMDEF resource table [1305](#)
- in WLMGROUP resource table [1307](#)
- in WLMINGRP resource table [1309](#)
- in WLMINSPC resource table [1311](#)
- in WLMSPEC resource table [1313](#)

EYU_RSVD01 field

- in PLATFORM resource table [970](#)

F

FACILITY field

- in HTASK resource table [655](#)
- in TASK resource table [1123](#)

FACILITYID field

- in TDQDEF resource table [1163](#)

FACILITYLIKE field

- in LOCTRAN resource table [763](#)
- in PROFDEF resource table [987](#)

FACILITYTYPE field

- in HTASK resource table [655](#)
- in TASK resource table [1123](#)

FACILNAME field

FACILNAME field (*continued*)

- in TASKASSC resource table [1113](#)

FACILTYPE field

- in TASKASSC resource table [1113](#)

FAILACTION field

- in TRANDEF resource table [1191](#)

FAILACTIVATE field

- in EJCOSE resource table [371](#)

FAILCREADS field

- in LSRPBUF resource table [777](#)
- in MLSRPBUF resource table [845](#)

FAILCWRITES field

- in LSRPBUF resource table [777](#)
- in MLSRPBUF resource table [845](#)

FAILEDOTHERS field

- in CONNECT resource table [164](#)
- in MCONNECT resource table [811](#)

FAILINKALLOC field

- in CONNECT resource table [164](#)
- in MCONNECT resource table [811](#)

FCADDCNT field

- in HTASK resource table [655](#)
- in MLOCTRAN resource table [837](#)
- in TASK resource table [1123](#)

FCAMCNT field

- in HTASK resource table [655](#)
- in MLOCTRAN resource table [837](#)
- in TASK resource table [1123](#)
- in TASKFILE resource table [1119](#)

FCBRWCNT field

- in HTASK resource table [655](#)
- in MLOCTRAN resource table [837](#)
- in TASK resource table [1123](#)

FCCOUNT field

- in HTASK resource table [655](#)
- in MLOCTRAN resource table [837](#)
- in TASK resource table [1123](#)

FCDELCNT field

- in HTASK resource table [655](#)
- in MLOCTRAN resource table [837](#)
- in TASK resource table [1123](#)

FCFUNCSHIP field

- in CONNECT resource table [164](#)
- in MCONNECT resource table [811](#)

FCGETCNT field

- in HTASK resource table [655](#)
- in MLOCTRAN resource table [837](#)
- in TASK resource table [1123](#)

FCIOCNT field

- in MLOCTRAN resource table [837](#)

FCIOTIME field

- in HTASK resource table [655](#)
- in MLOCTRAN resource table [837](#)
- in TASK resource table [1123](#)

FCPUTCNT field

- in HTASK resource table [655](#)
- in MLOCTRAN resource table [837](#)
- in TASK resource table [1123](#)

FCVSWTT field

- in HTASK resource table [655](#)
- in TASK resource table [1123](#)

FCXCWTT field

- in HTASK resource table [655](#)
- in TASK resource table [1123](#)

- FEEDBACK resource table [585](#)
- FENODDEF resource table [589](#)
- FEPICONN resource table [593](#)
- FEPINODE resource table [595](#)
- FEPIPOOL resource table [597](#)
- FEPIPROP resource table [601](#)
- FEPITRGT resource table [603](#)
- FEPOODEF resource table [605](#)
- FEPRODEF resource table [609](#)
- FETCHCNT field
 - in MPROGRAM resource table [875](#)
 - in PROGRAM resource table [1001](#)
- FETCHTIME field
 - in MPROGRAM resource table [875](#)
 - in PROGRAM resource table [1001](#)
- FETRGTDEF resource table [613](#)
- FIELDLENGTH field
 - in EVCSDATA resource table [555](#)
 - in EVCSINFO resource table [557](#)
 - in METAPARM resource table [821](#)
- FIELDNAME field
 - in METAPARM resource table [821](#)
- FIELDOFFSET field
 - in EVCSDATA resource table [555](#)
 - in EVCSINFO resource table [557](#)
 - in METAPARM resource table [821](#)
- FILE field
 - in CMDT resource table [141](#)
 - in DOCDEF resource table [331](#)
 - in DOCTEMP resource table [337](#)
 - in LOCFILE resource table [757](#)
 - in MCMDT resource table [807](#)
 - in MLOCFILE resource table [833](#)
 - in MREMFIL resource table [901](#)
 - in PROCDEF resource table [981](#)
 - in PROCTYP resource table [985](#)
 - in REMFIL resource table [1025](#)
- FILEACCESS field
 - in FILEDEF resource table [617](#)
- FILECOUNT field
 - in DSNAME resource table [345](#)
- FILEDEF resource table [617](#)
- FILEGROUP field
 - in FILINGRP resource table [625](#)
- FILELABEL field
 - in TDQDEF resource table [1163](#)
- FILELIMIT field
 - in MONITOR resource table [867](#)
- FILEENABLED field
 - in FILEDEF resource table [617](#)
- FILENAME field
 - in EVCSDATA resource table [555](#)
 - in EVCSINFO resource table [557](#)
 - in FILINGRP resource table [625](#)
- FILEOPEN field
 - in FILEDEF resource table [617](#)
- FILESAMP field
 - in CSYSDEF resource table [281](#)
 - in MAS resource table [787](#)
 - in MONSPEC resource table [873](#)
- FILETYPE field
 - in ERMCFIL resource table [479](#)
 - in FILEDEF resource table [617](#)
- FILEVER field

- FILEVER field (*continued*)
 - in FILINGRP resource table [625](#)
- FILINGRP resource table [625](#)
- FILLER1 field
 - in CPLEXDEF resource table [169](#)
 - in CPLXCMAS resource table [173](#)
- FILTER field
 - in ATTR resource table [49](#)
 - in EVALDEF resource table [549](#)
 - in RASGNDEF resource table [1013](#)
 - in WLMATGRP resource table [1289](#)
- FILTERL field
 - in EVALDEF resource table [549](#)
 - in RASGNDEF resource table [1013](#)
- FILTERVALUE field
 - in EVCSDATA resource table [555](#)
 - in EVCSOPT resource table [559](#)
- FIRSTPRGM field
 - in HTASK resource table [655](#)
 - in TASK resource table [1123](#)
- FJOURNALNAME field
 - in FEPIPOOL resource table [597](#)
 - in FEPIPROP resource table [601](#)
 - in FEPRODEF resource table [609](#)
- FJOURNALNUM field
 - in FEPIPOOL resource table [597](#)
 - in FEPIPROP resource table [601](#)
 - in FEPRODEF resource table [609](#)
- flag_bit field
 - in METAPARM resource table [821](#)
- flag_byte field
 - in METAPARM resource table [821](#)
- FLEDEFRG field
 - in RESDESC resource table [1035](#)
- FLEDEFRS field
 - in RESDESC resource table [1035](#)
- FLEDEFTS field
 - in RESDESC resource table [1035](#)
- FMHPARM field
 - in TYPTMDEF resource table [1239](#)
- FMHPARMST field
 - in TERMNL resource table [1179](#)
- FMHSTATUS field
 - in REQID resource table [1033](#)
- FMIDSEQ field
 - in WLMAROUT resource table [1281](#)
- FMTWRITE field
 - in MTDQGBL resource table [907](#)
 - in TDQGBL resource table [1169](#)
- FMTWRT field
 - in MTSQGBL resource table [913](#)
 - in TSQGBL resource table [1227](#)
- FNODEFRG field
 - in RESDESC resource table [1035](#)
- FNODEFRS field
 - in RESDESC resource table [1035](#)
- FNODEFTS field
 - in RESDESC resource table [1035](#)
- FNOGROUP field
 - in FNOINGRP resource table [627](#)
- FNOINGRP resource table [627](#)
- FNONAME field
 - in FNOINGRP resource table [627](#)
- FNOVER field

FNOVER field (*continued*)
 in FNOINGRP resource table [627](#)
 FORACTINDTO field
 in LOCTRAN resource table [763](#)
 in MLOCTRAN resource table [837](#)
 FORACTNOWT field
 in LOCTRAN resource table [763](#)
 in MLOCTRAN resource table [837](#)
 FORACTOPER field
 in LOCTRAN resource table [763](#)
 in MLOCTRAN resource table [837](#)
 FORACTOTHER field
 in LOCTRAN resource table [763](#)
 in MLOCTRAN resource table [837](#)
 FORACTTRNDF field
 in LOCTRAN resource table [763](#)
 in MLOCTRAN resource table [837](#)
 FORCEQR field
 in CICSRRGN resource table [89](#)
 in DSPGBL resource table [349](#)
 FORMAT field
 in FEPIPOOL resource table [597](#)
 in FEPIPROP resource table [601](#)
 in FEPRODEF resource table [609](#)
 FORMATEDFST field
 in EXITTRUE resource table [577](#)
 FORMFEED field
 in TYPTMDEF resource table [1239](#)
 FORMFEEDST field
 in TERMNL resource table [1179](#)
 FPODEFRG field
 in RESDESC resource table [1035](#)
 FPODEFRS field
 in RESDESC resource table [1035](#)
 FPODEFTS field
 in RESDESC resource table [1035](#)
 FPOGROUP field
 in FPOINGRP resource table [629](#)
 FPOINGRP resource table [629](#)
 FPONAME field
 in FPOINGRP resource table [629](#)
 FPOVER field
 in FPOINGRP resource table [629](#)
 FPRDEFRG field
 in RESDESC resource table [1035](#)
 FPRDEFRS field
 in RESDESC resource table [1035](#)
 FPRDEFTS field
 in RESDESC resource table [1035](#)
 FPRGROUP field
 in FPRINGRP resource table [631](#)
 FPRINGRP resource table [631](#)
 FPRNAME field
 in FPRINGRP resource table [631](#)
 FPRVER field
 in FPRINGRP resource table [631](#)
 FREEMAINRTC field
 in TSKSPOLS resource table [1211](#)
 FREEMAINRTE field
 in DOMSPOOL resource table [341](#)
 in TSKSPOOL resource table [1215](#)
 FREEMAINRTEC field
 in TSKSPOLS resource table [1211](#)
 FREEMAINRTEU field

FREEMAINRTEU field (*continued*)
 in TSKSPOLS resource table [1211](#)
 FREEMAINRTU field
 in TSKSPOLS resource table [1211](#)
 FREEOSSBCNT field
 in CMAS resource table [131](#)
 FREEOSSBUSE field
 in CMAS resource table [131](#)
 FREMTOTL field
 in CICSDSA resource table [79](#)
 in MCICSDSA resource table [799](#)
 FREQ field
 in STATDEF resource table [1093](#)
 FREQUENCY field
 in CICSRRGN resource table [89](#)
 in MONITOR resource table [867](#)
 FROMCSYS field
 in SYSLINK resource table [1103](#)
 FROMCSYSID field
 in SYSLINK resource table [1103](#)
 FSEGDEF resource table [633](#)
 FSEGDEFNAME field
 in FILEDEF resource table [617](#)
 FSEGDEFVER field
 in FILEDEF resource table [617](#)
 FSEGGROUP field
 in FSGINGRP resource table [649](#)
 FSEGNAME field
 in FSGINGRP resource table [649](#)
 FSEGVVER field
 in FSGINGRP resource table [649](#)
 FSFCBYTERECD field
 in IPCONN resource table [687](#)
 FSFCBYTESENT field
 in IPCONN resource table [687](#)
 FSFCREQS field
 in IPCONN resource table [687](#)
 FSGDEFRG field
 in RESDESC resource table [1035](#)
 FSGDEFRS field
 in RESDESC resource table [1035](#)
 FSGDEFTS field
 in RESDESC resource table [1035](#)
 FSGINGRP resource table [649](#)
 FSICBYTERECD field
 in IPCONN resource table [687](#)
 FSICBYTESENT field
 in IPCONN resource table [687](#)
 FSICREQS field
 in IPCONN resource table [687](#)
 FSPCBYTERECD field
 in IPCONN resource table [687](#)
 FSPCBYTESENT field
 in IPCONN resource table [687](#)
 FSPGREQS field
 in IPCONN resource table [687](#)
 FSTDBYTERECD field
 in IPCONN resource table [687](#)
 FSTDBYTESENT field
 in IPCONN resource table [687](#)
 FSTDREQS field
 in IPCONN resource table [687](#)
 FSTSBYTERECD field
 in IPCONN resource table [687](#)

FSTSBYTESSENT field
 in IPCONN resource table [687](#)
 FSTSREQS field
 in IPCONN resource table [687](#)
 FSYNC field
 in CPLXCMAS resource table [173](#)
 FTRDEFRG field
 in RESDESC resource table [1035](#)
 FTRDEFRS field
 in RESDESC resource table [1035](#)
 FTRDEFTS field
 in RESDESC resource table [1035](#)
 FTRGROUP field
 in FTRINGRP resource table [651](#)
 FTRINGRP resource table [651](#)
 FTRNAME field
 in FTRINGRP resource table [651](#)
 FTRVER field
 in FTRINGRP resource table [651](#)
 FTYPE field
 in CRESFILE resource table [215](#)
 FULLSCREEN field
 in TERMDEF resource table [1173](#)
 in TYPTMDEF resource table [1239](#)
 FWDRECOVLOG field
 in DSNAM resource table [345](#)
 in FILEDEF resource table [617](#)
 FWDRECOVLSN field
 in DSNAM resource table [345](#)
 FWDRECSTATUS field
 in CMDT resource table [141](#)
 in LOCFIL resource table [757](#)

G

GAENTRYNAME field
 in EXITGLUE resource table [575](#)
 in EXITTRUE resource table [577](#)
 in EXTGLORD resource table [579](#)
 GALENGTH field
 in EXITGLUE resource table [575](#)
 in EXITTRUE resource table [577](#)
 in EXTGLORD resource table [579](#)
 GARBAGEINT field
 in CICSGRN resource table [89](#)
 GAUSECOUNT field
 in EXITGLUE resource table [575](#)
 in EXITTRUE resource table [577](#)
 in EXTGLORD resource table [579](#)
 GCAVGTIMESOS field
 in CICSSTOR resource table [101](#)
 GCDSAGETM field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 GCDSASHWM field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 GCHARCODE field
 in TERMDEF resource table [1173](#)
 GCHARS field
 in TERMNL resource table [1179](#)
 GCNONIMMGET field
 in CICSSTOR resource table [101](#)
 GCODES field

GCODES field (*continued*)
 in TERMNL resource table [1179](#)
 GCPOLICY field
 in JVMSESV resource table [719](#)
 GCRATEFM field
 in CICSSTOR resource table [101](#)
 GCRATEGM field
 in CICSSTOR resource table [101](#)
 GCRATESTORV field
 in CICSSTOR resource table [101](#)
 GDSAACTIVE field
 in CICSDSA resource table [79](#)
 GENALERT field
 in ACTION resource table [17](#)
 in EVENT resource table [563](#)
 GENERICTCPS field
 in TCPIPS resource table [1157](#)
 GENEVENT field
 in ACTION resource table [17](#)
 GENEXTMSG field
 in ACTION resource table [17](#)
 in EVENT resource table [563](#)
 GETCNT field
 in CMDT resource table [141](#)
 in LOCFIL resource table [757](#)
 in MCMdT resource table [807](#)
 in MLOCFIL resource table [833](#)
 in MREMFIL resource table [901](#)
 in REMFIL resource table [1025](#)
 GETMAINOSSB field
 in CMAS resource table [131](#)
 GETMAINRTC field
 in TSKSPOLS resource table [1211](#)
 GETMAINRTE field
 in DOMSPOOL resource table [341](#)
 in TSKSPOOL resource table [1215](#)
 GETMAINRTEC field
 in TSKSPOLS resource table [1211](#)
 GETMAINRTEU field
 in TSKSPOLS resource table [1211](#)
 GETMAINRTU field
 in TSKSPOLS resource table [1211](#)
 GETMTOTL field
 in CICSDSA resource table [79](#)
 in MCICDSA resource table [799](#)
 GETPARMS field
 in EVALDEF resource table [549](#)
 GETPARMSL field
 in EVALDEF resource table [549](#)
 GETQAUX field
 in MTSQGBL resource table [913](#)
 in TSQGBL resource table [1227](#)
 GETQMAIN field
 in MTSQGBL resource table [913](#)
 in TSQGBL resource table [1227](#)
 GETSHRITEML field
 in TASKTSQ resource table [1141](#)
 GETSTORSIZE field
 in CICSDSA resource table [79](#)
 GETUPDCNT field
 in CMDT resource table [141](#)
 in LOCFIL resource table [757](#)
 in MCMdT resource table [807](#)
 in MLOCFIL resource table [833](#)

GETUPDCNT field (*continued*)
 in MREMFIL resource table [901](#)
 in REMFIL resource table [1025](#)

GLBLSAMP field
 in CSYSDEF resource table [281](#)
 in MAS resource table [787](#)
 in MONSPEC resource table [873](#)

GMMLENGTH field
 in CICSGRN resource table [89](#)

GMMTEXT field
 in CICSGRN resource table [89](#)

GMMTRANID field
 in CICSGRN resource table [89](#)

GMNOTSATIMM field
 in CICSAPG resource table [83](#)

GMTCRETIME field
 in CONNECT resource table [164](#)
 in MCONNECT resource table [811](#)

GMTCRETIME field
 in LSRPOOL resource table [779](#)

GMTCTIME field
 in IPCONN resource table [687](#)

GMTDELETIME field
 in CONNECT resource table [164](#)
 in MCONNECT resource table [811](#)

GMTDELTIME field
 in LSRPOOL resource table [779](#)

GMTDTIME field
 in IPCONN resource table [687](#)

GMTFILECLS field
 in CMDT resource table [141](#)
 in LOCFIL resource table [757](#)

GMTFILEOPN field
 in CMDT resource table [141](#)
 in LOCFIL resource table [757](#)

GMTSERVCLS field
 in TCPIPS resource table [1157](#)

GMTSERVOPN field
 in TCPIPS resource table [1157](#)

GNQDELAC field
 in MLOCTAN resource table [837](#)

GNQDELAY field
 in HTASK resource table [655](#)
 in MLOCTAN resource table [837](#)
 in TASK resource table [1123](#)

GRNAME field
 in CICSGRN resource table [89](#)
 in CONNECT resource table [164](#)

GROUP field
 in CSGLCGCG resource table [275](#)
 in CSGLCGCS resource table [277](#)
 in CSYSGRP resource table [287](#)
 in LNKSMSCG resource table [739](#)
 in LNKSMSCS resource table [741](#)
 in LNKSRS CG resource table [743](#)
 in LNKSRS CS resource table [745](#)
 in LNKSWSCG resource table [747](#)
 in LNKSWSCS resource table [749](#)
 in MONINGRP resource table [863](#)
 in MONINSPC resource table [865](#)
 in RTAINAPS resource table [1069](#)
 in RTAINGRP resource table [1071](#)
 in RTAINSPC resource table [1073](#)
 in STAINGRP resource table [1091](#)

GROUP field (*continued*)
 in WLMINGRP resource table [1309](#)
 in WLMINSPC resource table [1311](#)

GROUP_ID field
 in METAPARM resource table [821](#)

GRPCRITICAL field
 in TCPDEF resource table [1145](#)
 in TCPIPS resource table [1157](#)

GRSTATUS field
 in CICSGRN resource table [89](#)

GSAVGTIMESOS field
 in CICSSTOR resource table [101](#)

GSNONIMMGET field
 in CICSSTOR resource table [101](#)

GSRATEFM field
 in CICSSTOR resource table [101](#)

GSRATEGM field
 in CICSSTOR resource table [101](#)

GSRATESTORV field
 in CICSSTOR resource table [101](#)

GTFSTATUS field
 in CICSGRN resource table [89](#)
 in CMAS resource table [131](#)

GUAVGTIMESOS field
 in CICSSTOR resource table [101](#)

GUDSAGETM field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)

GUDSASHWM field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)

GUNONIMMGET field
 in CICSSTOR resource table [101](#)

GURATEFM field
 in CICSSTOR resource table [101](#)

GURATEGM field
 in CICSSTOR resource table [101](#)

GURATESTORV field
 in CICSSTOR resource table [101](#)

H

HA field
 in IPCONDEF resource table [681](#)
 in IPCONN resource table [687](#)

HDRTEXT field
 in ATTR resource table [49](#)

HDRTXTAVAIL field
 in ATTR resource table [49](#)

HDSCOUNT field
 in MASHIST resource table [793](#)

HEXNAME field
 in TSQNAME resource table [1231](#)
 in TSQSHR resource table [1233](#)

HFORMST field
 in TERMNL resource table [1179](#)

HFSFILE field
 in DOCDEF resource table [331](#)
 in DOCTEMP resource table [337](#)
 in EJDJAR resource table [377](#)
 in EJDJDEF resource table [381](#)
 in URIMAP resource table [1257](#)
 in URIMPDEF resource table [1261](#)

HFSNAME field

HFSNAME field (*continued*)
 in JVMPROF resource table [717](#)
 HIGHLIGHT field
 in TERMDEF resource table [1173](#)
 HIGHTBLVER field
 in OBJECT resource table [931](#)
 HIGHVALUE field
 in ATTR resource table [49](#)
 HILIGHT field
 in TYPTMDEF resource table [1239](#)
 HILIGHTST field
 in TERMNL resource table [1179](#)
 HIPERBUFF field
 in LSRPBUF resource table [777](#)
 in MLSRPBUF resource table [845](#)
 HLTHDUMP field
 in WLMATARG resource table [1285](#)
 in WLMAWAOR resource table [1295](#)
 HLTHMAXT field
 in WLMATARG resource table [1285](#)
 in WLMAWAOR resource table [1295](#)
 HLTHNRM field
 in WLMATARG resource table [1285](#)
 in WLMAWAOR resource table [1295](#)
 HLTHSOS field
 in WLMATARG resource table [1285](#)
 in WLMAWAOR resource table [1295](#)
 HLTHSTALL field
 in WLMATARG resource table [1285](#)
 in WLMAWAOR resource table [1295](#)
 HOLDSTATUS field
 in MPROGRAM resource table [875](#)
 in PROGRAM resource table [1001](#)
 HORIZFORM field
 in TYPTMDEF resource table [1239](#)
 HOST field
 in CSYSDEF resource table [281](#)
 in EJCODEF resource table [365](#)
 in EJCOSE resource table [371](#)
 in IPCONDEF resource table [681](#)
 in IPCONN resource table [687](#)
 in MAS resource table [787](#)
 in TCPDEF resource table [1145](#)
 in TCPIPS resource table [1157](#)
 in UOWLINK resource table [1251](#)
 in URIMAP resource table [1257](#)
 in URIMPDEF resource table [1261](#)
 HOST resource table [653](#)
 HOSTCODEPAGE field
 in URIMAP resource table [1257](#)
 in URIMPDEF resource table [1261](#)
 HOSTDISABLED field
 in URIMPGBL resource table [1267](#)
 HOSTTYPE field
 in EJCOSE resource table [371](#)
 in IPCONN resource table [687](#)
 in TCPIPS resource table [1157](#)
 in URIMAP resource table [1257](#)
 HOTPOOL field
 in PROGDEF resource table [995](#)
 HOTPOOLING field
 in PROGRAM resource table [1001](#)
 HSDATA field
 in EVALDEF resource table [549](#)

HSDATA field (*continued*)
 in EVENTDTL resource table [561](#)
 HSDATA12K field
 in LSRDEF resource table [769](#)
 HSDATA16K field
 in LSRDEF resource table [769](#)
 HSDATA20K field
 in LSRDEF resource table [769](#)
 HSDATA24K field
 in LSRDEF resource table [769](#)
 HSDATA28K field
 in LSRDEF resource table [769](#)
 HSDATA32K field
 in LSRDEF resource table [769](#)
 HSDATA4K field
 in LSRDEF resource table [769](#)
 HSDATA8K field
 in LSRDEF resource table [769](#)
 HSDATAL field
 in EVALDEF resource table [549](#)
 HSENTRY field
 in EVENT resource table [563](#)
 in RTADEF resource table [1063](#)
 in STATDEF resource table [1093](#)
 HSEXIT field
 in EVENT resource table [563](#)
 in RTADEF resource table [1063](#)
 in STATDEF resource table [1093](#)
 HSINDEX12K field
 in LSRDEF resource table [769](#)
 HSINDEX16K field
 in LSRDEF resource table [769](#)
 HSINDEX20K field
 in LSRDEF resource table [769](#)
 HSINDEX24K field
 in LSRDEF resource table [769](#)
 HSINDEX28K field
 in LSRDEF resource table [769](#)
 HSINDEX32K field
 in LSRDEF resource table [769](#)
 HSINDEX4K field
 in LSRDEF resource table [769](#)
 HSINDEX8K field
 in LSRDEF resource table [769](#)
 HTASK resource table [655](#)
 HWDATA field
 in EVALDEF resource table [549](#)
 in EVENTDTL resource table [561](#)
 HWDATAL field
 in EVALDEF resource table [549](#)
 HWENTRY field
 in EVENT resource table [563](#)
 in RTADEF resource table [1063](#)
 in STATDEF resource table [1093](#)
 HWEXIT field
 in EVENT resource table [563](#)
 in RTADEF resource table [1063](#)
 in STATDEF resource table [1093](#)
 HWMALLOC field
 in CICSDSA resource table [79](#)
 in MCICSDSA resource table [799](#)
 HWMASACTIVE field
 in CICSDSA resource table [79](#)
 HWMCMNSSUSRS field

HWMCMNSSUSRS field (*continued*)
 in CICSDSA resource table [79](#)
 in MCICSDSA resource table [799](#)
 HWMFREE field
 in CICSDSA resource table [79](#)
 in MCICSDSA resource table [799](#)
 HWMGDSAActiv field
 in CICSDSA resource table [79](#)
 HWMUNQSSUSRS field
 in CICSDSA resource table [79](#)
 in MCICSDSA resource table [799](#)

I

IBLOOKASIDE field
 in LSRPOOL resource table [779](#)
 in MLRPOOL resource table [847](#)
 IBNUWRITE field
 in LSRPOOL resource table [779](#)
 in MLRPOOL resource table [847](#)
 IBREADS field
 in LSRPOOL resource table [779](#)
 in MLRPOOL resource table [847](#)
 IBUFFCNT field
 in LSRPOOL resource table [779](#)
 in MLRPOOL resource table [847](#)
 IBUIWRITE field
 in LSRPOOL resource table [779](#)
 in MLRPOOL resource table [847](#)
 ICCOUNT field
 in HTASK resource table [655](#)
 in MLOCTAN resource table [837](#)
 in TASK resource table [1123](#)
 ICFUNSHIP field
 in CONNECT resource table [164](#)
 in MCONNECT resource table [811](#)
 ICREAD field
 in LSRPOOL resource table [779](#)
 in MLRPOOL resource table [847](#)
 ICTOTCNT field
 in MLOCTAN resource table [837](#)
 ICWRITE field
 in LSRPOOL resource table [779](#)
 in MLRPOOL resource table [847](#)
 ID field
 in ATTR resource table [49](#)
 in METAPARM resource table [821](#)
 in MGMTPART resource table [825](#)
 in OBJECT resource table [929](#)
 in OBJECT resource table [931](#)
 ID_RSVD field
 in ATTR resource table [49](#)
 IDATATYPE field
 in ATTR resource table [49](#)
 IDENT field
 in TASK resource table [1123](#)
 IDHIPERBUF field
 in LSRPOOL resource table [779](#)
 in MLRPOOL resource table [847](#)
 IDNTYCLASS field
 in CICSRRN resource table [89](#)
 in MONITOR resource table [867](#)
 IDPROP field
 in IPCONDDEF resource table [681](#)

IDPROP field (*continued*)
 in IPCONN resource table [687](#)
 IDXDATFLG field
 in LSRPOOL resource table [779](#)
 in MLRPOOL resource table [847](#)
 IEXCPCNT field
 in CMDT resource table [141](#)
 in LOCFIL resource table [757](#)
 in MCMMDT resource table [807](#)
 in MLOCFIL resource table [833](#)
 IFAILCREAD field
 in LSRPOOL resource table [779](#)
 in MLRPOOL resource table [847](#)
 IFAILCWRITE field
 in LSRPOOL resource table [779](#)
 in MLRPOOL resource table [847](#)
 IGNVALUE field
 in ATTR resource table [49](#)
 IMSREQCT field
 in HTASK resource table [655](#)
 in MLOCTAN resource table [837](#)
 in TASK resource table [1123](#)
 IMSWAIT field
 in HTASK resource table [655](#)
 in MLOCTAN resource table [837](#)
 in TASK resource table [1123](#)
 IMSWAITC field
 in MLOCTAN resource table [837](#)
 INBFMH field
 in PROFDEF resource table [987](#)
 INCLUDE field
 in MONDEF resource table [857](#)
 in POLMON resource table [975](#)
 INDEX12K field
 in LSRDEF resource table [769](#)
 INDEX16K field
 in LSRDEF resource table [769](#)
 INDEX1K field
 in LSRDEF resource table [769](#)
 INDEX20K field
 in LSRDEF resource table [769](#)
 INDEX24K field
 in LSRDEF resource table [769](#)
 INDEX28K field
 in LSRDEF resource table [769](#)
 INDEX2K field
 in LSRDEF resource table [769](#)
 INDEX32K field
 in LSRDEF resource table [769](#)
 INDEX4K field
 in LSRDEF resource table [769](#)
 INDEX512 field
 in LSRDEF resource table [769](#)
 INDEX8K field
 in LSRDEF resource table [769](#)
 INDEXBUFFERS field
 in FILEDEF resource table [617](#)
 INDIRECTNAME field
 in INDDTDQ resource table [673](#)
 in MINDDTDQ resource table [827](#)
 in TDQDEF resource table [1163](#)
 INDIRECTTYPE field
 in INDDTDQ resource table [673](#)
 in MINDDTDQ resource table [827](#)

- INDOUBT field
 - in HTASK resource table [655](#)
 - in INTRATDQ resource table [675](#)
 - in LOCTRAN resource table [763](#)
 - in TASK resource table [1123](#)
 - in TRANDEF resource table [1191](#)
- INDOUBTFAIL field
 - in HTASK resource table [655](#)
 - in TASK resource table [1123](#)
- INDOUBTMINS field
 - in LOCTRAN resource table [763](#)
 - in TASK resource table [1123](#)
- INDOUBTST field
 - in EXITTRUE resource table [577](#)
- INDOUBTWAIT field
 - in HTASK resource table [655](#)
 - in INTRATDQ resource table [675](#)
 - in LOCTRAN resource table [763](#)
 - in TASK resource table [1123](#)
- INDSYS field
 - in CONNDEF resource table [157](#)
- INDTDQ resource table [673](#)
- INGPTYPE field
 - in RESINGRP resource table [1049](#)
- INGPTYPX field
 - in RESINGRP resource table [1049](#)
- INHERIT field
 - in ATTR resource table [49](#)
 - in METADESC resource table [817](#)
- INITHEAP field
 - in JVMSESV resource table [719](#)
- INITIALDATA field
 - in FEPIPOOL resource table [597](#)
 - in FEPIPROP resource table [601](#)
 - in FEPRODEF resource table [609](#)
- INITIALDDS field
 - in CICSGRN resource table [89](#)
- INITQNAME field
 - in MQCONDEF resource table [883](#)
 - in MQINI resource table [889](#)
- INITSTATUS field
 - in CICSGRN resource table [89](#)
- INITTRAN field
 - in DB2THRD resource table [323](#)
 - in DB2TRAN resource table [325](#)
 - in MDB2THRD resource table [815](#)
- INITTRANRQRD field
 - in TERMDEF resource table [1173](#)
- INITUSERID field
 - in TASKASSC resource table [1113](#)
- INPMMSGCNT field
 - in MTERMNL resource table [909](#)
 - in TERMNL resource table [1179](#)
- INPUT field
 - in JRNLDEF resource table [701](#)
- INPUTDSN field
 - in BATCHREP resource table [53](#)
- INPUTMEMBER field
 - in BATCHREP resource table [53](#)
- INSCKSNPERS field
 - in TCPIPGBL resource table [1153](#)
- INSERVICE field
 - in CONNDEF resource table [157](#)
 - in IPCONDEF resource table [681](#)

- INSERVICE field (*continued*)
 - in SESSDEF resource table [1085](#)
 - in TERMDEF resource table [1173](#)
- INSOCKETSCR field
 - in TCPIPGBL resource table [1153](#)
- INSTALLAGENT field
 - in ATOMSERV resource table [45](#)
 - in BUNDLE resource table [69](#)
 - in CMDT resource table [141](#)
 - in CONNECT resource table [164](#)
 - in DB2CONN resource table [301](#)
 - in DB2ENTRY resource table [311](#)
 - in DB2PKGST resource table [315](#)
 - in DB2TRN resource table [327](#)
 - in DOCTEMP resource table [337](#)
 - in EJCOSE resource table [371](#)
 - in EJDJAR resource table [377](#)
 - in ENQMODEL resource table [431](#)
 - in EPADAPT resource table [435](#)
 - in EPADSET resource table [437](#)
 - in EVNTBIND resource table [567](#)
 - in EXTRATDQ resource table [581](#)
 - in INDTDQ resource table [673](#)
 - in INTRATDQ resource table [675](#)
 - in IPCONN resource table [687](#)
 - in JRNLMODL resource table [705](#)
 - in JVMSESV resource table [719](#)
 - in LIBRARY resource table [737](#)
 - in LOCFILE resource table [757](#)
 - in LOCTRAN resource table [763](#)
 - in MQCON resource table [879](#)
 - in MQINI resource table [889](#)
 - in MQMON resource table [893](#)
 - in OSGIBUND resource table [937](#)
 - in PIPELINE resource table [959](#)
 - in PROCTYP resource table [985](#)
 - in PROFILE resource table [993](#)
 - in PROGRAM resource table [1001](#)
 - in REMFILE resource table [1025](#)
 - in REMTDQ resource table [1027](#)
 - in REMTRAN resource table [1029](#)
 - in RQMODEL resource table [1059](#)
 - in RULE resource table [1079](#)
 - in TCPIPS resource table [1157](#)
 - in TRANCLAS resource table [1187](#)
 - in TSMODEL resource table [1223](#)
 - in URIMAP resource table [1257](#)
 - in WEBSERV resource table [1273](#)
 - in XMLTRANS resource table [1321](#)
- INSTALLDEFS field
 - in MTRANCLS resource table [911](#)
 - in TRANCLAS resource table [1187](#)
- INSTALLSCOPE field
 - in MGMTPART resource table [825](#)
- INSTALLTIME field
 - in ATOMSERV resource table [45](#)
 - in BUNDLE resource table [69](#)
 - in CMDT resource table [141](#)
 - in CONNECT resource table [164](#)
 - in DB2CONN resource table [301](#)
 - in DB2ENTRY resource table [311](#)
 - in DB2PKGST resource table [315](#)
 - in DB2TRN resource table [327](#)
 - in DOCTEMP resource table [337](#)

INSTALLTIME field (*continued*)

- in EJCOSE resource table [371](#)
- in EJDJAR resource table [377](#)
- in ENQMODEL resource table [431](#)
- in EPADAPT resource table [435](#)
- in EPADSET resource table [437](#)
- in EVNTBIND resource table [567](#)
- in EXTRATDQ resource table [581](#)
- in INDTDQ resource table [673](#)
- in INTRATDQ resource table [675](#)
- in IPCONN resource table [687](#)
- in JRNLMODL resource table [705](#)
- in JCMSERV resource table [719](#)
- in LIBRARY resource table [737](#)
- in LOCFILE resource table [757](#)
- in LOCTRAN resource table [763](#)
- in MQCON resource table [879](#)
- in MQINI resource table [889](#)
- in MQMON resource table [893](#)
- in OSGIBUND resource table [937](#)
- in PIPELINE resource table [959](#)
- in PROCTYP resource table [985](#)
- in PROFILE resource table [993](#)
- in PROGRAM resource table [1001](#)
- in REMFILE resource table [1025](#)
- in REMTDQ resource table [1027](#)
- in REMTRAN resource table [1029](#)
- in RQMODEL resource table [1059](#)
- in RULE resource table [1079](#)
- in TCPIPS resource table [1157](#)
- in TRANCLAS resource table [1187](#)
- in TSMODEL resource table [1223](#)
- in URIMAP resource table [1257](#)
- in WEBSERV resource table [1273](#)
- in XMLTRANS resource table [1321](#)

INSTALLUSRID field

- in ATOMSERV resource table [45](#)
- in BUNDLE resource table [69](#)
- in CMDT resource table [141](#)
- in CONNECT resource table [164](#)
- in DB2CONN resource table [301](#)
- in DB2ENTRY resource table [311](#)
- in DB2PKGST resource table [315](#)
- in DB2TRN resource table [327](#)
- in DOCTEMP resource table [337](#)
- in EJCOSE resource table [371](#)
- in EJDJAR resource table [377](#)
- in ENQMODEL resource table [431](#)
- in EPADAPT resource table [435](#)
- in EPADSET resource table [437](#)
- in EVNTBIND resource table [567](#)
- in EXTRATDQ resource table [581](#)
- in INDTDQ resource table [673](#)
- in INTRATDQ resource table [675](#)
- in IPCONN resource table [687](#)
- in JRNLMODL resource table [705](#)
- in JCMSERV resource table [719](#)
- in LIBRARY resource table [737](#)
- in LOCFILE resource table [757](#)
- in LOCTRAN resource table [763](#)
- in MQCON resource table [879](#)
- in MQINI resource table [889](#)
- in MQMON resource table [893](#)
- in OSGIBUND resource table [937](#)

INSTALLUSRID field (*continued*)

- in PIPELINE resource table [959](#)
- in PROCTYP resource table [985](#)
- in PROFILE resource table [993](#)
- in PROGRAM resource table [1001](#)
- in REMFILE resource table [1025](#)
- in REMTDQ resource table [1027](#)
- in REMTRAN resource table [1029](#)
- in RQMODEL resource table [1059](#)
- in RULE resource table [1079](#)
- in TCPIPS resource table [1157](#)
- in TRANCLAS resource table [1187](#)
- in TSMODEL resource table [1223](#)
- in URIMAP resource table [1257](#)
- in WEBSERV resource table [1273](#)
- in XMLTRANS resource table [1321](#)

INSTANCE field

- in EVALDEF resource table [549](#)
- in EVENTDTL resource table [561](#)

INSTANCECEL field

- in EVALDEF resource table [549](#)

INSTLSTATUS field

- in FEPICONN resource table [593](#)
- in FEPINODE resource table [595](#)
- in FEPIPOOL resource table [597](#)
- in FEPITRGT resource table [603](#)

INTACCCNT field

- in MTDQGBL resource table [907](#)

INTAGETQRATE field

- in MTSQGBL resource table [913](#)

INTAMAXRATE field

- in MCICSRGN resource table [803](#)

INTAPUTQRATE field

- in MTSQGBL resource table [913](#)

INTAVGCPUT field

- in MLOCTRAN resource table [837](#)

INTAVGFETCH field

- in MPROGRAM resource table [875](#)

INTAVGRESF field

- in MLOCTRAN resource table [837](#)
- in MREMTRAN resource table [905](#)

INTBHITRATE field

- in MTSQGBL resource table [913](#)

INTCUPPER field

- in MCICSRGN resource table [803](#)

INTDBHITRATE field

- in MLSPPOOL resource table [847](#)

INTDEXCPRATE field

- in MCMDT resource table [807](#)
- in MLOCFILE resource table [833](#)

INTDHREARATE field

- in MLSPPOOL resource table [847](#)

INTDHWIRATE field

- in MLSPPOOL resource table [847](#)

INTDREADRATE field

- in MLSPPOOL resource table [847](#)

INTDWRITRATE field

- in MLSPPOOL resource table [847](#)

INTERFACE field

- in RQMDEF resource table [1053](#)
- in RQMODEL resource table [1059](#)

INTERVAL field

- in CICSRRGN resource table [89](#)
- in CPLXCMAS resource table [173](#)

INTERVAL field (*continued*)

- in EMCICS resource table [401](#)
- in EMCONN resource table [403](#)
- in EMDBX resource table [405](#)
- in EMFILE resource table [407](#)
- in EMGLBL resource table [409](#)
- in EMJRNL resource table [411](#)
- in EMPROG resource table [413](#)
- in EMTDQS resource table [419](#)
- in EMTERM resource table [421](#)
- in EMTRAN resource table [423](#)
- in EPLEXCHG resource table [441](#)
- in MONITOR resource table [867](#)
- in REQID resource table [1033](#)

INTERVALID field

- in MCICSDSA resource table [799](#)
- in MCICSRGN resource table [803](#)
- in MCMDT resource table [807](#)
- in MCONNECT resource table [811](#)
- in MDB2THRD resource table [815](#)
- in MFEPICON resource table [823](#)
- in MINDTDQ resource table [827](#)
- in MJOURNL resource table [829](#)
- in MJRNLNAM resource table [831](#)
- in MLOCFILE resource table [833](#)
- in MLOCTRAN resource table [837](#)
- in MLSRPBUF resource table [845](#)
- in MLSRPOOL resource table [847](#)
- in MMODNAME resource table [851](#)
- in MNTRATDQ resource table [853](#)
- in MPROGRAM resource table [875](#)
- in MREMFIL resource table [901](#)
- in MREMTDQ resource table [903](#)
- in MREMTRAN resource table [905](#)
- in MTDQGBL resource table [907](#)
- in MTERMNL resource table [909](#)
- in MTSQGBL resource table [913](#)
- in MXTRATDQ resource table [927](#)

INTFACETYPE field

- in RQMDEF resource table [1053](#)
- in RQMODEL resource table [1059](#)

INTFCFSRATE field

- in MCONNECT resource table [811](#)

INTFRESTG field

- in MCICSDSA resource table [799](#)

INTFULLPER field

- in MJOURNL resource table [829](#)
- in MTDQGBL resource table [907](#)
- in MTSQGBL resource table [913](#)

INTHREADRATE field

- in MLSRPBUF resource table [845](#)

INTHWIRATE field

- in MLSRPBUF resource table [845](#)

INTIBHITRATE field

- in MLSRPOOL resource table [847](#)

INTIEXCPRATE field

- in MCMDT resource table [807](#)
- in MLOCFILE resource table [833](#)

INTIHREARATE field

- in MLSRPOOL resource table [847](#)

INTIHWIRATE field

- in MLSRPOOL resource table [847](#)

INTIMSGRATE field

- in MTERMNL resource table [909](#)

INTIREADRATE field

- in MLSRPOOL resource table [847](#)

INTIWRITRATE field

- in MLSRPOOL resource table [847](#)

INTMGETQRATE field

- in MTSQGBL resource table [913](#)

INTMPUTQRATE field

- in MTSQGBL resource table [913](#)

INTMRQRATE field

- in MCMDT resource table [807](#)

INTOMSGRATE field

- in MTERMNL resource table [909](#)

INTOUTQRATE field

- in MINDTDQ resource table [827](#)
- in MNTRATDQ resource table [853](#)
- in MREMTDQ resource table [903](#)
- in MXTRATDQ resource table [927](#)

INTPAMAXRATE field

- in MCICSRGN resource table [803](#)

INTPGIRATE field

- in MCICSRGN resource table [803](#)

INTPGORATE field

- in MCICSRGN resource table [803](#)

INTPTSKRATE field

- in MCICSRGN resource table [803](#)

INTRATDQ resource table [675](#)

INTREADRATE field

- in MCMDT resource table [807](#)
- in MLSRPBUF resource table [845](#)
- in MTDQGBL resource table [907](#)
- in MTSQGBL resource table [913](#)

INTREQRATE field

- in MCMDT resource table [807](#)
- in MLOCFILE resource table [833](#)
- in MREMFIL resource table [901](#)

INTRUSEPCT field

- in MPROGRAM resource table [875](#)

INTSIORATE field

- in MCICSRGN resource table [803](#)

INTSTATUS field

- in CICSGRN resource table [89](#)

INTTASKRATE field

- in MCICSRGN resource table [803](#)

INTTRANRATE field

- in MLOCTRAN resource table [837](#)
- in MREMTRAN resource table [905](#)
- in MTERMNL resource table [909](#)

INTUSERATE field

- in MDB2THRD resource table [815](#)
- in MPROGRAM resource table [875](#)

INTVL field

- in CPLEXDEF resource table [169](#)

INTVLC field

- in HTASK resource table [655](#)
- in TASK resource table [1123](#)

INTVLWAIT field

- in HTASK resource table [655](#)
- in TASK resource table [1123](#)

INTVLWC field

- in MLOCTRAN resource table [837](#)

INTVLWT field

- in MLOCTRAN resource table [837](#)

INTVTRANS field

- in CICSGRN resource table [89](#)

INTVTRANS field (*continued*)
 in MCICSRGN resource table [803](#)
 INTWRITRATE field
 in MLSRPBUF resource table [845](#)
 in MTDQGBL resource table [907](#)
 in MTSQGBL resource table [913](#)
 INUSELENGTH field
 in MVSESTG resource table [917](#)
 INVOKETYPE field
 in EPADAPT resource table [435](#)
 IOAREALEN field
 in SESSDEF resource table [1085](#)
 in TYPTMDEF resource table [1239](#)
 IOAREALEN2 field
 in SESSDEF resource table [1085](#)
 IOAREALENALT field
 in TYPTMDEF resource table [1239](#)
 IOERRS field
 in MTDQGBL resource table [907](#)
 in MTSQGBL resource table [913](#)
 in TDQGBL resource table [1169](#)
 in TSQGBL resource table [1227](#)
 IOFFSET field
 in ATTR resource table [49](#)
 IOTYPE field
 in ATTRAVA resource table [47](#)
 in EXTRATDQ resource table [581](#)
 IPADDRESS field
 in TCPDEF resource table [1145](#)
 in TCPIPS resource table [1157](#)
 IPCDEFRG field
 in RESDESC resource table [1035](#)
 IPCDEFRS field
 in RESDESC resource table [1035](#)
 IPCDEFTS field
 in RESDESC resource table [1035](#)
 IPCGROUP field
 in IPCINGRP resource table [679](#)
 IPCINGRP resource table [679](#)
 IPCNAME field
 in IPCINGRP resource table [679](#)
 IPCONDEF resource table [681](#)
 IPCONN field
 in IPFACIL resource table [693](#)
 in TASKASSC resource table [1113](#)
 IPCONN resource table [687](#)
 IPCVER field
 in IPCINGRP resource table [679](#)
 IPFACCNT field
 in TASK resource table [1123](#)
 IPFACIL resource table [693](#)
 IPFACILTYPE field
 in IPFACIL resource table [693](#)
 IPFACPTR field
 in TASK resource table [1123](#)
 IPFAMILY field
 in EJCOSE resource table [371](#)
 in IPCONN resource table [687](#)
 in TASKASSC resource table [1113](#)
 in TCPIPS resource table [1157](#)
 in URIMAP resource table [1257](#)
 IPRESOLVED field
 in EJCOSE resource table [371](#)
 in IPCONN resource table [687](#)

IPRESOLVED field (*continued*)
 in TCPIPS resource table [1157](#)
 in URIMAP resource table [1257](#)
 IRCSTAT field
 in CICSRRN resource table [89](#)
 in EMSTATUS resource table [415](#)
 in MCICSRGN resource table [803](#)
 IRCSTATUS field
 in CMAS resource table [131](#)
 IRIOCNT field
 in MLOCTRAN resource table [837](#)
 IRIOTIME field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in MREMTRAN resource table [905](#)
 in TASK resource table [1123](#)
 ISALWTT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 ISOLATE field
 in TRANDEF resource table [1191](#)
 ISOLATEST field
 in HTASK resource table [655](#)
 in LOCTRAN resource table [763](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 ITEMNAME field
 in EVCSINFO resource table [557](#)

J

J8CPUC field
 in MLOCTRAN resource table [837](#)
 J8CPUT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 JCIOCNT field
 in MLOCTRAN resource table [837](#)
 JCIOTIME field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 JCUSRWCNT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 JMSDEFRG field
 in RESDESC resource table [1035](#)
 JMSDEFRS field
 in RESDESC resource table [1035](#)
 JMSDEFTS field
 in RESDESC resource table [1035](#)
 JMSGROUP field
 in JMSINGRP resource table [695](#)
 JMSINGRP resource table [695](#)
 JMSNAME field
 in JMSINGRP resource table [695](#)
 JMSVER field
 in JMSINGRP resource table [695](#)
 JNDIPREFIX field
 in EJCODEF resource table [365](#)
 in EJCOSE resource table [371](#)
 JNLADD field

JNLADD field (*continued*)
in FILEDEF resource table [617](#)

JNLREAD field
in FILEDEF resource table [617](#)

JNLSYNCREAD field
in FILEDEF resource table [617](#)

JNLSYNCWRITE field
in FILEDEF resource table [617](#)

JNLUPDATE field
in FILEDEF resource table [617](#)

JNLWRTCT field
in MLOCTAN resource table [837](#)

JNTYPE field
in CRESJRN resource table [223](#)

JOBID field
in CICSRRN resource table [89](#)
in CMAS resource table [131](#)
in CMASLIST resource table [125](#)

JOBLIST field
in SYSDUMP resource table [1099](#)

JOBNAME field
in CICSRRN resource table [89](#)
in CMAS resource table [131](#)
in CMASLIST resource table [125](#)
in EMASJOIN resource table [387](#)
in EMASSTOP resource table [393](#)
in EMASSTR resource table [395](#)
in MCICSRRN resource table [803](#)

JOURNAL field
in FILEDEF resource table [617](#)
in PROFDEF resource table [987](#)

JOURNALMODEL field
in JRNLMODL resource table [705](#)

JOURNALNAME field
in JRNLMODL resource table [705](#)
in JRNLMODL resource table [707](#)
in JRNLMDEF resource table [709](#)
in MJRNLM resource table [831](#)

JOURNALNUM field
in CMDT resource table [141](#)
in DSKJRN resource table [343](#)
in LOCFIL resource table [757](#)
in MJOURNAL resource table [829](#)
in SMFJRN resource table [1089](#)
in TAPEJRN resource table [1111](#)
in VOLUME resource table [1269](#)

JOURNALTYPE field
in JRNLMDEF resource table [701](#)

JRLDEFRG field
in RESDESC resource table [1035](#)

JRLDEFRS field
in RESDESC resource table [1035](#)

JRLDEFTS field
in RESDESC resource table [1035](#)

JRMDEFRG field
in RESDESC resource table [1035](#)

JRMDEFRS field
in RESDESC resource table [1035](#)

JRMDEFTS field
in RESDESC resource table [1035](#)

JRMINGRP resource table [697](#)

JRNINGRP resource table [699](#)

JRNLMDEF resource table [701](#)

JRNLMGROUP field

JRNLMGROUP field (*continued*)
in JRNINGRP resource table [699](#)

JRNLMODL resource table [705](#)

JRNLMNAME field
in JRNINGRP resource table [699](#)

JRNLMNAME resource table [707](#)

JRNLSAMP field
in CSYSDEF resource table [281](#)
in MAS resource table [787](#)
in MONSPEC resource table [873](#)

JRNLMTYPE field
in ERMCMJRN resource table [485](#)
in ERMCMJRN resource table [487](#)

JRNLMVER field
in JRNINGRP resource table [699](#)

JRNLMWRITREQ field
in HTASK resource table [655](#)
in TASK resource table [1123](#)

JRNLMDEF resource table [709](#)

JRNLMMDVER field
in JRMINGRP resource table [697](#)

JRNLMGROUP field
in JRMINGRP resource table [697](#)

JRNLMNAME field
in JRMINGRP resource table [697](#)

JTYPE field
in CRESJRN resource table [221](#)
in MJOURNAL resource table [829](#)

JVM field
in PROGDEF resource table [995](#)

JVM resource table [713](#)

JVMCLASS field
in PROGDEF resource table [995](#)
in PROGRAM resource table [1001](#)

JVMDEBUG field
in PROGRAM resource table [1001](#)

JVMMLVLOTTRACE field
in JVMPOOL resource table [715](#)

JVMMLVL1TRACE field
in JVMPOOL resource table [715](#)

JVMMLVL2TRACE field
in JVMPOOL resource table [715](#)

JVMPOOL resource table [715](#)

JVMPROF resource table [717](#)

JVMPROFILE field
in JMVMSERV resource table [719](#)
in JMVMSVDEF resource table [723](#)
in PROGDEF resource table [995](#)
in PROGRAM resource table [1001](#)

JVMREQSCACHE field
in CLCACHE resource table [123](#)

JMVMSERV resource table [719](#)

JVMMSERVER field
in ERMCMOSGB resource table [495](#)
in ERMCMOSGS resource table [497](#)
in OSGIBUND resource table [937](#)
in OSGISERV resource table [939](#)
in PROGDEF resource table [995](#)
in PROGRAM resource table [1001](#)
in WLPSEV resource table [1317](#)

JVMSUSP field
in HTASK resource table [655](#)
in MLOCTAN resource table [837](#)
in TASK resource table [1123](#)

JVMSUSPC field
 in MLOCTRAN resource table [837](#)
 JVMSVDEF resource table [723](#)
 JVMTIME field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 JVMTIMEC field
 in MLOCTRAN resource table [837](#)
 JVMUSERTRACE field
 in JVMPOOL resource table [715](#)

K

KATAKANA field
 in TERMDEF resource table [1173](#)
 in TYPTMDEF resource table [1239](#)
 KATAKANAST field
 in TERMNL resource table [1179](#)
 KEEPTIME field
 in BRFACIL resource table [63](#)
 KEY field
 in ATTR resource table [49](#)
 in EACTNTFN resource table [357](#)
 in EVENT resource table [563](#)
 in EVENTDTL resource table [561](#)
 in WLMATAFF resource table [1283](#)
 KEYDATA field
 in OBJSTAT resource table [935](#)
 KEYFILE field
 in TCPDEF resource table [1145](#)
 KEYLEN field
 in OBJSTAT resource table [935](#)
 KEYLENGTH field
 in CMDT resource table [141](#)
 in FILEDEF resource table [617](#)
 in LOCFIL resource table [757](#)
 in REMFILE resource table [1025](#)
 KEYNUMBER field
 in FILEDEF resource table [617](#)
 KEYPOSITION field
 in CMDT resource table [141](#)
 in LOCFIL resource table [757](#)
 KEYWORD field
 in SYSPARM resource table [1107](#)
 KNLTRACE field
 in CMAS resource table [131](#)
 in MAS resource table [787](#)

L

L8CPUC field
 in MLOCTRAN resource table [837](#)
 L8CPUT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 LABEL field
 in JRNLEDF resource table [701](#)
 LANGUAGE field
 in PROGDEF resource table [995](#)
 in PROGRAM resource table [1001](#)
 LASTACQCODE field

 in FEPICONN resource table [593](#)
 in FEPINODE resource table [595](#)
 LASTMODTIME field
 in EJDJAR resource table [377](#)
 in WEBSERV resource table [1273](#)
 LASTOPER field
 in OBJSTAT resource table [935](#)
 LASTRESET field
 in CICSPAGP resource table [83](#)
 in CICSRRGN resource table [89](#)
 in CICSSTOR resource table [101](#)
 in DOMSPOOL resource table [341](#)
 in LOADACT resource table [751](#)
 in LOADER resource table [753](#)
 in MCICSRGN resource table [803](#)
 in MONITOR resource table [867](#)
 in PROGRAM resource table [1001](#)
 in STREAMNM resource table [1097](#)
 in TSKSPOLS resource table [1211](#)
 in TSKSPOOL resource table [1215](#)
 LASTTYPE field
 in EMSTATUS resource table [415](#)
 LASTUSEDINT field
 in TSQNAME resource table [1231](#)
 in TSQSHR resource table [1233](#)
 in TSQUEUE resource table [1235](#)
 LASTVOL field
 in MJOURNL resource table [829](#)
 in TAPEJRNL resource table [1111](#)
 LAYOUT field
 in JRNLEDF resource table [701](#)
 LDCLIST field
 in TYPTMDEF resource table [1239](#)
 LDGPSCR field
 in LOADACT resource table [751](#)
 LDGPSCRRC field
 in LOADER resource table [753](#)
 LDGPSCREC field
 in LOADER resource table [753](#)
 LDGPSCRER field
 in LOADER resource table [753](#)
 LDGPSCRES field
 in LOADER resource table [753](#)
 LDGPSCRR field
 in LOADER resource table [753](#)
 LDGPSCRS field
 in LOADER resource table [753](#)
 LDGPSCST field
 in LOADACT resource table [751](#)
 LDGPSCSTC field
 in LOADER resource table [753](#)
 LDGPSCSTEC field
 in LOADER resource table [753](#)
 LDGPSCSTER field
 in LOADER resource table [753](#)
 LDGPSCSTES field
 in LOADER resource table [753](#)
 LDGPSCSTR field
 in LOADER resource table [753](#)
 LDGPSCSTS field
 in LOADER resource table [753](#)
 LDGDREBS field
 in LOADACT resource table [751](#)

LDGDREBS field (*continued*)
in LOADER resource table [753](#)

LDGDSAINDEX field
in LOADACT resource table [751](#)

LDGDSID field
in LOADACT resource table [751](#)
in LOADER resource table [753](#)

LDGDSVER field
in LOADACT resource table [751](#)
in LOADER resource table [753](#)

LDGHWMT field
in LOADACT resource table [751](#)
in LOADER resource table [753](#)

LDGLBSOU field
in CICS RGN resource table [89](#)
in LOADER resource table [753](#)

LDGLLR field
in LOADACT resource table [751](#)
in LOADER resource table [753](#)

LDGLLRRO field
in LOADACT resource table [751](#)
in LOADER resource table [753](#)

LDGLLT field
in LOADACT resource table [751](#)
in LOADER resource table [753](#)

LDGLLTRO field
in LOADACT resource table [751](#)
in LOADER resource table [753](#)

LDGLSORT field
in CICS RGN resource table [89](#)
in LOADER resource table [753](#)

LDGLWSOU field
in CICS RGN resource table [89](#)
in LOADER resource table [753](#)

LDGPROGNIU field
in LOADACT resource table [751](#)

LDGPROGNIUC field
in LOADER resource table [753](#)

LDGPROGNIUEC field
in LOADER resource table [753](#)

LDGPROGNIUER field
in LOADER resource table [753](#)

LDGPROGNIUES field
in LOADER resource table [753](#)

LDGPROGNIUR field
in LOADER resource table [753](#)

LDGPROGNIUS field
in LOADER resource table [753](#)

LDGPUSES field
in LOADACT resource table [751](#)
in LOADER resource table [753](#)

LDGRECNIU field
in LOADACT resource table [751](#)

LDGRECNIUUC field
in LOADER resource table [753](#)

LDGRECNIUUEC field
in LOADER resource table [753](#)

LDGRECNIUER field
in LOADER resource table [753](#)

LDGRECNIUES field
in LOADER resource table [753](#)

LDGRECNIUUR field
in LOADER resource table [753](#)

LDGRECNIOUS field

LDGRECNIOUS field (*continued*)
in LOADER resource table [753](#)

LDGSTGNIU field
in LOADACT resource table [751](#)

LDGSTGNIUC field
in LOADER resource table [753](#)

LDGSTGNIUEC field
in LOADER resource table [753](#)

LDGSTGNIUER field
in LOADER resource table [753](#)

LDGSTGNIUES field
in LOADER resource table [753](#)

LDGSTGNIUR field
in LOADER resource table [753](#)

LDGSTGNIUS field
in LOADER resource table [753](#)

LDGTTW field
in LOADACT resource table [751](#)
in LOADER resource table [753](#)

LDGWLR field
in LOADACT resource table [751](#)
in LOADER resource table [753](#)

LDGWLRHW field
in LOADACT resource table [751](#)
in LOADER resource table [753](#)

LDGWTDLR field
in LOADACT resource table [751](#)
in LOADER resource table [753](#)

LENGTH field
in ATTR resource table [49](#)
in METADESC resource table [817](#)
in MPROGRAM resource table [875](#)
in PROGRAM resource table [1001](#)
in REQID resource table [1033](#)

LENKEY01 field
in FSEGDEF resource table [633](#)

LENKEY02 field
in FSEGDEF resource table [633](#)

LENKEY03 field
in FSEGDEF resource table [633](#)

LENKEY04 field
in FSEGDEF resource table [633](#)

LENKEY05 field
in FSEGDEF resource table [633](#)

LENKEY06 field
in FSEGDEF resource table [633](#)

LENKEY07 field
in FSEGDEF resource table [633](#)

LENKEY08 field
in FSEGDEF resource table [633](#)

LENKEY09 field
in FSEGDEF resource table [633](#)

LENKEY10 field
in FSEGDEF resource table [633](#)

LENKEY11 field
in FSEGDEF resource table [633](#)

LENKEY12 field
in FSEGDEF resource table [633](#)

LENKEY13 field
in FSEGDEF resource table [633](#)

LENKEY14 field
in FSEGDEF resource table [633](#)

LENKEY15 field
in FSEGDEF resource table [633](#)

- LENKEY16 field
 - in FSEGDEF resource table [633](#)
- LENKEY17 field
 - in FSEGDEF resource table [633](#)
- LENKEY18 field
 - in FSEGDEF resource table [633](#)
- LENKEY19 field
 - in FSEGDEF resource table [633](#)
- LENKEY20 field
 - in FSEGDEF resource table [633](#)
- LENKEY21 field
 - in FSEGDEF resource table [633](#)
- LENKEY22 field
 - in FSEGDEF resource table [633](#)
- LENKEY23 field
 - in FSEGDEF resource table [633](#)
- LENKEY24 field
 - in FSEGDEF resource table [633](#)
- LERUNOPTS field
 - in JVMSERV resource table [719](#)
 - in JVMSVDEF resource table [723](#)
- LGGAKPFREQ field
 - in STREAMNM resource table [1097](#)
- LGGAKPSTKN field
 - in STREAMNM resource table [1097](#)
- LGGDSID field
 - in STREAMNM resource table [1097](#)
- LGGDSVER field
 - in STREAMNM resource table [1097](#)
- LGGLGDEFER field
 - in STREAMNM resource table [1097](#)
- LGSDSID field
 - in STREAMNM resource table [1097](#)
- LGSDSVER field
 - in STREAMNM resource table [1097](#)
- LGSQLERIES field
 - in STREAMNM resource table [1097](#)
- LIBDEF resource table [727](#)
- LIBDEFRG field
 - in RESDESC resource table [1035](#)
- LIBDEFRS field
 - in RESDESC resource table [1035](#)
- LIBDEFTS field
 - in RESDESC resource table [1035](#)
- LIBDSN resource table [733](#)
- LIBGROUP field
 - in LIBINGRP resource table [735](#)
- LIBINGRP resource table [735](#)
- LIBNAME field
 - in LIBINGRP resource table [735](#)
- LIBRARY field
 - in LIBDSN resource table [733](#)
 - in PROGRAM resource table [1001](#)
- LIBRARY resource table [737](#)
- LIBRARYDSN field
 - in PROGRAM resource table [1001](#)
- LIBVER field
 - in LIBINGRP resource table [735](#)
- LIFETIME field
 - in WLMATAFF resource table [1283](#)
- LIGHTPEN field
 - in TYPTMDEF resource table [1239](#)
- LIGHTPENST field
 - in TERMNL resource table [1179](#)

- LIMIT field
 - in CICSDSA resource table [79](#)
 - in MCICSDSA resource table [799](#)
- LINK field
 - in LNKSMSCS resource table [741](#)
 - in LNKSRSRCS resource table [745](#)
 - in LNKSWSRCS resource table [749](#)
 - in UOW resource table [1253](#)
 - in UOWLINK resource table [1251](#)
- LINKAUTH field
 - in IPCONDEF resource table [681](#)
 - in IPCONN resource table [687](#)
- LINKNAME field
 - in UOWLINK resource table [1251](#)
- LINKSYSNET field
 - in BRFACIL resource table [63](#)
- LINKSYSTEM field
 - in BRFACIL resource table [63](#)
 - in CONNECT resource table [164](#)
 - in TERMNL resource table [1179](#)
- LINKTYPE field
 - in SYSLINK resource table [1103](#)
- LISTENERPORT field
 - in WORKREQ resource table [1319](#)
- LISTSEQ field
 - in CSDINLST resource table [271](#)
- LISTTYPE field
 - in ATTRAVAL resource table [47](#)
- LITERAL field
 - in PARMATA resource table [943](#)
- LNKSMSRSG resource table [739](#)
- LNKSMSRCS resource table [741](#)
- LNKSRSRSG resource table [743](#)
- LNKSRSRCS resource table [745](#)
- LNKSWSRSG resource table [747](#)
- LNKSWSRCS resource table [749](#)
- LOADACT resource table [751](#)
- LOADER resource table [753](#)
- LOADHWMR field
 - in CICSRRGN resource table [89](#)
 - in MCICSRRGN resource table [803](#)
- LOADHWMW field
 - in CICSRRGN resource table [89](#)
 - in MCICSRRGN resource table [803](#)
- LOADPNIU field
 - in CICSRRGN resource table [89](#)
 - in MCICSRRGN resource table [803](#)
- LOADPOINT field
 - in PROGRAM resource table [1001](#)
- LOADRATE field
 - in LOADACT resource table [751](#)
 - in LOADER resource table [753](#)
- LOADREQS field
 - in CICSRRGN resource table [89](#)
 - in MCICSRRGN resource table [803](#)
- LOADRNIU field
 - in CICSRRGN resource table [89](#)
 - in MCICSRRGN resource table [803](#)
- LOADTIME field
 - in CICSRRGN resource table [89](#)
 - in MCICSRRGN resource table [803](#)
- LOADTNIU field
 - in CICSRRGN resource table [89](#)
 - in MCICSRRGN resource table [803](#)

LOADTYPE field
 in CMDT resource table [141](#)
 in FILEDEF resource table [617](#)

LOADWAIT field
 in CICSRRN resource table [89](#)
 in MCICSRGN resource table [803](#)

LOADWCNT field
 in CICSRRN resource table [89](#)
 in MCICSRGN resource table [803](#)

LOCALCNT field
 in LOCTRAN resource table [763](#)
 in MLOCTRAN resource table [837](#)

LOCALQ field
 in TRANDEF resource table [1191](#)

LOCATION field
 in CICSDSA resource table [79](#)
 in DB2SS resource table [317](#)
 in DBCTLSS resource table [329](#)
 in EVCSDATA resource table [555](#)
 in EVCSINFO resource table [557](#)
 in MCICSDSA resource table [799](#)
 in TSMDEF resource table [1217](#)
 in TSMODEL resource table [1223](#)
 in TSQNAME resource table [1231](#)
 in TSQSHR resource table [1233](#)
 in TSQUEUE resource table [1235](#)
 in URIMAP resource table [1257](#)
 in URIMPDEF resource table [1261](#)

LOCCTIME field
 in IPCONN resource table [687](#)

LOCDELCNT field
 in CMDT resource table [141](#)
 in LOCFIL resource table [757](#)
 in MCMMDT resource table [807](#)
 in MLOCFIL resource table [833](#)

LOCETIME field
 in IPCONN resource table [687](#)

LOCFIL resource table [757](#)

LOCKMGRWAIT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)

LOCKMWC field
 in MLOCTRAN resource table [837](#)

LOCKMWT field
 in MLOCTRAN resource table [837](#)

LOCLHOSTNAME field
 in CONNDEF resource table [157](#)

LOCTRAN resource table [763](#)

LOCUOWID field
 in WLMATAFF resource table [1283](#)

LOG field
 in FILEDEF resource table [617](#)

LOGGRWRITREQ field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)

LOGMODE field
 in TYPTMDEF resource table [1239](#)

LOGONMSG field
 in TYPTMDEF resource table [1239](#)

LOGREC field
 in PROFDEF resource table [987](#)

LOGREPSTATUS field
 in DSNAME resource table [345](#)

LOGWRTCT field

LOGWRTCT field (*continued*)
 in MLOCTRAN resource table [837](#)

LONGAUXREC field
 in MTSQGBL resource table [913](#)
 in TSQGBL resource table [1227](#)

LONGDATE field
 in VOLUME resource table [1269](#)

LOOKASIDES field
 in LSRPBUF resource table [777](#)
 in MLSPBUF resource table [845](#)

LOSTCON_TIM field
 in EMSTATUS resource table [415](#)

LOSTLOCKS field
 in DSNAME resource table [345](#)

LOSTMAS_TIM field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)

LOWVALUE field
 in ATTR resource table [49](#)

LPARNAME field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)

LPASTAT field
 in MPROGRAM resource table [875](#)
 in PROGRAM resource table [1001](#)

LPCTCFREE field
 in CICSSTOR resource table [101](#)

LPCTECFREE field
 in CICSSTOR resource table [101](#)

LPCTERFREE field
 in CICSSTOR resource table [101](#)

LPCTESFREE field
 in CICSSTOR resource table [101](#)

LPCTETFREE field
 in CICSSTOR resource table [101](#)

LPCTEUFREE field
 in CICSSTOR resource table [101](#)

LPCTFREE field
 in CICSSTOR resource table [101](#)

LPCTRFREE field
 in CICSSTOR resource table [101](#)

LPCTSFREE field
 in CICSSTOR resource table [101](#)

LPCTUFREE field
 in CICSSTOR resource table [101](#)

LSCOPE field
 in RESDESC resource table [1035](#)

LSDATA field
 in EVALDEF resource table [549](#)
 in EVENTDTL resource table [561](#)

LSDATAL field
 in EVALDEF resource table [549](#)

LSEENTRY field
 in EVENT resource table [563](#)
 in RTADEF resource table [1063](#)
 in STATDEF resource table [1093](#)

LSEXIT field
 in EVENT resource table [563](#)
 in RTADEF resource table [1063](#)
 in STATDEF resource table [1093](#)

LSRDEF resource table [769](#)

LSRDEFRG field
 in RESDESC resource table [1035](#)

LSRDEFRRS field

LSRDEFRS field (*continued*)
 in RESDESC resource table [1035](#)
 LSRDEFTS field
 in RESDESC resource table [1035](#)
 LSREGSTR field
 in RESDESC resource table [1035](#)
 LSRGROUP field
 in LSRINGRP resource table [775](#)
 LSRINGRP resource table [775](#)
 LSRNAME field
 in LSRINGRP resource table [775](#)
 LSRPBUF resource table [777](#)
 LSRPOOL resource table [779](#)
 LSRPOOLID field
 in CMDT resource table [141](#)
 in FILEDEF resource table [617](#)
 in LOCFILE resource table [757](#)
 in LSRDEF resource table [769](#)
 in LSRPOOL resource table [779](#)
 in MCMDT resource table [807](#)
 in MLOCFILE resource table [833](#)
 in MLSRPOOL resource table [847](#)
 LSRVER field
 in LSRINGRP resource table [775](#)
 LTIMPAUSLIST field
 in TCPIPGBL resource table [1153](#)
 LTIMSTOPPERS field
 in TCPIPGBL resource table [1153](#)
 LU61WTT field
 in HTASK resource table [655](#)
 in MLOCTAN resource table [837](#)
 in TASK resource table [1123](#)
 LU61WTTCT field
 in MLOCTAN resource table [837](#)
 LU62WTT field
 in HTASK resource table [655](#)
 in MLOCTAN resource table [837](#)
 in TASK resource table [1123](#)
 LU62WTTCT field
 in MLOCTAN resource table [837](#)
 LUALIAS field
 in CONNDEF resource table [157](#)
 LUCURR field
 in CICSGRN resource table [89](#)
 in MCICSGRN resource table [803](#)
 LUHWM field
 in CICSGRN resource table [89](#)
 in MCICSGRN resource table [803](#)
 LUNAME field
 in HTASK resource table [655](#)
 in MTERMNL resource table [909](#)
 in TASK resource table [1123](#)
 in TASKASSC resource table [1113](#)
 in WLMATAFF resource table [1283](#)
 in WLMAWDEF resource table [1299](#)
 in WLMDEF resource table [1305](#)
 LUWID field
 in EXCI resource table [573](#)
 LWDATA field
 in EVALDEF resource table [549](#)
 in EVENTDTL resource table [561](#)
 LWDATA1 field
 in EVALDEF resource table [549](#)
 LWENTRY field

LWENTRY field (*continued*)
 in EVENT resource table [563](#)
 in RTADEF resource table [1063](#)
 in STATDEF resource table [1093](#)
 LWEXIT field
 in EVENT resource table [563](#)
 in RTADEF resource table [1063](#)
 in STATDEF resource table [1093](#)
 LWMFREE field
 in CICSDSA resource table [79](#)
 in MCICSDSA resource table [799](#)

M

MAJORVERSION field
 in APPLCTN resource table [23](#)
 in APPLDEF resource table [27](#)
 in BUNDEF resource table [65](#)
 in BUNDLE resource table [69](#)
 in CRESBUND resource table [181](#)
 in ERMCBUND resource table [449](#)
 MALSRCVD field
 in CMTCMLNK resource table [151](#)
 in CMTPMLNK resource table [153](#)
 MALSSSENT field
 in CMTCMLNK resource table [151](#)
 in CMTPMLNK resource table [153](#)
 MAPDEF resource table [781](#)
 MAPDEFGR field
 in RESDESC resource table [1035](#)
 MAPDEFGRS field
 in RESDESC resource table [1035](#)
 MAPDEFTS field
 in RESDESC resource table [1035](#)
 MAPGROUP field
 in MAPINGRP resource table [785](#)
 MAPINGRP resource table [785](#)
 MAPNAME field
 in MAPINGRP resource table [785](#)
 in TERMNL resource table [1179](#)
 MAPPINGLEVEL field
 in WEBSERV resource table [1273](#)
 in XMLTRANS resource table [1321](#)
 MAPPINGRNUM field
 in WEBSERV resource table [1273](#)
 in XMLTRANS resource table [1321](#)
 MAPPINGVNUM field
 in WEBSERV resource table [1273](#)
 in XMLTRANS resource table [1321](#)
 MAPREFCOUNT field
 in URIMAP resource table [1257](#)
 in URIMPGBL resource table [1267](#)
 MAPSETNAME field
 in TERMNL resource table [1179](#)
 MAPVER field
 in MAPINGRP resource table [785](#)
 MAS resource table [787](#)
 MASHIST resource table [793](#)
 MASQRYER resource table [795](#)
 MASSTART field
 in EMASJOIN resource table [387](#)
 in EMASSTOP resource table [393](#)
 in EMASSTRT resource table [395](#)
 MASSTAT resource table [797](#)

MASTRACE field
 in MAS resource table [787](#)
 MASTYPE field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)
 in MAS resource table [787](#)
 in MASSTAT resource table [797](#)
 MATCH field
 in TRANGRP resource table [1201](#)
 in WLMSPEC resource table [1313](#)
 MATCHANALYZE field
 in URIMPGBL resource table [1267](#)
 MATCHCOUNT field
 in URIMPGBL resource table [1267](#)
 MATCHDISABLD field
 in URIMAP resource table [1257](#)
 in URIMPGBL resource table [1267](#)
 MATCHREDIREC field
 in URIMAP resource table [1257](#)
 in URIMPGBL resource table [1267](#)
 MAXACTIVE field
 in MTRANCLS resource table [911](#)
 in TRANCLAS resource table [1187](#)
 in TRNCLDEF resource table [1205](#)
 MAXBIDS field
 in CONNECT resource table [164](#)
 in MCONNECT resource table [811](#)
 MAXBLK field
 in STREAMNM resource table [1097](#)
 MAXCCURSTR field
 in LSRPOOL resource table [779](#)
 in MLRPOOL resource table [847](#)
 MAXCTWIN field
 in SESSDEF resource table [1085](#)
 MAXDATALEN field
 in TCPDEF resource table [1145](#)
 in TCPIPS resource table [1157](#)
 MAXLENGTH field
 in FEPIPOOL resource table [597](#)
 in FEPIPROP resource table [601](#)
 in FEPRODEF resource table [609](#)
 MAXHEAP field
 in JVMSESV resource table [719](#)
 MAXHPTCBS field
 in CICSRRGN resource table [89](#)
 in DSPPOOL resource table [353](#)
 MAXIMUM field
 in SYSDUMP resource table [1099](#)
 in TRANDUMP resource table [1197](#)
 MAXINGRP field
 in SESSDEF resource table [1085](#)
 MAXITEMLEN field
 in TSQNAME resource table [1231](#)
 in TSQSHR resource table [1233](#)
 in TSQUEUE resource table [1235](#)
 MAXJVMTCBS field
 in CICSRRGN resource table [89](#)
 in DSPPOOL resource table [353](#)
 MAXKEYLEN field
 in LSRPOOL resource table [779](#)
 in MLRPOOL resource table [847](#)
 MAXKEYLENGTH field
 in LSRDEF resource table [769](#)

MAXNUMRECS field
 in CMDT resource table [141](#)
 in FILEDEF resource table [617](#)
 in MCMDT resource table [807](#)
 MAXOPENTCBS field
 in CICSRRGN resource table [89](#)
 in DSPPOOL resource table [353](#)
 MAXPERSIST field
 in TCPDEF resource table [1145](#)
 in TCPIPS resource table [1157](#)
 MAXPRIMARIES field
 in CONNECT resource table [164](#)
 in MCONNECT resource table [811](#)
 MAXQTALLCPRG field
 in CONNECT resource table [164](#)
 in MCONNECT resource table [811](#)
 MAXQTIME field
 in CONNDEF resource table [157](#)
 in CONNECT resource table [164](#)
 in IPCONDEF resource table [681](#)
 in IPCONN resource table [687](#)
 in MCONNECT resource table [811](#)
 MAXQTPURGCNT field
 in CONNECT resource table [164](#)
 in MCONNECT resource table [811](#)
 MAXRECORDLEN field
 in FILEDEF resource table [617](#)
 MAXSECOND field
 in CONNECT resource table [164](#)
 in MCONNECT resource table [811](#)
 MAXSOCKETS field
 in TCPIPGBL resource table [1153](#)
 MAXSSLTCBS field
 in CICSRRGN resource table [89](#)
 in DSPPOOL resource table [353](#)
 MAXSTCB field
 in CMAS resource table [131](#)
 MAXTASK field
 in CMAS resource table [131](#)
 MAXTASK_TIM field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)
 MAXTASKS field
 in CICSRRGN resource table [89](#)
 in EMSTATUS resource table [415](#)
 in HTASK resource table [655](#)
 in MCICSRRGN resource table [803](#)
 in TASK resource table [1123](#)
 in WLMATARG resource table [1285](#)
 in WLMAWAOR resource table [1295](#)
 MAXTCNT field
 in CMAS resource table [131](#)
 MAXTHRDCNT field
 in DBCTLSS resource table [329](#)
 MAXTHRDTCBS field
 in CICSRRGN resource table [89](#)
 MAXTHRDTIME field
 in DBCTLSS resource table [329](#)
 MAXTHREAD field
 in DB2SS resource table [317](#)
 in DBCTLSS resource table [329](#)
 MAXTHREADS field
 in DB2THRD resource table [323](#)

MAXTHREADS field (*continued*)
 in MDB2THRD resource table [815](#)
 MAXTRCNT field
 in CICSRCN resource table [89](#)
 in MCICSRGN resource table [803](#)
 MAXTSIZE field
 in CMDT resource table [141](#)
 in MCMdT resource table [807](#)
 MAXXPTCBS field
 in CICSRCN resource table [89](#)
 in DSPPOOL resource table [353](#)
 MCICSDSA resource table [799](#)
 MCICSRGN resource table [803](#)
 MCMdT resource table [807](#)
 MCONNECT resource table [811](#)
 MDB2THRD resource table [815](#)
 MEDIATYPE field
 in URIMAP resource table [1257](#)
 in URIMPDEF resource table [1261](#)
 MEMBER field
 in DOCTEMP resource table [337](#)
 in EXTRATDQ resource table [581](#)
 MEMBERNAME field
 in CONNECT resource table [164](#)
 in DOCDEF resource table [331](#)
 MEMLIMIT field
 in CICSDSA resource table [79](#)
 in CICSRCN resource table [89](#)
 in CMAS resource table [131](#)
 METADATAFILE field
 in BUNDPART resource table [73](#)
 METADESC resource table [817](#)
 METANAME resource table [819](#)
 METAPARM resource table [821](#)
 MEXPANSION field
 in EMSTATUS resource table [415](#)
 MFEPICON resource table [823](#)
 MGMTPART field
 in BUNDLE resource table [69](#)
 in CRESBUND resource table [181](#)
 in ERMCBUND resource table [449](#)
 MGMTPART resource table [825](#)
 MIACQRATE field
 in MFEPICON resource table [823](#)
 MICROVERSION field
 in APPLCTN resource table [23](#)
 in APPLDEF resource table [27](#)
 in BUNDEF resource table [65](#)
 in BUNDLE resource table [69](#)
 in CRESBUND resource table [181](#)
 in ERMCBUND resource table [449](#)
 MINDTDQ resource table [827](#)
 MINITEMLEN field
 in TSQNAME resource table [1231](#)
 in TSQSHR resource table [1233](#)
 in TSQUEUE resource table [1235](#)
 MINORVERSION field
 in APPLCTN resource table [23](#)
 in APPLDEF resource table [27](#)
 in BUNDEF resource table [65](#)
 in BUNDLE resource table [69](#)
 in CRESBUND resource table [181](#)
 in ERMCBUND resource table [449](#)
 MINRECORDLEN field

MINRECORDLEN field (*continued*)
 in FILEDEF resource table [617](#)
 MINRUNLEVEL field
 in WEBSERV resource table [1273](#)
 in XMLTRANS resource table [1321](#)
 MINRUNRNUM field
 in WEBSERV resource table [1273](#)
 in XMLTRANS resource table [1321](#)
 MINRUNVNUM field
 in WEBSERV resource table [1273](#)
 in XMLTRANS resource table [1321](#)
 MINTHRDCNT field
 in DBCTLSS resource table [329](#)
 MINTHREAD field
 in DBCTLSS resource table [329](#)
 MIRRORLIFE field
 in IPCONDEF resource table [681](#)
 in IPCONN resource table [687](#)
 MJOURNAL resource table [829](#)
 MJRNLNAM resource table [831](#)
 MLOCFILE resource table [833](#)
 MLOCTRAN resource table [837](#)
 MLSPBPUF resource table [845](#)
 MLSPPOOL resource table [847](#)
 MMODNAME resource table [851](#)
 MNCDSID field
 in TASK resource table [1123](#)
 in TASKRMI resource table [1121](#)
 MNCDSVER field
 in TASK resource table [1123](#)
 in TASKRMI resource table [1121](#)
 MNGAUTRT field
 in MONITOR resource table [867](#)
 MNGCAUTA field
 in MONITOR resource table [867](#)
 MNGCPUT field
 in MONITOR resource table [867](#)
 MNGDSID field
 in MONITOR resource table [867](#)
 in MVSWLM resource table [923](#)
 MNGDSVER field
 in MONITOR resource table [867](#)
 in MVSWLM resource table [923](#)
 MNGER field
 in MONITOR resource table [867](#)
 MNGERS field
 in MONITOR resource table [867](#)
 MNGIR field
 in MONITOR resource table [867](#)
 MNGIRS field
 in MONITOR resource table [867](#)
 MNGLUTAT field
 in MONITOR resource table [867](#)
 MNGLUTCL field
 in MONITOR resource table [867](#)
 MNGLUTRT field
 in MONITOR resource table [867](#)
 MNGMCHTP field
 in MVSWLM resource table [923](#)
 MNGMDLID field
 in MVSWLM resource table [923](#)
 MNGMXUTA field
 in MONITOR resource table [867](#)
 MNGOFLCP field

MNGOFLCP field (*continued*)
 in MONITOR resource table [867](#)
 MNGPR field
 in MONITOR resource table [867](#)
 MNGPRS field
 in MONITOR resource table [867](#)
 MNGPUTRT field
 in MONITOR resource table [867](#)
 MNGRR field
 in MONITOR resource table [867](#)
 MNGRRS field
 in MONITOR resource table [867](#)
 MNGSMFR field
 in MONITOR resource table [867](#)
 MNGSMFRS field
 in MONITOR resource table [867](#)
 MNGSTNUM field
 in MONITOR resource table [867](#)
 MNGTONCP field
 in MONITOR resource table [867](#)
 MNGUTNUM field
 in MONITOR resource table [867](#)
 MNGWLMAD field
 in MVSWLM resource table [923](#)
 MNGWLMCC field
 in MVSWLM resource table [923](#)
 MNGWLMGI field
 in MVSWLM resource table [923](#)
 MNGWLMGM field
 in MVSWLM resource table [923](#)
 MNGWLMGT field
 in MVSWLM resource table [923](#)
 MNGWLMGV field
 in MVSWLM resource table [923](#)
 MNGWLMHL field
 in MVSWLM resource table [923](#)
 MNGWLMHT field
 in MVSWLM resource table [923](#)
 MNGWLMIN field
 in MVSWLM resource table [923](#)
 MNGWLMMD field
 in MVSWLM resource table [923](#)
 MNGWLMOS field
 in MVSWLM resource table [923](#)
 MNGWLMRC field
 in MVSWLM resource table [923](#)
 MNGWLMRG field
 in MVSWLM resource table [923](#)
 MNGWLMSC field
 in MVSWLM resource table [923](#)
 MNGWLMSK field
 in MVSWLM resource table [923](#)
 MNGWLMST field
 in MVSWLM resource table [923](#)
 MNGWLMWN field
 in MVSWLM resource table [923](#)
 MNRADD field
 in TASKFILE resource table [1119](#)
 MNRBRWSE field
 in TASKFILE resource table [1119](#)
 MNRCFDTIOWT field
 in TASKFILE resource table [1119](#)
 MNRDEL field
 in TASKFILE resource table [1119](#)

MNRDSID field
 in TASKFILE resource table [1119](#)
 in TASKTSQ resource table [1141](#)
 MNRDSVER field
 in TASKFILE resource table [1119](#)
 in TASKTSQ resource table [1141](#)
 MNRFILELIMIT field
 in TASKFILE resource table [1119](#)
 MNRGET field
 in TASKFILE resource table [1119](#)
 MNRIDFLAGS field
 in TASKFILE resource table [1119](#)
 in TASKTSQ resource table [1141](#)
 MNRIOWT field
 in TASKFILE resource table [1119](#)
 MNRNAME field
 in TASKFILE resource table [1119](#)
 MNRPUT field
 in TASKFILE resource table [1119](#)
 MNRRLSIOWT field
 in TASKFILE resource table [1119](#)
 MNRSTART field
 in TASKFILE resource table [1119](#)
 in TASKTSQ resource table [1141](#)
 MNRTASKNO field
 in TASKFILE resource table [1119](#)
 in TASKTSQ resource table [1141](#)
 MNRTOTAL field
 in TASKFILE resource table [1119](#)
 MNRTRANID field
 in TASKFILE resource table [1119](#)
 in TASKTSQ resource table [1141](#)
 MNRTSQLIMIT field
 in TASKTSQ resource table [1141](#)
 MNRUSERID field
 in TASKFILE resource table [1119](#)
 in TASKTSQ resource table [1141](#)
 MNTDSID field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 in TASKRMI resource table [1121](#)
 MNTDSVER field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 in TASKRMI resource table [1121](#)
 MNTRATDQ resource table [853](#)
 MODE field
 in METAPARM resource table [821](#)
 in RASGNDEF resource table [1013](#)
 in RASPROC resource table [1019](#)
 in RDSCPROC resource table [1021](#)
 in SYSRES resource table [1109](#)
 MODEL field
 in AIMODEL resource table [19](#)
 in TERMDEF resource table [1173](#)
 MODELNAME field
 in OBJECT resource table [931](#)
 MODENAME field
 in CMTCMDEF resource table [147](#)
 in CONNDEF resource table [157](#)
 in PROFDEF resource table [987](#)
 in SESSDEF resource table [1085](#)
 in TERMDEF resource table [1173](#)
 in TERMNL resource table [1179](#)

MODENAME resource table [855](#)
 MODKEY01 field
 in FSEGDEF resource table [633](#)
 MODKEY02 field
 in FSEGDEF resource table [633](#)
 MODKEY03 field
 in FSEGDEF resource table [633](#)
 MODKEY04 field
 in FSEGDEF resource table [633](#)
 MODKEY05 field
 in FSEGDEF resource table [633](#)
 MODKEY06 field
 in FSEGDEF resource table [633](#)
 MODKEY07 field
 in FSEGDEF resource table [633](#)
 MODKEY08 field
 in FSEGDEF resource table [633](#)
 MODKEY09 field
 in FSEGDEF resource table [633](#)
 MODKEY10 field
 in FSEGDEF resource table [633](#)
 MODKEY11 field
 in FSEGDEF resource table [633](#)
 MODKEY12 field
 in FSEGDEF resource table [633](#)
 MODKEY13 field
 in FSEGDEF resource table [633](#)
 MODKEY14 field
 in FSEGDEF resource table [633](#)
 MODKEY15 field
 in FSEGDEF resource table [633](#)
 MODKEY16 field
 in FSEGDEF resource table [633](#)
 MODKEY17 field
 in FSEGDEF resource table [633](#)
 MODKEY18 field
 in FSEGDEF resource table [633](#)
 MODKEY19 field
 in FSEGDEF resource table [633](#)
 MODKEY20 field
 in FSEGDEF resource table [633](#)
 MODKEY21 field
 in FSEGDEF resource table [633](#)
 MODKEY22 field
 in FSEGDEF resource table [633](#)
 MODKEY23 field
 in FSEGDEF resource table [633](#)
 MODKEY24 field
 in FSEGDEF resource table [633](#)
 MODULE field
 in RQMDEF resource table [1053](#)
 in RQMODEL resource table [1059](#)
 MON_SPEC field
 in EMASJOIN resource table [387](#)
 in EMASSTOP resource table [393](#)
 in EMASSTRT resource table [395](#)
 MONCLASS field
 in EMCICS resource table [401](#)
 in EMCONN resource table [403](#)
 in EMDBX resource table [405](#)
 in EMFILE resource table [407](#)
 in EMGLBL resource table [409](#)
 in EMJRNL resource table [411](#)
 in EMPROG resource table [413](#)

MONCLASS field (*continued*)
 in EMTDQS resource table [419](#)
 in EMTERM resource table [421](#)
 in EMTRAN resource table [423](#)
 MONDATA field
 in MQMON resource table [893](#)
 in MQMONDEF resource table [897](#)
 MONDEF resource table [857](#)
 MONDTE field
 in ECSYSCHG resource table [359](#)
 MONGROUP resource table [861](#)
 MONINGRP resource table [863](#)
 MONINSPC resource table [865](#)
 MONITOR resource table [867](#)
 MONMCONN field
 in CMAS resource table [131](#)
 MONMFILE field
 in CMAS resource table [131](#)
 MONMJRNL field
 in CMAS resource table [131](#)
 MONMPROG field
 in CMAS resource table [131](#)
 MONMSYS field
 in CMAS resource table [131](#)
 MONMTDQ field
 in CMAS resource table [131](#)
 MONMTERM field
 in CMAS resource table [131](#)
 MONMTRAN field
 in CMAS resource table [131](#)
 MONRPTTIME field
 in CICSRRN resource table [89](#)
 MONSPEC resource table [873](#)
 MONSTAT field
 in CICSRRN resource table [89](#)
 in CRESAIMD resource table [177](#)
 in CRESATOM resource table [179](#)
 in CRESBUND resource table [181](#)
 in CRESCONN resource table [183](#)
 in CRESDB2C resource table [185](#)
 in CRESDB2E resource table [187](#)
 in CRESDB2P resource table [189](#)
 in CRESDB2T resource table [191](#)
 in CRESDOCT resource table [193](#)
 in CRESDSNM resource table [195](#)
 in CRESENM resource table [197](#)
 in CRESEPAD resource table [199](#)
 in CRESEPAS resource table [201](#)
 in CRESEVBD resource table [203](#)
 in CRESEVCS resource table [205](#)
 in CRESFECO resource table [207](#)
 in CRESFEND resource table [209](#)
 in CRESFEPO resource table [211](#)
 in CRESFETR resource table [213](#)
 in CRESFILE resource table [215](#)
 in CRESGLUE resource table [217](#)
 in CRESIPCN resource table [219](#)
 in CRESJRNL resource table [221](#)
 in CRESJRNM resource table [223](#)
 in CRESJVMS resource table [225](#)
 in CRESLIBR resource table [227](#)
 in CRESMODE resource table [229](#)
 in CRESMQMN resource table [231](#)
 in CRESPART resource table [233](#)

MONSTAT field (*continued*)
 in CRESPIPE resource table [235](#)
 in CRESPRGM resource table [237](#)
 in CRESPROF resource table [239](#)
 in CRESPTY resource table [241](#)
 in CRESRQMD resource table [243](#)
 in CRESSDMP resource table [245](#)
 in CRESTCPS resource table [247](#)
 in CRESTDMP resource table [249](#)
 in CRESTDQ resource table [251](#)
 in CRESTERM resource table [253](#)
 in CRESTRAN resource table [255](#)
 in CRESTRUE resource table [257](#)
 in CRESTSMD resource table [259](#)
 in CRESURIM resource table [261](#)
 in CRESWEBS resource table [263](#)
 in CRESXMLT resource table [265](#)
 MONSTATUS field
 in CSYSDEF resource table [281](#)
 in MAS resource table [787](#)
 in MQMON resource table [893](#)
 MONTRACE field
 in CMAS resource table [131](#)
 MONUSERID field
 in MQMON resource table [893](#)
 in MQMONDEF resource table [897](#)
 MPCMAS field
 in CMASPLEX resource table [129](#)
 MPCMASID field
 in CSYSDEF resource table [281](#)
 MPNAME field
 in CPLXCMAS resource table [173](#)
 MPPRTXCD field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 MPROGRAM resource table [875](#)
 MPSRACT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 MPSRECT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 MPSTATE field
 in CMASPLEX resource table [129](#)
 MPSTATUS field
 in CICSplex resource table [87](#)
 in CMASPLEX resource table [129](#)
 in CPLXCMAS resource table [173](#)
 MPSYNCDATA field
 in CPLXCMAS resource table [173](#)
 MPSYSID field
 in CPLXCMAS resource table [173](#)
 MQCDEFRG field
 in RESDESC resource table [1035](#)
 MQCDEFRS field
 in RESDESC resource table [1035](#)
 MQCDEFTS field
 in RESDESC resource table [1035](#)
 MQCGROUP field
 in MQCINGRP resource table [877](#)
 MQCINGRP resource table [877](#)
 MQCNAME field
 in MQCINGRP resource table [877](#)
 MQCON resource table [879](#)
 MQCONDEF resource table [883](#)
 MQCONN resource table [887](#)
 MQCONNECT field
 in MQCONN resource table [887](#)
 MQCVER field
 in MQCINGRP resource table [877](#)
 MQGCONNSTAT field
 in MQCONN resource table [887](#)
 MQGDSID field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGDSVER field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGGMTCONN field
 in MQCON resource table [879](#)
 MQGGMTDISC field
 in MQCON resource table [879](#)
 MQGINDBTUOW field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGINITQ field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGLOCCONN field
 in MQCON resource table [879](#)
 MQGLOCDISC field
 in MQCON resource table [879](#)
 MQGMQRELEASE field
 in MQCONN resource table [887](#)
 MQGQMGRNAME field
 in MQCONN resource table [887](#)
 MQGRESBACUW field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGRESCOMUW field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGT2PCOMM field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTAPI field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTAPIOK field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTBACKUOW field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTBUFMH field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTCALL field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTCALLIO field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTCALLSYNC field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTTCB field
 in MQCON resource table [879](#)

MQGTCTB field (*continued*)
 in MQCONN resource table [887](#)
 MQGTCLOSE field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTCOMMUOW field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTCONSUME field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTCRTMH field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTCTL field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTDLTMH field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTDLTMP field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTFUTATT field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTGET field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTGETWAIT field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTINQ field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTINQMP field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTMHBUF field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTOPEN field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTPUT field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTPUT1 field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTSET field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTSETMP field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTSPCOMM field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTSTAT field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTSUB field
 in MQCON resource table [879](#)

MQGTSUB field (*continued*)
 in MQCONN resource table [887](#)
 MQGTSUBRQ field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTSUBTASK field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTTASKEND field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGTTASKS field
 in MQCONN resource table [887](#)
 MQGTWAITMSG field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQGUNRESUOW field
 in MQCON resource table [879](#)
 in MQCONN resource table [887](#)
 MQINI resource table [889](#)
 MQMDEFRG field
 in RESDESC resource table [1035](#)
 MQMDEFRS field
 in RESDESC resource table [1035](#)
 MQMDEFTS field
 in RESDESC resource table [1035](#)
 MQMGROUP field
 in MQMINGRP resource table [891](#)
 MQMINGRP resource table [891](#)
 MQMNAME field
 in MQMINGRP resource table [891](#)
 MQMON resource table [893](#)
 MQMONDEF resource table [897](#)
 MQMVER field
 in MQMINGRP resource table [891](#)
 MQNAME field
 in MQCON resource table [879](#)
 in MQCONDEF resource table [883](#)
 MQQMGR field
 in MQCON resource table [879](#)
 MQRELEASE field
 in MQCON resource table [879](#)
 MQRGMTSTART field
 in MQMON resource table [893](#)
 MQRGMTSTOP field
 in MQMON resource table [893](#)
 MQRLCLSTART field
 in MQMON resource table [893](#)
 MQRLCLSTOP field
 in MQMON resource table [893](#)
 MQRQNAME field
 in MQMON resource table [893](#)
 MQRTBACKUOW field
 in MQMON resource table [893](#)
 MQRTCLOSE field
 in MQMON resource table [893](#)
 MQRTCOMMUOW field
 in MQMON resource table [893](#)
 MQRTGET field
 in MQMON resource table [893](#)
 MQRTGETWAIT field
 in MQMON resource table [893](#)
 MQRTINQ field
 in MQMON resource table [893](#)

MQRTINQL field
 in MQMON resource table [893](#)
 MQRTOPEN field
 in MQMON resource table [893](#)
 MQRTOTHER field
 in MQMON resource table [893](#)
 MQRTPUT field
 in MQMON resource table [893](#)
 MQRTPUT1 field
 in MQMON resource table [893](#)
 MQRTSET field
 in MQMON resource table [893](#)
 MQTALLPURG field
 in IPCONN resource table [687](#)
 MQTALLQPURG field
 in IPCONN resource table [687](#)
 MREMFIL resource table [901](#)
 MREMTDQ resource table [903](#)
 MREMTAN resource table [905](#)
 MROBATCH field
 in CICSRRN resource table [89](#)
 in MCICSRGN resource table [803](#)
 MSCPUC field
 in MLOCTAN resource table [837](#)
 MSCPUT field
 in HTASK resource table [655](#)
 in MLOCTAN resource table [837](#)
 in TASK resource table [1123](#)
 MSDISPC field
 in MLOCTAN resource table [837](#)
 MSDISPT field
 in HTASK resource table [655](#)
 in MLOCTAN resource table [837](#)
 in TASK resource table [1123](#)
 MSGFORMAT field
 in PIPELINE resource table [959](#)
 MSGIN field
 in HTASK resource table [655](#)
 in MLOCTAN resource table [837](#)
 in TASK resource table [1123](#)
 MSGINSEC field
 in HTASK resource table [655](#)
 in MLOCTAN resource table [837](#)
 in TASK resource table [1123](#)
 MSGINTEG field
 in PROFDEF resource table [987](#)
 MSGJRNL field
 in FEPIPOOL resource table [597](#)
 in FEPIPROP resource table [601](#)
 in FEPRODEF resource table [609](#)
 in PROFDEF resource table [987](#)
 MSGOUT field
 in HTASK resource table [655](#)
 in MLOCTAN resource table [837](#)
 in TASK resource table [1123](#)
 MSGOUTSEC field
 in HTASK resource table [655](#)
 in MLOCTAN resource table [837](#)
 in TASK resource table [1123](#)
 MSGQUEUE1 field
 in DB2CDEF resource table [295](#)
 in DB2CONN resource table [301](#)
 MSGQUEUE2 field
 in DB2CDEF resource table [295](#)

MSGQUEUE2 field (*continued*)
 in DB2CONN resource table [301](#)
 MSGQUEUE3 field
 in DB2CDEF resource table [295](#)
 in DB2CONN resource table [301](#)
 MSGSRCVD field
 in CMTCLNKN resource table [151](#)
 in CMTPLNKN resource table [153](#)
 MSGSENT field
 in CMTCLNKN resource table [151](#)
 in CMTPLNKN resource table [153](#)
 MSGTRACE field
 in CMAS resource table [131](#)
 in MAS resource table [787](#)
 MSRCONTROL field
 in TYPTMDEF resource table [1239](#)
 MSRCONTROLST field
 in TERMNL resource table [1179](#)
 MTDQGBL resource table [907](#)
 MTERMNL resource table [909](#)
 MTOMNOXOPST field
 in PIPELINE resource table [959](#)
 MTOMST field
 in PIPELINE resource table [959](#)
 MTRANCLS resource table [911](#)
 MTSQGBL resource table [913](#)
 MVSESTG resource table [917](#)
 MVSIMAGE field
 in TASKASSC resource table [1113](#)
 MVSLOC field
 in CMAS resource table [131](#)
 MVSNAME field
 in EMASJOIN resource table [387](#)
 in EMASSTOP resource table [393](#)
 in EMASSTRT resource table [395](#)
 MVSSYSID field
 in CICSRRN resource table [89](#)
 in EXCI resource table [573](#)
 in MCICSRGN resource table [803](#)
 MVSSYSNAME field
 in CICSRRN resource table [89](#)
 in WLMAROUT resource table [1281](#)
 MVSTCB resource table [921](#)
 MVSTCBGL resource table [919](#)
 MVSWLM resource table [923](#)
 MXTACTION field
 in CSYSDEF resource table [281](#)
 in MAS resource table [787](#)
 in RTASPEC resource table [1075](#)
 MXTDELAY field
 in HTASK resource table [655](#)
 in MLOCTAN resource table [837](#)
 in TASK resource table [1123](#)
 MXTDELAYCT field
 in MLOCTAN resource table [837](#)
 MXTOTDLC field
 in MLOCTAN resource table [837](#)
 MXTOTDLY field
 in HTASK resource table [655](#)
 in MLOCTAN resource table [837](#)
 in TASK resource table [1123](#)
 MXTRATDQ resource table [927](#)
 MXTSEV field
 in CSYSDEF resource table [281](#)

MXTSEV field (*continued*)

- in MAS resource table [787](#)
- in RTASPEC resource table [1075](#)

N

NAME field

- in ACTION resource table [17](#)
- in APPLDEF resource table [27](#)
- in APSPEC resource table [31](#)
- in ATOMDEF resource table [39](#)
- in ATOMSERSV resource table [45](#)
- in ATTR resource table [49](#)
- in ATTRAVA resource table [47](#)
- in BRFACIL resource table [63](#)
- in BUNDDEF resource table [65](#)
- in BUNDLE resource table [69](#)
- in CFDTPOOL resource table [77](#)
- in CICSDSA resource table [79](#)
- in CMTCMLNK resource table [151](#)
- in CMTPMLNK resource table [153](#)
- in CONNDEF resource table [157](#)
- in CONNECT resource table [164](#)
- in CRESAIMD resource table [177](#)
- in CRESATOM resource table [179](#)
- in CRESBUND resource table [181](#)
- in CRESCONN resource table [183](#)
- in CRESDB2C resource table [185](#)
- in CRESDB2E resource table [187](#)
- in CRESDB2P resource table [189](#)
- in CRESDB2T resource table [191](#)
- in CRESDOCT resource table [193](#)
- in CRESDSNM resource table [195](#)
- in CRESENQM resource table [197](#)
- in CRESEPAD resource table [199](#)
- in CRESEPAS resource table [201](#)
- in CRESEVBD resource table [203](#)
- in CRESEVCS resource table [205](#)
- in CRESFECO resource table [207](#)
- in CRESFEND resource table [209](#)
- in CRESFEPO resource table [211](#)
- in CRESFETR resource table [213](#)
- in CRESFILE resource table [215](#)
- in CRESGLUE resource table [217](#)
- in CRESIPCN resource table [219](#)
- in CRESJRNL resource table [221](#)
- in CRESJRNLM resource table [223](#)
- in CRESJVMS resource table [225](#)
- in CRESLIBR resource table [227](#)
- in CRESMODE resource table [229](#)
- in CRESMQMN resource table [231](#)
- in CRESPART resource table [233](#)
- in CRESPIPE resource table [235](#)
- in CRESPRGM resource table [237](#)
- in CRESPROF resource table [239](#)
- in CRESPTY resource table [241](#)
- in CRESRQMD resource table [243](#)
- in CRESSDMP resource table [245](#)
- in CRESTCPS resource table [247](#)
- in CRESTDMP resource table [249](#)
- in CRESTDQ resource table [251](#)
- in CRESTERM resource table [253](#)
- in CRESTRAN resource table [255](#)
- in CRESTRUE resource table [257](#)

NAME field (*continued*)

- in CRESTSMD resource table [259](#)
- in CRESURIM resource table [261](#)
- in CRESWEBS resource table [263](#)
- in CRESXMLT resource table [265](#)
- in CSDGROUP resource table [267](#)
- in CSDLIST resource table [273](#)
- in CSYSDEF resource table [281](#)
- in DB2CDEF resource table [295](#)
- in DB2CONN resource table [301](#)
- in DB2EDEF resource table [307](#)
- in DB2ENTRY resource table [311](#)
- in DB2PKGST resource table [315](#)
- in DB2SS resource table [317](#)
- in DB2TDEF resource table [319](#)
- in DB2THRD resource table [323](#)
- in DB2TRAN resource table [325](#)
- in DB2TRN resource table [327](#)
- in DBCTLSS resource table [329](#)
- in DOCDEF resource table [331](#)
- in DOCTEMP resource table [337](#)
- in EJCOBEAN resource table [363](#)
- in EJCODEF resource table [365](#)
- in EJCOSE resource table [371](#)
- in EJDJAR resource table [377](#)
- in EJDJBAN resource table [379](#)
- in EJDJDEF resource table [381](#)
- in ENQMDEF resource table [427](#)
- in ENQMODEL resource table [431](#)
- in EPADAPT resource table [435](#)
- in ERMCAIMD resource table [445](#)
- in ERMCAOM resource table [447](#)
- in ERMCBUND resource table [449](#)
- in ERMCCONN resource table [451](#)
- in ERMCDDB2C resource table [453](#)
- in ERMCDDB2E resource table [455](#)
- in ERMCDDB2P resource table [457](#)
- in ERMCDDB2T resource table [459](#)
- in ERMCDOCT resource table [461](#)
- in ERMCDSNM resource table [463](#)
- in ERMCCENQM resource table [465](#)
- in ERMCEVBD resource table [467](#)
- in ERMCEVCS resource table [469](#)
- in ERMCFECO resource table [471](#)
- in ERMCFEND resource table [473](#)
- in ERMCFEPO resource table [475](#)
- in ERMCFETR resource table [477](#)
- in ERMCFILE resource table [479](#)
- in ERMCGLUE resource table [481](#)
- in ERMCIIPCN resource table [483](#)
- in ERMCIJRNLM resource table [485](#)
- in ERMCIJRNLM resource table [487](#)
- in ERMCIJVM resource table [489](#)
- in ERMCLIBR resource table [491](#)
- in ERMCMODE resource table [493](#)
- in ERMCPART resource table [499](#)
- in ERMCPPIPE resource table [501](#)
- in ERMCPRGM resource table [503](#)
- in ERMCPROF resource table [505](#)
- in ERMCPPTY resource table [507](#)
- in ERMCRQMD resource table [509](#)
- in ERMCSAMP resource table [511](#)
- in ERMCTCPS resource table [513](#)
- in ERMCTDMP resource table [515](#)

NAME field (*continued*)

- in ERMCTDQ resource table [517](#)
- in ERMCTERM resource table [519](#)
- in ERMCTRAN resource table [521](#)
- in ERMCTRUE resource table [523](#)
- in ERMCTSMD resource table [525](#)
- in ERMCURIM resource table [527](#)
- in ERMWEBS resource table [529](#)
- in ERMXMLT resource table [531](#)
- in EVALDEF resource table [549](#)
- in EVENT resource table [563](#)
- in EVENTDTL resource table [561](#)
- in EVNTBIND resource table [567](#)
- in FENODDEF resource table [589](#)
- in FEPODEF resource table [605](#)
- in FEPRODEF resource table [609](#)
- in FETRGDEF resource table [613](#)
- in FILEDEF resource table [617](#)
- in FSEGDEF resource table [633](#)
- in HOST resource table [653](#)
- in IPCONDEF resource table [681](#)
- in IPCONN resource table [687](#)
- in JRNLEDEF resource table [701](#)
- in JRNMLEDEF resource table [709](#)
- in JVM resource table [713](#)
- in JVMPROF resource table [717](#)
- in JVMSERV resource table [719](#)
- in JVMSVDEF resource table [723](#)
- in LIBDEF resource table [727](#)
- in LIBRARY resource table [737](#)
- in LSRDEF resource table [769](#)
- in MAPDEF resource table [781](#)
- in MCICSDSA resource table [799](#)
- in MCONNECT resource table [811](#)
- in MDB2THRD resource table [815](#)
- in METADESC resource table [817](#)
- in METANAME resource table [819](#)
- in METAPARM resource table [821](#)
- in MMODNAME resource table [851](#)
- in MODENAME resource table [855](#)
- in MONDEF resource table [857](#)
- in MONGROUP resource table [861](#)
- in MONSPEC resource table [873](#)
- in MQCON resource table [879](#)
- in MQCONDEF resource table [883](#)
- in MQINI resource table [889](#)
- in MQMON resource table [893](#)
- in MQMONDEF resource table [897](#)
- in MTRANCLS resource table [911](#)
- in OBJECT resource table [931](#)
- in PARTDEF resource table [945](#)
- in PERIODEF resource table [951](#)
- in PIPEDEF resource table [955](#)
- in PIPELINE resource table [959](#)
- in PLATDEF resource table [965](#)
- in POLMON resource table [975](#)
- in PROCDEF resource table [981](#)
- in PROCTYP resource table [985](#)
- in PROFDEF resource table [987](#)
- in PROGDEF resource table [995](#)

NAME field (*continued*)

- in PRTNDEF resource table [1009](#)
- in REQID resource table [1033](#)
- in RQMDEF resource table [1053](#)
- in RQMODEL resource table [1059](#)
- in RTAACTV resource table [1061](#)
- in RTADEF resource table [1063](#)
- in RTAGROUP resource table [1067](#)
- in RTAINAPS resource table [1069](#)
- in RTAINSPC resource table [1073](#)
- in RTASPEC resource table [1075](#)
- in SESSDEF resource table [1085](#)
- in STATDEF resource table [1093](#)
- in TCPDEF resource table [1145](#)
- in TCPIPS resource table [1157](#)
- in TDQDEF resource table [1163](#)
- in TERMDEF resource table [1173](#)
- in TRANCLAS resource table [1187](#)
- in TRANDEF resource table [1191](#)
- in TRANGRP resource table [1201](#)
- in TRNCLDEF resource table [1205](#)
- in TSMDEF resource table [1217](#)
- in TSMODEL resource table [1223](#)
- in TSPOOL resource table [1225](#)
- in TSQNAME resource table [1231](#)
- in TSQSHR resource table [1233](#)
- in TSQUEUE resource table [1235](#)
- in TYPTMDEF resource table [1239](#)
- in URIMAP resource table [1257](#)
- in URIMPDEF resource table [1261](#)
- in WEBSERV resource table [1273](#)
- in WEBSVDEF resource table [1277](#)
- in WLMWDEF resource table [1299](#)
- in WLMDEF resource table [1305](#)
- in WLMGROUP resource table [1307](#)
- in WLMINSPC resource table [1311](#)
- in WLMSPEC resource table [1313](#)
- in WORKREQ resource table [1319](#)
- in XMLTRANS resource table [1321](#)

NAME\$INUSE field

- in MTSQGBL resource table [913](#)
- in TSQGBL resource table [1227](#)

NAME\$SPACE field

- in BR\$FACIL resource table [63](#)

NAME\$TYPE field

- in METANAME resource table [819](#)

NATLANG field

- in TERMDEF resource table [1173](#)
- in TERMNL resource table [1179](#)

NATURE field

- in TERMNL resource table [1179](#)

NCGETCNT field

- in HTASK resource table [655](#)
- in TASK resource table [1123](#)

NCICSTC\$BSGAI field

NCICSTCBGSGAI field (*continued*)
 in MVSTCBGL resource table [919](#)
 NCICSTCBGSGBI field
 in MVSTCBGL resource table [919](#)
 NCICSTCBSTGA field
 in MVSTCBGL resource table [919](#)
 NCICSTCBSTGB field
 in MVSTCBGL resource table [919](#)
 NCICSTCBTIME field
 in MVSTCBGL resource table [919](#)
 NEPCLASS field
 in PROFDEF resource table [987](#)
 in SESSDEF resource table [1085](#)
 in TYPTMDEF resource table [1239](#)
 NETALERT field
 in CMAS resource table [131](#)
 NETBIOSADAPT field
 in CONNDEF resource table [157](#)
 NETID field
 in TASKASSC resource table [1113](#)
 NETNAME field
 in BRFACIL resource table [63](#)
 in CONNDEF resource table [157](#)
 in CONNECT resource table [164](#)
 in CRESCONN resource table [183](#)
 in CRESIPCN resource table [219](#)
 in CRESTERM resource table [253](#)
 in ERMCCONN resource table [451](#)
 in ERMCI PCN resource table [483](#)
 in HTASK resource table [655](#)
 in MCONNECT resource table [811](#)
 in MTERMNL resource table [909](#)
 in PARTDEF resource table [945](#)
 in PARTNER resource table [949](#)
 in TASK resource table [1123](#)
 in TERMDEF resource table [1173](#)
 in TERMNL resource table [1179](#)
 in UOW resource table [1253](#)
 in UOWDSNF resource table [1247](#)
 NETNAMEQ field
 in SESSDEF resource table [1085](#)
 NETUOWID field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 in UOW resource table [1253](#)
 in UOWENQ resource table [1249](#)
 in UOWLINK resource table [1251](#)
 in WLMATAFF resource table [1283](#)
 NETVIEW field
 in ACTION resource table [17](#)
 in EVENT resource table [563](#)
 NETVPPI field
 in CMAS resource table [131](#)
 NETWORK field
 in PARTDEF resource table [945](#)
 in PARTNER resource table [949](#)
 NETWORKID field
 in CSYSDEF resource table [281](#)
 in IPCONDEF resource table [681](#)
 in IPCONN resource table [687](#)
 in MAS resource table [787](#)
 NEWCOPYCNT field
 in DOCTEMP resource table [337](#)
 in MPROGRAM resource table [875](#)

NEWCOPYCNT field (*continued*)
 in PROGRAM resource table [1001](#)
 NEXTTIME field
 in CICS RGN resource table [89](#)
 NEXTTRANSID field
 in TERMNL resource table [1179](#)
 NODELIST field
 in FENODDEF resource table [589](#)
 in FEPOODEF resource table [605](#)
 NODENAME field
 in FEPICONN resource table [593](#)
 in FEPINODE resource table [595](#)
 in MFEPICON resource table [823](#)
 NODES field
 in FEPIPOOL resource table [597](#)
 in FEPITRGT resource table [603](#)
 NOMATCHCOUNT field
 in URIMPGBL resource table [1267](#)
 NONCICSTCBCT field
 in MVSTCBGL resource table [919](#)
 NONPERSIST field
 in TCPIPS resource table [1157](#)
 NONSPEC AID field
 in MCONNECT resource table [811](#)
 NONSPEC AID S field
 in CONNECT resource table [164](#)
 NONTERMREL field
 in DB2CDEF resource table [295](#)
 in DB2CONN resource table [301](#)
 NONUWRITE field
 in LSRPBUF resource table [777](#)
 in MLSRPBUF resource table [845](#)
 NOSPACECNT field
 in MTDQGBL resource table [907](#)
 in TDQGBL resource table [1169](#)
 NPERSATMAXP field
 in TCPIPS resource table [1157](#)
 NPERSATT LIM field
 in TCPIPS resource table [1157](#)
 NQGACNQRT field
 in ENQUEUE resource table [433](#)
 NQGAGNQWT field
 in ENQUEUE resource table [433](#)
 NQGATNQWT field
 in ENQUEUE resource table [433](#)
 NQGCACNQRT field
 in ENQUEUE resource table [433](#)
 NQGCAGNQWT field
 in ENQUEUE resource table [433](#)
 NQGCATNQWT field
 in ENQUEUE resource table [433](#)
 NQGCNQRT field
 in ENQUEUE resource table [433](#)
 NQGCNQSR field
 in ENQUEUE resource table [433](#)
 NQGCNQSW field
 in ENQUEUE resource table [433](#)
 NQGCNQWT field
 in ENQUEUE resource table [433](#)
 NQGDSID field
 in ENQUEUE resource table [433](#)
 NQGDSVER field
 in ENQUEUE resource table [433](#)
 NQGGNQSW field

NQGGNQSW field (*continued*)
 in ENQUEUE resource table [433](#)
 NQGGNQWT field
 in ENQUEUE resource table [433](#)
 NQGPOOL field
 in ENQUEUE resource table [433](#)
 NQGSNQSW field
 in ENQUEUE resource table [433](#)
 NQGSNQWT field
 in ENQUEUE resource table [433](#)
 NQGTIRJB field
 in ENQUEUE resource table [433](#)
 NQGTIRJR field
 in ENQUEUE resource table [433](#)
 NQGTNQRT field
 in ENQUEUE resource table [433](#)
 NQGTNQSI field
 in ENQUEUE resource table [433](#)
 NQGTNQSR field
 in ENQUEUE resource table [433](#)
 NQGTNQSW field
 in ENQUEUE resource table [433](#)
 NQGTNQWT field
 in ENQUEUE resource table [433](#)
 NQGTWPOP field
 in ENQUEUE resource table [433](#)
 NQGTWPTO field
 in ENQUEUE resource table [433](#)
 NQGTWRJR field
 in ENQUEUE resource table [433](#)
 NQNAME field
 in CONNECT resource table [164](#)
 in TERMNL resource table [1179](#)
 NRMACTION field
 in CSYSDEF resource table [281](#)
 in MAS resource table [787](#)
 in RTASPEC resource table [1075](#)
 NRMSEV field
 in CSYSDEF resource table [281](#)
 in MAS resource table [787](#)
 in RTASPEC resource table [1075](#)
 NSRGROUP field
 in FILEDEF resource table [617](#)
 NSTGCURR field
 in CICSDSA resource table [79](#)
 NSTGTOTL field
 in CICSDSA resource table [79](#)
 in MCICSDSA resource table [799](#)
 NSTGTSUSP field
 in MCICSDSA resource table [799](#)
 NTFNTYPE field
 in EACTNTFN resource table [357](#)
 NULKEY01 field
 in FSEGDEF resource table [633](#)
 NULKEY02 field
 in FSEGDEF resource table [633](#)
 NULKEY03 field
 in FSEGDEF resource table [633](#)
 NULKEY04 field
 in FSEGDEF resource table [633](#)
 NULKEY05 field
 in FSEGDEF resource table [633](#)
 NULKEY06 field
 in FSEGDEF resource table [633](#)

NULKEY07 field
 in FSEGDEF resource table [633](#)
 NULKEY08 field
 in FSEGDEF resource table [633](#)
 NULKEY09 field
 in FSEGDEF resource table [633](#)
 NULKEY10 field
 in FSEGDEF resource table [633](#)
 NULKEY11 field
 in FSEGDEF resource table [633](#)
 NULKEY12 field
 in FSEGDEF resource table [633](#)
 NULKEY13 field
 in FSEGDEF resource table [633](#)
 NULKEY14 field
 in FSEGDEF resource table [633](#)
 NULKEY15 field
 in FSEGDEF resource table [633](#)
 NULKEY16 field
 in FSEGDEF resource table [633](#)
 NULKEY17 field
 in FSEGDEF resource table [633](#)
 NULKEY18 field
 in FSEGDEF resource table [633](#)
 NULKEY19 field
 in FSEGDEF resource table [633](#)
 NULKEY20 field
 in FSEGDEF resource table [633](#)
 NULKEY21 field
 in FSEGDEF resource table [633](#)
 NULKEY22 field
 in FSEGDEF resource table [633](#)
 NULKEY23 field
 in FSEGDEF resource table [633](#)
 NULKEY24 field
 in FSEGDEF resource table [633](#)
 NUMACTSTRING field
 in CMDT resource table [141](#)
 in LOCFILE resource table [757](#)
 in MCMDT resource table [807](#)
 in MLOCFILE resource table [833](#)
 NUMBUFLUSH field
 in JRNLNAME resource table [707](#)
 in MJRNLNAM resource table [831](#)
 NUMBYTES field
 in JRNLNAME resource table [707](#)
 in MJRNLNAM resource table [831](#)
 NUMCIPHERS field
 in EJCOSE resource table [371](#)
 in IPCONN resource table [687](#)
 in TCPIPS resource table [1157](#)
 in URIMAP resource table [1257](#)
 NUMCMF2SMF field
 in MONITOR resource table [867](#)
 NUMCTRLINTV field
 in MTDQGBL resource table [907](#)
 in TDQGBL resource table [1169](#)
 NUMDATAPRED field
 in EVCSPEC resource table [553](#)
 NUMDATBUFF field
 in CMDT resource table [141](#)
 in LOCFILE resource table [757](#)
 in MCMDT resource table [807](#)
 in MLOCFILE resource table [833](#)

- NUMDSNAMES field
 - in LIBDSN resource table [733](#)
 - in LIBRARY resource table [737](#)
- NUMEXITS field
 - in EXITGLUE resource table [575](#)
 - in EXTGLORD resource table [579](#)
- NUMINDEXBUFF field
 - in CMDT resource table [141](#)
 - in LOCFIL resource table [757](#)
 - in MCMDT resource table [807](#)
 - in MLOCFIL resource table [833](#)
- NUMINDOUBWT field
 - in LOCTRAN resource table [763](#)
 - in MLOCTRAN resource table [837](#)
- NUMINFOSRCE field
 - in EVCSPEC resource table [553](#)
- NUMITEMS field
 - in INTRATDQ resource table [675](#)
 - in MNTRATDQ resource table [853](#)
 - in TSQNAME resource table [1231](#)
 - in TSQSHR resource table [1233](#)
 - in TSQUEUE resource table [1235](#)
- NUMNLK01 field
 - in FSEGDEF resource table [633](#)
- NUMNLK02 field
 - in FSEGDEF resource table [633](#)
- NUMNLK03 field
 - in FSEGDEF resource table [633](#)
- NUMNLK04 field
 - in FSEGDEF resource table [633](#)
- NUMNLK05 field
 - in FSEGDEF resource table [633](#)
- NUMNLK06 field
 - in FSEGDEF resource table [633](#)
- NUMNLK07 field
 - in FSEGDEF resource table [633](#)
- NUMNLK08 field
 - in FSEGDEF resource table [633](#)
- NUMNLK09 field
 - in FSEGDEF resource table [633](#)
- NUMNLK10 field
 - in FSEGDEF resource table [633](#)
- NUMNLK11 field
 - in FSEGDEF resource table [633](#)
- NUMNLK12 field
 - in FSEGDEF resource table [633](#)
- NUMNLK13 field
 - in FSEGDEF resource table [633](#)
- NUMNLK14 field
 - in FSEGDEF resource table [633](#)
- NUMNLK15 field
 - in FSEGDEF resource table [633](#)
- NUMNLK16 field
 - in FSEGDEF resource table [633](#)
- NUMNLK17 field
 - in FSEGDEF resource table [633](#)
- NUMNLK18 field
 - in FSEGDEF resource table [633](#)
- NUMNLK19 field
 - in FSEGDEF resource table [633](#)
- NUMNLK20 field
 - in FSEGDEF resource table [633](#)
- NUMNLK21 field
 - in FSEGDEF resource table [633](#)

- NUMNLK22 field
 - in FSEGDEF resource table [633](#)
- NUMNLK23 field
 - in FSEGDEF resource table [633](#)
- NUMNLK24 field
 - in FSEGDEF resource table [633](#)
- NUMOPTPRED field
 - in EVCSPEC resource table [553](#)
- NUMSTAT2SMF field
 - in MONITOR resource table [867](#)
- NUMSTRINGWT field
 - in CMDT resource table [141](#)
 - in LOCFIL resource table [757](#)
 - in MCMDT resource table [807](#)
 - in MLOCFIL resource table [833](#)
- NUMTBLVER field
 - in OBJECT resource table [931](#)
- NUMWRITES field
 - in JRNLNAM resource table [707](#)
 - in MJRNLNAM resource table [831](#)

O

- OADATA1 field
 - in HTASK resource table [655](#)
- OADATA2 field
 - in HTASK resource table [655](#)
- OADATA3 field
 - in HTASK resource table [655](#)
- OADID field
 - in HTASK resource table [655](#)
- OAPPLID field
 - in HTASK resource table [655](#)
 - in TASK resource table [1123](#)
 - in WORKREQ resource table [1319](#)
- OBFORMAT field
 - in TYPTMDEF resource table [1239](#)
- OBFORMATST field
 - in TERMNL resource table [1179](#)
- OBJACT resource table [929](#)
- OBJACTION field
 - in ACTION resource table [17](#)
- OBJACTIVATES field
 - in EJCOSE resource table [371](#)
- OBJECT field
 - in ASYNCREQ resource table [33](#)
 - in ATTR resource table [49](#)
 - in ATTRAVAL resource table [47](#)
 - in DSNAM resource table [345](#)
 - in FEEDBACK resource table [585](#)
 - in LOCFIL resource table [757](#)
 - in MLOCFIL resource table [833](#)
 - in OBJACT resource table [929](#)
 - in OBJSTAT resource table [935](#)
- OBJECT resource table [931](#)
- OBJECT_ACT field
 - in ASYNCREQ resource table [33](#)
 - in FEEDBACK resource table [585](#)
- OBJSTAT resource table [935](#)
- OBJSTORES field
 - in EJCOSE resource table [371](#)
- OBJTYPE field
 - in OBJECT resource table [931](#)
 - in OBJSTAT resource table [935](#)

OBOPERID field
 in TYPTMDEF resource table [1239](#)
 OBOPERIDST field
 in TERMNL resource table [1179](#)
 OCCUPANCY field
 in JVMSERV resource table [719](#)
 OCLIPADR field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 OCLIPTOR field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 ODAPPLID field
 in TASKASSC resource table [1113](#)
 ODAPTRDATA1 field
 in TASKASSC resource table [1113](#)
 ODAPTRDATA2 field
 in TASKASSC resource table [1113](#)
 ODAPTRDATA3 field
 in TASKASSC resource table [1113](#)
 ODAPTRID field
 in TASKASSC resource table [1113](#)
 ODCLNTIPADDR field
 in TASKASSC resource table [1113](#)
 ODCLNTPORT field
 in TASKASSC resource table [1113](#)
 ODFACILNAME field
 in TASKASSC resource table [1113](#)
 ODFACILTYPE field
 in TASKASSC resource table [1113](#)
 ODIPFAMILY field
 in TASKASSC resource table [1113](#)
 ODLUNAME field
 in TASKASSC resource table [1113](#)
 ODNETID field
 in TASKASSC resource table [1113](#)
 ODNETWORKID field
 in TASKASSC resource table [1113](#)
 ODSERVERPORT field
 in TASKASSC resource table [1113](#)
 ODSTARTTIME field
 in TASKASSC resource table [1113](#)
 ODSTARTTM field
 in TASKASSC resource table [1113](#)
 ODTASKID field
 in TASKASSC resource table [1113](#)
 ODTCPIPS field
 in TASKASSC resource table [1113](#)
 ODTRANSID field
 in TASKASSC resource table [1113](#)
 ODUSERID field
 in TASKASSC resource table [1113](#)
 OFCTYNME field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 OFFLCPUT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 OFFSET field
 in ATTR resource table [49](#)
 in METADESC resource table [817](#)
 OLDCACHES field
 in CLCACHE resource table [123](#)
 OLDPART field

OLDPART field (*continued*)
 in MJOURNAL resource table [829](#)
 in TAPEJRNL resource table [1111](#)
 OMGINTERFACE field
 in RQMDEF resource table [1053](#)
 in RQMODEL resource table [1059](#)
 OMGMODULE field
 in RQMDEF resource table [1053](#)
 in RQMODEL resource table [1059](#)
 OMGOPERATION field
 in RQMDEF resource table [1053](#)
 in RQMODEL resource table [1059](#)
 ONETWKID field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 ONEWTE field
 in PROFDEF resource table [987](#)
 OPEN field
 in JRNLEDF resource table [701](#)
 OPENSTATUS field
 in CMDT resource table [141](#)
 in CRESFILE resource table [215](#)
 in CRESJRNL resource table [221](#)
 in CRESTDQ resource table [251](#)
 in DSKJRNL resource table [343](#)
 in EXTRATDQ resource table [581](#)
 in JRNLEDF resource table [701](#)
 in LOCFILE resource table [757](#)
 in MCMDT resource table [807](#)
 in MJOURNAL resource table [829](#)
 in MLOCFILE resource table [833](#)
 in MXTRATDQ resource table [927](#)
 in SMFJRNL resource table [1089](#)
 in TAPEJRNL resource table [1111](#)
 in TCPIPS resource table [1157](#)
 in VOLUME resource table [1269](#)
 OPENTIME field
 in FILEDEF resource table [617](#)
 in TDQDEF resource table [1163](#)
 OPERATION field
 in BUNDPART resource table [73](#)
 in LOCTRAN resource table [763](#)
 in PROGRAM resource table [1001](#)
 in REMTRAN resource table [1029](#)
 in RQMDEF resource table [1053](#)
 in RQMODEL resource table [1059](#)
 in URIMAP resource table [1257](#)
 OPERATOR field
 in EVCSDATA resource table [555](#)
 in EVCSOPT resource table [559](#)
 in RULE resource table [1079](#)
 OPERID field
 in SESSDEF resource table [1085](#)
 in TERMDEF resource table [1173](#)
 in TERMNL resource table [1179](#)
 OPERPRIORITY field
 in SESSDEF resource table [1085](#)
 in TERMDEF resource table [1173](#)
 OPERRSL field
 in SESSDEF resource table [1085](#)
 in TERMDEF resource table [1173](#)
 OPERRSL1 field
 in SESSDEF resource table [1085](#)
 in TERMDEF resource table [1173](#)

OPERRSL2 field
 in SESSDEF resource table [1085](#)
 in TERMDEF resource table [1173](#)

OPERRSL3 field
 in SESSDEF resource table [1085](#)
 in TERMDEF resource table [1173](#)

OPERSEC field
 in SESSDEF resource table [1085](#)
 in TERMDEF resource table [1173](#)

OPERSEC1 field
 in SESSDEF resource table [1085](#)
 in TERMDEF resource table [1173](#)

OPERSEC2 field
 in SESSDEF resource table [1085](#)
 in TERMDEF resource table [1173](#)

OPERSEC3 field
 in SESSDEF resource table [1085](#)
 in TERMDEF resource table [1173](#)

OPERSEC4 field
 in SESSDEF resource table [1085](#)
 in TERMDEF resource table [1173](#)

OPERSEC5 field
 in SESSDEF resource table [1085](#)
 in TERMDEF resource table [1173](#)

OPERSEC6 field
 in SESSDEF resource table [1085](#)
 in TERMDEF resource table [1173](#)

OPERSEC7 field
 in SESSDEF resource table [1085](#)
 in TERMDEF resource table [1173](#)

OPERSEC8 field
 in SESSDEF resource table [1085](#)
 in TERMDEF resource table [1173](#)

OPORTNUM field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)

OPREL field
 in CICSGRN resource table [89](#)

OPRSTRING field
 in EVALDEF resource table [549](#)

OPRSTRINGL field
 in EVALDEF resource table [549](#)

OPSRESTP field
 in EMCICS resource table [401](#)
 in EMCONN resource table [403](#)
 in EMDBX resource table [405](#)
 in EMFILE resource table [407](#)
 in EMGLBL resource table [409](#)
 in EMJRNL resource table [411](#)
 in EMPROG resource table [413](#)
 in EMTDQS resource table [419](#)
 in EMTERM resource table [421](#)
 in EMTRAN resource table [423](#)

OPSYS field
 in CICSGRN resource table [89](#)

OPSYSREL field
 in EMASJOIN resource table [387](#)
 in EMASSTOP resource table [393](#)
 in EMASSTRT resource table [395](#)

OPTIONNAME field
 in EVCSOPT resource table [559](#)

ORIGINTYPE field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)

ORSTRING field
 in RASGNDEF resource table [1013](#)

ORSTRINGL field
 in RASGNDEF resource table [1013](#)

OS2CNT field
 in CPLEXDEF resource table [169](#)
 in CPLXCMAS resource table [173](#)

OS2TERMTYP field
 in TERMDEF resource table [1173](#)

OSGIBUND field
 in OSGIBUND resource table [937](#)

OSGIBUND resource table [937](#)

OSGIBUNDLE field
 in OSGISERV resource table [939](#)

OSGIBUNDLEID field
 in ERMCOGB resource table [495](#)
 in OSGIBUND resource table [937](#)

OSGISERV resource table [939](#)

OSGISERVICE field
 in OSGISERV resource table [939](#)

OSGISERVID field
 in ERMCOGB resource table [497](#)

OSGISTATUS field
 in ERMCOGB resource table [495](#)
 in OSGIBUND resource table [937](#)

OSGIVERSION field
 in OSGIBUND resource table [937](#)
 in OSGISERV resource table [939](#)

OSLEVEL field
 in CICSGRN resource table [89](#)
 in MCICSGRN resource table [803](#)

OSTART field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)

OTASK field
 in WORKREQ resource table [1319](#)

OTCPSVCE field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)

OTHERIDS field
 in DB2THRD resource table [323](#)
 in MDB2THRD resource table [815](#)

OTRAN field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)

OTRANFLG field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)

OTRANNUM field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)

OTRANSID field
 in WORKREQ resource table [1319](#)

OTSTID field
 in UOW resource table [1253](#)

OTSTIMEOUT field
 in LOCTRAN resource table [763](#)
 in TRANDEF resource table [1191](#)

OUSERCOR field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)

OUSERID field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)

OUTCNT field
 in EXTRATDQ resource table [581](#)
 in INDDTDQ resource table [673](#)
 in INTRATDQ resource table [675](#)
 in MINDTDQ resource table [827](#)
 in MNTRATDQ resource table [853](#)
 in MREMTDQ resource table [903](#)
 in MXTRATDQ resource table [927](#)
 in REMTDQ resource table [1027](#)
 OUTLINE field
 in TYPTMDEF resource table [1239](#)
 OUTLINEST field
 in TERMNL resource table [1179](#)
 OUTMSGCNT field
 in MTERMNL resource table [909](#)
 in TERMNL resource table [1179](#)
 OUTPRIVACY field
 in EJCODEF resource table [365](#)
 in EJCOSE resource table [371](#)
 OUTPUTUSER field
 in BATCHREP resource table [53](#)
 OUTSALLOC field
 in CONNECT resource table [164](#)
 in MCONNECT resource table [811](#)
 OUTSCKSREUSE field
 in TCPIPGBL resource table [1153](#)
 OUTSOCKETSCL field
 in TCPIPGBL resource table [1153](#)
 OUTSOCKETSCR field
 in TCPIPGBL resource table [1153](#)
 OUTSOCKSPERS field
 in TCPIPGBL resource table [1153](#)
 OVERRIDE field
 in RASGNDEF resource table [1013](#)
 OWLMSTAT field
 in EMSTATUS resource table [415](#)
 OWNERNAME field
 in OBJECT resource table [931](#)
 OWNINGCMAS field
 in WLMATARG resource table [1285](#)
 OWSTATE field
 in WLMAROUT resource table [1281](#)
 in WLMATARG resource table [1285](#)
 in WLMAWAOR resource table [1295](#)
 in WLMAWORK resource table [1301](#)
 in WLMAWTOR resource table [1303](#)

P

PABORTS field
 in DB2CONN resource table [301](#)
 PADRESERVED field
 in TSKSPOLS resource table [1211](#)
 PAGEEEMPCT field
 in DOMSPOOL resource table [341](#)
 PAGEHT field
 in TERMNL resource table [1179](#)
 PAGEIN field
 in CICSRRGN resource table [89](#)
 in CMAS resource table [131](#)
 in MCICSRGN resource table [803](#)
 PAGEOUT field
 in CICSRRGN resource table [89](#)
 in CMAS resource table [131](#)

PAGEOUT field (*continued*)
 in MCICSRGN resource table [803](#)
 PAGEPAGEPCT field
 in DOMSPOOL resource table [341](#)
 in TSKSPOOL resource table [1215](#)
 PAGEPAGPPCT field
 in DOMSPOOL resource table [341](#)
 PAGEPLPCTC field
 in TSKSPOLS resource table [1211](#)
 PAGEPLPCTEC field
 in TSKSPOLS resource table [1211](#)
 PAGEPLPCTEU field
 in TSKSPOLS resource table [1211](#)
 PAGEPLPCTU field
 in TSKSPOLS resource table [1211](#)
 PAGESIZECOL field
 in TYPTMDEF resource table [1239](#)
 PAGESIZEROW field
 in TYPTMDEF resource table [1239](#)
 PAGESTATUS field
 in TERMNL resource table [1179](#)
 PAGEWD field
 in TERMNL resource table [1179](#)
 PARDEFGR field
 in RESDESC resource table [1035](#)
 PARDEFGRS field
 in RESDESC resource table [1035](#)
 PARDEFGRS field
 in RESDESC resource table [1035](#)
 PARINGGRP resource table [941](#)
 PARMABA resource table [943](#)
 PARMABAIDN field
 in PARMABA resource table [943](#)
 PARMCOUNT field
 in OBJECT resource table [929](#)
 PARMIDN field
 in PARMABA resource table [943](#)
 PART field
 in VOLUME resource table [1269](#)
 PARTCLASS field
 in BUNDPART resource table [73](#)
 PARTCODEPAGE field
 in CONNDEF resource table [157](#)
 in SESSDEF resource table [1085](#)
 PARTCOUNT field
 in BUNDLE resource table [69](#)
 in CRESBUND resource table [181](#)
 in ERMCBUND resource table [449](#)
 PARTDEF resource table [945](#)
 PARTGROUP field
 in PARINGGRP resource table [941](#)
 PARTITIONS field
 in TYPTMDEF resource table [1239](#)
 PARTITIONSET field
 in TRANDEF resource table [1191](#)
 PARTITIONSST field
 in TERMNL resource table [1179](#)
 PARTLUALIAS field
 in CONNDEF resource table [157](#)
 PARTNAME field
 in PARINGGRP resource table [941](#)
 PARTNER field
 in IPCONN resource table [687](#)
 in PARTNER resource table [949](#)

PARTNER resource table [949](#)

PARTTYPE field

- in BUNDPART resource table [73](#)

PARTVER field

- in PARINGRP resource table [941](#)

PASSWORD field

- in FILEDEF resource table [617](#)

PASSWORDS field

- in FENODDEF resource table [589](#)

PATH field

- in URIMAP resource table [1257](#)
- in URIMPDEF resource table [1261](#)

PAUSE field

- in JRNLDEF resource table [701](#)

PAUSINGLIST field

- in TCPIPGBL resource table [1153](#)

PC24RHHW field

- in HTASK resource table [655](#)
- in MLOCTRAN resource table [837](#)
- in TASK resource table [1123](#)

PC24SHWM field

- in HTASK resource table [655](#)
- in MLOCTRAN resource table [837](#)
- in TASK resource table [1123](#)

PC31SHWM field

- in HTASK resource table [655](#)
- in MLOCTRAN resource table [837](#)
- in TASK resource table [1123](#)

PCALLS field

- in DB2CONN resource table [301](#)

PCDPLCT field

- in HTASK resource table [655](#)
- in MLOCTRAN resource table [837](#)
- in TASK resource table [1123](#)

PCDSANIU field

- in LOADER resource table [753](#)

PCLINKCNT field

- in HTASK resource table [655](#)
- in MLOCTRAN resource table [837](#)
- in TASK resource table [1123](#)

PCLOADCNT field

- in HTASK resource table [655](#)
- in MLOCTRAN resource table [837](#)
- in TASK resource table [1123](#)

PCLOADTM field

- in HTASK resource table [655](#)
- in MLOCTRAN resource table [837](#)
- in TASK resource table [1123](#)

PCLOADWCNT field

- in MLOCTRAN resource table [837](#)

PCLURMCT field

- in HTASK resource table [655](#)
- in MLOCTRAN resource table [837](#)
- in TASK resource table [1123](#)

PCOMMITS field

- in DB2CONN resource table [301](#)

PCONV field

- in DTRINGRP resource table [355](#)

PCTCCSH field

- in CICSSTOR resource table [101](#)

PCTCFREE field

- in CICSSTOR resource table [101](#)

PCTCGMF field

- in CICSSTOR resource table [101](#)

PCTLFA2DSA field
in CICSPAGP resource table [83](#)

PCTLFACDSA field
in CICSSTOR resource table [101](#)

PCTLFAECDDSA field
in CICSSTOR resource table [101](#)

PCTLFAERDSA field
in CICSSTOR resource table [101](#)

PCTLFAESDSA field
in CICSSTOR resource table [101](#)

PCTLFAETDSA field
in CICSSTOR resource table [101](#)

PCTLFAEUDSA field
in CICSSTOR resource table [101](#)

PCTLFARDSA field
in CICSSTOR resource table [101](#)

PCTLFASDSA field
in CICSSTOR resource table [101](#)

PCTLFAUDSA field
in CICSSTOR resource table [101](#)

PCTRCSH field
in CICSSTOR resource table [101](#)

PCTRFREE field
in CICSSTOR resource table [101](#)

PCTRGMF field
in CICSSTOR resource table [101](#)

PCTRGMP field
in CICSSTOR resource table [101](#)

PCTSCSH field
in CICSSTOR resource table [101](#)

PCTSFREE field
in CICSSTOR resource table [101](#)

PCTSGMF field
in CICSSTOR resource table [101](#)

PCTSGMP field
in CICSSTOR resource table [101](#)

PCTSTGCDSA field
in CICSSTOR resource table [101](#)

PCTSTGDSA field
in CICSPAGP resource table [83](#)

PCTSTGECDDSA field
in CICSSTOR resource table [101](#)

PCTSTGERDSA field
in CICSSTOR resource table [101](#)

PCTSTGESDSA field
in CICSSTOR resource table [101](#)

PCTSTGETDSA field
in CICSSTOR resource table [101](#)

PCTSTGEUDSA field
in CICSSTOR resource table [101](#)

PCTSTGGCDSA field
in CICSSTOR resource table [101](#)

PCTSTGGSDSA field
in CICSSTOR resource table [101](#)

PCTSTGGUDSA field
in CICSSTOR resource table [101](#)

PCTSTGRDSA field
in CICSSTOR resource table [101](#)

PCTSTGSDSA field
in CICSSTOR resource table [101](#)

PCTSTGUDSA field
in CICSSTOR resource table [101](#)

PCTUCSH field
in CICSSTOR resource table [101](#)

PCTUFREE field
in CICSSTOR resource table [101](#)

PCTUGMF field
in CICSSTOR resource table [101](#)

PCTUGMP field
in CICSSTOR resource table [101](#)

PCXCTLCNT field
in HTASK resource table [655](#)
in MLOCTRAN resource table [837](#)
in TASK resource table [1123](#)

PDELMAXSOCKS field
in TCPIPGBL resource table [1153](#)

PDSANIU field
in LOADACT resource table [751](#)

PEAKALLCS field
in FEPIPOOL resource table [597](#)

PEAKALLCWAIT field
in FEPIPOOL resource table [597](#)
in FEPITRGT resource table [603](#)

PEAKAMAX field
in CICSRRGN resource table [89](#)
in CMAS resource table [131](#)
in MCICSRGN resource table [803](#)

PEAKBWAIT field
in MTDQGBL resource table [907](#)
in TDQGBL resource table [1169](#)

PEAKCACCESS field
in MTDQGBL resource table [907](#)
in TDQGBL resource table [1169](#)

PEAKCACHEJVM field
in CLCACHE resource table [123](#)

PEAKCIUSE field
in MTDQGBL resource table [907](#)
in MTSQGBL resource table [913](#)
in TDQGBL resource table [1169](#)
in TSQGBL resource table [1227](#)

PEAKCONNS field
in FEPIPOOL resource table [597](#)
in TCPIPS resource table [1157](#)

PEAKHEAP field
in JVMSERV resource table [719](#)

PEAKQACTV field
in MTDQGBL resource table [907](#)
in TDQGBL resource table [1169](#)

PEAKQUES field
in MTSQGBL resource table [913](#)
in TSQGBL resource table [1227](#)

PEAKQUEUED field
in IPCONN resource table [687](#)

PEAKSTG field
in MTSQGBL resource table [913](#)
in TSQGBL resource table [1227](#)

PEAKSTRACC field
in MTDQGBL resource table [907](#)
in TDQGBL resource table [1169](#)

PEAKSTRWAIT field
in MTDQGBL resource table [907](#)
in TDQGBL resource table [1169](#)

PEAKTASKS field
in CICSRRGN resource table [89](#)
in MCICSRGN resource table [803](#)

PEAKTHREADS field
in DBCTLSS resource table [329](#)

PEAKUSDSTR field

PEAKUSDSTR field (*continued*)
 in MTSQGBL resource table [913](#)
 in TSQGBL resource table [1227](#)
 PEAKUWBUF field
 in MTSQGBL resource table [913](#)
 in TSQGBL resource table [1227](#)
 PEAKUWSTR field
 in MTSQGBL resource table [913](#)
 in TSQGBL resource table [1227](#)
 PEAKWAITREQ field
 in LSRPOOL resource table [779](#)
 in MLRPOOL resource table [847](#)
 PECDSANIU field
 in LOADER resource table [753](#)
 PEKACTVUSRTR field
 in CICSGRN resource table [89](#)
 in MCICSGRN resource table [803](#)
 PEKQUEDUSRTR field
 in CICSGRN resource table [89](#)
 in MCICSGRN resource table [803](#)
 PENDSTATUS field
 in CONNECT resource table [164](#)
 in IPCONN resource table [687](#)
 PERDSANIU field
 in LOADER resource table [753](#)
 PERFCLASS field
 in CICSGRN resource table [89](#)
 in MONITOR resource table [867](#)
 PERFINTVL field
 in CMASPLEX resource table [129](#)
 PERFRECCNT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 PERIODEF resource table [951](#)
 PERRECNT field
 in MLOCTRAN resource table [837](#)
 PESDSANIU field
 in LOADER resource table [753](#)
 PEXCSUPR field
 in MONITOR resource table [867](#)
 PGCSTHWM field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 PGMINGRP resource table [953](#)
 PGMINTERFACE field
 in WEBSERV resource table [1273](#)
 PGMLOADCNT field
 in LIBRARY resource table [737](#)
 PGMNAME field
 in CRESTRAN resource table [255](#)
 PGMONIU field
 in CICSDSA resource table [79](#)
 in MCICSDSA resource table [799](#)
 PGRJUSECOUNT field
 in PROGRAM resource table [1001](#)
 PHAPPLID field
 in HTASK resource table [655](#)
 in TASKASSC resource table [1113](#)
 PHASINGOUT field
 in CLCACHE resource table [123](#)
 in JVMPOOL resource table [715](#)
 PHASINGOUTST field
 in JVM resource table [713](#)
 PHCOUNT field

PHCOUNT field (*continued*)
 in HTASK resource table [655](#)
 in TASKASSC resource table [1113](#)
 PHNETWORKID field
 in TASKASSC resource table [1113](#)
 PHNTWKID field
 in HTASK resource table [655](#)
 PHSTART field
 in HTASK resource table [655](#)
 PHSTARTTIME field
 in TASKASSC resource table [1113](#)
 PHSTARTTM field
 in TASKASSC resource table [1113](#)
 PHTASKID field
 in TASKASSC resource table [1113](#)
 PHTRAN field
 in HTASK resource table [655](#)
 PHTRANNO field
 in HTASK resource table [655](#)
 PHTRANSID field
 in TASKASSC resource table [1113](#)
 PICKLIST field
 in ATTR resource table [49](#)
 in METAPARM resource table [821](#)
 PID field
 in JVMSERV resource table [719](#)
 PIDNSUPR field
 in MONITOR resource table [867](#)
 PINSCKSNPERS field
 in TCPIPGBL resource table [1153](#)
 PINSCKSPERS field
 in TCPIPGBL resource table [1153](#)
 PINSOCKETS field
 in TCPIPGBL resource table [1153](#)
 PIPDEFRG field
 in RESDESC resource table [1035](#)
 PIPDEFRS field
 in RESDESC resource table [1035](#)
 PIPDEFTS field
 in RESDESC resource table [1035](#)
 PIPEDEF resource table [955](#)
 PIPELINE field
 in URIMAP resource table [1257](#)
 in URIMPDEF resource table [1261](#)
 in WEBSERV resource table [1273](#)
 in WEBSVDEF resource table [1277](#)
 PIPELINE resource table [959](#)
 PIPELINEREQS field
 in URIMPGBL resource table [1267](#)
 PIPEMODE field
 in PIPELINE resource table [959](#)
 PIPEUSECOUNT field
 in PIPELINE resource table [959](#)
 PIPGROUP field
 in PIPINGRP resource table [963](#)
 PIPINGRP resource table [963](#)
 PIPNAME field
 in PIPINGRP resource table [963](#)
 PIPVER field
 in PIPINGRP resource table [963](#)
 PKFWTRS field
 in STREAMNM resource table [1097](#)
 PLAN field
 in DB2CDEF resource table [295](#)

PLAN field (*continued*)

- in DB2CONN resource table [301](#)
- in DB2EDEF resource table [307](#)
- in DB2ENTRY resource table [311](#)
- in DB2TRN resource table [327](#)

PLANENTRTRC field

- in DB2SS resource table [317](#)

PLANEXITNAME field

- in DB2CDEF resource table [295](#)
- in DB2CONN resource table [301](#)
- in DB2EDEF resource table [307](#)
- in DB2ENTRY resource table [311](#)
- in DB2TRN resource table [327](#)

PLANEXITTRC field

- in DB2SS resource table [317](#)

PLANNAME field

- in DB2THRD resource table [323](#)
- in MDB2THRD resource table [815](#)

PLANPRGM field

- in DB2THRD resource table [323](#)
- in MDB2THRD resource table [815](#)

PLASTRESET field

- in CICSGRN resource table [89](#)
- in MCICSGRN resource table [803](#)

PLATDEF field

- in APPLCTN resource table [23](#)
- in APPLDEF resource table [27](#)
- in CSYSGRP resource table [287](#)
- in MGMTPART resource table [825](#)
- in PLATFORM resource table [970](#)

PLATDEF resource table [965](#)

PLATDIR field

- in PLATDEF resource table [965](#)
- in PLATFORM resource table [970](#)

PLATFORM field

- in EVALDEF resource table [549](#)
- in LOCTRAN resource table [763](#)
- in MGMTPART resource table [825](#)
- in PLATFORM resource table [970](#)
- in PROGRAM resource table [1001](#)
- in REMTRAN resource table [1029](#)
- in URIMAP resource table [1257](#)

PLATFORM resource table [970](#)

PLATFORMML field

- in EVALDEF resource table [549](#)

PLATHOME field

- in MGMTPART resource table [825](#)
- in PLATFORM resource table [970](#)

PLATTOKEN field

- in APPLCTN resource table [23](#)
- in BUNDEF resource table [65](#)
- in CRESDB2P resource table [189](#)
- in ERMCDDB2P resource table [457](#)
- in MGMTPART resource table [825](#)
- in PLATFORM resource table [970](#)

PLEXNAME field

- in BINCONRS resource table [57](#)
- in BINCONSC resource table [59](#)
- in BINSTERR resource table [61](#)
- in CICSPLEX resource table [87](#)
- in CMASPLEX resource table [129](#)
- in CMTPLNKN resource table [153](#)
- in EACTNTFN resource table [357](#)
- in ELSIGNAL resource table [385](#)

PLEXNAME field (*continued*)

- in EMASJOIN resource table [387](#)
- in EMASICK resource table [389](#)
- in EMASSTOP resource table [393](#)
- in EMASSTRT resource table [395](#)
- in EMASWELL resource table [397](#)
- in EMCICS resource table [401](#)
- in EMCONN resource table [403](#)
- in EMDDBX resource table [405](#)
- in EMFILE resource table [407](#)
- in EMGLBL resource table [409](#)
- in EMJRNAL resource table [411](#)
- in EMPROG resource table [413](#)
- in EMSTATUS resource table [415](#)
- in EMTDQS resource table [419](#)
- in EMTERM resource table [421](#)
- in EMTRAN resource table [423](#)
- in ERESSTAT resource table [443](#)
- in ERMCAIMD resource table [445](#)
- in ERMCAIOM resource table [447](#)
- in ERMCBUND resource table [449](#)
- in ERMCCONN resource table [451](#)
- in ERMCDDB2C resource table [453](#)
- in ERMCDDB2E resource table [455](#)
- in ERMCDDB2P resource table [457](#)
- in ERMCDDB2T resource table [459](#)
- in ERMCDOCT resource table [461](#)
- in ERMCDSDNM resource table [463](#)
- in ERMCDENQM resource table [465](#)
- in ERMCEVBD resource table [467](#)
- in ERMCEVCS resource table [469](#)
- in ERMCFECO resource table [471](#)
- in ERMCFEND resource table [473](#)
- in ERMCFEPO resource table [475](#)
- in ERMCFETR resource table [477](#)
- in ERMCFEFILE resource table [479](#)
- in ERMCGLUE resource table [481](#)
- in ERMCIIPCN resource table [483](#)
- in ERMCIJRNAL resource table [485](#)
- in ERMCIJRNOM resource table [487](#)
- in ERMCIJVM resource table [489](#)
- in ERMCLIBR resource table [491](#)
- in ERMCMODE resource table [493](#)
- in ERMCCOSGB resource table [495](#)
- in ERMCCOSGS resource table [497](#)
- in ERMCPART resource table [499](#)
- in ERMCPPIPE resource table [501](#)
- in ERMCPPRGM resource table [503](#)
- in ERMCPROF resource table [505](#)
- in ERMCPRTY resource table [507](#)
- in ERMCRQMD resource table [509](#)
- in ERMCDSDMP resource table [511](#)
- in ERMCTCPS resource table [513](#)
- in ERMCTDMP resource table [515](#)
- in ERMCTDQ resource table [517](#)
- in ERMCTERM resource table [519](#)
- in ERMCTRAN resource table [521](#)
- in ERMCTRUE resource table [523](#)
- in ERMCTSMD resource table [525](#)
- in ERMCCURIM resource table [527](#)
- in ERMCCWEBS resource table [529](#)
- in ERMCCXMLT resource table [531](#)
- in ERMCCONN resource table [533](#)
- in ERMCCFILE resource table [535](#)

PLEXNAME field (*continued*)

- in ERMJMRL resource table [537](#)
- in ERMMPRGM resource table [539](#)
- in ERMMTDQ resource table [541](#)
- in ERMMENTER resource table [543](#)
- in ERMMENTRAN resource table [545](#)
- in ESGRPCHG resource table [547](#)
- in MASQRYER resource table [795](#)

PLOADWAIT field

- in LOADACT resource table [751](#)
- in LOADER resource table [753](#)

PMSGCNT field

- in MTERMNL resource table [909](#)
- in TERMNL resource table [1179](#)

PMSGCONSEC field

- in MTERMNL resource table [909](#)
- in TERMNL resource table [1179](#)

PMSGGRPCNT field

- in MTERMNL resource table [909](#)
- in TERMNL resource table [1179](#)

POLICY field

- in RULE resource table [1079](#)

POLICYDIR field

- in PIPEDEF resource table [955](#)
- in PIPELINE resource table [959](#)
- in WEBSERV resource table [1273](#)
- in WEBSVDEF resource table [1277](#)

POLICYSET field

- in RULE resource table [1079](#)

POLLCNT field

- in MTERMNL resource table [909](#)
- in TERMNL resource table [1179](#)

POLMON resource table [975](#)

POOL field

- in LSRPBUF resource table [777](#)
- in TERMDEF resource table [1173](#)

POOLNAME field

- in CMDT resource table [141](#)
- in DSPPOOL resource table [353](#)
- in FEPICONN resource table [593](#)
- in FEPIPOOL resource table [597](#)
- in FEPITRGT resource table [603](#)
- in FILEDEF resource table [617](#)
- in MCMMDT resource table [807](#)
- in MFEPICON resource table [823](#)
- in TSMDEF resource table [1217](#)
- in TSMODEL resource table [1223](#)
- in TSQSHR resource table [1233](#)

POOLPCTFREE field

- in CICSDSA resource table [79](#)
- in MCICSDSA resource table [799](#)

POOLSIZETYPE field

- in LSRPBUF resource table [777](#)
- in MLSRPBUF resource table [845](#)

PORT field

- in CSYSDEF resource table [281](#)
- in EJCODEF resource table [365](#)
- in EJCOSE resource table [371](#)
- in IPCONDEF resource table [681](#)
- in IPCONN resource table [687](#)
- in MAS resource table [787](#)
- in TCPIPS resource table [1157](#)
- in UOWLINK resource table [1251](#)
- in URIMAP resource table [1257](#)

PORT field (*continued*)

- in URIMPDEF resource table [1261](#)

PORTNUMBER field

- in TCPDEF resource table [1145](#)

POSKEY01 field

- in FSEGDEF resource table [633](#)

POSKEY02 field

- in FSEGDEF resource table [633](#)

POSKEY03 field

- in FSEGDEF resource table [633](#)

POSKEY04 field

- in FSEGDEF resource table [633](#)

POSKEY05 field

- in FSEGDEF resource table [633](#)

POSKEY06 field

- in FSEGDEF resource table [633](#)

POSKEY07 field

- in FSEGDEF resource table [633](#)

POSKEY08 field

- in FSEGDEF resource table [633](#)

POSKEY09 field

- in FSEGDEF resource table [633](#)

POSKEY10 field

- in FSEGDEF resource table [633](#)

POSKEY11 field

- in FSEGDEF resource table [633](#)

POSKEY12 field

- in FSEGDEF resource table [633](#)

POSKEY13 field

- in FSEGDEF resource table [633](#)

POSKEY14 field

- in FSEGDEF resource table [633](#)

POSKEY15 field

- in FSEGDEF resource table [633](#)

POSKEY16 field

- in FSEGDEF resource table [633](#)

POSKEY17 field

- in FSEGDEF resource table [633](#)

POSKEY18 field

- in FSEGDEF resource table [633](#)

POSKEY19 field

- in FSEGDEF resource table [633](#)

POSKEY20 field

- in FSEGDEF resource table [633](#)

POSKEY21 field

- in FSEGDEF resource table [633](#)

POSKEY22 field

- in FSEGDEF resource table [633](#)

POSKEY23 field

- in FSEGDEF resource table [633](#)

POSKEY24 field

- in FSEGDEF resource table [633](#)

POUTSCKSBOTH field

- in TCPIPGBL resource table [1153](#)

POUTSOCKETS field

- in TCPIPGBL resource table [1153](#)

PPCTCFREE field

- in CICSSOR resource table [101](#)

PPCTECFREE field

- in CICSSOR resource table [101](#)

PPCTERFREE field

- in CICSSOR resource table [101](#)

PPCTESFREE field

- in CICSSOR resource table [101](#)

PPCTETFREE field
 in CICSSTOR resource table [101](#)
 PPCTEUFREE field
 in CICSSTOR resource table [101](#)
 PPCTFREE field
 in CICSSTOR resource table [83](#)
 PPCTRFREE field
 in CICSSTOR resource table [101](#)
 PPCTSFREE field
 in CICSSTOR resource table [101](#)
 PPCTSTGCDSA field
 in CICSSTOR resource table [101](#)
 PPCTSTGDSA field
 in CICSSTOR resource table [101](#)
 in CICSSTOR resource table [83](#)
 PPCTSTGECDSA field
 in CICSSTOR resource table [101](#)
 PPCTSTGERDSA field
 in CICSSTOR resource table [101](#)
 PPCTSTGESDSA field
 in CICSSTOR resource table [101](#)
 PPCTSTGETDSA field
 in CICSSTOR resource table [101](#)
 PPCTSTGEUDSA field
 in CICSSTOR resource table [101](#)
 PPCTSTGGCDSA field
 in CICSSTOR resource table [101](#)
 PPCTSTGGSDSA field
 in CICSSTOR resource table [101](#)
 PPCTSTGGUDSA field
 in CICSSTOR resource table [101](#)
 PPCTSTGRDSA field
 in CICSSTOR resource table [101](#)
 PPCTSTGSDSA field
 in CICSSTOR resource table [101](#)
 PPCTSTGUDSA field
 in CICSSTOR resource table [101](#)
 PPCTUFREE field
 in CICSSTOR resource table [101](#)
 PPEROCKETS field
 in TCPIPGBL resource table [1153](#)
 PPERSUPR field
 in MONITOR resource table [867](#)
 PPSIGNONS field
 in DB2CONN resource table [301](#)
 PRCDEFRG field
 in RESDESC resource table [1035](#)
 PRCDEFRS field
 in RESDESC resource table [1035](#)
 PRCDEFTS field
 in RESDESC resource table [1035](#)
 PRCINGRP resource table [977](#)
 PRCSID field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 PRCSNAME field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 PRCSTYPE field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 PRCVER field
 in PRCINGRP resource table [977](#)
 PRDSANIU field
 in LOADER resource table [753](#)

PRECVSESS field
 in IPCONN resource table [687](#)
 PREFIX field
 in TSMDEF resource table [1217](#)
 in TSMODEL resource table [1223](#)
 PRESSUPR field
 in MONITOR resource table [867](#)
 PREUSELIMCT field
 in DB2CONN resource table [301](#)
 PRGDEFRG field
 in RESDESC resource table [1035](#)
 PRGDEFRS field
 in RESDESC resource table [1035](#)
 PRGDEFTS field
 in RESDESC resource table [1035](#)
 PRGMRCMP field
 in CICSRRGN resource table [89](#)
 in MCICSRGN resource table [803](#)
 PRGMUCNT field
 in CICSRRGN resource table [89](#)
 in MCICSRGN resource table [803](#)
 PRGMWAIT field
 in CICSRRGN resource table [89](#)
 in MCICSRGN resource table [803](#)
 PRICMAS field
 in CSYSDEF resource table [281](#)
 in MAS resource table [787](#)
 PRICURRUSED field
 in CONNECT resource table [164](#)
 in MCONNECT resource table [811](#)
 PRIMEDSIZE field
 in TRANDEF resource table [1191](#)
 PRIMPRE field
 in EVCSPEC resource table [553](#)
 PRIMPREDO field
 in EVCSPEC resource table [553](#)
 PRIMPREDTYPE field
 in EVCSPEC resource table [553](#)
 PRINCLSMODE field
 in TERMDEF resource table [1173](#)
 PRINTADAPTER field
 in TYPTMDEF resource table [1239](#)
 PRINTADAPTST field
 in TERMNL resource table [1179](#)
 PRINTCLASS field
 in BATCHREP resource table [53](#)
 PRINTCONTROL field
 in EXTRATDQ resource table [581](#)
 in TDQDEF resource table [1163](#)
 PRINTEDMSG field
 in TERMDEF resource table [1173](#)
 PRINTER field
 in TERMDEF resource table [1173](#)
 in TERMNL resource table [1179](#)
 PRINTERCOMP field
 in PROFDEF resource table [987](#)
 PRINTERCOPY field
 in TERMDEF resource table [1173](#)
 PRINTERNUM field
 in TDQDEF resource table [1163](#)
 PRINTIMMED field
 in TERMDEF resource table [1173](#)
 PRINTNODE field
 in BATCHREP resource table [53](#)

PRIORITY field
 in ACTION resource table [17](#)
 in DB2CDEF resource table [295](#)
 in DB2CONN resource table [301](#)
 in DB2EDEF resource table [307](#)
 in DB2ENTRY resource table [311](#)
 in EPADAPT resource table [435](#)
 in EVENT resource table [563](#)
 in EVENTDTL resource table [561](#)
 in HTASK resource table [655](#)
 in LOCTRAN resource table [763](#)
 in MLOCTRAN resource table [837](#)
 in REMTRAN resource table [1029](#)
 in TASK resource table [1123](#)
 in TRANDEF resource table [1191](#)
 PRIVACY field
 in TCPDEF resource table [1145](#)
 in TCPIPS resource table [1157](#)
 PRNINGRP resource table [979](#)
 PRNTCLSMODE field
 in TERMDEF resource table [1173](#)
 PROCDEF resource table [981](#)
 PROCESS field
 in BATCHREP resource table [53](#)
 PROCESSTYPE field
 in WLMWDEF resource table [1299](#)
 in WLMDEF resource table [1305](#)
 PROCGROUP field
 in PRCINGRP resource table [977](#)
 PROCNAME field
 in PRCINGRP resource table [977](#)
 PROCTYP resource table [985](#)
 PRODEFRG field
 in RESDESC resource table [1035](#)
 PRODEFRS field
 in RESDESC resource table [1035](#)
 PRODEFTS field
 in RESDESC resource table [1035](#)
 PROFDEF resource table [987](#)
 PROFGROUP field
 in PROINGRP resource table [1007](#)
 PROFILE field
 in CLCACHE resource table [123](#)
 in JVM resource table [713](#)
 in LOCTRAN resource table [763](#)
 in PARTDEF resource table [945](#)
 in PARTNER resource table [949](#)
 in PROFILE resource table [993](#)
 in REMTRAN resource table [1029](#)
 in TASK resource table [1123](#)
 in TRANDEF resource table [1191](#)
 PROFILE resource table [993](#)
 PROFILEDIR field
 in JVMPOOL resource table [715](#)
 in JVMSERV resource table [719](#)
 PROFNAME field
 in PROINGRP resource table [1007](#)
 PROFVER field
 in PROINGRP resource table [1007](#)
 PROGAUTOATTM field
 in CICSRRGN resource table [89](#)
 in MCICSRRGN resource table [803](#)
 PROGAUTOCTLG field
 in CICSRRGN resource table [89](#)
 PROGAUTOEXIT field
 in CICSRRGN resource table [89](#)
 PROGAUTOFAIL field
 in CICSRRGN resource table [89](#)
 in MCICSRRGN resource table [803](#)
 PROGAUTOINST field
 in CICSRRGN resource table [89](#)
 PROGAUTOXREJ field
 in CICSRRGN resource table [89](#)
 in MCICSRRGN resource table [803](#)
 PROGDEF resource table [995](#)
 PROGGROUP field
 in PGMINGRP resource table [953](#)
 PROGRAMNAME field
 in PGMINGRP resource table [953](#)
 PROGRAM field
 in DOCDEF resource table [331](#)
 in DOCTEMP resource table [337](#)
 in EPADAPT resource table [435](#)
 in EXITGLUE resource table [575](#)
 in EXITTRUE resource table [577](#)
 in EXTGLORD resource table [579](#)
 in LOCTRAN resource table [763](#)
 in MLOCTRAN resource table [837](#)
 in MPROGRAM resource table [875](#)
 in PROGRAM resource table [1001](#)
 in TASKASSC resource table [1113](#)
 in TRANDEF resource table [1191](#)
 in URIMAP resource table [1257](#)
 in URIMPDEF resource table [1261](#)
 in WEBSERV resource table [1273](#)
 PROGRAM resource table [1001](#)
 PROGSAMP field
 in CSYSDEF resource table [281](#)
 in MAS resource table [787](#)
 in MONSPEC resource table [873](#)
 PROGSYMBOLS field
 in TYPTMDEF resource table [1239](#)
 PROGSYMBOLST field
 in TERMNL resource table [1179](#)
 PROGTYPE field
 in MPROGRAM resource table [875](#)
 in PROGRAM resource table [1001](#)
 PROGVER field
 in PGMINGRP resource table [953](#)
 PROINGRP resource table [1007](#)
 PROPERTYSET field
 in FEPIPOOL resource table [597](#)
 in FEPIPROP resource table [601](#)
 in FEPOODEF resource table [605](#)
 PROTECT field
 in PROFDEF resource table [987](#)
 PROTECTNUM field
 in DB2EDEF resource table [307](#)
 in DB2ENTRY resource table [311](#)
 PROTOCOL field
 in CMTCMDEF resource table [147](#)
 in CMTCMLNK resource table [151](#)
 in CMTPMLNK resource table [153](#)
 in CONNDEF resource table [157](#)
 in CONNECT resource table [164](#)
 in MCONNECT resource table [811](#)
 in SESSDEF resource table [1085](#)
 in TCPDEF resource table [1145](#)

PROTOCOL field (*continued*)
 in TCPIPS resource table [1157](#)
 in UOWLINK resource table [1251](#)
 PRPNAME field
 in DBCTLSS resource table [329](#)
 PRQCUR field
 in DB2CONN resource table [301](#)
 PRQHWM field
 in DB2CONN resource table [301](#)
 PRSSERRORCNT field
 in CICSGRN resource table [89](#)
 in MCICSRGN resource table [803](#)
 PRSSINQCNT field
 in CICSGRN resource table [89](#)
 in MCICSRGN resource table [803](#)
 PRSSNIBCNT field
 in CICSGRN resource table [89](#)
 in MCICSRGN resource table [803](#)
 PRSSOPNCNT field
 in CICSGRN resource table [89](#)
 in MCICSRGN resource table [803](#)
 PRSSUNBND CNT field
 in CICSGRN resource table [89](#)
 in MCICSRGN resource table [803](#)
 PRTCOPYST field
 in TERMNL resource table [1179](#)
 PRTDEFRG field
 in RESDESC resource table [1035](#)
 PRTDEFRS field
 in RESDESC resource table [1035](#)
 PRTDEFTS field
 in RESDESC resource table [1035](#)
 PRTNDEF resource table [1009](#)
 PRTNGROUP field
 in PRNINGRP resource table [979](#)
 PRTNNAME field
 in PRNINGRP resource table [979](#)
 PRTNVER field
 in PRNINGRP resource table [979](#)
 PRTYAGING field
 in CICSGRN resource table [89](#)
 PSBSCHED field
 in DBCTLSS resource table [329](#)
 PSDINTERVAL field
 in CICSGRN resource table [89](#)
 PSDSANIU field
 in LOADER resource table [753](#)
 PSENDESS field
 in IPCONN resource table [687](#)
 PSEUDOMODE field
 in WLMATRN resource table [1293](#)
 PSIGNONS field
 in DB2CONN resource table [301](#)
 in DB2ENTRY resource table [311](#)
 PSMFWERRC field
 in MONITOR resource table [867](#)
 PSMFWERRS field
 in MONITOR resource table [867](#)
 PSPHASE field
 in DB2CONN resource table [301](#)
 PSRECOVERY field
 in CONNDEF resource table [157](#)
 PSTASUPR field
 in MONITOR resource table [867](#)

PSTG24HWM field
 in HTASK resource table [655](#)
 in MLOCTRN resource table [837](#)
 in TASK resource table [1123](#)
 PSTG31HWM field
 in HTASK resource table [655](#)
 in MLOCTRN resource table [837](#)
 in TASK resource table [1123](#)
 PSTGHWM field
 in HTASK resource table [655](#)
 in MLOCTRN resource table [837](#)
 in TASK resource table [1123](#)
 PSTGNIU field
 in LOADACT resource table [751](#)
 PSTGNIUC field
 in LOADER resource table [753](#)
 PSTGNIUEC field
 in LOADER resource table [753](#)
 PSTGNIUER field
 in LOADER resource table [753](#)
 PSTGNIUES field
 in LOADER resource table [753](#)
 PSTGNIUR field
 in LOADER resource table [753](#)
 PSTGNIUS field
 in LOADER resource table [753](#)
 PSTYPE field
 in CICSGRN resource table [89](#)
 PTCOUNT field
 in HTASK resource table [655](#)
 in TASKASSC resource table [1113](#)
 PTCREATE field
 in DB2CONN resource table [301](#)
 PTCURR field
 in DB2CONN resource table [301](#)
 in DB2ENTRY resource table [311](#)
 PTHREADS field
 in DB2ENTRY resource table [311](#)
 PTHWM field
 in DB2CONN resource table [301](#)
 in DB2ENTRY resource table [311](#)
 PTLIM field
 in DB2ENTRY resource table [311](#)
 PTLIMIT field
 in DB2CONN resource table [301](#)
 PTREUSE field
 in DB2CONN resource table [301](#)
 PTSTART field
 in HTASK resource table [655](#)
 PTSTARTTIME field
 in TASKASSC resource table [1113](#)
 PTSTARTTM field
 in TASKASSC resource table [1113](#)
 PTTASKID field
 in TASKASSC resource table [1113](#)
 PTTERM field
 in DB2CONN resource table [301](#)
 PTTRAN field
 in HTASK resource table [655](#)
 PTTRANNO field
 in HTASK resource table [655](#)
 PTTRANSID field
 in TASKASSC resource table [1113](#)
 PTWAIT field

PTWAIT field (*continued*)
 in DB2CONN resource table [301](#)
 PURGEABILITY field
 in LOCTRAN resource table [763](#)
 in REMTRAN resource table [1029](#)
 in TASK resource table [1123](#)
 PURGEABLEST field
 in EXITTRUE resource table [577](#)
 PURGECYCLEM field
 in DB2CDEF resource table [295](#)
 in DB2CONN resource table [301](#)
 PURGECYCLES field
 in DB2CDEF resource table [295](#)
 in DB2CONN resource table [301](#)
 PURGEIMMED field
 in MTRANCLS resource table [911](#)
 in TRANCLAS resource table [1187](#)
 PURGETHRESH field
 in MTRANCLS resource table [911](#)
 in TRANCLAS resource table [1187](#)
 in TRNCLDEF resource table [1205](#)
 PURGETYPE field
 in IPCONN resource table [687](#)
 in TASK resource table [1123](#)
 in WORKREQ resource table [1319](#)
 PURGEWHILEQD field
 in MTRANCLS resource table [911](#)
 in TRANCLAS resource table [1187](#)
 PURGTHRTIMES field
 in MTRANCLS resource table [911](#)
 in TRANCLAS resource table [1187](#)
 PUTAUXITEML field
 in TASKTSQ resource table [1141](#)
 PUTEVENTS field
 in EPADAPT resource table [435](#)
 PUTMAINITEML field
 in TASKTSQ resource table [1141](#)
 PUTQAUX field
 in MTSQGBL resource table [913](#)
 in TSQGBL resource table [1227](#)
 PUTQMAIN field
 in MTSQGBL resource table [913](#)
 in TSQGBL resource table [1227](#)
 PUTSHRITEML field
 in TASKTSQ resource table [1141](#)
 PXCURR field
 in DB2CONN resource table [301](#)
 PXHWM field
 in DB2CONN resource table [301](#)
 PXTOTAL field
 in DB2CONN resource table [301](#)

Q

QLIMALLOCREJ field
 in IPCONN resource table [687](#)
 QNAME field
 in MQMON resource table [893](#)
 in MQMONDEF resource table [897](#)
 QRCPUC field
 in MLOCTRAN resource table [837](#)
 QRCPUT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)

QRCPUT field (*continued*)
 in TASK resource table [1123](#)
 QRDISPC field
 in MLOCTRAN resource table [837](#)
 QRDISPT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 QRMODDLC field
 in MLOCTRAN resource table [837](#)
 QRMODDLY field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 QTMAXSOCKS field
 in TCPIPGBL resource table [1153](#)
 QTYPE field
 in CRESTDQ resource table [251](#)
 QUALCOL field
 in EVALDEF resource table [549](#)
 in EVENTDTL resource table [561](#)
 QUALDATA field
 in EVALDEF resource table [549](#)
 in EVENTDTL resource table [561](#)
 QUALDATAL field
 in EVALDEF resource table [549](#)
 QUALDLEN field
 in EVENTDTL resource table [561](#)
 QUALIFIER field
 in EXITTRUE resource table [577](#)
 in UOWENQ resource table [1249](#)
 QUALLN field
 in UOWENQ resource table [1249](#)
 QUALOPER field
 in EVALDEF resource table [549](#)
 in EVENTDTL resource table [561](#)
 QUECRECNT field
 in MTSQGBL resource table [913](#)
 in TSQGBL resource table [1227](#)
 QUEDALLOCATE field
 in CONNECT resource table [164](#)
 in MCONNECT resource table [811](#)
 QUELENGTH field
 in TSQNAME resource table [1231](#)
 in TSQSHR resource table [1233](#)
 in TSQUEUE resource table [1235](#)
 QUERY field
 in TYPTMDEF resource table [1239](#)
 QUERYREL field
 in OBJECT resource table [931](#)
 QUERYST field
 in TERMNL resource table [1179](#)
 QUETRACE field
 in CMAS resource table [131](#)
 in MAS resource table [787](#)
 QUEUE field
 in REQID resource table [1033](#)
 QUEUED field
 in MTRANCLS resource table [911](#)
 in TRANCLAS resource table [1187](#)
 QUEUEDPEAK field
 in MTRANCLS resource table [911](#)
 in TRANCLAS resource table [1187](#)
 QUEUELIMIT field

QUEUELIMIT field (*continued*)
 in CONNDEF resource table [157](#)
 in IPCONDEF resource table [681](#)
 in IPCONN resource table [687](#)
 QUEUE TIME field
 in MTRANCLS resource table [911](#)
 in TRANCLAS resource table [1187](#)
 QUEXTENDS field
 in MTSQGBL resource table [913](#)
 in TSQGBL resource table [1227](#)
 QUIESCESTATE field
 in DSNAM resource table [345](#)

R

RANKING field
 in LIBDEF resource table [727](#)
 in LIBRARY resource table [737](#)
 RAQ field
 in PROFDEF resource table [987](#)
 RASGNDEF resource table [1013](#)
 RASINDSC resource table [1017](#)
 RASPROC resource table [1019](#)
 RATE field
 in AACTV resource table [21](#)
 in EVENT resource table [563](#)
 in EVENTDTL resource table [561](#)
 in RTAACTV resource table [1061](#)
 in RTADEF resource table [1063](#)
 RATECREL field
 in CICS PGP resource table [83](#)
 RATEEXTSA field
 in CICS PGP resource table [83](#)
 RATEEXTSR field
 in CICS PGP resource table [83](#)
 RATEFM field
 in CICS PGP resource table [83](#)
 RATEGM field
 in CICS PGP resource table [83](#)
 RATESTORVIOL field
 in CICS PGP resource table [83](#)
 RAVGTIMESOS field
 in CICSSTOR resource table [101](#)
 RBATYPE field
 in LOCFIL resource table [757](#)
 RCTNAME field
 in DB2SS resource table [317](#)
 RCVCLK field
 in CMTMLNK resource table [151](#)
 in CMTPLNK resource table [153](#)
 RDEBRBLD field
 in CICS RGN resource table [89](#)
 in MCICSRGN resource table [803](#)
 RDEFTYPE field
 in RASGNDEF resource table [1013](#)
 in RASPROC resource table [1019](#)
 in RDSCPROC resource table [1021](#)
 in SYSRES resource table [1109](#)
 RDSASIZE field
 in LOADER resource table [753](#)
 RDSCPROC resource table [1021](#)
 READ field
 in CMDT resource table [141](#)
 in FILEDEF resource table [617](#)

READ field (*continued*)
 in LOCFIL resource table [757](#)
 READCOMMIT field
 in DB2THRD resource table [323](#)
 in MDB2THRD resource table [815](#)
 READCOUNT field
 in DOCTEMP resource table [337](#)
 READINTEG field
 in FILEDEF resource table [617](#)
 in LOCFIL resource table [757](#)
 READRETRY field
 in CMDT resource table [141](#)
 in MCMMDT resource table [807](#)
 READRS field
 in CICS PLEX resource table [87](#)
 in CMAS PLEX resource table [129](#)
 in CPLEXDEF resource table [169](#)
 in CPLXCMAS resource table [173](#)
 in CSYSDEF resource table [281](#)
 in EPLEXCHG resource table [441](#)
 in MAS resource table [787](#)
 in WLMATARG resource table [1285](#)
 in WLMAWAOR resource table [1295](#)
 READS field
 in CMDT resource table [141](#)
 in LSRPBUF resource table [777](#)
 in MCMMDT resource table [807](#)
 in MLSRPBUF resource table [845](#)
 in MTDQGBL resource table [907](#)
 in TDQGBL resource table [1169](#)
 REALM field
 in TASKASSC resource table [1113](#)
 in TCPDEF resource table [1145](#)
 in TCPIPS resource table [1157](#)
 REALSTG field
 in CICS RGN resource table [89](#)
 in CMAS resource table [131](#)
 in MCICSRGN resource table [803](#)
 REASON field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 in MASHIST resource table [793](#)
 in UOWDSNF resource table [1247](#)
 RECEIVECOUNT field
 in CONNECT resource table [164](#)
 in IPCONDEF resource table [681](#)
 in IPCONN resource table [687](#)
 in MCONNECT resource table [811](#)
 in SESSDEF resource table [1085](#)
 RECEIVEPFX field
 in SESSDEF resource table [1085](#)
 RECEIVES field
 in TCPIPS resource table [1157](#)
 RECEIVESIZE field
 in SESSDEF resource table [1085](#)
 in TYPTMDEF resource table [1239](#)
 RECNOTFND field
 in CMDT resource table [141](#)
 in MCMMDT resource table [807](#)
 RECORDFORMAT field
 in CMDT resource table [141](#)
 in CONNDEF resource table [157](#)
 in EXTRATDQ resource table [581](#)
 in FILEDEF resource table [617](#)

RECORDFORMAT field (*continued*)
 in LOCFILE resource table [757](#)
 in TDQDEF resource table [1163](#)
 RECORDING field
 in CICS RGN resource table [89](#)
 in MONITOR resource table [867](#)
 RECORDLENGTH field
 in EXTRATDQ resource table [581](#)
 RECORDNUM field
 in OBJSTAT resource table [935](#)
 RECORDSIZE field
 in CMDT resource table [141](#)
 in FILEDEF resource table [617](#)
 in LOCFILE resource table [757](#)
 in MCMMDT resource table [807](#)
 in MLOCFILE resource table [833](#)
 in TDQDEF resource table [1163](#)
 RECOVER TKN field
 in TASK resource table [1123](#)
 RECOVERY field
 in FILEDEF resource table [617](#)
 in TSMDEF resource table [1217](#)
 RECOVERY resource table [1023](#)
 RECOVNOTIFY field
 in SESSDEF resource table [1085](#)
 in TYPTMDEF resource table [1239](#)
 RECOVOPTION field
 in SESSDEF resource table [1085](#)
 in TYPTMDEF resource table [1239](#)
 RECOVSTATUS field
 in CMDT resource table [141](#)
 in CONNECT resource table [164](#)
 in DSNNAME resource table [345](#)
 in INTRATDQ resource table [675](#)
 in IPCONN resource table [687](#)
 in LOCFILE resource table [757](#)
 in TDQDEF resource table [1163](#)
 in TSMODEL resource table [1223](#)
 in TSQNAME resource table [1231](#)
 in TSQSHR resource table [1233](#)
 in TSQUEUE resource table [1235](#)
 RECTYPE field
 in HTASK resource table [655](#)
 in OBJSTAT resource table [935](#)
 in TASK resource table [1123](#)
 RECUNITID field
 in TASK resource table [1123](#)
 RECVBUF field
 in CMTCMDEF resource table [147](#)
 RECVPFX field
 in CMTCMDEF resource table [147](#)
 RECVTIMEOUT field
 in FEPICONN resource table [593](#)
 in MFEPICON resource table [823](#)
 RECWRCNT field
 in DSKJRNL resource table [343](#)
 in MJOURNL resource table [829](#)
 in SMFJRNL resource table [1089](#)
 in TAPEJRNL resource table [1111](#)
 REDIRECTTYPE field
 in URIMAP resource table [1257](#)
 in URIMPDEF resource table [1261](#)
 REENTPROTECT field
 in CICS RGN resource table [89](#)
 REFASGN field
 in RASGNDEF resource table [1013](#)
 REFDEF field
 in RASPROC resource table [1019](#)
 in RDSCPROC resource table [1021](#)
 in SYSRES resource table [1109](#)
 REFTYPE field
 in RASPROC resource table [1019](#)
 in RDSCPROC resource table [1021](#)
 in SYSRES resource table [1109](#)
 REFVER field
 in RASPROC resource table [1019](#)
 in RDSCPROC resource table [1021](#)
 in SYSRES resource table [1109](#)
 REGIONTYPE field
 in CSYSGRP resource table [287](#)
 in MGMTPART resource table [825](#)
 REGIONUSERID field
 in CICS RGN resource table [89](#)
 RELATION field
 in UOWENQ resource table [1249](#)
 RELEASE field
 in CICS RGN resource table [89](#)
 in DB2SS resource table [317](#)
 in MCICS RGN resource table [803](#)
 in WLMAROUT resource table [1281](#)
 RELOAD field
 in PROGDEF resource table [995](#)
 RELRASG field
 in BINCONSC resource table [59](#)
 RELRDSC field
 in BINCONSC resource table [59](#)
 RELREQ field
 in SESSDEF resource table [1085](#)
 in TYPTMDEF resource table [1239](#)
 RELREQST field
 in TERMNL resource table [1179](#)
 RELSCOPE field
 in BINCONSC resource table [59](#)
 RELTBLVER field
 in OBJECT resource table [931](#)
 RELTYPE field
 in LOCFILE resource table [757](#)
 REMDELCNT field
 in MREMFIL resource table [901](#)
 in REMFIL resource table [1025](#)
 REMFIL resource table [1025](#)
 REMOTECNT field
 in LOCTRAN resource table [763](#)
 in MLOCTRAN resource table [837](#)
 in MREMTRAN resource table [905](#)
 in REMTRAN resource table [1029](#)
 REMOTELENGTH field
 in TDQDEF resource table [1163](#)
 REMOTENAME field
 in CONNDEF resource table [157](#)
 in CONNECT resource table [164](#)
 in CRESFIL resource table [215](#)
 in CRESPRGM resource table [237](#)
 in CRESTDQ resource table [251](#)
 in CRESTRAN resource table [255](#)
 in ERMCFIL resource table [479](#)
 in ERMCPRGM resource table [503](#)
 in ERMCTDQ resource table [517](#)

REMOTENAME field (*continued*)
 in ERMCTRAN resource table [521](#)
 in FILEDEF resource table [617](#)
 in LOCTRAN resource table [763](#)
 in MREMFIL resource table [901](#)
 in MREMTDQ resource table [903](#)
 in MREMTRAN resource table [905](#)
 in MTERMNL resource table [909](#)
 in PROGDEF resource table [995](#)
 in PROGRAM resource table [1001](#)
 in REMFILE resource table [1025](#)
 in REMTDQ resource table [1027](#)
 in REMTRAN resource table [1029](#)
 in TASK resource table [1123](#)
 in TDQDEF resource table [1163](#)
 in TERMDEF resource table [1173](#)
 in TERMNL resource table [1179](#)
 in TRANDEF resource table [1191](#)
 REMOTEPREFIX field
 in TSMDEF resource table [1217](#)
 in TSMODEL resource table [1223](#)
 REMOTESYSNET field
 in BRFACIL resource table [63](#)
 in CONNDEF resource table [157](#)
 in CONNECT resource table [164](#)
 in TERMDEF resource table [1173](#)
 in TERMNL resource table [1179](#)
 REMOTESYSTEM field
 in BRFACIL resource table [63](#)
 in CONNDEF resource table [157](#)
 in CONNECT resource table [164](#)
 in CRESFILE resource table [215](#)
 in CRESPRGM resource table [237](#)
 in CRESTDQ resource table [251](#)
 in CRESTRAN resource table [255](#)
 in ERMCFIL resource table [479](#)
 in ERMCPRGM resource table [503](#)
 in ERMCTDQ resource table [517](#)
 in ERMCTRAN resource table [521](#)
 in FILEDEF resource table [617](#)
 in LOCTRAN resource table [763](#)
 in MREMFIL resource table [901](#)
 in MREMTDQ resource table [903](#)
 in MREMTRAN resource table [905](#)
 in MTERMNL resource table [909](#)
 in PROGDEF resource table [995](#)
 in PROGRAM resource table [1001](#)
 in REMFILE resource table [1025](#)
 in REMTDQ resource table [1027](#)
 in REMTRAN resource table [1029](#)
 in TDQDEF resource table [1163](#)
 in TERMDEF resource table [1173](#)
 in TERMNL resource table [1179](#)
 in TRANDEF resource table [1191](#)
 in TSMDEF resource table [1217](#)
 in TSMODEL resource table [1223](#)
 REMOVECNT field
 in MPROGRAM resource table [875](#)
 in PROGRAM resource table [1001](#)
 REMSTARTCNT field
 in LOCTRAN resource table [763](#)
 in MLOCTRAN resource table [837](#)
 in MREMTRAN resource table [905](#)
 in REMTRAN resource table [1029](#)

REMSYSAPPLID field
 in CONNDEF resource table [157](#)
 REMTDQ resource table [1027](#)
 REMTHOSTNAME field
 in CONNDEF resource table [157](#)
 REMTHOSTPORT field
 in CONNDEF resource table [157](#)
 REMTRAN resource table [1029](#)
 REMTRMSTRT field
 in IPCONN resource table [687](#)
 REQID resource table [1033](#)
 REQSWAITMVS field
 in CICSDSA resource table [79](#)
 in MCICSDSA resource table [799](#)
 REQTYPE field
 in REQID resource table [1033](#)
 REQUESTID field
 in WORKREQ resource table [1319](#)
 REQUESTS field
 in TCPIPS resource table [1157](#)
 REQUIRED field
 in ATTR resource table [49](#)
 in METAPARM resource table [821](#)
 RESACT field
 in ERESSTAT resource table [443](#)
 RESASSGN field
 in RASGNDEF resource table [1013](#)
 in RASINDSC resource table [1017](#)
 in RASPROC resource table [1019](#)
 in RDSCPROC resource table [1021](#)
 in SYSRES resource table [1109](#)
 RESCHANGES field
 in EMSTATUS resource table [415](#)
 RESCLASS field
 in ERESSTAT resource table [443](#)
 in MONDEF resource table [857](#)
 in POLMON resource table [975](#)
 RESCOUNT field
 in MPROGRAM resource table [875](#)
 in PROGRAM resource table [1001](#)
 RESDEF field
 in RASPROC resource table [1019](#)
 in RDSCPROC resource table [1021](#)
 in SYSRES resource table [1109](#)
 RESDESC field
 in RASINDSC resource table [1017](#)
 in RDSCPROC resource table [1021](#)
 in RESDESC resource table [1035](#)
 in RESINDSC resource table [1047](#)
 in SYSRES resource table [1109](#)
 RESDESC resource table [1035](#)
 RESERV02 field
 in MCONNECT resource table [811](#)
 RESERVD2 field
 in APPLDEF resource table [27](#)
 in WLMATAFF resource table [1283](#)
 RESERVE field
 in ELSIGNAL resource table [385](#)
 RESERVE1 field
 in OBJSTAT resource table [935](#)
 in RULE resource table [1079](#)
 in TRANGRP resource table [1201](#)
 in WLMATGRP resource table [1289](#)
 in WLMSPEC resource table [1313](#)

RESERVE2 field
 in ELSIGNAL resource table [385](#)
 in WLMAROUT resource table [1281](#)
 in WLMAWORK resource table [1301](#)
 in WLMAWTOR resource table [1303](#)
 in WLMSPEC resource table [1313](#)
RESERVE3 field
 in WLMAWORK resource table [1301](#)
RESERVED field
 in ACTION resource table [17](#)
 in APPLCTN resource table [23](#)
 in APPLDEF resource table [27](#)
 in APSPEC resource table [31](#)
 in ASYNCREQ resource table [33](#)
 in ATTR resource table [49](#)
 in ATTRAVA resource table [47](#)
 in BATCHREP resource table [53](#)
 in BINCONRS resource table [57](#)
 in BINCONSC resource table [59](#)
 in BINSTERR resource table [61](#)
 in CICSPLX resource table [87](#)
 in CICSGRN resource table [89](#)
 in CMAS resource table [131](#)
 in CMASLIST resource table [125](#)
 in CMASPLEX resource table [129](#)
 in CMDMPAPS resource table [137](#)
 in CMDMSAPS resource table [139](#)
 in CMTCMDEF resource table [147](#)
 in CMTCMLNK resource table [151](#)
 in CMTPMLNK resource table [153](#)
 in CONNECT resource table [164](#)
 in CPLEXDEF resource table [169](#)
 in CPLXCMAS resource table [173](#)
 in CRESAIMD resource table [177](#)
 in CRESATOM resource table [179](#)
 in CRESBUND resource table [181](#)
 in CRESCONN resource table [183](#)
 in CRESDB2C resource table [185](#)
 in CRESDB2E resource table [187](#)
 in CRESDB2P resource table [189](#)
 in CRESDB2T resource table [191](#)
 in CRESDOCT resource table [193](#)
 in CRESDSNM resource table [195](#)
 in CRESENQM resource table [197](#)
 in CRESEPAD resource table [199](#)
 in CRESEPAS resource table [201](#)
 in CRESEVBD resource table [203](#)
 in CRESEVCS resource table [205](#)
 in CRESFECO resource table [207](#)
 in CRESFEND resource table [209](#)
 in CRESFEPO resource table [211](#)
 in CRESFETR resource table [213](#)
 in CRESFILE resource table [215](#)
 in CRESGLUE resource table [217](#)
 in CRESIPCN resource table [219](#)
 in CRESJRNL resource table [221](#)
 in CRESJRNM resource table [223](#)
 in CRESJVMS resource table [225](#)
 in CRESLIBR resource table [227](#)
 in CRESMODE resource table [229](#)
 in CRESMQMN resource table [231](#)
 in CRESPART resource table [233](#)
 in CRESPIPE resource table [235](#)
 in CRESPRGM resource table [237](#)

RESERVED field (*continued*)
 in CRESPROF resource table [239](#)
 in CRESPTY resource table [241](#)
 in CRESRQMD resource table [243](#)
 in CRESSDMP resource table [245](#)
 in CRESTCPS resource table [247](#)
 in CRESTDMP resource table [249](#)
 in CRESTDQ resource table [251](#)
 in CRESTERM resource table [253](#)
 in CRESTRAN resource table [255](#)
 in CRESTRUE resource table [257](#)
 in CRESTSMD resource table [259](#)
 in CRESURIM resource table [261](#)
 in CRESWEBS resource table [263](#)
 in CRESXMLT resource table [265](#)
 in CSDGROUP resource table [267](#)
 in CSDINGRP resource table [269](#)
 in CSDINLST resource table [271](#)
 in CSDLIST resource table [273](#)
 in CSGLCGCG resource table [275](#)
 in CSGLCGCS resource table [277](#)
 in CSYSDEF resource table [281](#)
 in CSYSGRP resource table [287](#)
 in DTRINGRP resource table [355](#)
 in EACTNTFN resource table [357](#)
 in ECSYSCHG resource table [359](#)
 in EMASJOIN resource table [387](#)
 in EMASICK resource table [389](#)
 in EMASSTOP resource table [393](#)
 in EMASSTRT resource table [395](#)
 in EMASWELL resource table [397](#)
 in EMCICS resource table [401](#)
 in EMCONN resource table [403](#)
 in EMDBX resource table [405](#)
 in EMFILE resource table [407](#)
 in EMGLBL resource table [409](#)
 in EMJRNL resource table [411](#)
 in EMPROG resource table [413](#)
 in EMSTATUS resource table [415](#)
 in EMTDQS resource table [419](#)
 in EMTERM resource table [421](#)
 in EMTRAN resource table [423](#)
 in EPLEXCHG resource table [441](#)
 in ERESSTAT resource table [443](#)
 in ERMCAIMD resource table [445](#)
 in ERMCAIOM resource table [447](#)
 in ERMCBUND resource table [449](#)
 in ERMCCONN resource table [451](#)
 in ERMCDDB2C resource table [453](#)
 in ERMCDDB2E resource table [455](#)
 in ERMCDDB2P resource table [457](#)
 in ERMCDDB2T resource table [459](#)
 in ERMCDOCT resource table [461](#)
 in ERMCDSNM resource table [463](#)
 in ERMENQM resource table [465](#)
 in ERMCEVBD resource table [467](#)
 in ERMCEVCS resource table [469](#)
 in ERMCFECO resource table [471](#)
 in ERMCFEND resource table [473](#)
 in ERMCFEPO resource table [475](#)
 in ERMCFETR resource table [477](#)
 in ERMCFILE resource table [479](#)
 in ERMCGLUE resource table [481](#)
 in ERMCIIPCN resource table [483](#)

RESERVED field (*continued*)

in ERM CJRN L resource table [485](#)
 in ERM CJRN M resource table [487](#)
 in ERM CJVMS resource table [489](#)
 in ERM CLIBR resource table [491](#)
 in ERM CMODE resource table [493](#)
 in ERM COSGB resource table [495](#)
 in ERM COSGS resource table [497](#)
 in ERM CPART resource table [499](#)
 in ERM CPIPE resource table [501](#)
 in ERM CPRGM resource table [503](#)
 in ERM CPROF resource table [505](#)
 in ERM CPRTY resource table [507](#)
 in ERM CRQMD resource table [509](#)
 in ERM CS DMP resource table [511](#)
 in ERM CT CPS resource table [513](#)
 in ERM CT DMP resource table [515](#)
 in ERM CT DQ resource table [517](#)
 in ERM CT ER M resource table [519](#)
 in ERM CT RAN resource table [521](#)
 in ERM CT RUE resource table [523](#)
 in ERM CT SMD resource table [525](#)
 in ERM CURIM resource table [527](#)
 in ERM CW EBS resource table [529](#)
 in ERM CXMLT resource table [531](#)
 in ERM MCON N resource table [533](#)
 in ERM MFILE resource table [535](#)
 in ERM MJRN L resource table [537](#)
 in ERM MPRGM resource table [539](#)
 in ERM MTDQ resource table [541](#)
 in ERM MTER M resource table [543](#)
 in ERM MTRAN resource table [545](#)
 in ES GRPCHG resource table [547](#)
 in EVALDEF resource table [549](#)
 in EVENT resource table [563](#)
 in EVENTDTL resource table [561](#)
 in FEEDBACK resource table [585](#)
 in JRN LNAME resource table [707](#)
 in LN KSMSCG resource table [739](#)
 in LN KSMSCS resource table [741](#)
 in LN KSRSCG resource table [743](#)
 in LN KSRSCS resource table [745](#)
 in LN KSWSCG resource table [747](#)
 in LN KSWSCS resource table [749](#)
 in LOCFILE resource table [757](#)
 in LSRPOOL resource table [779](#)
 in MAS resource table [787](#)
 in MASQRYER resource table [795](#)
 in MASSTAT resource table [797](#)
 in MCICSRGN resource table [803](#)
 in MCONNECT resource table [811](#)
 in METADESC resource table [817](#)
 in METANAME resource table [819](#)
 in METAPARM resource table [821](#)
 in MGMTPART resource table [825](#)
 in MLOCFILE resource table [833](#)
 in MLOCTRAN resource table [837](#)
 in MONDEF resource table [857](#)
 in MONGROUP resource table [861](#)
 in MONINGRP resource table [863](#)

RESERVED field (*continued*)

in MONINSPC resource table [865](#)
 in MONSPEC resource table [873](#)
 in OBJECT resource table [929](#)
 in OBJECT resource table [931](#)
 in PARMAVA resource table [943](#)
 in PERIODEF resource table [951](#)
 in PLATDEF resource table [965](#)
 in PLATFORM resource table [970](#)
 in RASGNDEF resource table [1013](#)
 in RASINDSC resource table [1017](#)
 in RASPROC resource table [1019](#)
 in RDSCPROC resource table [1021](#)
 in RESDESC resource table [1035](#)
 in RESINDSC resource table [1047](#)
 in RTADEF resource table [1063](#)
 in RTAGROUP resource table [1067](#)
 in RTAINAPS resource table [1069](#)
 in RTAINGRP resource table [1071](#)
 in RTAINSPC resource table [1073](#)
 in RTASPEC resource table [1075](#)
 in STAINGRP resource table [1091](#)
 in STATDEF resource table [1093](#)
 in STREAMNM resource table [1097](#)
 in SYSLINK resource table [1103](#)
 in SYSRES resource table [1109](#)
 in TASK resource table [1123](#)
 in TERMNL resource table [1179](#)
 in TRANGRP resource table [1201](#)
 in TSQGBL resource table [1227](#)
 in TSQNAME resource table [1231](#)
 in TSQSHR resource table [1233](#)
 in TSQUEUE resource table [1235](#)
 in WLMAROUT resource table [1281](#)
 in WLMATAFF resource table [1283](#)
 in WLMATARG resource table [1285](#)
 in WLMATGRP resource table [1289](#)
 in WLMATRAN resource table [1293](#)
 in WLMAWAOR resource table [1295](#)
 in WLMAWDEF resource table [1299](#)
 in WLMAWORK resource table [1301](#)
 in WLMAWTOR resource table [1303](#)
 in WLMDEF resource table [1305](#)
 in WLMGROUP resource table [1307](#)
 in WLMINGRP resource table [1309](#)
 in WLMINSPC resource table [1311](#)
 in WLMSPEC resource table [1313](#)

RESERVED1 field

RESERVED1 field (*continued*)
 in CICSDSA resource table [79](#)
 in CICSGRN resource table [89](#)
 in CMDT resource table [141](#)
 in HTASK resource table [655](#)
 in LOCTRAN resource table [763](#)
 in MASHIST resource table [793](#)
 in MCMDT resource table [807](#)
 in METANAME resource table [819](#)
 in PIPELINE resource table [959](#)
 in REMTRAN resource table [1029](#)

RESERVED10 field
 in HTASK resource table [655](#)

RESERVED11 field
 in HTASK resource table [655](#)

RESERVED2 field
 in ACTION resource table [17](#)
 in CICSGRN resource table [89](#)
 in CMTCMDEF resource table [147](#)
 in HTASK resource table [655](#)
 in MASHIST resource table [793](#)
 in MASQRYER resource table [795](#)
 in SYSLINK resource table [1103](#)
 in TASK resource table [1123](#)
 in TERMNL resource table [1179](#)
 in WLMDEF resource table [1305](#)

RESERVED3 field
 in ACTION resource table [17](#)
 in HTASK resource table [655](#)
 in MASHIST resource table [793](#)
 in WLMWAOR resource table [1295](#)

RESERVED4 field
 in ACTION resource table [17](#)
 in HTASK resource table [655](#)
 in MASHIST resource table [793](#)

RESERVED5 field
 in HTASK resource table [655](#)
 in MASHIST resource table [793](#)

RESERVED6 field
 in HTASK resource table [655](#)
 in MASHIST resource table [793](#)

RESERVED7 field
 in HTASK resource table [655](#)

RESERVED8 field
 in HTASK resource table [655](#)

RESERVED9 field
 in HTASK resource table [655](#)

RESGROUP field
 in RASGNDEF resource table [1013](#)
 in RASINDSC resource table [1017](#)
 in RASPROC resource table [1019](#)
 in RDSCPROC resource table [1021](#)
 in RESGROUP resource table [1043](#)
 in RESINDSC resource table [1047](#)
 in RESINGRP resource table [1049](#)
 in SYSRES resource table [1109](#)

RESGROUP resource table [1043](#)

RESIDENCY field
 in PROGRAM resource table [1001](#)

RESIDENT field
 in MAPDEF resource table [781](#)
 in PROGDEF resource table [995](#)
 in PRTNDEF resource table [1009](#)
 in TDQDEF resource table [1163](#)

RESINDSC resource table [1047](#)

RESINGRP resource table [1049](#)

RESKYN01 field
 in FSEGDEF resource table [633](#)

RESKYN02 field
 in FSEGDEF resource table [633](#)

RESKYN03 field
 in FSEGDEF resource table [633](#)

RESKYN04 field
 in FSEGDEF resource table [633](#)

RESKYN05 field
 in FSEGDEF resource table [633](#)

RESKYN06 field
 in FSEGDEF resource table [633](#)

RESKYN07 field
 in FSEGDEF resource table [633](#)

RESKYN08 field
 in FSEGDEF resource table [633](#)

RESKYN09 field
 in FSEGDEF resource table [633](#)

RESKYN10 field
 in FSEGDEF resource table [633](#)

RESKYN11 field
 in FSEGDEF resource table [633](#)

RESKYN12 field
 in FSEGDEF resource table [633](#)

RESKYN13 field
 in FSEGDEF resource table [633](#)

RESKYN14 field
 in FSEGDEF resource table [633](#)

RESKYN15 field
 in FSEGDEF resource table [633](#)

RESKYN16 field
 in FSEGDEF resource table [633](#)

RESKYN17 field
 in FSEGDEF resource table [633](#)

RESKYN18 field
 in FSEGDEF resource table [633](#)

RESKYN19 field
 in FSEGDEF resource table [633](#)

RESKYN20 field
 in FSEGDEF resource table [633](#)

RESKYN21 field
 in FSEGDEF resource table [633](#)

RESKYN22 field
 in FSEGDEF resource table [633](#)

RESKYN23 field
 in FSEGDEF resource table [633](#)

RESKYN24 field
 in FSEGDEF resource table [633](#)

RESLEN field
 in UOWENQ resource table [1249](#)

RESNAME field
 in BINSTERR resource table [61](#)
 in ERESSTAT resource table [443](#)
 in MONDEF resource table [857](#)
 in POLMON resource table [975](#)

RESOLVEACT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)

RESOURCE field
 in UOWENQ resource table [1249](#)

RESOURCENAME field
 in ATOMDEF resource table [39](#)

RESOURCENAME field (*continued*)
 in ATOMSERV resource table [45](#)
 RESOURCETYPE field
 in ATOMDEF resource table [39](#)
 in ATOMSERV resource table [45](#)
 RESPONSE field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 in MLOCTRAN resource table [837](#)
 RESPTIME field
 in HTASK resource table [655](#)
 in MREMTRAN resource table [905](#)
 in TASK resource table [1123](#)
 in TASKRMI resource table [1121](#)
 RESPWAIT field
 in PIPEDEF resource table [955](#)
 in PIPELINE resource table [959](#)
 RESRCECLASS field
 in MONITOR resource table [867](#)
 RESRV01 field
 in MONDEF resource table [857](#)
 in POLMON resource table [975](#)
 RESRV02 field
 in MONDEF resource table [857](#)
 RESRV03 field
 in MONDEF resource table [857](#)
 RESRV04 field
 in MONDEF resource table [857](#)
 RESRV05 field
 in MONDEF resource table [857](#)
 RESRVD001 field
 in MCICSRGN resource table [803](#)
 RESRVD02 field
 in MCICSRGN resource table [803](#)
 RESRVD1 field
 in CRESJVMS resource table [225](#)
 RESSEC field
 in LOCTRAN resource table [763](#)
 in TASK resource table [1123](#)
 in TRANDEF resource table [1191](#)
 RESSTAT field
 in ERESSTAT resource table [443](#)
 RESTART field
 in TRANDEF resource table [1191](#)
 RESTARTCNT field
 in LOCTRAN resource table [763](#)
 in MLOCTRAN resource table [837](#)
 RESTARTMAS field
 in ACTION resource table [17](#)
 RESTYPE field
 in BINCONRS resource table [57](#)
 in BINSTERR resource table [61](#)
 in EACTNTFN resource table [357](#)
 in EVENT resource table [563](#)
 in EVENTDTL resource table [561](#)
 RESULTSET field
 in ASYNCREQ resource table [33](#)
 RESVD1 field
 in OBJECT resource table [931](#)
 RESVER field
 in BINSTERR resource table [61](#)
 RESYNCMEMBER field
 in DB2CDEF resource table [295](#)
 in DB2CONN resource table [301](#)

RESYNCMEMBER field (*continued*)
 in MQCON resource table [879](#)
 in MQCONDEF resource table [883](#)
 RESYNCSTATUS field
 in UOWLINK resource table [1251](#)
 RETENTION field
 in CSYSDEF resource table [281](#)
 in MAS resource table [787](#)
 in MONSPEC resource table [873](#)
 RETLOCKS field
 in DSNAME resource table [345](#)
 RETPD field
 in STREAMNM resource table [1097](#)
 RETRY field
 in JRNLDEF resource table [701](#)
 RETRYERRS field
 in STREAMNM resource table [1097](#)
 REUSE field
 in TDQDEF resource table [1163](#)
 REUSELIMCT field
 in DB2ENTRY resource table [311](#)
 REUSELIMIT field
 in DB2CDEF resource table [295](#)
 in DB2CONN resource table [301](#)
 REUSEST field
 in CLCACHE resource table [123](#)
 in JVM resource table [713](#)
 in JVMPROF resource table [717](#)
 REWIND field
 in EXTRATDQ resource table [581](#)
 in TDQDEF resource table [1163](#)
 REWRITE field
 in CMDT resource table [141](#)
 in MCMMDT resource table [807](#)
 RGSCOPE field
 in RESDESC resource table [1035](#)
 RKP field
 in FILEDEF resource table [617](#)
 RLOADING field
 in PROGRAM resource table [1001](#)
 RLSACCESS field
 in FILEDEF resource table [617](#)
 in LOCFILE resource table [757](#)
 in UOWDSNF resource table [1247](#)
 RLSCPUCNT field
 in MLOCTRAN resource table [837](#)
 RLSCPUT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 RLSREQWTTTO field
 in LOCFILE resource table [757](#)
 in MLOCFILE resource table [833](#)
 RLSSTATUS field
 in CICSGRN resource table [89](#)
 RLWAIT field
 in MLOCTRAN resource table [837](#)
 RLWAITCNT field
 in MLOCTRAN resource table [837](#)
 RLWAITTIME field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 RMGATSHTI field
 in RECOVERY resource table [1023](#)

RMGATSHTR field
 in RECOVERY resource table [1023](#)
 RMGCATSHTI field
 in RECOVERY resource table [1023](#)
 RMGCATSHTR field
 in RECOVERY resource table [1023](#)
 RMGCSHIN field
 in RECOVERY resource table [1023](#)
 RMGCSHRO field
 in RECOVERY resource table [1023](#)
 RMGCSHTI field
 in RECOVERY resource table [1023](#)
 RMGCSHTR field
 in RECOVERY resource table [1023](#)
 RMGDSID field
 in RECOVERY resource table [1023](#)
 RMGDSVER field
 in RECOVERY resource table [1023](#)
 RMGIAFNW field
 in RECOVERY resource table [1023](#)
 RMGIAFOP field
 in RECOVERY resource table [1023](#)
 RMGIAFOT field
 in RECOVERY resource table [1023](#)
 RMGIAFTI field
 in RECOVERY resource table [1023](#)
 RMGIAFTR field
 in RECOVERY resource table [1023](#)
 RMGIAMIS field
 in RECOVERY resource table [1023](#)
 RMGNW61 field
 in RECOVERY resource table [1023](#)
 RMGNWMRO field
 in RECOVERY resource table [1023](#)
 RMGNWOTH field
 in RECOVERY resource table [1023](#)
 RMGNWRMI field
 in RECOVERY resource table [1023](#)
 RMGNWTD field
 in RECOVERY resource table [1023](#)
 RMGRESYN field
 in RECOVERY resource table [1023](#)
 RMGSYBWD field
 in RECOVERY resource table [1023](#)
 RMGSYFWD field
 in RECOVERY resource table [1023](#)
 RMGTSHIN field
 in RECOVERY resource table [1023](#)
 RMGTSHRO field
 in RECOVERY resource table [1023](#)
 RMGTSHTI field
 in RECOVERY resource table [1023](#)
 RMGTSHTR field
 in RECOVERY resource table [1023](#)
 RMICPSMTIME field
 in HTASK resource table [655](#)
 in TASKRMI resource table [1121](#)
 RMIDB2TIME field
 in HTASK resource table [655](#)
 in TASKRMI resource table [1121](#)
 RMIDBCTLTIME field
 in HTASK resource table [655](#)
 in TASKRMI resource table [1121](#)
 RMIEXECDLITM field

RMIEXECDLITM field (*continued*)
 in HTASK resource table [655](#)
 in TASKRMI resource table [1121](#)
 RMIMQSERIEST field
 in HTASK resource table [655](#)
 in TASKRMI resource table [1121](#)
 RMIOOTHERTIME field
 in HTASK resource table [655](#)
 in TASKRMI resource table [1121](#)
 RMIQFY field
 in UOWLINK resource table [1251](#)
 RMIST field
 in MONITOR resource table [867](#)
 RMISUSP field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 RMISUSPCT field
 in MLOCTRAN resource table [837](#)
 RMITCPIPTIME field
 in HTASK resource table [655](#)
 in TASKRMI resource table [1121](#)
 RMITIME field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 in TASKRMI resource table [1121](#)
 RMITIMECT field
 in MLOCTRAN resource table [837](#)
 RMITOTALTIME field
 in HTASK resource table [655](#)
 in TASKRMI resource table [1121](#)
 RNONIMMGET field
 in CICSSTOR resource table [101](#)
 RNTPGPROTECT field
 in CICSDSA resource table [79](#)
 in MCICSDSA resource table [799](#)
 RODMCMAS field
 in MONSPEC resource table [873](#)
 RODMNAME field
 in CMAS resource table [131](#)
 RODMPOP field
 in CPLEXDEF resource table [169](#)
 in CPLXCMAS resource table [173](#)
 in MONDEF resource table [857](#)
 in POLMON resource table [975](#)
 ROFAIL field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 ROLE field
 in UOWLINK resource table [1251](#)
 ROLLBACKOPT field
 in DB2THRD resource table [323](#)
 in MDB2THRD resource table [815](#)
 ROMODDLY field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 ROPS31HWM field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 ROUTABLE field
 in TRANDEF resource table [1191](#)
 ROUTEDMSGS field
 in TYPTMDEF resource table [1239](#)

ROUTESTATUS field
 in LOCTRAN resource table [763](#)
 ROUTEWGHT field
 in WLMATARG resource table [1285](#)
 in WLMAWAOR resource table [1295](#)
 ROUTING field
 in LOCTRAN resource table [763](#)
 in REMTRAN resource table [1029](#)
 in TASK resource table [1123](#)
 ROUTINGLOAD field
 in WLMATARG resource table [1285](#)
 in WLMAWAOR resource table [1295](#)
 RPLID field
 in MPROGRAM resource table [875](#)
 in PROGRAM resource table [1001](#)
 RPLLIST resource table [1051](#)
 RPLNUM field
 in RPLLIST resource table [1051](#)
 RPTCMAS field
 in MASSTAT resource table [797](#)
 in WLMAWAOR resource table [1295](#)
 in WLMAWORK resource table [1301](#)
 in WLMAWTOR resource table [1303](#)
 RPTINGCMAS field
 in WLMAROUT resource table [1281](#)
 in WLMATARG resource table [1285](#)
 RQCUR field
 in DB2ENTRY resource table [311](#)
 RQHWM field
 in DB2ENTRY resource table [311](#)
 RQMDEF resource table [1053](#)
 RQMDEFRG field
 in RESDESC resource table [1035](#)
 RQMDEFRS field
 in RESDESC resource table [1035](#)
 RQMDEFTS field
 in RESDESC resource table [1035](#)
 RQMGROUP field
 in RQMINGRP resource table [1057](#)
 RQMINGRP resource table [1057](#)
 RQMNAME field
 in RQMINGRP resource table [1057](#)
 RQMODEL resource table [1059](#)
 RQMVER field
 in RQMINGRP resource table [1057](#)
 RRATECREL field
 in CICSSTOR resource table [101](#)
 RRATEEXTSA field
 in CICSSTOR resource table [101](#)
 RRATEEXTSR field
 in CICSSTOR resource table [101](#)
 RRATEFM field
 in CICSSTOR resource table [101](#)
 RRATEGM field
 in CICSSTOR resource table [101](#)
 RRATESTORV field
 in CICSSTOR resource table [101](#)
 RREMOVAL field
 in PROGRAM resource table [1001](#)
 RRMSSTAT field
 in CICSRCN resource table [89](#)
 RRMSURID field
 in EXCI resource table [573](#)
 in HTASK resource table [655](#)

RRMSURID field (*continued*)
 in TASK resource table [1123](#)
 in UOWLINK resource table [1251](#)
 RRMSURIDCHAR field
 in EXCI resource table [573](#)
 RRMSWAIC field
 in MLOCTRAN resource table [837](#)
 RRMSWAIT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 RSCOPE field
 in RASGNDEF resource table [1013](#)
 in RASINDSC resource table [1017](#)
 in RASPROC resource table [1019](#)
 in RDSCPROC resource table [1021](#)
 RSENAME field
 in DBCTLSS resource table [329](#)
 RSEQ field
 in REQID resource table [1033](#)
 RSL field
 in FILEDEF resource table [617](#)
 in JRNLEDEF resource table [701](#)
 in MAPDEF resource table [781](#)
 in PROGDEF resource table [995](#)
 in PRTNDEF resource table [1009](#)
 in TDQDEF resource table [1163](#)
 in TRANDEF resource table [1191](#)
 RSLC field
 in TRANDEF resource table [1191](#)
 RSLTRECID field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 RSMFWERRC field
 in MONITOR resource table [867](#)
 RSMFWERRS field
 in MONITOR resource table [867](#)
 RSMFWRITE field
 in MONITOR resource table [867](#)
 RSPOLID field
 in CICSPLEX resource table [87](#)
 in CMASPLEX resource table [129](#)
 in CPLEXDEF resource table [169](#)
 in CPLXCMAS resource table [173](#)
 in EPLEXCHG resource table [441](#)
 in WLMATARG resource table [1285](#)
 in WLMAWAOR resource table [1295](#)
 RSRVD01 field
 in EVCSPEC resource table [553](#)
 RSRVD02 field
 in EACTNTFN resource table [357](#)
 RSRVD1 field
 in DSPMODE resource table [351](#)
 in TSMODEL resource table [1223](#)
 RSRVED01 field
 in ASYNCREQ resource table [33](#)
 in FEEDBACK resource table [585](#)
 RSRVSL01 field
 in APACTV resource table [21](#)
 in CPLEXDEF resource table [169](#)
 in CPLXCMAS resource table [173](#)
 in EMASJOIN resource table [387](#)
 in EMASSTRT resource table [395](#)
 in EPLEXCHG resource table [441](#)

RSRVSL01 field (*continued*)
 in MAS resource table [787](#)
 in MASSTAT resource table [797](#)
 in RTAACTV resource table [1061](#)

RSRVSL02 field
 in CMASPLEX resource table [129](#)
 in CPLEXDEF resource table [169](#)
 in CPLXCMAS resource table [173](#)
 in CSYSDEF resource table [281](#)
 in EMASJOIN resource table [387](#)
 in EMASSTOP resource table [393](#)
 in EMASSTRT resource table [395](#)
 in EPLEXCHG resource table [441](#)

RSTAWRITE field
 in MONITOR resource table [867](#)

RSTSIGNOFF field
 in TYPTMDEF resource table [1239](#)

RSVD_ID field
 in OBJECT resource table [931](#)

RSVD_IDAT field
 in ATTR resource table [49](#)

RSVD01 field
 in CONNECT resource table [164](#)
 in JVMPROF resource table [717](#)
 in WORKREQ resource table [1319](#)

RSVD02 field
 in JVMPROF resource table [717](#)
 in WORKREQ resource table [1319](#)

RSVD1 field
 in APPLCTN resource table [23](#)
 in ATOMSERV resource table [45](#)
 in BUNDPART resource table [73](#)
 in CMAS resource table [131](#)
 in EJCOSE resource table [371](#)
 in EJDJAR resource table [377](#)
 in ENQMODEL resource table [431](#)
 in EVALDEF resource table [549](#)
 in EVENTDTL resource table [561](#)
 in EXTRATDQ resource table [581](#)
 in IPCONN resource table [687](#)
 in JRNLMODL resource table [705](#)
 in JVMSERV resource table [719](#)
 in MGMTPART resource table [825](#)
 in PIPELINE resource table [959](#)
 in RQMODEL resource table [1059](#)
 in TASK resource table [1123](#)
 in TCPIPGBL resource table [1153](#)
 in TSMODEL resource table [1223](#)
 in WEBSERV resource table [1273](#)

RSVD2 field
 in APPLCTN resource table [23](#)
 in ATOMSERV resource table [45](#)
 in CMAS resource table [131](#)
 in EVENTDTL resource table [561](#)
 in JVMSERV resource table [719](#)
 in PIPELINE resource table [959](#)
 in PROGRAM resource table [1001](#)
 in TASK resource table [1123](#)
 in TCPIPGBL resource table [1153](#)

RSVD3 field
 in ATOMSERV resource table [45](#)
 in JVMSERV resource table [719](#)
 in TASK resource table [1123](#)

RSVD58 field

RSVD58 field (*continued*)
 in REQID resource table [1033](#)

RSVDA1 field
 in BINCONRS resource table [57](#)
 in BINCONSC resource table [59](#)
 in BINSTERR resource table [61](#)

RSVDA2 field
 in BINCONRS resource table [57](#)
 in BINCONSC resource table [59](#)

RSVDA3 field
 in BINCONRS resource table [57](#)

RSVDA4 field
 in BINCONRS resource table [57](#)

RSVDAREA field
 in ERESSTAT resource table [443](#)

RSVRD1 field
 in ATMINGRP resource table [37](#)
 in ATOMDEF resource table [39](#)
 in BUNDDEF resource table [65](#)
 in BUNDLE resource table [69](#)
 in BUNDPART resource table [73](#)
 in BUNINGRP resource table [75](#)
 in CICSPAGP resource table [83](#)
 in CICSSTOR resource table [101](#)
 in CONINGRP resource table [155](#)
 in CONNDEF resource table [157](#)
 in CRESBUND resource table [181](#)
 in D2CINGRP resource table [289](#)
 in D2EINGRP resource table [291](#)
 in D2TINGRP resource table [293](#)
 in DB2CDEF resource table [295](#)
 in DB2CONN resource table [301](#)
 in DB2EDEF resource table [307](#)
 in DB2ENTRY resource table [311](#)
 in DB2TDEF resource table [319](#)
 in DOCDEF resource table [331](#)
 in DOCINGRP resource table [335](#)
 in DOCTEMP resource table [337](#)
 in DOMSPOOL resource table [341](#)
 in DSPGBL resource table [349](#)
 in DSPMODE resource table [351](#)
 in DSPPOOL resource table [353](#)
 in EJCINGRP resource table [361](#)
 in EJCODEF resource table [365](#)
 in EJDINGRP resource table [375](#)
 in EJDJDEF resource table [381](#)
 in ENQINGRP resource table [425](#)
 in ENQMDEF resource table [427](#)
 in ENQUEUE resource table [433](#)
 in EPADAPT resource table [435](#)
 in EPADSET resource table [437](#)
 in ERMCBUND resource table [449](#)
 in EVNTBIND resource table [567](#)
 in FENODDEF resource table [589](#)
 in FEPOODEF resource table [605](#)
 in FEPRODEF resource table [609](#)
 in FETRGDEF resource table [613](#)
 in FILEDEF resource table [617](#)
 in FILINGRP resource table [625](#)
 in FNOINGRP resource table [627](#)
 in FPOINGRP resource table [629](#)
 in FPRINGRP resource table [631](#)
 in FSEGDEF resource table [633](#)
 in FSGINGRP resource table [649](#)

RSVRD1 field (*continued*)

- in FTRINGRP resource table [651](#)
- in IPCINGRP resource table [679](#)
- in IPCONDEF resource table [681](#)
- in JMSINGRP resource table [695](#)
- in JRMINGRP resource table [697](#)
- in JRNINGRP resource table [699](#)
- in JRNLDEF resource table [701](#)
- in JRNMDEF resource table [709](#)
- in JVMPOOL resource table [715](#)
- in JVMSVDEF resource table [723](#)
- in LIBDEF resource table [727](#)
- in LIBINGRP resource table [735](#)
- in LOADACT resource table [751](#)
- in LOADER resource table [753](#)
- in LSRDEF resource table [769](#)
- in LSRINGRP resource table [775](#)
- in LSRPBUF resource table [777](#)
- in MAPDEF resource table [781](#)
- in MAPINGRP resource table [785](#)
- in MLSRPBUF resource table [845](#)
- in MONITOR resource table [867](#)
- in MQCINGRP resource table [877](#)
- in MQCON resource table [879](#)
- in MQCONDEF resource table [883](#)
- in MQCONN resource table [887](#)
- in MQMINGRP resource table [891](#)
- in MQMON resource table [893](#)
- in MQMONDEF resource table [897](#)
- in MVSTCBGL resource table [919](#)
- in MVSWLM resource table [923](#)
- in OSGIBUND resource table [937](#)
- in PARINGRP resource table [941](#)
- in PARTDEF resource table [945](#)
- in PGMINGRP resource table [953](#)
- in PIPEDEF resource table [955](#)
- in PIPINGRP resource table [963](#)
- in PRCINGRP resource table [977](#)
- in PRNINGRP resource table [979](#)
- in PROCDEF resource table [981](#)
- in PROFDEF resource table [987](#)
- in PROGDEF resource table [995](#)
- in PROGRAM resource table [1001](#)
- in PROINGRP resource table [1007](#)
- in PRTNDEF resource table [1009](#)
- in RECOVERY resource table [1023](#)
- in RESGROUP resource table [1043](#)
- in RESINGRP resource table [1049](#)
- in RQMDEF resource table [1053](#)
- in RQMINGRP resource table [1057](#)
- in SESINGRP resource table [1083](#)
- in SESSDEF resource table [1085](#)
- in STREAMNM resource table [1097](#)
- in TASKASSC resource table [1113](#)
- in TASKFILE resource table [1119](#)
- in TCLINGRP resource table [1143](#)
- in TCPDEF resource table [1145](#)
- in TCPINGRP resource table [1151](#)
- in TCPIPS resource table [1157](#)
- in TDQDEF resource table [1163](#)
- in TDQINGRP resource table [1171](#)
- in TERMDEF resource table [1173](#)
- in TRANDEF resource table [1191](#)
- in TRMINGRP resource table [1203](#)

RSVRD1 field (*continued*)

- in TRNCLDEF resource table [1205](#)
- in TRNINGRP resource table [1209](#)
- in TSMDEF resource table [1217](#)
- in TSMINGRP resource table [1221](#)
- in TSMODEL resource table [1223](#)
- in TYPINGRP resource table [1237](#)
- in TYPTMDEF resource table [1239](#)
- in UOWLINK resource table [1251](#)
- in URIINGRP resource table [1255](#)
- in URIMAP resource table [1257](#)
- in URIMPDEF resource table [1261](#)
- in WEBINGRP resource table [1271](#)
- in WEBSERV resource table [1273](#)
- in WEBSVDEF resource table [1277](#)

RSVRD10 field

- in CICSSTOR resource table [101](#)

RSVRD11 field

- in CICSSTOR resource table [101](#)

RSVRD12 field

- in CICSSTOR resource table [101](#)

RSVRD13 field

- in CICSSTOR resource table [101](#)

RSVRD2 field

- in ATOMDEF resource table [39](#)
- in BUNDDEF resource table [65](#)
- in CICSPPAG resource table [83](#)
- in CICSSTOR resource table [101](#)
- in CONNDEF resource table [157](#)
- in DB2CDEF resource table [295](#)
- in DB2CONN resource table [301](#)
- in DB2EDEF resource table [307](#)
- in DB2TDEF resource table [319](#)
- in DOCDEF resource table [331](#)
- in DOMSPOOL resource table [341](#)
- in DSPGBL resource table [349](#)
- in DSPMODE resource table [351](#)
- in DSPPOOL resource table [353](#)
- in EJCODEF resource table [365](#)
- in EJDJDEF resource table [381](#)
- in ENQMDEF resource table [427](#)
- in EPADAPT resource table [435](#)
- in EVNTBIND resource table [567](#)
- in FENODDEF resource table [589](#)
- in FEPOODEF resource table [605](#)
- in FEPRODEF resource table [609](#)
- in FETRGDEF resource table [613](#)
- in FILEDEF resource table [617](#)
- in FSEGDEF resource table [633](#)
- in IPCONDEF resource table [681](#)
- in JRNLDEF resource table [701](#)
- in JRNMDEF resource table [709](#)
- in JVMSVDEF resource table [723](#)
- in LIBDEF resource table [727](#)
- in LOADER resource table [753](#)
- in LSRDEF resource table [769](#)
- in LSRPBUF resource table [777](#)
- in MAPDEF resource table [781](#)
- in MONITOR resource table [867](#)
- in MQCONDEF resource table [883](#)
- in MQMON resource table [893](#)
- in MQMONDEF resource table [897](#)
- in MVSWLM resource table [923](#)
- in PARTDEF resource table [945](#)

RSVRD2 field (*continued*)

- in PIPEDEF resource table [955](#)
- in PROCDEF resource table [981](#)
- in PROFDEF resource table [987](#)
- in PROGDEF resource table [995](#)
- in PRTNDEF resource table [1009](#)
- in RECOVERY resource table [1023](#)
- in RESINGRP resource table [1049](#)
- in RQMDEF resource table [1053](#)
- in SESSDEF resource table [1085](#)
- in STREAMNM resource table [1097](#)
- in TASKASSC resource table [1113](#)
- in TCPDEF resource table [1145](#)
- in TCPIPS resource table [1157](#)
- in TDQDEF resource table [1163](#)
- in TERMDEF resource table [1173](#)
- in TRANDEF resource table [1191](#)
- in TRNCLDEF resource table [1205](#)
- in TSMDEF resource table [1217](#)
- in TYPTMDEF resource table [1239](#)
- in URIMAP resource table [1257](#)
- in URIMPDEF resource table [1261](#)
- in WEBSERV resource table [1273](#)
- in WEBSVDEF resource table [1277](#)
- in XMLTRANS resource table [1321](#)

RSVRD3 field

- in CICSPAGP resource table [83](#)
- in CICSSTOR resource table [101](#)
- in CONNDEF resource table [157](#)
- in DB2CDEF resource table [295](#)
- in DB2EDEF resource table [307](#)
- in DB2TDEF resource table [319](#)
- in DOCDEF resource table [331](#)
- in DOMSPOOL resource table [341](#)
- in DSPMODE resource table [351](#)
- in DSPPOOL resource table [353](#)
- in EJCODEF resource table [365](#)
- in EJDJDEF resource table [381](#)
- in ENQMDEF resource table [427](#)
- in FENODDEF resource table [589](#)
- in FEPOODEF resource table [605](#)
- in FEPRODEF resource table [609](#)
- in FETRDEF resource table [613](#)
- in FILEDEF resource table [617](#)
- in IPCONDEF resource table [681](#)
- in JRNLDEF resource table [701](#)
- in LOADACT resource table [751](#)
- in LOADER resource table [753](#)
- in MONITOR resource table [867](#)
- in MQCON resource table [879](#)
- in MVSWLM resource table [923](#)
- in PIPEDEF resource table [955](#)
- in PIPELINE resource table [959](#)
- in PROCDEF resource table [981](#)
- in PROGDEF resource table [995](#)
- in RECOVERY resource table [1023](#)
- in RQMDEF resource table [1053](#)
- in STREAMNM resource table [1097](#)
- in TASK resource table [1123](#)
- in TCPDEF resource table [1145](#)
- in TCPIPS resource table [1157](#)
- in TDQDEF resource table [1163](#)
- in TERMDEF resource table [1173](#)
- in TRANDEF resource table [1191](#)

RSVRD3 field (*continued*)

- in TSMDEF resource table [1217](#)
- in TYPTMDEF resource table [1239](#)
- in URIMAP resource table [1257](#)
- in URIMPDEF resource table [1261](#)
- in WEBSVDEF resource table [1277](#)
- in XMLTRANS resource table [1321](#)

RSVRD4 field

- in CICSPAGP resource table [83](#)
- in CICSSTOR resource table [101](#)
- in CONNDEF resource table [157](#)
- in DB2CDEF resource table [295](#)
- in DOMSPOOL resource table [341](#)
- in DSPMODE resource table [351](#)
- in DSPPOOL resource table [353](#)
- in EJCODEF resource table [365](#)
- in EJDJDEF resource table [381](#)
- in FENODDEF resource table [589](#)
- in FEPOODEF resource table [605](#)
- in FEPRODEF resource table [609](#)
- in FETRDEF resource table [613](#)
- in FILEDEF resource table [617](#)
- in LOADACT resource table [751](#)
- in LOADER resource table [753](#)
- in MONITOR resource table [867](#)
- in PROGDEF resource table [995](#)
- in TASK resource table [1123](#)
- in TCPDEF resource table [1145](#)
- in TCPIPS resource table [1157](#)
- in TDQDEF resource table [1163](#)
- in TERMDEF resource table [1173](#)
- in TRANDEF resource table [1191](#)
- in TSMDEF resource table [1217](#)
- in URIMPDEF resource table [1261](#)
- in XMLTRANS resource table [1321](#)

RSVRD5 field

- in CICSSTOR resource table [101](#)
- in DOMSPOOL resource table [341](#)
- in FILEDEF resource table [617](#)
- in LOADACT resource table [751](#)
- in LOADER resource table [753](#)
- in MONITOR resource table [867](#)
- in TASK resource table [1123](#)
- in TERMDEF resource table [1173](#)
- in TRANDEF resource table [1191](#)
- in URIMPDEF resource table [1261](#)

RSVRD6 field

- in CICSSTOR resource table [101](#)
- in LOADACT resource table [751](#)
- in LOADER resource table [753](#)
- in TASK resource table [1123](#)

RSVRD7 field

- in CICSSTOR resource table [101](#)
- in LOADACT resource table [751](#)

RSVRD8 field

- in CICSSTOR resource table [101](#)

RSVRD9 field

- in CICSSTOR resource table [101](#)

RSVTHREADS field

- in DB2THRD resource table [323](#)
- in MDB2THRD resource table [815](#)

RSVTRAC1 field

- in MAS resource table [787](#)

RSVTRAC2 field

RSVTRAC2 field (*continued*)
 in MAS resource table [787](#)

RSYSID field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)

RTA_SPEC field
 in EMASJOIN resource table [387](#)
 in EMASSTOP resource table [393](#)
 in EMASSTRT resource table [395](#)

RTAACTV resource table [1061](#)

RTABEND field
 in WLMATARG resource table [1285](#)

RTADEF resource table [1063](#)

RTADTE field
 in ECSYSCHG resource table [359](#)

RTAGROUP resource table [1067](#)

RTAINAPS resource table [1069](#)

RTAINGRP resource table [1071](#)

RTAINSPC resource table [1073](#)

RTASPEC field
 in CMASPLEX resource table [129](#)
 in EPLEXCHG resource table [441](#)

RTASPEC resource table [1075](#)

RTASTATUS field
 in CSYSDEF resource table [281](#)
 in MAS resource table [787](#)

RTATRACE field
 in CMAS resource table [131](#)
 in MAS resource table [787](#)

RTCOMPLETE field
 in WLMATARG resource table [1285](#)

RTERMID field
 in REQID resource table [1033](#)

RTERROR field
 in WLMATARG resource table [1285](#)

RTIMEOUT field
 in LOCTRAN resource table [763](#)
 in REMTRAN resource table [1029](#)
 in TASK resource table [1123](#)

RTIMOUT field
 in PROFDEF resource table [987](#)

RTINITIATE field
 in WLMATARG resource table [1285](#)

RTNOTIFY field
 in WLMATARG resource table [1285](#)

RTRANSID field
 in REQID resource table [1033](#)

RTSELECT field
 in WLMATARG resource table [1285](#)

RTTERMINATE field
 in WLMATARG resource table [1285](#)

RTUOWEND field
 in WLMAROUT resource table [1281](#)

RTYPE field
 in RQMDEF resource table [1053](#)
 in RQMODEL resource table [1059](#)

RULE field
 in RULE resource table [1079](#)

RULE resource table [1079](#)

RULEGROUP field
 in RULE resource table [1079](#)

RULEITEM field
 in RULE resource table [1079](#)

RULETYPE field
 in RULE resource table [1079](#)

RUNAWAY field
 in CICSGRN resource table [89](#)
 in LOCTRAN resource table [763](#)
 in TASK resource table [1123](#)
 in TRANDEF resource table [1191](#)

RUNAWAYTYPE field
 in LOCTRAN resource table [763](#)

RUNSTATUS field
 in TASK resource table [1123](#)

RUNTIME field
 in PROGRAM resource table [1001](#)

RUNTRWTC field
 in MLOCTRAN resource table [837](#)

RUNTRWTT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)

RUNTYPE field
 in BATCHREP resource table [53](#)

RUSE field
 in PROGRAM resource table [1001](#)

RWRITES field
 in STREAMNM resource table [1097](#)

S

S8CPUC field
 in MLOCTRAN resource table [837](#)

S8CPUT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)

SAMACTION field
 in CSYSDEF resource table [281](#)
 in MAS resource table [787](#)
 in RTASPEC resource table [1075](#)

SAMKEY01 field
 in FSEGDEF resource table [633](#)

SAMKEY02 field
 in FSEGDEF resource table [633](#)

SAMKEY03 field
 in FSEGDEF resource table [633](#)

SAMKEY04 field
 in FSEGDEF resource table [633](#)

SAMKEY05 field
 in FSEGDEF resource table [633](#)

SAMKEY06 field
 in FSEGDEF resource table [633](#)

SAMKEY07 field
 in FSEGDEF resource table [633](#)

SAMKEY08 field
 in FSEGDEF resource table [633](#)

SAMKEY09 field
 in FSEGDEF resource table [633](#)

SAMKEY10 field
 in FSEGDEF resource table [633](#)

SAMKEY11 field
 in FSEGDEF resource table [633](#)

SAMKEY12 field
 in FSEGDEF resource table [633](#)

SAMKEY13 field
 in FSEGDEF resource table [633](#)

SAMKEY14 field
in FSEGDEF resource table [633](#)

SAMKEY15 field
in FSEGDEF resource table [633](#)

SAMKEY16 field
in FSEGDEF resource table [633](#)

SAMKEY17 field
in FSEGDEF resource table [633](#)

SAMKEY18 field
in FSEGDEF resource table [633](#)

SAMKEY19 field
in FSEGDEF resource table [633](#)

SAMKEY20 field
in FSEGDEF resource table [633](#)

SAMKEY21 field
in FSEGDEF resource table [633](#)

SAMKEY22 field
in FSEGDEF resource table [633](#)

SAMKEY23 field
in FSEGDEF resource table [633](#)

SAMKEY24 field
in FSEGDEF resource table [633](#)

SAMPLE field
in EVALDEF resource table [549](#)

SAMSEV field
in CSYSDEF resource table [281](#)
in MAS resource table [787](#)
in RTASPEC resource table [1075](#)

SAVGTIMESOS field
in CICSSTOR resource table [101](#)

SC24FSHR field
in MLOCTRAN resource table [837](#)

SC24GSHR field
in MLOCTRAN resource table [837](#)

SC24SGCT field
in MLOCTRAN resource table [837](#)

SC31FSHR field
in MLOCTRAN resource table [837](#)

SC31GSHR field
in MLOCTRAN resource table [837](#)

SC31SGCT field
in MLOCTRAN resource table [837](#)

SCANDELAY field
in CICSIRGN resource table [89](#)

SCHEDCLK field
in CMTMMLNK resource table [151](#)
in CMTMMLNK resource table [153](#)

SCHEMALEVEL field
in EVNTGBL resource table [569](#)

SCHEME field
in URIMAP resource table [1257](#)
in URIMPDEF resource table [1261](#)

SCHEMEHTTP field
in URIMPGBL resource table [1267](#)

SCHEMEHTTPS field
in URIMPGBL resource table [1267](#)

SCOPE field
in AACTV resource table [21](#)
in EACTNFTN resource table [357](#)
in RTAINAPS resource table [1069](#)

SCOPEREQ field
in OBJECT resource table [931](#)

SCOPESORT field
in OBJECT resource table [931](#)

SCREENHEIGHT field
in TERMNL resource table [1179](#)

SCREENWIDTH field
in TERMNL resource table [1179](#)

SCRHIGH field
in TERMDEF resource table [1173](#)

SCRNSIZE field
in LOCTRAN resource table [763](#)
in PROFDEF resource table [987](#)
in REMTRAN resource table [1029](#)
in TASK resource table [1123](#)

SCRWIDTH field
in TERMDEF resource table [1173](#)

SDMACTION field
in CSYSDEF resource table [281](#)
in MAS resource table [787](#)
in RTASPEC resource table [1075](#)

SDMPSTATUS field
in CRESSDMP resource table [245](#)
in CRESTDMP resource table [249](#)

SDMPSUPP field
in CICSIRGN resource table [89](#)
in MCICSIRGN resource table [803](#)
in SYSDUMP resource table [1099](#)
in TRANDUMP resource table [1197](#)

SDMPTOTL field
in CICSIRGN resource table [89](#)
in MCICSIRGN resource table [803](#)
in SYSDUMP resource table [1099](#)
in TRANDUMP resource table [1197](#)

SDMSEV field
in CSYSDEF resource table [281](#)
in MAS resource table [787](#)
in RTASPEC resource table [1075](#)

SDSASIZE field
in LOADER resource table [753](#)

SDTRAN field
in CICSIRGN resource table [89](#)

SDUMP field
in CMAS resource table [131](#)

SDUMPSCOPE field
in SYSDUMP resource table [1099](#)

SEARCHPOS field
in LIBDSN resource table [733](#)
in LIBRARY resource table [737](#)

SECATTACH field
in CMTMDEF resource table [147](#)

SECBYPASS field
in CPLEXDEF resource table [169](#)
in CPLXCMAS resource table [173](#)
in CSYSDEF resource table [281](#)
in MAS resource table [787](#)

SECCMDCHK field
in CPLEXDEF resource table [169](#)
in CPLXCMAS resource table [173](#)
in CSYSDEF resource table [281](#)
in MAS resource table [787](#)

SECCURRUSED field
in CONNECT resource table [164](#)
in MCONNECT resource table [811](#)

SECNAME field
in CMTMDEF resource table [147](#)

SECRESCHK field
in CPLEXDEF resource table [169](#)

SECRESCHK field (*continued*)
 in CPLXCMAS resource table [173](#)
 in CSYSDEF resource table [281](#)
 in MAS resource table [787](#)
 SECURE field
 in TRANDEF resource table [1191](#)
 SECURITY field
 in TERMNL resource table [1179](#)
 in TSMDEF resource table [1217](#)
 SECURITYNAME field
 in CONNDEF resource table [157](#)
 in IPCONDEF resource table [681](#)
 in IPCONN resource table [687](#)
 in TERMDEF resource table [1173](#)
 SECURITYST field
 in TSMODEL resource table [1223](#)
 SEGNUM field
 in SYSPARM resource table [1107](#)
 SEGSPERCI field
 in MTSQGBL resource table [913](#)
 in TSQGBL resource table [1227](#)
 SEGTOT field
 in SYSPARM resource table [1107](#)
 SENDBUF field
 in CMTCMDEF resource table [147](#)
 SENDCOUNT field
 in CONNECT resource table [164](#)
 in IPCONDEF resource table [681](#)
 in IPCONN resource table [687](#)
 in MCONNECT resource table [811](#)
 in SESSDEF resource table [1085](#)
 SENDMTOMST field
 in PIPELINE resource table [959](#)
 SENDPFX field
 in CMTCMDEF resource table [147](#)
 in SESSDEF resource table [1085](#)
 SENDS field
 in TCPIPS resource table [1157](#)
 SENDSIZE field
 in SESSDEF resource table [1085](#)
 in TYPTMDEF resource table [1239](#)
 SEPTASK field
 in EVALDEF resource table [549](#)
 SEQNUMBER field
 in BUNDPART resource table [73](#)
 in EVCSDATA resource table [555](#)
 in EVCSINFO resource table [557](#)
 in EVCSOPT resource table [559](#)
 SEQUENCE field
 in EVENT resource table [563](#)
 in EVENTDTL resource table [561](#)
 SERVERIPADDR field
 in TASKASSC resource table [1113](#)
 SERVERPORT field
 in TASKASSC resource table [1113](#)
 SERVSTATUS field
 in CONNECT resource table [164](#)
 in CRESCONN resource table [183](#)
 in CRESFECO resource table [207](#)
 in CRESIPCN resource table [219](#)
 in CRESTERM resource table [253](#)
 in FENODDEF resource table [589](#)
 in FEPICONN resource table [593](#)
 in FEPINODE resource table [595](#)

SERVSTATUS field (*continued*)
 in FEPIPOOL resource table [597](#)
 in FEPITRGT resource table [603](#)
 in FEPOODEF resource table [605](#)
 in FETRGDEF resource table [613](#)
 in IPCONN resource table [687](#)
 in MCONNECT resource table [811](#)
 in MFEPICON resource table [823](#)
 in MTERMNL resource table [909](#)
 in TERMNL resource table [1179](#)
 SESDEFRG field
 in RESDESC resource table [1035](#)
 SESDEFRS field
 in RESDESC resource table [1035](#)
 SESDEFTS field
 in RESDESC resource table [1035](#)
 SESINGRP resource table [1083](#)
 SESSACTV field
 in MMODNAME resource table [851](#)
 in MODENAME resource table [855](#)
 SESSAVAIL field
 in MMODNAME resource table [851](#)
 in MODENAME resource table [855](#)
 SESSBEANTIME field
 in EJCODEF resource table [365](#)
 in EJCOSE resource table [371](#)
 SESSBUFFSIZE field
 in CONNDEF resource table [157](#)
 SESSCOUNT field
 in CONNDEF resource table [157](#)
 SESSDEF field
 in SYSLINK resource table [1103](#)
 SESSDEF resource table [1085](#)
 SESSDEFVER field
 in SYSLINK resource table [1103](#)
 SESSGROUP field
 in SESINGRP resource table [1083](#)
 SESSIONTYPE field
 in TERMNL resource table [1179](#)
 in TYPTMDEF resource table [1239](#)
 SESSMAX field
 in MMODNAME resource table [851](#)
 in MODENAME resource table [855](#)
 SESSMAXWIN field
 in MMODNAME resource table [851](#)
 in MODENAME resource table [855](#)
 SESSNAME field
 in SESINGRP resource table [1083](#)
 in SESSDEF resource table [1085](#)
 SESSPRIORITY field
 in SESSDEF resource table [1085](#)
 SESSVER field
 in SESINGRP resource table [1083](#)
 SETACTION field
 in EVALDEF resource table [549](#)
 in EVENTDTL resource table [561](#)
 SETCICS400 field
 in ATTR resource table [49](#)
 SETCICSAIX field
 in ATTR resource table [49](#)
 SETCICSES2 field
 in ATTR resource table [49](#)
 SETCICSES3 field
 in ATTR resource table [49](#)

SETCICSESA field
 in ATTR resource table [49](#)
 SETCICSOS2 field
 in ATTR resource table [49](#)
 SETCICSRV1 field
 in ATTR resource table [49](#)
 SETCICSRV2 field
 in ATTR resource table [49](#)
 SETCICSVSE field
 in ATTR resource table [49](#)
 SETCICSWNT field
 in ATTR resource table [49](#)
 SETVALID field
 in ATTR resource table [49](#)
 SEVERITY field
 in EACTNTFN resource table [357](#)
 in EVALDEF resource table [549](#)
 in EVENT resource table [563](#)
 in EVENTDTL resource table [561](#)
 SGRPNAME field
 in ESGRPCHG resource table [547](#)
 SHARED field
 in WLMWORK resource table [1301](#)
 SHAREDTSWAIT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 SHARELIMIT field
 in LSRDEF resource table [769](#)
 SHARESTATUS field
 in MPROGRAM resource table [875](#)
 in PROGRAM resource table [1001](#)
 SHDTSWC field
 in MLOCTAN resource table [837](#)
 SHDTSWT field
 in MLOCTAN resource table [837](#)
 SHELF field
 in EJCODEF resource table [365](#)
 in EJCOSE resource table [371](#)
 in PIPEDEF resource table [955](#)
 in PIPELINE resource table [959](#)
 SHIPPABLE field
 in TYPTMDEF resource table [1239](#)
 SHR4ACCESS field
 in FILEDEF resource table [617](#)
 SHRDPOOLCONN field
 in MTSQGBL resource table [913](#)
 in TSQGBL resource table [1227](#)
 SHRDPOOLDEF field
 in MTSQGBL resource table [913](#)
 in TSQGBL resource table [1227](#)
 SHRDREADREQ field
 in MTSQGBL resource table [913](#)
 in TSQGBL resource table [1227](#)
 SHRDWRITEREQ field
 in MTSQGBL resource table [913](#)
 in TSQGBL resource table [1227](#)
 SHRTSQIOWT field
 in TASKTSQ resource table [1141](#)
 SHSTGBYTEFMA field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 SHSTGBYTEFMB field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 SHSTGBYTEFMG field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 SHSTGBYTEGMA field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 SHSTGBYTEGMB field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 SHSTGBYTEGMG field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 SHSTGGMCAVB field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 SHSTGGMCBAR field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 SHSTGGMCBEL field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 SHUNTED field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 SHUTDOWN field
 in LOCTAN resource table [763](#)
 in TRANDEF resource table [1191](#)
 SHUTDOWNST field
 in EXITTRUE resource table [577](#)
 SHUTDSTATUS field
 in CRESSDMP resource table [245](#)
 in CRESTDMP resource table [249](#)
 SHUTOPTION field
 in SYSDUMP resource table [1099](#)
 in TRANDUMP resource table [1197](#)
 SHUTSTATUS field
 in CICSRRN resource table [89](#)
 SICKTYPE field
 in EMASICK resource table [389](#)
 SIGNID field
 in DB2CDEF resource table [295](#)
 in DB2CONN resource table [301](#)
 SIGNOFF field
 in TYPTMDEF resource table [1239](#)
 SIGNONS field
 in DB2ENTRY resource table [311](#)
 SIGNONSTATUS field
 in TERMNL resource table [1179](#)
 SIGTYPE field
 in ELSIGNAL resource table [385](#)
 SIMDTE field
 in ECSYSCHG resource table [359](#)
 SIMTRACE field
 in MAS resource table [787](#)
 SINGLESESS field
 in CONNDEF resource table [157](#)
 SINGLESTATUS field
 in CICSRRN resource table [89](#)
 SIOREQ field
 in CICSRRN resource table [89](#)
 in MCICSRRN resource table [803](#)
 SIZE field
 in CICSDSA resource table [79](#)
 in LSRPBUF resource table [777](#)

SIZE field (*continued*)
 in MCICSDSA resource table [799](#)
 SJGCURRCACHE field
 in JVMPOOL resource table [715](#)
 SJGCURRJVMS field
 in JVMPOOL resource table [715](#)
 SJGDSID field
 in JVMPOOL resource table [715](#)
 SJGDSVER field
 in JVMPOOL resource table [715](#)
 SJGPEAKCACHE field
 in JVMPOOL resource table [715](#)
 SJGPEAKJVMS field
 in JVMPOOL resource table [715](#)
 SJGREQSCACHE field
 in JVMPOOL resource table [715](#)
 SJGREQSINIT field
 in JVMPOOL resource table [715](#)
 SJGREQSMISMA field
 in JVMPOOL resource table [715](#)
 SJGREQSRESET field
 in JVMPOOL resource table [715](#)
 SJGREQSREUSE field
 in JVMPOOL resource table [715](#)
 SJGREQSTERMI field
 in JVMPOOL resource table [715](#)
 SJGREQSTOTAL field
 in JVMPOOL resource table [715](#)
 SJRDS_ID field
 in JVMPROF resource table [717](#)
 SJRDSVER field
 in JVMPROF resource table [717](#)
 SLMDTE field
 in ECSYSCHG resource table [359](#)
 SMDACCESS field
 in DOMSPOOL resource table [341](#)
 SMDBNDRY field
 in DOMSPOOL resource table [341](#)
 SMDCELEM field
 in DOMSPOOL resource table [341](#)
 SMDCES field
 in DOMSPOOL resource table [341](#)
 SMDGPS field
 in DOMSPOOL resource table [341](#)
 SMDDSAINDEX field
 in DOMSPOOL resource table [341](#)
 SMDDSANAME field
 in DOMSPOOL resource table [341](#)
 SMDDSID field
 in DOMSPOOL resource table [341](#)
 SMDDSVR field
 in DOMSPOOL resource table [341](#)
 SMDELCHN field
 in DOMSPOOL resource table [341](#)
 SMDETYPE field
 in DOMSPOOL resource table [341](#)
 SMDFLEN field
 in DOMSPOOL resource table [341](#)
 SMDFMREQ field
 in DOMSPOOL resource table [341](#)
 SMDGMREQ field
 in DOMSPOOL resource table [341](#)
 SMDHWMPs field
 in DOMSPOOL resource table [341](#)

SMDIFREE field
 in DOMSPOOL resource table [341](#)
 SMDLOCN field
 in DOMSPOOL resource table [341](#)
 SMDSPN field
 in DOMSPOOL resource table [341](#)
 SMFJRNL resource table [1089](#)
 SMSACCESS field
 in CICSPAGP resource table [83](#)
 SMSASACTIVE field
 in CICSSTOR resource table [101](#)
 SMSASR field
 in CICSPAGP resource table [83](#)
 SMSATBCUSHLI field
 in CICSSTOR resource table [101](#)
 SMSATBCUSHRE field
 in CICSSTOR resource table [101](#)
 SMSCASR field
 in CICSSTOR resource table [101](#)
 SMSCCREL field
 in CICSSTOR resource table [101](#)
 SMSCCRIS field
 in CICSSTOR resource table [101](#)
 SMSCCSIZE field
 in CICSSTOR resource table [101](#)
 SMSCCSUBP field
 in CICSSTOR resource table [101](#)
 SMSCDSASZ field
 in CICSSTOR resource table [101](#)
 SMSCDSR field
 in CICSSTOR resource table [101](#)
 SMSCEXTS field
 in CICSSTOR resource table [101](#)
 SMSCEXTSA field
 in CICSSTOR resource table [101](#)
 SMSCEXTSR field
 in CICSSTOR resource table [101](#)
 SMSCFMREQ field
 in CICSSTOR resource table [101](#)
 SMSCFSTG field
 in CICSSTOR resource table [101](#)
 SMSCGMREQ field
 in CICSSTOR resource table [101](#)
 SMSCHWMFSTG field
 in CICSSTOR resource table [101](#)
 SMSCHWMSS field
 in CICSSTOR resource table [101](#)
 SMSCLFA field
 in CICSSTOR resource table [101](#)
 SMSCLWMFSTG field
 in CICSSTOR resource table [101](#)
 SMSCPWWs field
 in CICSSTOR resource table [101](#)
 SMSCREL field
 in CICSPAGP resource table [83](#)
 SMSCRISS field
 in CICSPAGP resource table [83](#)
 SMSCSIZE field
 in CICSPAGP resource table [83](#)
 SMSCSOS field
 in CICSSTOR resource table [101](#)
 SMSCSSCUM field
 in CICSPAGP resource table [83](#)
 in CICSSTOR resource table [101](#)

SMSCSSCUR field
 in CICSPAGP resource table [83](#)
 in CICSSTOR resource table [101](#)

SMSCSSHWM field
 in CICSPAGP resource table [83](#)
 in CICSSTOR resource table [101](#)

SMSCSUBP field
 in CICSPAGP resource table [83](#)

SMSCSV field
 in CICSSTOR resource table [101](#)

SMSCTSOS field
 in CICSSTOR resource table [101](#)

SMSCUCSS field
 in CICSSTOR resource table [101](#)

SMSDSABYTES field
 in CICSPAGP resource table [83](#)
 in DOMSPOOL resource table [341](#)

SMSDSALIMIT field
 in CICSPAGP resource table [83](#)
 in CICSSTOR resource table [101](#)

SMSDSANAME field
 in CICSPAGP resource table [83](#)

SMSDSASZ field
 in CICSPAGP resource table [83](#)
 in DOMSPOOL resource table [341](#)

SMSDSATOTAL field
 in CICSPAGP resource table [83](#)
 in CICSSTOR resource table [101](#)
 in DOMSPOOL resource table [341](#)
 in LOADACT resource table [751](#)
 in LOADER resource table [753](#)
 in TSKSPOLS resource table [1211](#)

SMSDSID field
 in CICSPAGP resource table [83](#)
 in CICSSTOR resource table [101](#)
 in DOMSPOOL resource table [341](#)
 in LOADACT resource table [751](#)
 in LOADER resource table [753](#)

SMSDSR field
 in CICSPAGP resource table [83](#)

SMSDSVER field
 in CICSPAGP resource table [83](#)
 in CICSSTOR resource table [101](#)
 in DOMSPOOL resource table [341](#)
 in LOADACT resource table [751](#)
 in LOADER resource table [753](#)

SMSECASR field
 in CICSSTOR resource table [101](#)

SMSECCREL field
 in CICSSTOR resource table [101](#)

SMSECCRISS field
 in CICSSTOR resource table [101](#)

SMSECCSIZE field
 in CICSSTOR resource table [101](#)

SMSECCSUBP field
 in CICSSTOR resource table [101](#)

SMSECDASZ field
 in CICSSTOR resource table [101](#)

SMSECDSR field
 in CICSSTOR resource table [101](#)

SMSECEXTS field
 in CICSSTOR resource table [101](#)

SMSECEXTSA field
 in CICSSTOR resource table [101](#)

SMSEEXTSR field
 in CICSSTOR resource table [101](#)

SMSECFMREQ field
 in CICSSTOR resource table [101](#)

SMSECFSTG field
 in CICSSTOR resource table [101](#)

SMSECGMREQ field
 in CICSSTOR resource table [101](#)

SMSECHWMFSTG field
 in CICSSTOR resource table [101](#)

SMSECHWMSS field
 in CICSSTOR resource table [101](#)

SMSECLFA field
 in CICSSTOR resource table [101](#)

SMSECLWMFSTG field
 in CICSSTOR resource table [101](#)

SMSECPWWS field
 in CICSSTOR resource table [101](#)

SMSECSOS field
 in CICSSTOR resource table [101](#)

SMSECSV field
 in CICSSTOR resource table [101](#)

SMSECTSOS field
 in CICSSTOR resource table [101](#)

SMSECUCSS field
 in CICSSTOR resource table [101](#)

SMSEDSALIMIT field
 in CICSPAGP resource table [83](#)
 in CICSSTOR resource table [101](#)

SMSEDSATOTAL field
 in CICSPAGP resource table [83](#)
 in CICSSTOR resource table [101](#)
 in LOADER resource table [753](#)
 in TSKSPOLS resource table [1211](#)

SMSERASR field
 in CICSSTOR resource table [101](#)

SMSERCREL field
 in CICSSTOR resource table [101](#)

SMSERCRISS field
 in CICSSTOR resource table [101](#)

SMSERCSIZE field
 in CICSSTOR resource table [101](#)

SMSERCSUBP field
 in CICSSTOR resource table [101](#)

SMSERDSASZ field
 in CICSSTOR resource table [101](#)

SMSERDSR field
 in CICSSTOR resource table [101](#)

SMSEREXTS field
 in CICSSTOR resource table [101](#)

SMSEREXTSA field
 in CICSSTOR resource table [101](#)

SMSEREXTSR field
 in CICSSTOR resource table [101](#)

SMSERFMREQ field
 in CICSSTOR resource table [101](#)

SMSERFSTG field
 in CICSSTOR resource table [101](#)

SMSERGMREQ field
 in CICSSTOR resource table [101](#)

SMSERHWMFSTG field
 in CICSSTOR resource table [101](#)

SMSERHWMSS field
 in CICSSTOR resource table [101](#)

SMSERLFA field
 in CICSSTOR resource table [101](#)
 SMSERLWMFSTG field
 in CICSSTOR resource table [101](#)
 SMSERPWW field
 in CICSSTOR resource table [101](#)
 SMSERSOS field
 in CICSSTOR resource table [101](#)
 SMSERSV field
 in CICSSTOR resource table [101](#)
 SMSERTSOS field
 in CICSSTOR resource table [101](#)
 SMSERUCSS field
 in CICSSTOR resource table [101](#)
 SMSESASR field
 in CICSSTOR resource table [101](#)
 SMSESCREL field
 in CICSSTOR resource table [101](#)
 SMSESCRIS field
 in CICSSTOR resource table [101](#)
 SMSESCSIZE field
 in CICSSTOR resource table [101](#)
 SMSESCSUBP field
 in CICSSTOR resource table [101](#)
 SMSESDSASZ field
 in CICSSTOR resource table [101](#)
 SMSESDSR field
 in CICSSTOR resource table [101](#)
 SMSESEXTS field
 in CICSSTOR resource table [101](#)
 SMSESEXTSA field
 in CICSSTOR resource table [101](#)
 SMSESEXTSR field
 in CICSSTOR resource table [101](#)
 SMSESFMREQ field
 in CICSSTOR resource table [101](#)
 SMSESFSTG field
 in CICSSTOR resource table [101](#)
 SMSESGMREQ field
 in CICSSTOR resource table [101](#)
 SMSESHWMFSTG field
 in CICSSTOR resource table [101](#)
 SMSESHWMSS field
 in CICSSTOR resource table [101](#)
 SMSESLFA field
 in CICSSTOR resource table [101](#)
 SMSESLWMFSTG field
 in CICSSTOR resource table [101](#)
 SMSESPWW field
 in CICSSTOR resource table [101](#)
 SMSESSOS field
 in CICSSTOR resource table [101](#)
 SMSESSV field
 in CICSSTOR resource table [101](#)
 SMSESTSOS field
 in CICSSTOR resource table [101](#)
 SMSESUCSS field
 in CICSSTOR resource table [101](#)
 SMSETASR field
 in CICSSTOR resource table [101](#)
 SMSETCREL field
 in CICSSTOR resource table [101](#)
 SMSETCRISS field
 in CICSSTOR resource table [101](#)

SMSETCSIZE field
 in CICSSTOR resource table [101](#)
 SMSETCSUBP field
 in CICSSTOR resource table [101](#)
 SMSETDSASZ field
 in CICSSTOR resource table [101](#)
 SMSETDSR field
 in CICSSTOR resource table [101](#)
 SMSETEXTS field
 in CICSSTOR resource table [101](#)
 SMSETEXTSA field
 in CICSSTOR resource table [101](#)
 SMSETEXTSR field
 in CICSSTOR resource table [101](#)
 SMSETFMREQ field
 in CICSSTOR resource table [101](#)
 SMSETFSTG field
 in CICSSTOR resource table [101](#)
 SMSETGMREQ field
 in CICSSTOR resource table [101](#)
 SMSETHWMFSTG field
 in CICSSTOR resource table [101](#)
 SMSETHWMSS field
 in CICSSTOR resource table [101](#)
 SMSETLFA field
 in CICSSTOR resource table [101](#)
 SMSETLWMFSTG field
 in CICSSTOR resource table [101](#)
 SMSETPWW field
 in CICSSTOR resource table [101](#)
 SMSETSOS field
 in CICSSTOR resource table [101](#)
 SMSETSV field
 in CICSSTOR resource table [101](#)
 SMSETTSOS field
 in CICSSTOR resource table [101](#)
 SMSETUCSS field
 in CICSSTOR resource table [101](#)
 SMSEUASR field
 in CICSSTOR resource table [101](#)
 SMSEUCREL field
 in CICSSTOR resource table [101](#)
 SMSEUCRISS field
 in CICSSTOR resource table [101](#)
 SMSEUCSIZE field
 in CICSSTOR resource table [101](#)
 SMSEUCSUBP field
 in CICSSTOR resource table [101](#)
 SMSEUDSASZ field
 in CICSSTOR resource table [101](#)
 SMSEUDSR field
 in CICSSTOR resource table [101](#)
 SMSEUEXTS field
 in CICSSTOR resource table [101](#)
 SMSEUEXTSA field
 in CICSSTOR resource table [101](#)
 SMSEUEXTSR field
 in CICSSTOR resource table [101](#)
 SMSEUFMREQ field
 in CICSSTOR resource table [101](#)
 SMSEUFSTG field
 in CICSSTOR resource table [101](#)
 SMSEUGMREQ field
 in CICSSTOR resource table [101](#)

SMSEUHWMFSTG field
 in CICSSTOR resource table [101](#)
 SMSEUHWMS field
 in CICSSTOR resource table [101](#)
 SMSEULFA field
 in CICSSTOR resource table [101](#)
 SMSEULWMFSTG field
 in CICSSTOR resource table [101](#)
 SMSEUPWWS field
 in CICSSTOR resource table [101](#)
 SMSEUSOS field
 in CICSSTOR resource table [101](#)
 SMSEUSV field
 in CICSSTOR resource table [101](#)
 SMSEUTSOS field
 in CICSSTOR resource table [101](#)
 SMSEUUCSS field
 in CICSSTOR resource table [101](#)
 SMSEXTS field
 in CICSSTOR resource table [101](#)
 SMSEXTSA field
 in CICSSTOR resource table [101](#)
 SMSEXTSR field
 in CICSSTOR resource table [101](#)
 SMSFMREQ field
 in CICSSTOR resource table [101](#)
 SMSFRMGFLSZ field
 in CICSSTOR resource table [101](#)
 SMSFRMGRDFL field
 in CICSSTOR resource table [101](#)
 SMSFSTG field
 in CICSSTOR resource table [101](#)
 SMSGCASR field
 in CICSSTOR resource table [101](#)
 SMSGCCREL field
 in CICSSTOR resource table [101](#)
 SMSGCCRISS field
 in CICSSTOR resource table [101](#)
 SMSGCCSIZE field
 in CICSSTOR resource table [101](#)
 SMSGCCSS field
 in CICSSTOR resource table [101](#)
 SMSGCCSUBP field
 in CICSSTOR resource table [101](#)
 SMSGCDSASZ field
 in CICSSTOR resource table [101](#)
 SMSGCDSR field
 in CICSSTOR resource table [101](#)
 SMSGCFMREQ field
 in CICSSTOR resource table [101](#)
 SMSGCFSTG field
 in CICSSTOR resource table [101](#)
 SMSGCGMREQ field
 in CICSSTOR resource table [101](#)
 SMSGCHWMSS field
 in CICSSTOR resource table [101](#)
 SMSGCLFA field
 in CICSSTOR resource table [101](#)
 SMSGCPWWS field
 in CICSSTOR resource table [101](#)
 SMSGCSOS field
 in CICSSTOR resource table [101](#)
 SMSGCSV field
 in CICSSTOR resource table [101](#)

SMSGCTSOS field
 in CICSSTOR resource table [101](#)
 SMSGCUCSS field
 in CICSSTOR resource table [101](#)
 SMSGDSAACTIV field
 in CICSSTOR resource table [101](#)
 SMSGDSAALOC field
 in CICSSTOR resource table [101](#)
 SMSGDSALIMIT field
 in CICSSTOR resource table [101](#)
 SMSGDSATOTAL field
 in CICSSTOR resource table [101](#)
 SMSGETSTORSZ field
 in CICSSTOR resource table [101](#)
 SMSGMREQ field
 in CICSSTOR resource table [101](#)
 SMSGSASR field
 in CICSSTOR resource table [101](#)
 SMSGSCREL field
 in CICSSTOR resource table [101](#)
 SMSGSCRIS field
 in CICSSTOR resource table [101](#)
 SMSGSCSIZE field
 in CICSSTOR resource table [101](#)
 SMSGSCSS field
 in CICSSTOR resource table [101](#)
 SMSGSCSUBP field
 in CICSSTOR resource table [101](#)
 SMSGSDASZ field
 in CICSSTOR resource table [101](#)
 SMSGSDSR field
 in CICSSTOR resource table [101](#)
 SMSGSFMREQ field
 in CICSSTOR resource table [101](#)
 SMSGSFSTG field
 in CICSSTOR resource table [101](#)
 SMSGSGMREQ field
 in CICSSTOR resource table [101](#)
 SMSGSHWMSS field
 in CICSSTOR resource table [101](#)
 SMSGSLFA field
 in CICSSTOR resource table [101](#)
 SMSGSPWWS field
 in CICSSTOR resource table [101](#)
 SMSGSSOS field
 in CICSSTOR resource table [101](#)
 SMSGSSV field
 in CICSSTOR resource table [101](#)
 SMSGSTSOS field
 in CICSSTOR resource table [101](#)
 SMSGSUCSS field
 in CICSSTOR resource table [101](#)
 SMSGUASR field
 in CICSSTOR resource table [101](#)
 SMSGUAREL field
 in CICSSTOR resource table [101](#)
 SMSGUARIS field
 in CICSSTOR resource table [101](#)
 SMSGUCSIZE field
 in CICSSTOR resource table [101](#)
 SMSGUCSS field
 in CICSSTOR resource table [101](#)
 SMSGUCSUBP field
 in CICSSTOR resource table [101](#)

MSGUDSASZ field
 in CICSSTOR resource table [101](#)
 MSGUDSR field
 in CICSSTOR resource table [101](#)
 MSGUFMREQ field
 in CICSSTOR resource table [101](#)
 MSGUFSTG field
 in CICSSTOR resource table [101](#)
 MSGUGMREQ field
 in CICSSTOR resource table [101](#)
 MSGUHWMS field
 in CICSSTOR resource table [101](#)
 MSGULFA field
 in CICSSTOR resource table [101](#)
 MSGUPWWS field
 in CICSSTOR resource table [101](#)
 MSGUSOS field
 in CICSSTOR resource table [101](#)
 MSGUSV field
 in CICSSTOR resource table [101](#)
 MSGUTSOS field
 in CICSSTOR resource table [101](#)
 MSGUUCSS field
 in CICSSTOR resource table [101](#)
 SMHGDSAALC field
 in CICSSTOR resource table [101](#)
 SMHPGSNREAL field
 in CICSSTOR resource table [101](#)
 SMHVAXSLTS field
 in CICSSTOR resource table [101](#)
 SMHVGAXSTS field
 in CICSSTOR resource table [101](#)
 SMSHWMASACT field
 in CICSSTOR resource table [101](#)
 SMSHWMCDSA field
 in CICSSTOR resource table [101](#)
 SMSHWMDASZ field
 in CICSPAGP resource table [83](#)
 SMSHWMDSATOT field
 in CICSPAGP resource table [83](#)
 in CICSSTOR resource table [101](#)
 SMSHWMECDSA field
 in CICSSTOR resource table [101](#)
 SMSHWMEDSATO field
 in CICSPAGP resource table [83](#)
 in CICSSTOR resource table [101](#)
 SMSHWMERDSA field
 in CICSSTOR resource table [101](#)
 SMSHWMESDSA field
 in CICSSTOR resource table [101](#)
 SMSHWMETDSA field
 in CICSSTOR resource table [101](#)
 SMSHWMEUDSA field
 in CICSSTOR resource table [101](#)
 SMSHWMFSTG field
 in CICSPAGP resource table [83](#)
 SMSHWMGCDSA field
 in CICSSTOR resource table [101](#)
 SMSHWMGCFSTG field
 in CICSSTOR resource table [101](#)
 SMSHWMGDSAAC field
 in CICSSTOR resource table [101](#)
 SMSHWMGDSATO field
 in CICSSTOR resource table [101](#)

SMSHWMGSDSA field
 in CICSSTOR resource table [101](#)
 SMSHWMGSFSTG field
 in CICSSTOR resource table [101](#)
 SMSHWMGUDSA field
 in CICSSTOR resource table [101](#)
 SMSHWMGUFSTG field
 in CICSSTOR resource table [101](#)
 SMSHWMRDSA field
 in CICSSTOR resource table [101](#)
 SMSHWMSDSA field
 in CICSSTOR resource table [101](#)
 SMSHWMSS field
 in CICSPAGP resource table [83](#)
 SMSHWMUDSA field
 in CICSSTOR resource table [101](#)
 SMLFA field
 in CICSPAGP resource table [83](#)
 SMSLOCN field
 in CICSPAGP resource table [83](#)
 SMSLRGMEMOBJ field
 in CICSSTOR resource table [101](#)
 SMSLRGPGBNRL field
 in CICSSTOR resource table [101](#)
 SMSLVABYTES field
 in CICSSTOR resource table [101](#)
 SMSLVGBYTES field
 in CICSSTOR resource table [101](#)
 SMSLVHBYTES field
 in CICSSTOR resource table [101](#)
 SMSLVNMOMBS field
 in CICSSTOR resource table [101](#)
 SMSLVSHRBTS field
 in CICSSTOR resource table [101](#)
 SMSLVSHRGS field
 in CICSSTOR resource table [101](#)
 SMSLVSHRNMO field
 in CICSSTOR resource table [101](#)
 SMSLWMFSTG field
 in CICSPAGP resource table [83](#)
 SMSLWMGCFSTG field
 in CICSSTOR resource table [101](#)
 SMSLWMGSFSTG field
 in CICSSTOR resource table [101](#)
 SMSLWMGUFSTG field
 in CICSSTOR resource table [101](#)
 SMSMEMLIMIT field
 in CICSSTOR resource table [101](#)
 SMSMEMLIMSRC field
 in CICSSTOR resource table [101](#)
 SMSNPAGP field
 in CICSPAGP resource table [83](#)
 in CICSSTOR resource table [101](#)
 SMSPGSINREAL field
 in CICSSTOR resource table [101](#)
 SMPWWS field
 in CICSPAGP resource table [83](#)
 SMSRASR field
 in CICSSTOR resource table [101](#)
 SMSRCREL field
 in CICSSTOR resource table [101](#)
 SMSRCRISS field
 in CICSSTOR resource table [101](#)
 SMSRCSIZE field

SMSRCSIZE field (*continued*)
 in CICSSTOR resource table [101](#)
 SMSRCSUBP field
 in CICSSTOR resource table [101](#)
 SMSRDSASZ field
 in CICSSTOR resource table [101](#)
 SMSRDSR field
 in CICSSTOR resource table [101](#)
 SMSRENTPGM field
 in CICSPAGP resource table [83](#)
 in CICSSTOR resource table [101](#)
 SMSREXTS field
 in CICSSTOR resource table [101](#)
 SMSREXTSA field
 in CICSSTOR resource table [101](#)
 SMSREXTSR field
 in CICSSTOR resource table [101](#)
 SMSRFMREQ field
 in CICSSTOR resource table [101](#)
 SMSRFSTG field
 in CICSSTOR resource table [101](#)
 SMSRGMREQ field
 in CICSSTOR resource table [101](#)
 SMSRHWMFSTG field
 in CICSSTOR resource table [101](#)
 SMSRHWMSS field
 in CICSSTOR resource table [101](#)
 SMSRLFA field
 in CICSSTOR resource table [101](#)
 SMSRLWMFSTG field
 in CICSSTOR resource table [101](#)
 SMSRPWWS field
 in CICSSTOR resource table [101](#)
 SMSRQWAITMVS field
 in CICSSTOR resource table [101](#)
 SMSRSOS field
 in CICSSTOR resource table [101](#)
 SMSRSV field
 in CICSSTOR resource table [101](#)
 SMSRTSOS field
 in CICSSTOR resource table [101](#)
 SMSRUCSS field
 in CICSSTOR resource table [101](#)
 SMSSASR field
 in CICSSTOR resource table [101](#)
 SMSSCREL field
 in CICSSTOR resource table [101](#)
 SMSSCRISS field
 in CICSSTOR resource table [101](#)
 SMSSCSIZE field
 in CICSSTOR resource table [101](#)
 SMSSCSUBP field
 in CICSSTOR resource table [101](#)
 SMSSDSASZ field
 in CICSSTOR resource table [101](#)
 SMSSDSR field
 in CICSSTOR resource table [101](#)
 SMSSEXTS field
 in CICSSTOR resource table [101](#)
 SMSSEXTSA field
 in CICSSTOR resource table [101](#)
 SMSSEXTSR field
 in CICSSTOR resource table [101](#)
 SMSSFREQ field

SMSSFREQ field (*continued*)
 in CICSSTOR resource table [101](#)
 SMSSFSTG field
 in CICSSTOR resource table [101](#)
 SMSSGMREQ field
 in CICSSTOR resource table [101](#)
 SMSSHWMFSTG field
 in CICSSTOR resource table [101](#)
 SMSSHWMSS field
 in CICSSTOR resource table [101](#)
 SMSSLFA field
 in CICSSTOR resource table [101](#)
 SMSSLWMFSTG field
 in CICSSTOR resource table [101](#)
 SMSSOS field
 in CICSPAGP resource table [83](#)
 SMSSOSABAR field
 in CICSSTOR resource table [101](#)
 SMSSOSALINE field
 in CICSSTOR resource table [101](#)
 SMSSOSBLINE field
 in CICSSTOR resource table [101](#)
 SMSSOSSTATUS field
 in CICSSTOR resource table [101](#)
 SMSSPWWWS field
 in CICSSTOR resource table [101](#)
 SMSSSOS field
 in CICSSTOR resource table [101](#)
 SMSSSV field
 in CICSSTOR resource table [101](#)
 SMSSTGPROT field
 in CICSPAGP resource table [83](#)
 in CICSSTOR resource table [101](#)
 SMSSTSOS field
 in CICSSTOR resource table [101](#)
 SMSSUCSS field
 in CICSSTOR resource table [101](#)
 SMSSV field
 in CICSPAGP resource table [83](#)
 SMSTMWAITMVS field
 in CICSSTOR resource table [101](#)
 SMSTRANISO field
 in CICSPAGP resource table [83](#)
 in CICSSTOR resource table [101](#)
 SMSTSOS field
 in CICSPAGP resource table [83](#)
 SMSUASR field
 in CICSSTOR resource table [101](#)
 SMSUCREL field
 in CICSSTOR resource table [101](#)
 SMSUCRISS field
 in CICSSTOR resource table [101](#)
 SMSUCSIZE field
 in CICSSTOR resource table [101](#)
 SMSUCSS field
 in CICSPAGP resource table [83](#)
 SMSUCSUBP field
 in CICSSTOR resource table [101](#)
 SMSUDSASZ field
 in CICSSTOR resource table [101](#)
 SMSUDSR field
 in CICSSTOR resource table [101](#)
 SMSUEXTS field
 in CICSSTOR resource table [101](#)

SMSUEXTSA field
 in CICSSTOR resource table [101](#)
 SMSUEXTSR field
 in CICSSTOR resource table [101](#)
 SMSUFMREQ field
 in CICSSTOR resource table [101](#)
 SMSUFSTG field
 in CICSSTOR resource table [101](#)
 SMSUGMREQ field
 in CICSSTOR resource table [101](#)
 SMSUHWMFSTG field
 in CICSSTOR resource table [101](#)
 SMSUHWMS field
 in CICSSTOR resource table [101](#)
 SMSULFA field
 in CICSSTOR resource table [101](#)
 SMSULWMFSTG field
 in CICSSTOR resource table [101](#)
 SMSUPWWS field
 in CICSSTOR resource table [101](#)
 SMSUSOS field
 in CICSSTOR resource table [101](#)
 SMSUSSCUM field
 in CICSSTOR resource table [101](#)
 in CICSSTOR resource table [83](#)
 in CICSSTOR resource table [101](#)
 SMSUSSCUR field
 in CICSSTOR resource table [83](#)
 in CICSSTOR resource table [101](#)
 SMSUSSHWM field
 in CICSSTOR resource table [83](#)
 in CICSSTOR resource table [101](#)
 SMSUSV field
 in CICSSTOR resource table [101](#)
 SMSUTSOS field
 in CICSSTOR resource table [101](#)
 SMSUUCSS field
 in CICSSTOR resource table [101](#)
 SMTACCESS field
 in TSKSPOOL resource table [1215](#)
 SMTACCESSC field
 in TSKSPOLS resource table [1211](#)
 SMTACCESSEC field
 in TSKSPOLS resource table [1211](#)
 SMTACCESSEU field
 in TSKSPOLS resource table [1211](#)
 SMTACCESSU field
 in TSKSPOLS resource table [1211](#)
 SMTCES field
 in TSKSPOOL resource table [1215](#)
 SMTCESCDSA field
 in TSKSPOLS resource table [1211](#)
 SMTCESECDSA field
 in TSKSPOLS resource table [1211](#)
 SMTCESEUDSA field
 in TSKSPOLS resource table [1211](#)
 SMTCESUDSA field
 in TSKSPOLS resource table [1211](#)
 SMTCNE field
 in TSKSPOOL resource table [1215](#)
 SMTCNECDSA field
 in TSKSPOLS resource table [1211](#)
 SMTCNEECDSA field
 in TSKSPOLS resource table [1211](#)
 SMTCNEUDSA field

SMTCNEEUDSA field (*continued*)
 in TSKSPOLS resource table [1211](#)
 SMTCNEUDSA field
 in TSKSPOLS resource table [1211](#)
 SMTCPSCDSA field
 in TSKSPOOL resource table [1215](#)
 SMTCPSECDSA field
 in TSKSPOLS resource table [1211](#)
 SMTCPSEUDSA field
 in TSKSPOLS resource table [1211](#)
 SMTCPSEUDSA field
 in TSKSPOLS resource table [1211](#)
 SMTDINDEX field
 in TSKSPOOL resource table [1215](#)
 SMTDSANAME field
 in TSKSPOOL resource table [1215](#)
 SMTDSID field
 in TSKSPOLS resource table [1211](#)
 in TSKSPOOL resource table [1215](#)
 SMTDSVER field
 in TSKSPOLS resource table [1211](#)
 in TSKSPOOL resource table [1215](#)
 SMTFMREQ field
 in TSKSPOOL resource table [1215](#)
 SMTFMREQCDSA field
 in TSKSPOLS resource table [1211](#)
 SMTFMREQEC field
 in TSKSPOLS resource table [1211](#)
 SMTFMREQEU field
 in TSKSPOLS resource table [1211](#)
 SMTFMREQUDSA field
 in TSKSPOLS resource table [1211](#)
 SMTGMREQ field
 in TSKSPOOL resource table [1215](#)
 SMTGMREQCDSA field
 in TSKSPOLS resource table [1211](#)
 SMTGMREQEC field
 in TSKSPOLS resource table [1211](#)
 SMTGMREQEU field
 in TSKSPOLS resource table [1211](#)
 SMTGMREQUDSA field
 in TSKSPOLS resource table [1211](#)
 SMTHWMPS field
 in TSKSPOOL resource table [1215](#)
 SMTHWMPSCDSA field
 in TSKSPOLS resource table [1211](#)
 SMTHWMPSEC field
 in TSKSPOLS resource table [1211](#)
 SMTHWMPSEU field
 in TSKSPOLS resource table [1211](#)
 SMTHWMPSEUDSA field
 in TSKSPOLS resource table [1211](#)
 SMTLOCN field
 in TSKSPOOL resource table [1215](#)
 SMTLOCNCDSA field
 in TSKSPOLS resource table [1211](#)
 SMTLOCNECDSA field
 in TSKSPOLS resource table [1211](#)
 SMTLOCNEUDSA field
 in TSKSPOLS resource table [1211](#)
 SMTLOCNUDSA field
 in TSKSPOLS resource table [1211](#)

SNAPCLASS field
 in DB2SS resource table [317](#)
 SNONIMMGET field
 in CICSSTOR resource table [101](#)
 SOAPLEVEL field
 in PIPELINE resource table [959](#)
 SOAPRNUM field
 in PIPELINE resource table [959](#)
 SOAPVNUM field
 in PIPELINE resource table [959](#)
 SOBYDECT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 SOBYENCT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 SOCIPHER field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 SOCKETCLOSE field
 in TCPDEF resource table [1145](#)
 in TCPIPS resource table [1157](#)
 in URIMAP resource table [1257](#)
 in URIMPDEF resource table [1261](#)
 SOCKPLSZPEAK field
 in URIMAP resource table [1257](#)
 SOCKPOOLSIZE field
 in URIMAP resource table [1257](#)
 SOCKRECLAIMD field
 in URIMAP resource table [1257](#)
 SOCKETIMEDOUT field
 in URIMAP resource table [1257](#)
 SOIOWTC field
 in MLOCTRAN resource table [837](#)
 SOIOWTT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 SOLICITED field
 in TERMDEF resource table [1173](#)
 SOMODDLY field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 SORT field
 in ATTR resource table [49](#)
 SOSABOVE_TIM field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)
 SOSABOVEBAR field
 in CICSRRN resource table [89](#)
 in CMAS resource table [131](#)
 SOSABOVELINE field
 in CICSRRN resource table [89](#)
 in CMAS resource table [131](#)
 SOSACTION field
 in CSYSDEF resource table [281](#)
 in MAS resource table [787](#)
 in RTASPEC resource table [1075](#)
 SOSBELOW_TIM field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)

SOSBELOW_TIM field (*continued*)
 in EMSTATUS resource table [415](#)
 SOSBELOWLINE field
 in CICSRRN resource table [89](#)
 in CMAS resource table [131](#)
 SOSCDSDA_TIM field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)
 SOSCONDS field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)
 SOSCONDS2 field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)
 SOSECDSDA_TIM field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)
 SOSERDSA_TIM field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)
 SOSESDSDA_TIM field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)
 SOSEUDSDA_TIM field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)
 SOSGCSDA_TIM field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)
 SOSI field
 in TYPTMDEF resource table [1239](#)
 SOSIST field
 in TERMNL resource table [1179](#)
 SOSMVS_TIM field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)
 SOSRDSA_TIM field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)
 SOSSDSDA_TIM field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)
 SOSSEV field
 in CSYSDEF resource table [281](#)
 in MAS resource table [787](#)
 in RTASPEC resource table [1075](#)
 SOSSTATUS field
 in CICSRRN resource table [89](#)
 SOSUDSDA_TIM field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)
 SOTUNING field

SOTUNING field (*continued*)
 in TCPIPGBL resource table [1153](#)
 SOURCE field
 in ATTR resource table [49](#)
 in SYSPARM resource table [1107](#)
 SPEC field
 in CMDMPAPS resource table [137](#)
 in CMDMSAPS resource table [139](#)
 in EACTNTFN resource table [357](#)
 in LNKSMSCG resource table [739](#)
 in LNKSMSCS resource table [741](#)
 in LNKSRS CG resource table [743](#)
 in LNKSRS CS resource table [745](#)
 in LNKSWSCG resource table [747](#)
 in LNKSWSCS resource table [749](#)
 in MONINSPC resource table [865](#)
 SPECIFTCPS field
 in TCPDEF resource table [1145](#)
 in TCPIPS resource table [1157](#)
 SPHASE field
 in DB2ENTRY resource table [311](#)
 SPIST field
 in EXITTRUE resource table [577](#)
 SPOOLDEST field
 in TERMDEF resource table [1173](#)
 SPOOLPRTRSL field
 in TERMDEF resource table [1173](#)
 SPOOLPRTO field
 in TERMDEF resource table [1173](#)
 SPOOLTO field
 in TERMDEF resource table [1173](#)
 SPURGE field
 in TRANDEF resource table [1191](#)
 SQLTRCID field
 in DB2SS resource table [317](#)
 SRATECREL field
 in CICSSTOR resource table [101](#)
 SRATEEXTSA field
 in CICSSTOR resource table [101](#)
 SRATEEXTSR field
 in CICSSTOR resource table [101](#)
 SRATEFM field
 in CICSSTOR resource table [101](#)
 SRATEGM field
 in CICSSTOR resource table [101](#)
 RATESTORV field
 in CICSSTOR resource table [101](#)
 SRCHM field
 in FILEDEF resource table [617](#)
 SRVCNAME field
 in OSGISERV resource table [939](#)
 in WLPSE RV resource table [1317](#)
 SRVCRTTMEGMT field
 in JVMSE RV resource table [719](#)
 SRVCRTTMELCL field
 in JVMSE RV resource table [719](#)
 SRVCSTATUS field
 in ERMCO S GS resource table [497](#)
 in OSGISERV resource table [939](#)
 in WLPSE RV resource table [1317](#)
 SRVGCMJRCNT field
 in JVMSE RV resource table [719](#)
 SRVGCMJR CPU field
 in JVMSE RV resource table [719](#)

SRVGCMJRFRD field
 in JVMSE RV resource table [719](#)
 SRVGCMNRCNT field
 in JVMSE RV resource table [719](#)
 SRVGCMNRCPU field
 in JVMSE RV resource table [719](#)
 SRVGCMNRFRD field
 in JVMSE RV resource table [719](#)
 SRVSPWC field
 in MLOCT RAN resource table [837](#)
 SRVSPWT field
 in MLOCT RAN resource table [837](#)
 SRVSYSTHCNT field
 in JVMSE RV resource table [719](#)
 SRVSYSTHDWT field
 in JVMSE RV resource table [719](#)
 SRVSYSTHNWT field
 in JVMSE RV resource table [719](#)
 SRVSYSTHPWT field
 in JVMSE RV resource table [719](#)
 SRVSYSTHWTT field
 in JVMSE RV resource table [719](#)
 SRVSYWTT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 SRVTHRCURR field
 in JVMSE RV resource table [719](#)
 SRVTHRHWM field
 in JVMSE RV resource table [719](#)
 SRVTHRWAITS field
 in JVMSE RV resource table [719](#)
 SRVTHRWCURR field
 in JVMSE RV resource table [719](#)
 SRVTHRWHWM field
 in JVMSE RV resource table [719](#)
 SRVTHRWTIME field
 in JVMSE RV resource table [719](#)
 SRVTRACE field
 in CMAS resource table [131](#)
 in MAS resource table [787](#)
 SRVUSECOUNT field
 in JVMSE RV resource table [719](#)
 SSL field
 in EJCODEF resource table [365](#)
 in EJCOSE resource table [371](#)
 in IPCONDEF resource table [681](#)
 in TCPDEF resource table [1145](#)
 SSLCACHE field
 in TCPIPGBL resource table [1153](#)
 SSLPORT field
 in EJCODEF resource table [365](#)
 in EJCOSE resource table [371](#)
 SSLTYPE field
 in IPCONN resource table [687](#)
 in TCPIPS resource table [1157](#)
 SSLUNAUTH field
 in EJCODEF resource table [365](#)
 in EJCOSE resource table [371](#)
 STACK field
 in WORKREQ resource table [1319](#)
 STAINGRP resource table [1091](#)
 STALL_TIM field
 in EMAS SICK resource table [389](#)
 in EMAS WELL resource table [397](#)

STALL_TIM field (*continued*)
 in EMSTATUS resource table [415](#)
 STANDBYMODE field
 in DB2CDEF resource table [295](#)
 in DB2CONN resource table [301](#)
 START field
 in HTASK resource table [655](#)
 in PERIODEF resource table [951](#)
 in TASK resource table [1123](#)
 in TASKRMI resource table [1121](#)
 STARTCODE field
 in TASK resource table [1123](#)
 STARTSTATUS field
 in CRESGLUE resource table [217](#)
 in CRESTRUE resource table [257](#)
 in EXITGLUE resource table [575](#)
 in EXITTRUE resource table [577](#)
 in EXTGLORD resource table [579](#)
 STARTTIME field
 in CLCACHE resource table [123](#)
 in TASKASSC resource table [1113](#)
 STARTTM field
 in TASKASSC resource table [1113](#)
 STARTUP field
 in CICSRCN resource table [89](#)
 STARTUPDATE field
 in CICSRCN resource table [89](#)
 STATDEF resource table [1093](#)
 STATE field
 in CPLEXDEF resource table [169](#)
 in CPLXCMAS resource table [173](#)
 in CRESWEBS resource table [263](#)
 in EJCOSE resource table [371](#)
 in EJDJAR resource table [377](#)
 in EVENTDTL resource table [561](#)
 in FEPICONN resource table [593](#)
 in MFEPICON resource table [823](#)
 in TRANGRP resource table [1201](#)
 in UOWENQ resource table [1249](#)
 in WEBSERV resource table [1273](#)
 in WLMABWORK resource table [1301](#)
 STATCONTENT field
 in URIMPGBL resource table [1267](#)
 STATPGM field
 in STATDEF resource table [1093](#)
 STATSDEST field
 in DB2SS resource table [317](#)
 STATSQUEUE field
 in DB2CDEF resource table [295](#)
 in DB2CONN resource table [301](#)
 STATUS field
 in APACTV resource table [21](#)
 in ATOMDEF resource table [39](#)
 in BUNDEF resource table [65](#)
 in CICSPLX resource table [87](#)
 in CLCACHE resource table [123](#)
 in CMASLIST resource table [125](#)
 in CPLEXDEF resource table [169](#)
 in CPLXCMAS resource table [173](#)
 in CRESJRN resource table [223](#)
 in DB2SS resource table [317](#)
 in DBCTLSS resource table [329](#)
 in EJCODEF resource table [365](#)
 in EMASJOIN resource table [387](#)

STATUS field (*continued*)
 in EMASSTOP resource table [393](#)
 in EMASSTRT resource table [395](#)
 in ENQMDEF resource table [427](#)
 in FILEDEF resource table [617](#)
 in INTRATDQ resource table [675](#)
 in JRNLNAME resource table [707](#)
 in JVMPOOL resource table [715](#)
 in JVMSVDEF resource table [723](#)
 in LIBDEF resource table [727](#)
 in LOCTRAN resource table [763](#)
 in MAPDEF resource table [781](#)
 in MASHIST resource table [793](#)
 in MLOCTRAN resource table [837](#)
 in MNTRATDQ resource table [853](#)
 in MONITOR resource table [867](#)
 in MPROGRAM resource table [875](#)
 in MQMONDEF resource table [897](#)
 in OBJSTAT resource table [935](#)
 in PIPEDEF resource table [955](#)
 in PLATFORM resource table [970](#)
 in POLMON resource table [975](#)
 in PROCDEF resource table [981](#)
 in PROGDEF resource table [995](#)
 in PROGRAM resource table [1001](#)
 in PRTNDEF resource table [1009](#)
 in REMTRAN resource table [1029](#)
 in RTAACTV resource table [1061](#)
 in STREAMNM resource table [1097](#)
 in TCPDEF resource table [1145](#)
 in TCPIPGBL resource table [1153](#)
 in TRANDEF resource table [1191](#)
 in URIMPDEF resource table [1261](#)
 in WLMATARG resource table [1285](#)
 in WLMATGRP resource table [1289](#)
 in WLMABWAOR resource table [1295](#)
 in WLMABWORK resource table [1301](#)
 STGALCINU field
 in CMDT resource table [141](#)
 in MCMDT resource table [807](#)
 STGALCTOT field
 in CMDT resource table [141](#)
 in MCMDT resource table [807](#)
 STGCRELC field
 in CICSDSA resource table [79](#)
 in MCICSDSA resource table [799](#)
 STGCSTRT field
 in MONITOR resource table [867](#)
 STGDSID field
 in MONITOR resource table [867](#)
 STGDSVER field
 in MONITOR resource table [867](#)
 STGDTAINU field
 in CMDT resource table [141](#)
 in MCMDT resource table [807](#)
 STGDTATOT field
 in CMDT resource table [141](#)
 in MCMDT resource table [807](#)
 STGENTINU field
 in CMDT resource table [141](#)
 in MCMDT resource table [807](#)
 STGENTTOT field
 in CMDT resource table [141](#)
 in MCMDT resource table [807](#)

STGEODR field
in MONITOR resource table [867](#)

STGFSIZE field
in CICSDSA resource table [79](#)
in MCICSDSA resource table [799](#)

STGHWM field
in CICSDSA resource table [79](#)
in MCICSDSA resource table [799](#)

STGIDXINU field
in CMDT resource table [141](#)
in MCMDT resource table [807](#)

STGIDXTOT field
in CMDT resource table [141](#)
in MCMDT resource table [807](#)

STGINTR field
in MONITOR resource table [867](#)

STGLDW field
in MONITOR resource table [867](#)

STGLRT field
in MONITOR resource table [867](#)

STGLSIZE field
in CICSDSA resource table [79](#)
in MCICSDSA resource table [799](#)

STGNC field
in MONITOR resource table [867](#)

STGNSUBP field
in CICSDSA resource table [79](#)
in MCICSDSA resource table [799](#)

STGPROT field
in CICS RGN resource table [89](#)

STGPROTECT field
in CICSDSA resource table [79](#)
in MCICSDSA resource table [799](#)

STGPPWCNT field
in CICSDSA resource table [79](#)
in MCICSDSA resource table [799](#)

STGREQR field
in MONITOR resource table [867](#)

STGRRTR field
in MONITOR resource table [867](#)

STGSHWM field
in CICSDSA resource table [79](#)
in MCICSDSA resource table [799](#)

STGSMFE field
in MONITOR resource table [867](#)

STGSMFS field
in MONITOR resource table [867](#)

STGSMFW field
in MONITOR resource table [867](#)

STGSOSC field
in CICSDSA resource table [79](#)
in MCICSDSA resource table [799](#)

STGSOST field
in CICSDSA resource table [79](#)
in MCICSDSA resource table [799](#)

STGSTOTL field
in CICSDSA resource table [79](#)
in MCICSDSA resource table [799](#)

STGUSSR field
in MONITOR resource table [867](#)

STGVCNT field
in LOCTRAN resource table [763](#)
in MLOCTRAN resource table [837](#)
in MTERMNL resource table [909](#)

STGVCNT field (*continued*)
in TERMNL resource table [1179](#)

STGVTOTL field
in CICSDSA resource table [79](#)
in MCICSDSA resource table [799](#)

STLACTION field
in CSYSDEF resource table [281](#)
in MAS resource table [787](#)
in RTASPEC resource table [1075](#)

STLSEV field
in CSYSDEF resource table [281](#)
in MAS resource table [787](#)
in RTASPEC resource table [1075](#)

STOP field
in HTASK resource table [655](#)
in TASK resource table [1123](#)
in TASKRMI resource table [1121](#)

STOPPINGPERS field
in TCPIPGBL resource table [1153](#)

STORAGE field
in MTERMNL resource table [909](#)
in TERMNL resource table [1179](#)

STORAGECLEAR field
in LOCTRAN resource table [763](#)
in TASK resource table [1123](#)
in TRANDEF resource table [1191](#)

STORAGEKEY field
in MVSESTG resource table [917](#)

STRACCESS field
in MTDQGBL resource table [907](#)
in TDQGBL resource table [1169](#)

STRCNAME field
in STREAMNM resource table [1097](#)

STREAMNAME field
in JRNLMODL resource table [705](#)
in JRNLNAME resource table [707](#)
in JRNMDEF resource table [709](#)
in MJRNLNAM resource table [831](#)
in STREAMNM resource table [1097](#)

STREAMNM resource table [1097](#)

STREAMTYPE field
in JRNMDEF resource table [709](#)

STRINGS field
in CMDT resource table [141](#)
in FILEDEF resource table [617](#)
in LOCFIL resource table [757](#)
in LSRDEF resource table [769](#)
in MCMDT resource table [807](#)
in MLOCFIL resource table [833](#)
in MTDQGBL resource table [907](#)
in MTSQGBL resource table [913](#)
in TDQGBL resource table [1169](#)
in TSQGBL resource table [1227](#)

STRINGWAIT field
in MTSQGBL resource table [913](#)
in TSQGBL resource table [1227](#)

STRNGWAITS field
in MTDQGBL resource table [907](#)
in TDQGBL resource table [1169](#)

STRTTIME field
in CICS RGN resource table [89](#)
in CMAS resource table [131](#)
in MCICSRGN resource table [803](#)
in WLMAROUT resource table [1281](#)

STRUCTNAME field
 in EVCSDATA resource table [555](#)
 in EVCSINFO resource table [557](#)

STSN field
 in FEPIPOOL resource table [597](#)
 in FEPIPROP resource table [601](#)
 in FEPRODEF resource table [609](#)

SUBEXECOMP field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)

subf_dtype field
 in METAPARM resource table [821](#)

subf_ins field
 in METAPARM resource table [821](#)

subf_len field
 in METAPARM resource table [821](#)

SUBPOOLNUM field
 in MVSESTG resource table [917](#)

SUBSYSTEMID field
 in CICSRRGN resource table [89](#)
 in MONITOR resource table [867](#)

SUBTASKS field
 in CICSRRGN resource table [89](#)

SUBTYPE field
 in HTASK resource table [655](#)

SUMMARIZE field
 in ATTR resource table [49](#)

SUMOPT field
 in ATTR resource table [49](#)

SUSPCNT field
 in MLOCTRAN resource table [837](#)

SUSPENDTIME field
 in TASK resource table [1123](#)

SUSPENDTYPE field
 in TASK resource table [1123](#)
 in TASKRMI resource table [1121](#)

SUSPENDVALUE field
 in TASK resource table [1123](#)

SUSPTIME field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 in TASKRMI resource table [1121](#)

SWAREQRC field
 in RPLLIST resource table [1051](#)

SWAREQRE field
 in RPLLIST resource table [1051](#)

SWITCHSTATUS field
 in CICSRRGN resource table [89](#)

SYNCCOUNT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)

SYNCDATA field
 in CPLXCMAS resource table [173](#)

SYNCDLY field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)

SYNCDLYC field
 in MLOCTRAN resource table [837](#)

SYNCPPOINTST field
 in CICSRRGN resource table [89](#)
 in MONITOR resource table [867](#)

SYNCPWAITTM field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)

SYNCTIMCNT field
 in MLOCTRAN resource table [837](#)

SYNCTIME field
 in MLOCTRAN resource table [837](#)

SYSCONDS field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)

SYSDUMP field
 in CICSRRGN resource table [89](#)
 in MCICSRRGN resource table [803](#)

SYSDUMP resource table [1099](#)

SYSDUMP_TIM field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)

SYSDUMPCODE field
 in SYSDUMP resource table [1099](#)

SYSDUMPING field
 in SYSDUMP resource table [1099](#)
 in TRANDUMP resource table [1197](#)

SYSDUMPPEND field
 in EMSTATUS resource table [415](#)

SYSID field
 in CICSRRGN resource table [89](#)
 in CICSRRGN resource table [89](#)
 in CMAS resource table [131](#)
 in CMASLIST resource table [125](#)
 in CMTCMDEF resource table [147](#)
 in CMTCMLNK resource table [151](#)
 in CMTPMLNK resource table [153](#)
 in CPLXCMAS resource table [173](#)
 in CSYSDEF resource table [281](#)
 in EMASJOIN resource table [387](#)
 in EMASSTOP resource table [393](#)
 in EMASSTRT resource table [395](#)
 in MCICSRRGN resource table [803](#)
 in PROGDEF resource table [995](#)
 in UOW resource table [1253](#)
 in UOWDSNF resource table [1247](#)
 in UOWLINK resource table [1251](#)

SYSLINK resource table [1103](#)

SYSOUTCLASS field
 in EXTRATDQ resource table [581](#)
 in TDQDEF resource table [1163](#)

SYSPPARM resource table [1107](#)

SYSPPLEX field
 in EMASJOIN resource table [387](#)
 in EMASSTOP resource table [393](#)
 in EMASSTRT resource table [395](#)

SYSRES resource table [1109](#)

SYSTEM field
 in LNKSMSCS resource table [741](#)
 in LNKSRSCS resource table [745](#)
 in LNKSWSCS resource table [749](#)

SYSTEMLOG field
 in STREAMNM resource table [1097](#)

SYSTEMSTATUS field
 in CICSRRGN resource table [89](#)
 in CMAS resource table [131](#)

SYSWAIT field

SYSWAIT field (*continued*)
 in JRNLDEF resource table [701](#)
 SZALLCTO field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 SZALLOCT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 SZCHRRIN field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 SZCHROUT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 SZRCVCT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 SZRCVTO field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 SZSENDCT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 SZSTRTCT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 SZTOTCT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 SZWAIT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 SZWAITCT field
 in MLOCTRAN resource table [837](#)

T

TABLE field
 in CMDT resource table [141](#)
 in EVALDEF resource table [549](#)
 in EVENTDTL resource table [561](#)
 in FILEDEF resource table [617](#)
 in MCMDT resource table [807](#)
 in METAPARM resource table [821](#)
 TABLNAME field
 in CMDT resource table [141](#)
 in FILEDEF resource table [617](#)
 in MCMDT resource table [807](#)
 TABLESIZE field
 in CICSRRGN resource table [89](#)
 TABLEVER field
 in ATTR resource table [49](#)
 in ATTRAVA resource table [47](#)
 in OBJACT resource table [929](#)

TALENGTH field
 in EXITTRUE resource table [577](#)
 TAPEJRNL resource table [1111](#)
 TAPEMARK field
 in TDQDEF resource table [1163](#)
 TAPESLFT field
 in MJOURNAL resource table [829](#)
 in TAPEJRNL resource table [1111](#)
 TAPESOPEN field
 in MJOURNAL resource table [829](#)
 in TAPEJRNL resource table [1111](#)
 TARGET field
 in EVENT resource table [563](#)
 in EVENTDTL resource table [561](#)
 TARGETAPPL field
 in CMTCMDEF resource table [147](#)
 TARGETCOUNT field
 in BUNDLE resource table [69](#)
 TARGETLIST field
 in FEPOODEF resource table [605](#)
 in FETRGEDEF resource table [613](#)
 TARGETNAME field
 in CMTCMDEF resource table [147](#)
 in FEPICCONN resource table [593](#)
 in FEPITRGT resource table [603](#)
 in MFEPICON resource table [823](#)
 TARGETS field
 in FEPIPOOL resource table [597](#)
 TARGRASG field
 in BINCONSC resource table [59](#)
 TARGRDSC field
 in BINCONSC resource table [59](#)
 TARGSCOPE field
 in BINCONSC resource table [59](#)
 TASK field
 in EXCI resource table [573](#)
 in HTASK resource table [655](#)
 in JVM resource table [713](#)
 in TASK resource table [1123](#)
 in TASKESTG resource table [1117](#)
 in WORKREQ resource table [1319](#)
 TASK resource table [1123](#)
 TASKASSC resource table [1113](#)
 TASKDATAKEY field
 in HTASK resource table [655](#)
 in LOCTRAN resource table [763](#)
 in TASK resource table [1123](#)
 in TRANDEF resource table [1191](#)
 TASKDATALOC field
 in HTASK resource table [655](#)
 in LOCTRAN resource table [763](#)
 in TASK resource table [1123](#)
 in TRANDEF resource table [1191](#)
 TASKESTG resource table [1117](#)
 TASKFILE resource table [1119](#)
 TASKFLAG field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TASKID field
 in BRFACIL resource table [63](#)
 in IPFACIL resource table [693](#)
 in MQMON resource table [893](#)
 in TASKASSC resource table [1113](#)
 in TASKRMI resource table [1121](#)

TASKID field (*continued*)
 in TERMNL resource table [1179](#)
 in UOW resource table [1253](#)
 in UOWENQ resource table [1249](#)
 TASKINC field
 in WLMATARG resource table [1285](#)
 in WLMAWAOR resource table [1295](#)
 TASKLIMIT field
 in TERMDEF resource table [1173](#)
 TASKLOAD field
 in WLMATARG resource table [1285](#)
 in WLMAWAOR resource table [1295](#)
 TASKNO field
 in MASHIST resource table [793](#)
 TASKREQ field
 in TRANDEF resource table [1191](#)
 TASKRMI resource table [1121](#)
 TASKS field
 in MQCON resource table [879](#)
 TASKSTART field
 in EXITTRUE resource table [577](#)
 TASKTSQ resource table [1141](#)
 TBUFRCVD field
 in CMTCMLNK resource table [151](#)
 in CMTPMLNK resource table [153](#)
 TBUFSENT field
 in CMTCMLNK resource table [151](#)
 in CMTPMLNK resource table [153](#)
 TCALWTT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TCAMCONTROL field
 in TERMNL resource table [1179](#)
 TCB field
 in TASK resource table [1123](#)
 TCBADDRESS field
 in MVSESTG resource table [917](#)
 in MVSTCB resource table [921](#)
 TCBATTCT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 TCBCICSTASK field
 in MVSTCB resource table [921](#)
 TCBCPU TIME field
 in MVSTCB resource table [921](#)
 TCBD AUGHTER field
 in MVSTCB resource table [921](#)
 TCBFREE field
 in DB2CONN resource table [301](#)
 TCBLIMIT field
 in DB2CDEF resource table [295](#)
 in DB2CONN resource table [301](#)
 TCBMOTHER field
 in MVSTCB resource table [921](#)
 TCBNAME field
 in MVSTCB resource table [921](#)
 TCBPOOLN field
 in DSPMODE resource table [351](#)
 TCBRDYQCURR field
 in DB2CONN resource table [301](#)
 TCBRDYQHWM field
 in DB2CONN resource table [301](#)
 TCBS field

TCBS field (*continued*)
 in DB2CONN resource table [301](#)
 TCBSISTER field
 in MVSTCB resource table [921](#)
 TCBSTGABOVE field
 in MVSTCB resource table [921](#)
 TCBSTGAINUSE field
 in MVSTCB resource table [921](#)
 TCBSTGBELOW field
 in MVSTCB resource table [921](#)
 TCBSTGBINUSE field
 in MVSTCB resource table [921](#)
 TCBTYPE field
 in MVSTCB resource table [921](#)
 TCBTYPEFLAG field
 in MVSTCB resource table [921](#)
 TCC62IN2 field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 TCC62OU2 field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 TCEXITSTATUS field
 in CICS RGN resource table [89](#)
 TCIOCNT field
 in MLOCTRAN resource table [837](#)
 TCIOTIME field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 TCLASS field
 in TRANDEF resource table [1191](#)
 TCLDEFRG field
 in RESDESC resource table [1035](#)
 TCLDEFRS field
 in RESDESC resource table [1035](#)
 TCLDEFTS field
 in RESDESC resource table [1035](#)
 TCLDELAY field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 TCLDELAYCT field
 in MLOCTRAN resource table [837](#)
 TCLINGRP resource table [1143](#)
 TCM62IN2 field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 TCM62OU2 field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 TCPDEF resource table [1145](#)
 TCPDEFRG field
 in RESDESC resource table [1035](#)
 TCPDEFRS field
 in RESDESC resource table [1035](#)
 TCPDEFTS field
 in RESDESC resource table [1035](#)
 TCPGROUP field
 in TCPINGRP resource table [1151](#)

TCPINGRP resource table [1151](#)
 TCPIP field
 in CICS RGN resource table [89](#)
 TCPIPGBL resource table [1153](#)
 TCPIPJOB field
 in TASKASSC resource table [1113](#)
 TCPIPS resource table [1157](#)
 TCPIP SERVICE field
 in HOST resource table [653](#)
 in IPCONDEF resource table [681](#)
 in IPCONN resource table [687](#)
 in TASKASSC resource table [1113](#)
 in URIMAP resource table [1257](#)
 in URIMPDEF resource table [1261](#)
 TCPIPZONE field
 in TASKASSC resource table [1113](#)
 TCPNAME field
 in TCPINGRP resource table [1151](#)
 TCPVER field
 in TCPINGRP resource table [1151](#)
 TCREATE field
 in DB2ENTRY resource table [311](#)
 TCURR field
 in DB2CONN resource table [301](#)
 in DB2ENTRY resource table [311](#)
 TDCOUNT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 TDELWTT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TDFUNCSHIP field
 in CONNECT resource table [164](#)
 in MCONNECT resource table [811](#)
 TDGETCNT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 TDILWTT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TDIOCNT field
 in MLOCTRAN resource table [837](#)
 TDIOTIME field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 TDM ACTION field
 in CSYSDEF resource table [281](#)
 in MAS resource table [787](#)
 in RTASPEC resource table [1075](#)
 TDMSTATUS field
 in CRESTDMP resource table [249](#)
 TDMPSUPP field
 in CICS RGN resource table [89](#)
 in MCICS RGN resource table [803](#)
 in TRANDUMP resource table [1197](#)
 TDMPTOTL field
 in CICS RGN resource table [89](#)
 in MCICS RGN resource table [803](#)
 in TRANDUMP resource table [1197](#)
 TDMSEV field
 in CSYSDEF resource table [281](#)

TDMSEV field (*continued*)
 in MAS resource table [787](#)
 in RTASPEC resource table [1075](#)
 TDOMAXSOCKS field
 in TCPIPGBL resource table [1153](#)
 TDPURCNT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 TDPUTCNT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 TDQDEF resource table [1163](#)
 TDQDEF RG field
 in RESDESC resource table [1035](#)
 TDQDEF RS field
 in RESDESC resource table [1035](#)
 TDQDEF TS field
 in RESDESC resource table [1035](#)
 TDQGBL resource table [1169](#)
 TDQGROUP field
 in TDQINGRP resource table [1171](#)
 TDQINGRP resource table [1171](#)
 TDQNAME field
 in TDQINGRP resource table [1171](#)
 TDQSAMP field
 in CSYSDEF resource table [281](#)
 in MAS resource table [787](#)
 in MONSPEC resource table [873](#)
 TDQTYPE field
 in ERMCTDQ resource table [517](#)
 in TDQDEF resource table [1163](#)
 TDQUEUE field
 in DOCDEF resource table [331](#)
 in DOCTEMP resource table [337](#)
 in EXTRATDQ resource table [581](#)
 in INDTDQ resource table [673](#)
 in INTRATDQ resource table [675](#)
 in MINDTDQ resource table [827](#)
 in MNTRATDQ resource table [853](#)
 in MREMTDQ resource table [903](#)
 in MXTRATDQ resource table [927](#)
 in REMTDQ resource table [1027](#)
 TDQVER field
 in TDQINGRP resource table [1171](#)
 TDUMPSCOPE field
 in TRANDUMP resource table [1197](#)
 TEMPLATENAME field
 in DOCDEF resource table [331](#)
 in DOCTEMP resource table [337](#)
 in URIMAP resource table [1257](#)
 in URIMPDEF resource table [1261](#)
 TEMPLATETYPE field
 in DOCTEMP resource table [337](#)
 TERMCONNAME field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TERMDEF resource table [1173](#)
 TERMGROUP field
 in TRMINGRP resource table [1203](#)
 TERMID field
 in BR FACIL resource table [63](#)
 in HTASK resource table [655](#)

TERMID field (*continued*)
 in MLOCTRAN resource table [837](#)
 in MTERMNL resource table [909](#)
 in REQID resource table [1033](#)
 in TASK resource table [1123](#)
 in TDQDEF resource table [1163](#)
 in TERMNL resource table [1179](#)
 in UOW resource table [1253](#)
 in WLMATAFF resource table [1283](#)
 TERMMODEL field
 in TERMNL resource table [1179](#)
 in TYPTMDEF resource table [1239](#)
 TERMNALINFO field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TERMNAME field
 in TRMINGRP resource table [1203](#)
 TERMNL resource table [1179](#)
 TERMPRIORITY field
 in TERMDEF resource table [1173](#)
 in TERMNL resource table [1179](#)
 TERMSAMP field
 in CSYSDEF resource table [281](#)
 in MAS resource table [787](#)
 in MONSPEC resource table [873](#)
 TERMSHAREREQ field
 in CONNECT resource table [164](#)
 in MCONNECT resource table [811](#)
 TERMSTATUS field
 in BRFACIL resource table [63](#)
 TERMSTG field
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 TERMTYPE field
 in TERMNL resource table [1179](#)
 TERMTYPEOS field
 in TERMDEF resource table [1173](#)
 TERMVER field
 in TRMINGRP resource table [1203](#)
 TERRCNT field
 in MTERMNL resource table [909](#)
 in TERMNL resource table [1179](#)
 TEXTKYBD field
 in TYPTMDEF resource table [1239](#)
 TEXTKYBDST field
 in TERMNL resource table [1179](#)
 TEXTPRINT field
 in TYPTMDEF resource table [1239](#)
 TEXTPRINTST field
 in TERMNL resource table [1179](#)
 TFCWAIT field
 in STREAMNM resource table [1097](#)
 THREAD field
 in ASYNCREQ resource table [33](#)
 THREADERROR field
 in DB2CDEF resource table [295](#)
 in DB2CONN resource table [301](#)
 THREADHWM field
 in DB2THRD resource table [323](#)
 in MDB2THRD resource table [815](#)
 THREADLIMIT field
 in DB2CDEF resource table [295](#)
 in DB2CONN resource table [301](#)
 in DB2EDEF resource table [307](#)

THREADLIMIT field (*continued*)
 in DB2ENTRY resource table [311](#)
 in JVMSESV resource table [719](#)
 in JVMSVDEF resource table [723](#)
 THREADS field
 in DB2CONN resource table [301](#)
 in DB2ENTRY resource table [311](#)
 THREADWAIT field
 in DB2CDEF resource table [295](#)
 in DB2CONN resource table [301](#)
 in DB2EDEF resource table [307](#)
 in DB2ENTRY resource table [311](#)
 in DB2THRD resource table [323](#)
 in MDB2THRD resource table [815](#)
 THREADWOPT field
 in DB2THRD resource table [323](#)
 in MDB2THRD resource table [815](#)
 THRESHOLD field
 in RULE resource table [1079](#)
 THWM field
 in DB2CONN resource table [301](#)
 in DB2ENTRY resource table [311](#)
 TIMATACCLIM field
 in TCPIPGBL resource table [1153](#)
 TIMDISCATMAX field
 in TCPIPGBL resource table [1153](#)
 TIME field
 in HTASK resource table [655](#)
 in METAPARM resource table [821](#)
 in MONITOR resource table [867](#)
 in REQID resource table [1033](#)
 in RULE resource table [1079](#)
 in VOLUME resource table [1269](#)
 TIMECLOSE field
 in CMDT resource table [141](#)
 in LOCFILE resource table [757](#)
 in MCMDT resource table [807](#)
 in MLOCFILE resource table [833](#)
 in TCPIPS resource table [1157](#)
 TIMEOFF field
 in DBCTLSS resource table [329](#)
 TIMEON field
 in DBCTLSS resource table [329](#)
 TIMEOPEN field
 in CMDT resource table [141](#)
 in LOCFILE resource table [757](#)
 in MCMDT resource table [807](#)
 in MLOCFILE resource table [833](#)
 in TCPIPS resource table [1157](#)
 TIMEOUTINT field
 in CICSGRN resource table [89](#)
 TIMESATMAX field
 in MTRANCLS resource table [911](#)
 in TRANCLAS resource table [1187](#)
 TIMESTAMP field
 in CMAS resource table [131](#)
 TIMEWAITMVS field
 in CICSDSA resource table [79](#)
 in MCICSDSA resource table [799](#)
 TIMEZONE field
 in CMAS resource table [131](#)
 TIMMAXSOCKS field
 in TCPIPGBL resource table [1153](#)
 TIMMNONPERS field

TIMMNONPERS field (*continued*)
 in TCPIPGBL resource table [1153](#)
 TIMSTOPPERS field
 in TCPIPGBL resource table [1153](#)
 TLIMIT field
 in DB2CONN resource table [301](#)
 in DB2ENTRY resource table [311](#)
 TLOADWAIT field
 in LOADACT resource table [751](#)
 in LOADER resource table [753](#)
 TMEZONE field
 in CMASPLEX resource table [129](#)
 in CPLEXDEF resource table [169](#)
 in CPLXCMAS resource table [173](#)
 in CSYSDEF resource table [281](#)
 in EMASJOIN resource table [387](#)
 in EMASSTRT resource table [395](#)
 in EPLEXCHG resource table [441](#)
 in MAS resource table [787](#)
 TMEZONEO field
 in CMASPLEX resource table [129](#)
 in CPLEXDEF resource table [169](#)
 in CPLXCMAS resource table [173](#)
 in CSYSDEF resource table [281](#)
 in EMASJOIN resource table [387](#)
 in EMASSTRT resource table [395](#)
 in EPLEXCHG resource table [441](#)
 in MAS resource table [787](#)
 TMRATMSN field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRBFDGC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRBFTC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRCBRNM field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRCFACT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRCIPOR field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRCMDLY field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRDHDLC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRDSCWT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 TMRDSMWT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRDSTHW field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRECEVC field
 in HTASK resource table [655](#)

TMRECEVC field (*continued*)
 in TASK resource table [1123](#)
 TMRECFOC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRECSEC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRECSGE field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMREICTC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMREJBAC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMREJBCC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMREJBPC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMREJBRC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMREJBTC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMREJMCT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRHTDLY field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRICSCC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRICSCD field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRICSRC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRICSRD field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRISACT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRISCNM field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRISWT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRJ9CPU field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRJSTWT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRJTDLY field
 in HTASK resource table [655](#)

TMRJTDLY field (*continued*)
 in TASK resource table [1123](#)
 TMRJVMIT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRJVMRT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRKY8CP field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRKY8DS field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRKY9CP field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRKY9DS field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRL9CPU field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRMLCTM field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRMLTDL field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRMLXTC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRMQAST field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRMQGWT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRNETID field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRNETSX field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMROIDWT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMROTSID field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRPCDCC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRPCDLL field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRPCDRL field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRPCLCC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRPCRCC field
 in HTASK resource table [655](#)

TMRPCRCC field (*continued*)
 in TASK resource table [1123](#)
 TMRPCRCL field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRPCXCC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRPGBCC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRPGCCC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRPGCTC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRPGGCC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRPGGCL field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRPGMCC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRPGPCC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRPGPCL field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRPIPLN field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRPORTN field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRPTPWT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRRLUNM field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRROCPU field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRRODSP field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRROPWT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRRQRWT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRSOCIN field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRSOCNS field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRSOCOT field
 in HTASK resource table [655](#)

TMRSOCOT field (*continued*)
 in TASK resource table [1123](#)
 TMRSOCPS field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRSOERC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRSOI1C field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRSOIMC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRSONHW field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRSOO1C field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRSOOMC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRSOOWT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMR SOPHW field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRSORCT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMR SOSCT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMR SOTC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMR STDLY field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRT8CPU field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRTCPV field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRTGPID field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRTIATC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRTITC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRTRSN field
 in TASK resource table [1123](#)
 TMRTTDLY field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRURIMN field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)

TMRWBBOC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRWBBC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRWBRC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRWBRC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRWBI1C field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRWBIRC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRWBIWC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRWBO1C field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRWBOSC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRWBPRC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRWBRDL field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRWBROC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRWBRPR field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRWBRR field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRWBWDL field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRWBWOC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRWBWRC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRWMQRC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRWPBMN field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRWSATC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRWSCBC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRWSCGC field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TMRWSEPC field

TMRWSEPC field (*continued*)
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)

TMRWSOPN field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)

TMRWSVCN field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)

TMRX8CPU field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)

TMRX9CPU field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)

TMRXTDLY field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)

TOCSYS field
 in SYSLINK resource table [1103](#)

TOCSYSID field
 in SYSLINK resource table [1103](#)

TOGROUP field
 in CSGLCGCG resource table [275](#)

TOKEN field
 in IPFACIL resource table [693](#)

TOPOBJ resource table [4](#)

TOPRSUPD field
 in CICSplex resource table [87](#)
 in CMASplex resource table [129](#)
 in CPLEXDEF resource table [169](#)
 in CPLXCMAS resource table [173](#)
 in CSYSDEF resource table [281](#)
 in EPLEXCHG resource table [441](#)
 in MAS resource table [787](#)
 in WLMATARG resource table [1285](#)

TOPTRACE field
 in CMAS resource table [131](#)
 in MAS resource table [787](#)

TOR field
 in WLMAROUT resource table [1281](#)
 in WLMAWTOR resource table [1303](#)

TORCNT field
 in WLMAWORK resource table [1301](#)

TORNAME field
 in WLMATAFF resource table [1283](#)

TOROWNER field
 in WLMAROUT resource table [1281](#)
 in WLMAWTOR resource table [1303](#)

TOTACTVUSRTR field
 in CICSrgn resource table [89](#)
 in MCICSrgn resource table [803](#)

TOTAL field
 in JVMPOOL resource table [715](#)

TOTALCONNS field
 in TCPIPS resource table [1157](#)

TOTALJVMS field
 in CLCACHE resource table [123](#)

TOTALLEN field
 in SYSPARM resource table [1107](#)

TOTALLOC field
 in IPCONN resource table [687](#)

TOTALLOCTOUT field
 in FEPIPOOL resource table [597](#)

TOTALLOCTOUT field (*continued*)
 in FEPITRGT resource table [603](#)

TOTALLOCWAIT field
 in FEPIPOOL resource table [597](#)
 in FEPITRGT resource table [603](#)

TOTCICSSTAT field
 in MONITOR resource table [867](#)

TOTDELYUSRTR field
 in CICSrgn resource table [89](#)
 in MCICSrgn resource table [803](#)

TOTFUNCSHIP field
 in MCONNECT resource table [811](#)

TOTLREQCNT field
 in MCMDT resource table [807](#)
 in MLOCFILE resource table [833](#)
 in MREMFIL resource table [901](#)

TOTLTASKS field
 in CICSrgn resource table [89](#)
 in CMAS resource table [131](#)
 in MCICSrgn resource table [803](#)

TOTMREQCNT field
 in MCMDT resource table [807](#)

TOTQUEDCNT field
 in MTRANCLS resource table [911](#)
 in TRANCLAS resource table [1187](#)

TOTQUETIME field
 in CICSrgn resource table [89](#)
 in MCICSrgn resource table [803](#)

TOTSTRINGS field
 in LSRPOOL resource table [779](#)
 in MLRPOOL resource table [847](#)

TOTWAITREQ field
 in LSRPOOL resource table [779](#)
 in MLRPOOL resource table [847](#)

TPNAME field
 in PARTDEF resource table [945](#)
 in PARTNER resource table [949](#)
 in TRANDEF resource table [1191](#)

TPNAMELEN field
 in PARTNER resource table [949](#)

TPURGE field
 in TRANDEF resource table [1191](#)

TRACE field
 in TRANDEF resource table [1191](#)

TRACING field
 in LOCTRAN resource table [763](#)
 in TASK resource table [1123](#)
 in TERMNL resource table [1179](#)

TRANATTACH field
 in TCPIPS resource table [1157](#)

TRANCLAS resource table [1187](#)

TRANCLASS field
 in HTASK resource table [655](#)
 in LOCTRAN resource table [763](#)
 in MLOCTRAN resource table [837](#)
 in MREMTAN resource table [905](#)
 in REMTRAN resource table [1029](#)
 in TASK resource table [1123](#)
 in TRANDEF resource table [1191](#)

TRANCNT field
 in MTERMNL resource table [909](#)
 in TERMNL resource table [1179](#)
 in WLMATGRP resource table [1289](#)

TRANDEF resource table [1191](#)

TRANDUMP resource table [1197](#)
 TRANDUMP_CNT field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)
 TRANDUMP_TIM field
 in EMASICK resource table [389](#)
 in EMASWELL resource table [397](#)
 in EMSTATUS resource table [415](#)
 TRANDUMPCODE field
 in TRANDUMP resource table [1197](#)
 TRANDUMPING field
 in TRANDUMP resource table [1197](#)
 TRANFLAGS field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TRANGROUP field
 in TRNINGRP resource table [1209](#)
 TRANGRP field
 in DTRINGRP resource table [355](#)
 in WLMATAFF resource table [1283](#)
 in WLMATGRP resource table [1289](#)
 in WLMATTRAN resource table [1293](#)
 in WLMAWDEF resource table [1299](#)
 in WLMDEF resource table [1305](#)
 TRANGRP resource table [1201](#)
 TRANID field
 in DTRINGRP resource table [355](#)
 in HTASK resource table [655](#)
 in LOCTRAN resource table [763](#)
 in MLOCTRAN resource table [837](#)
 in MREMTRAN resource table [905](#)
 in REMTRAN resource table [1029](#)
 in STATDEF resource table [1093](#)
 in TASK resource table [1123](#)
 in TASKRMI resource table [1121](#)
 in WLMATTRAN resource table [1293](#)
 TRANISOLATE field
 in CICSRRGN resource table [89](#)
 TRANNAME field
 in TRNINGRP resource table [1209](#)
 TRANPRIORITY field
 in TASK resource table [1123](#)
 TRANSACTION field
 in EPADAPT resource table [435](#)
 in MQMON resource table [893](#)
 in MQMONDEF resource table [897](#)
 in SESSDEF resource table [1085](#)
 in TASKASSC resource table [1113](#)
 in TCPDEF resource table [1145](#)
 in TERMDEF resource table [1173](#)
 in TERMNL resource table [1179](#)
 in URIMAP resource table [1257](#)
 in URIMPDEF resource table [1261](#)
 TRANSAMP field
 in CSYSDEF resource table [281](#)
 in MAS resource table [787](#)
 in MONSPEC resource table [873](#)
 TRANSATTCH field
 in IPCONN resource table [687](#)
 TRANSCLK field
 in CMTCLNKL resource table [151](#)
 in CMTPLNKL resource table [153](#)
 TRANSEC field
 in TRANDEF resource table [1191](#)
 TRANSID field
 in BRFACIL resource table [63](#)
 in DB2EDEF resource table [307](#)
 in DB2TDEF resource table [319](#)
 in DB2TRN resource table [327](#)
 in PROGDEF resource table [995](#)
 in PROGRAM resource table [1001](#)
 in REQID resource table [1033](#)
 in RQMDEF resource table [1053](#)
 in RQMODEL resource table [1059](#)
 in TCPIPS resource table [1157](#)
 in TDQDEF resource table [1163](#)
 in TSQNAME resource table [1231](#)
 in TSQSHR resource table [1233](#)
 in TSQUEUE resource table [1235](#)
 in UOW resource table [1253](#)
 in UOWENQ resource table [1249](#)
 in WORKREQ resource table [1319](#)
 TRANSITCMAS field
 in CICSPLX resource table [87](#)
 in CMASLIST resource table [125](#)
 TRANSITCNT field
 in CICSPLX resource table [87](#)
 in CMASLIST resource table [125](#)
 TRANSMODE field
 in EPADAPT resource table [435](#)
 TRANTYPE field
 in ERMCTTRAN resource table [521](#)
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TRANVER field
 in TRNINGRP resource table [1209](#)
 TRATRACE field
 in CMAS resource table [131](#)
 in MAS resource table [787](#)
 TRBYTERECD field
 in IPCONN resource table [687](#)
 TRBYTESENT field
 in IPCONN resource table [687](#)
 TREEDATA resource table [4](#)
 TREEHEAD resource table [4](#)
 TREUSE field
 in DB2ENTRY resource table [311](#)
 TRIGGERLEVEL field
 in INTRATDQ resource table [675](#)
 in MNTRATDQ resource table [853](#)
 in TDQDEF resource table [1163](#)
 TRIGMONTASKS field
 in MQCON resource table [879](#)
 TRMDEFRG field
 in RESDESC resource table [1035](#)
 TRMDEFRS field
 in RESDESC resource table [1035](#)
 TRMDEFTS field
 in RESDESC resource table [1035](#)
 TRMINGRP resource table [1203](#)
 TRNCLDEF resource table [1205](#)
 TRNCLGROUP field
 in TCLINGRP resource table [1143](#)
 TRNCLNAME field
 in TCLINGRP resource table [1143](#)
 TRNCLVER field

TRNCLVER field (*continued*)
 in TCLINGRP resource table [1143](#)
 TRNDEFRG field
 in RESDESC resource table [1035](#)
 TRNDEFRS field
 in RESDESC resource table [1035](#)
 TRNDEFTS field
 in RESDESC resource table [1035](#)
 TRNGRPID field
 in TASKASSC resource table [1113](#)
 TRNINGRP resource table [1209](#)
 TRNISOLATION field
 in CICSDSA resource table [79](#)
 in MCICSDSA resource table [799](#)
 TRPROF field
 in LOCTRAN resource table [763](#)
 in REMTRAN resource table [1029](#)
 in TASK resource table [1123](#)
 in TRANDEF resource table [1191](#)
 TRREQS field
 in IPCONN resource table [687](#)
 TSCOPE field
 in RASGNDEF resource table [1013](#)
 in RASINDSC resource table [1017](#)
 in RASPROC resource table [1019](#)
 in RDSCPROC resource table [1021](#)
 TSCOUNT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 TSFUNCSHIP field
 in CONNECT resource table [164](#)
 in MCONNECT resource table [811](#)
 TSGETCNT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 TSGETSCNT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TSIOCNT field
 in MLOCTRAN resource table [837](#)
 TSIOTIME field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 TSKSPOLS resource table [1211](#)
 TSKSPOOL resource table [1215](#)
 TSMMAINHIT field
 in TSQGBL resource table [1227](#)
 TSMMAININUSE field
 in TSQGBL resource table [1227](#)
 TSMMAINLIMIT field
 in TSQGBL resource table [1227](#)
 TSMMAINMAX field
 in TSQGBL resource table [1227](#)
 TSMMAINPCT field
 in TSQGBL resource table [1227](#)
 TSMDEF resource table [1217](#)
 TSMDEFRG field
 in RESDESC resource table [1035](#)
 TSMDEFRS field
 in RESDESC resource table [1035](#)
 TSMDEFTS field

TSMDEFTS field (*continued*)
 in RESDESC resource table [1035](#)
 TSMFWrites field
 in MONITOR resource table [867](#)
 TSMGROUP field
 in TSMINGRP resource table [1221](#)
 TSMINGRP resource table [1221](#)
 TSMNAME field
 in TSMINGRP resource table [1221](#)
 TSMODEL resource table [1223](#)
 TSMVER field
 in TSMINGRP resource table [1221](#)
 TSPPOOL resource table [1225](#)
 TSPUTACNT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 TSPUTMCNT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 TSPUTSCNT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 TSQDEFRG field
 in RESDESC resource table [1035](#)
 TSQDEFRS field
 in RESDESC resource table [1035](#)
 TSQDEFTS field
 in RESDESC resource table [1035](#)
 TSQGBL resource table [1227](#)
 TSQGET field
 in TASKTSQ resource table [1141](#)
 TSQGETITEML field
 in TASKTSQ resource table [1141](#)
 TSQGETSHR field
 in TASKTSQ resource table [1141](#)
 TSQIOWT field
 in TASKTSQ resource table [1141](#)
 TSQNAME field
 in TASKTSQ resource table [1141](#)
 TSQNAME resource table [1231](#)
 TSQPREFIX field
 in TCPDEF resource table [1145](#)
 in TCPIPS resource table [1157](#)
 TSQPUTAUX field
 in TASKTSQ resource table [1141](#)
 TSQPUTMAIN field
 in TASKTSQ resource table [1141](#)
 TSQPUTSHR field
 in TASKTSQ resource table [1141](#)
 TSQSHR resource table [1233](#)
 TSQTOTAL field
 in TASKTSQ resource table [1141](#)
 TSQUEUE field
 in DOCDEF resource table [331](#)
 in DOCTEMP resource table [337](#)
 TSQUEUE resource table [1235](#)
 TSQUEUELIMIT field
 in MONITOR resource table [867](#)
 TSYSTEM field
 in WORKREQ resource table [1319](#)
 TSYSTYPE field
 in WORKREQ resource table [1319](#)

TTERM field
 in DB2ENTRY resource table [311](#)
 TTI field
 in TYPTMDEF resource table [1239](#)
 TTISTATUS field
 in TERMNL resource table [1179](#)
 TTYPE field
 in CRESTRAN resource table [255](#)
 TWASIZE field
 in LOCTAN resource table [763](#)
 in TASK resource table [1123](#)
 in TRANDEF resource table [1191](#)
 TWORO field
 in DB2ENTRY resource table [311](#)
 TYPDEFRG field
 in RESDESC resource table [1035](#)
 TYPDEFRS field
 in RESDESC resource table [1035](#)
 TYPDEFTS field
 in RESDESC resource table [1035](#)
 TYPE field
 in ACTION resource table [17](#)
 in APPLCTN resource table [23](#)
 in APPLDEF resource table [27](#)
 in APSPEC resource table [31](#)
 in ASYNCREQ resource table [33](#)
 in ATMINGRP resource table [37](#)
 in ATOMDEF resource table [39](#)
 in ATTR resource table [49](#)
 in ATTRAVAL resource table [47](#)
 in BATCHREP resource table [53](#)
 in BINCONRS resource table [57](#)
 in BINCONSC resource table [59](#)
 in BINSTERR resource table [61](#)
 in BUNDEF resource table [65](#)
 in BUNINGRP resource table [75](#)
 in CICSPLX resource table [87](#)
 in CMAS resource table [131](#)
 in CMASLIST resource table [125](#)
 in CMASPLX resource table [129](#)
 in CMDMPAPS resource table [137](#)
 in CMDMSAPS resource table [139](#)
 in CMTCMDEF resource table [147](#)
 in CMTCMLNK resource table [151](#)
 in CMTPMLNK resource table [153](#)
 in CONINGRP resource table [155](#)
 in CONNDEF resource table [157](#)
 in CONNECT resource table [164](#)
 in CPLEXDEF resource table [169](#)
 in CPLXCMAS resource table [173](#)
 in CRESAIMD resource table [177](#)
 in CRESATOM resource table [179](#)
 in CRESBUND resource table [181](#)
 in CRESCONN resource table [183](#)
 in CRESDB2C resource table [185](#)
 in CRESDB2E resource table [187](#)
 in CRESDB2P resource table [189](#)
 in CRESDB2T resource table [191](#)
 in CRESDOCT resource table [193](#)
 in CRESDSNM resource table [195](#)
 in CRESENQM resource table [197](#)
 in CRESEPAD resource table [199](#)
 in CRESEPAS resource table [201](#)
 in CRESEVBD resource table [203](#)

TYPE field (*continued*)
 in CRESEVCS resource table [205](#)
 in CRESFECO resource table [207](#)
 in CRESFEND resource table [209](#)
 in CRESFEPO resource table [211](#)
 in CRESFETR resource table [213](#)
 in CRESFILE resource table [215](#)
 in CRESGLUE resource table [217](#)
 in CRESIPCN resource table [219](#)
 in CRESJRNAL resource table [221](#)
 in CRESJRNLM resource table [223](#)
 in CRESJVMS resource table [225](#)
 in CRESLIBR resource table [227](#)
 in CRESMODE resource table [229](#)
 in CRESMQMN resource table [231](#)
 in CRESPART resource table [233](#)
 in CRESPIPE resource table [235](#)
 in CRESPRGM resource table [237](#)
 in CRESPROF resource table [239](#)
 in CRESPTY resource table [241](#)
 in CRESRQMD resource table [243](#)
 in CRESSDMP resource table [245](#)
 in CRESTCPS resource table [247](#)
 in CRESTDMP resource table [249](#)
 in CRESTDQ resource table [251](#)
 in CRESTERM resource table [253](#)
 in CRESTRAN resource table [255](#)
 in CRESTRUE resource table [257](#)
 in CRESTSMD resource table [259](#)
 in CRESURIM resource table [261](#)
 in CRESWEBS resource table [263](#)
 in CRESXMLT resource table [265](#)
 in CSDGROUP resource table [267](#)
 in CSDINGRP resource table [269](#)
 in CSDINLST resource table [271](#)
 in CSDLIST resource table [273](#)
 in CSGLCGCG resource table [275](#)
 in CSGLCGCS resource table [277](#)
 in CSYSDEF resource table [281](#)
 in CSYSGRP resource table [287](#)
 in D2CINGRP resource table [289](#)
 in D2EINGRP resource table [291](#)
 in D2TINGRP resource table [293](#)
 in DB2CDEF resource table [295](#)
 in DB2EDEF resource table [307](#)
 in DB2TDEF resource table [319](#)
 in DOCDEF resource table [331](#)
 in DOCINGRP resource table [335](#)
 in DSKJRNAL resource table [343](#)
 in DTRINGRP resource table [355](#)
 in EACTNTFN resource table [357](#)
 in ECSYSCHG resource table [359](#)
 in EJCINGRP resource table [361](#)
 in EJCODEF resource table [365](#)
 in EJDINGRP resource table [375](#)
 in EJDJDEF resource table [381](#)
 in ELSIGNAL resource table [385](#)
 in EMASJOIN resource table [387](#)
 in EMASICK resource table [389](#)
 in EMASSTOP resource table [393](#)
 in EMASSTRT resource table [395](#)
 in EMASWELL resource table [397](#)
 in EMCICS resource table [401](#)
 in EMCONN resource table [403](#)

TYPE field (*continued*)

in EMDBX resource table [405](#)
in EMFILE resource table [407](#)
in EMGLBL resource table [409](#)
in EMJRNL resource table [411](#)
in EMPROG resource table [413](#)
in EMSTATUS resource table [415](#)
in EMTDQS resource table [419](#)
in EMTERM resource table [421](#)
in EMTRAN resource table [423](#)
in ENQINGRP resource table [425](#)
in ENQMDEF resource table [427](#)
in EPLEXCHG resource table [441](#)
in ERESSTAT resource table [443](#)
in ERMCAIMD resource table [445](#)
in ERMCATOM resource table [447](#)
in ERMCBUND resource table [449](#)
in ERMCCONN resource table [451](#)
in ERMCDDB2C resource table [453](#)
in ERMCDDB2E resource table [455](#)
in ERMCDDB2P resource table [457](#)
in ERMCDDB2T resource table [459](#)
in ERMCDOCT resource table [461](#)
in ERMCDSNM resource table [463](#)
in ERMCENQM resource table [465](#)
in ERMCEVBD resource table [467](#)
in ERMCEVCS resource table [469](#)
in ERMCFECO resource table [471](#)
in ERMCFEND resource table [473](#)
in ERMCFEPO resource table [475](#)
in ERMCFETR resource table [477](#)
in ERMCFILE resource table [479](#)
in ERMCGLUE resource table [481](#)
in ERMICIPCN resource table [483](#)
in ERMJCJRNL resource table [485](#)
in ERMJCJRNM resource table [487](#)
in ERMJCJMS resource table [489](#)
in ERMCLIBR resource table [491](#)
in ERMCMODE resource table [493](#)
in ERMCOSGB resource table [495](#)
in ERMCOSGS resource table [497](#)
in ERMCPART resource table [499](#)
in ERMCPPIPE resource table [501](#)
in ERMCPRGM resource table [503](#)
in ERMCPROF resource table [505](#)
in ERMCPRTY resource table [507](#)
in ERMCRQMD resource table [509](#)
in ERMCSDMI resource table [511](#)
in ERMCTCPS resource table [513](#)
in ERMCTDMP resource table [515](#)
in ERMCTDQ resource table [517](#)
in ERMCTERM resource table [519](#)
in ERMCTRAN resource table [521](#)
in ERMCTRUE resource table [523](#)
in ERMCTSMD resource table [525](#)
in ERMCURIM resource table [527](#)
in ERMWEBS resource table [529](#)
in ERMXMLT resource table [531](#)
in ERMCONN resource table [533](#)
in ERMFILE resource table [535](#)
in ERMJRNL resource table [537](#)

TYPE field (*continued*)

in ERMMPRGM resource table [539](#)
in ERMMTDQ resource table [541](#)
in ERMMTTERM resource table [543](#)
in ERMMTTRAN resource table [545](#)
in ESGRPCHG resource table [547](#)
in EVALDEF resource table [549](#)
in EVENT resource table [563](#)
in EVENTDTL resource table [561](#)
in FEEDBACK resource table [585](#)
in FENODDEF resource table [589](#)
in FEPOODEF resource table [605](#)
in FEPRODEF resource table [609](#)
in FETRGDEF resource table [613](#)
in FILEDEF resource table [617](#)
in FILINGRP resource table [625](#)
in FNOINGRP resource table [627](#)
in FPOINGRP resource table [629](#)
in FPRINGRP resource table [631](#)
in FSEGDEF resource table [633](#)
in FSGINGRP resource table [649](#)
in FTRINGRP resource table [651](#)
in IPCINGRP resource table [679](#)
in IPCONDEF resource table [681](#)
in JMSINGRP resource table [695](#)
in JRMINGRP resource table [697](#)
in JRNINGRP resource table [699](#)
in JRNLDEF resource table [701](#)
in JRNLMODL resource table [705](#)
in JRNNAME resource table [707](#)
in JRNMDEF resource table [709](#)
in JVMSVDEF resource table [723](#)
in LIBDEF resource table [727](#)
in LIBINGRP resource table [735](#)
in LNKSMSCG resource table [739](#)
in LNKSMSCS resource table [741](#)
in LNKSRSCG resource table [743](#)
in LNKSRSCS resource table [745](#)
in LNKSWSCG resource table [747](#)
in LNKSWSCS resource table [749](#)
in LSRDEF resource table [769](#)
in LSRINGRP resource table [775](#)
in LSRPBUF resource table [777](#)
in MAPDEF resource table [781](#)
in MAPINGRP resource table [785](#)
in MAS resource table [787](#)
in MASQRYER resource table [795](#)
in MASSTAT resource table [797](#)
in MCONNECT resource table [811](#)
in METADESC resource table [817](#)
in METANAME resource table [819](#)
in METAPARM resource table [821](#)
in MGMTPART resource table [825](#)
in MJRNLNAM resource table [831](#)
in MONDEF resource table [857](#)
in MONGROUP resource table [861](#)
in MONINGRP resource table [863](#)
in MONINSPC resource table [865](#)
in MONSPEC resource table [873](#)
in MQCINGRP resource table [877](#)
in MQCONDEF resource table [883](#)
in MQMINGRP resource table [891](#)

TYPE field (*continued*)

- in MQMONDEF resource table [897](#)
- in OBJECT resource table [929](#)
- in OBJECT resource table [931](#)
- in PARINGRP resource table [941](#)
- in PARMAVA resource table [943](#)
- in PARTDEF resource table [945](#)
- in PERIODEF resource table [951](#)
- in PGMINGRP resource table [953](#)
- in PIPEDEF resource table [955](#)
- in PIPINGRP resource table [963](#)
- in PLATDEF resource table [965](#)
- in PLATFORM resource table [970](#)
- in PRCINGRP resource table [977](#)
- in PRNINGRP resource table [979](#)
- in PROCDEF resource table [981](#)
- in PROFDEF resource table [987](#)
- in PROGDEF resource table [995](#)
- in PROINGRP resource table [1007](#)
- in PRTNDEF resource table [1009](#)
- in RASGNDEF resource table [1013](#)
- in RASINDSC resource table [1017](#)
- in RASPROC resource table [1019](#)
- in RDSCPROC resource table [1021](#)
- in RESDESC resource table [1035](#)
- in RESGROUP resource table [1043](#)
- in RESINDSC resource table [1047](#)
- in RESINGRP resource table [1049](#)
- in RQMDEF resource table [1053](#)
- in RQMINGRP resource table [1057](#)
- in RTAACTV resource table [1061](#)
- in RTADEF resource table [1063](#)
- in RTAGROUP resource table [1067](#)
- in RTAINAPS resource table [1069](#)
- in RTAINGRP resource table [1071](#)
- in RTAINSPC resource table [1073](#)
- in RTASPEC resource table [1075](#)
- in SESINGRP resource table [1083](#)
- in SESSDEF resource table [1085](#)
- in STAINGRP resource table [1091](#)
- in STATDEF resource table [1093](#)
- in SYSLINK resource table [1103](#)
- in SYSPARM resource table [1107](#)
- in SYSRES resource table [1109](#)
- in TAPEJRNL resource table [1111](#)
- in TCLINGRP resource table [1143](#)
- in TCPDEF resource table [1145](#)
- in TCPINGRP resource table [1151](#)
- in TDQDEF resource table [1163](#)
- in TDQINGRP resource table [1171](#)
- in TERMDEF resource table [1173](#)
- in TRANDEF resource table [1191](#)
- in TRANGRP resource table [1201](#)
- in TRMINGRP resource table [1203](#)
- in TRNCLDEF resource table [1205](#)

TYPE field (*continued*)

- in TRNINGRP resource table [1209](#)
- in TSMDEF resource table [1217](#)
- in TSMINGRP resource table [1221](#)
- in TYPINGRP resource table [1237](#)
- in TYPTMDEF resource table [1239](#)
- in UOWENQ resource table [1249](#)
- in UOWLINK resource table [1251](#)
- in URIINGRP resource table [1255](#)
- in URIMPDEF resource table [1261](#)
- in WEBINGRP resource table [1271](#)
- in WEBSVDEF resource table [1277](#)
- in WLMAROUT resource table [1281](#)
- in WLMATAFF resource table [1283](#)
- in WLMATARG resource table [1285](#)
- in WLMATGRP resource table [1289](#)
- in WLMATRAN resource table [1293](#)
- in WLMAWAOR resource table [1295](#)
- in WLMAWDEF resource table [1299](#)
- in WLMAWORK resource table [1301](#)
- in WLMAWTOR resource table [1303](#)
- in WLMDEF resource table [1305](#)
- in WLMGROUP resource table [1307](#)
- in WLMINGRP resource table [1309](#)
- in WLMINSPC resource table [1311](#)
- in WLMSPEC resource table [1313](#)

TYPEFILE field

- in TDQDEF resource table [1163](#)

TYPETERM field

- in TERMDEF resource table [1173](#)

TYPINGRP resource table [1237](#)

TYPTMDEF resource table [1239](#)

TYPTMGROUP field

- in TYPINGRP resource table [1237](#)

TYPTMNAME field

- in TYPINGRP resource table [1237](#)

TYPTMVER field

- in TYPINGRP resource table [1237](#)

U

UAVGTIMESOS field

- in CICSSTOR resource table [101](#)

UBYTRCVD field

- in CMTCMLNK resource table [151](#)
- in CMTPMLNK resource table [153](#)

UBYTSENT field
 in CMTCLNK resource table [151](#)
 in CMTPLNK resource table [153](#)
 UCHAR field
 in ATTR resource table [49](#)
 UCTRAN field
 in PROFDEF resource table [987](#)
 in TYPTMDEF resource table [1239](#)
 UCTRANST field
 in TERMNL resource table [1179](#)
 UCURPROFUSE field
 in JVMPROF resource table [717](#)
 UDSASIZE field
 in TSKSPOLS resource table [1211](#)
 UJVMDESTRSOS field
 in JVMPROF resource table [717](#)
 UJVMHEAPHWM field
 in JVMPROF resource table [717](#)
 UJVMSUNRESET field
 in JVMPROF resource table [717](#)
 ULEHEAPHWM field
 in JVMPROF resource table [717](#)
 UMISMAVICTIM field
 in JVMPROF resource table [717](#)
 UMISMSTEALER field
 in JVMPROF resource table [717](#)
 UNAUTH field
 in EJCODEF resource table [365](#)
 in EJCOSE resource table [371](#)
 UNEWJVMSCRT field
 in JVMPROF resource table [717](#)
 UNIT field
 in RULE resource table [1079](#)
 UNITOFWORK field
 in TASK resource table [1123](#)
 UNONIMMGET field
 in CICSSTOR resource table [101](#)
 UNSHUNTED field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 UNSOLDATA field
 in FEPIPOOL resource table [597](#)
 in FEPIPROP resource table [601](#)
 in FEPRODEF resource table [609](#)
 UNSOLDATAACK field
 in FEPIPOOL resource table [597](#)
 in FEPIPROP resource table [601](#)
 in FEPRODEF resource table [609](#)
 UNSOLICINP field
 in FEPICONN resource table [593](#)
 in MFEPICON resource table [823](#)
 UNSUPREQS field
 in IPCONN resource table [687](#)
 UOW resource table [1253](#)
 UOWACTION field
 in IPCONN resource table [687](#)
 UOWDSNF resource table [1247](#)
 UOWENQ resource table [1249](#)
 UOWID field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 in UOW resource table [1253](#)
 in UOWDSNF resource table [1247](#)
 in UOWENQ resource table [1249](#)

UOWID field (*continued*)
 in UOWLINK resource table [1251](#)
 UOWINSTSEQ field
 in HTASK resource table [655](#)
 UOWLINK resource table [1251](#)
 UOWSTATE field
 in UOW resource table [1253](#)
 UPCASETR field
 in TERMDEF resource table [1173](#)
 UPDATE field
 in CMDT resource table [141](#)
 in FILEDEF resource table [617](#)
 in LOCFILE resource table [757](#)
 UPDATECNT field
 in CMDT resource table [141](#)
 in LOCFILE resource table [757](#)
 in MCMDT resource table [807](#)
 in MLOCFILE resource table [833](#)
 in MREMFIL resource table [901](#)
 in REMFILE resource table [1025](#)
 UPDATEMODEL field
 in CMDT resource table [141](#)
 in FILEDEF resource table [617](#)
 UPDATERS field
 in CICSPLX resource table [87](#)
 in CMASPLX resource table [129](#)
 in CPLEXDEF resource table [169](#)
 in CPLXCMAS resource table [173](#)
 in CSYSDEF resource table [281](#)
 in EPLEXCHG resource table [441](#)
 in MAS resource table [787](#)
 in WLMATARG resource table [1285](#)
 in WLMAWAOR resource table [1295](#)
 UPEAKPROFUSE field
 in JVMPROF resource table [717](#)
 UPGRADE_FROM field
 in CPLXCMAS resource table [173](#)
 UPROFILEREQS field
 in JVMPROF resource table [717](#)
 UPROFXMXVALU field
 in JVMPROF resource table [717](#)
 URATECREL field
 in CICSSTOR resource table [101](#)
 URATEEXTSA field
 in CICSSTOR resource table [101](#)
 URATEEXTSR field
 in CICSSTOR resource table [101](#)
 URATEFM field
 in CICSSTOR resource table [101](#)
 URATEGM field
 in CICSSTOR resource table [101](#)
 URATESTORV field
 in CICSSTOR resource table [101](#)
 URIDEFRG field
 in RESDESC resource table [1035](#)
 URIDEFRS field
 in RESDESC resource table [1035](#)
 URIDEFTS field
 in RESDESC resource table [1035](#)
 URIGROUP field
 in URIINGRP resource table [1255](#)
 URIINGRP resource table [1255](#)
 URIMAP field
 in WEBSERV resource table [1273](#)

- URIMAP resource table [1257](#)
- URIMAPNAME field
 - in ATOMSERSV resource table [45](#)
- URIMPDEF resource table [1261](#)
- URIMPGBL resource table [1267](#)
- URINAME field
 - in URIINGRP resource table [1255](#)
- URIVER field
 - in URIINGRP resource table [1255](#)
- URM field
 - in TCPDEF resource table [1145](#)
 - in TCPIPS resource table [1157](#)
- USAGE field
 - in MAPDEF resource table [781](#)
 - in PROGDEF resource table [995](#)
 - in PRTNDEF resource table [1009](#)
 - in RASGNDEF resource table [1013](#)
 - in RASPROC resource table [1019](#)
 - in RDSCPROC resource table [1021](#)
 - in SYSRES resource table [1109](#)
 - in URIMAP resource table [1257](#)
 - in URIMPDEF resource table [1261](#)
- USEAGELSTAT field
 - in MPROGRAM resource table [875](#)
 - in PROGRAM resource table [1001](#)
- USEALTSCRSIZ field
 - in TRANDEF resource table [1191](#)
- USECOUNT field
 - in DB2THRD resource table [323](#)
 - in DOCTEMP resource table [337](#)
 - in EXTGLORD resource table [579](#)
 - in LOCTRAN resource table [763](#)
 - in MDB2THRD resource table [815](#)
 - in MLOCTRAN resource table [837](#)
 - in MPROGRAM resource table [875](#)
 - in MREMTRAN resource table [905](#)
 - in PROGRAM resource table [1001](#)
 - in REMTRAN resource table [1029](#)
 - in STREAMNM resource table [1097](#)
 - in XMLTRANS resource table [1321](#)
- USEDFLTUSER field
 - in CONNDEF resource table [157](#)
 - in TERMDEF resource table [1173](#)
- USEFETCH field
 - in PROGRAM resource table [1001](#)
- USELPACOPY field
 - in MAPDEF resource table [781](#)
 - in PROGDEF resource table [995](#)
 - in PRTNDEF resource table [1009](#)
- USERAREA field
 - in TERMNL resource table [1179](#)
- USERAREALEN field
 - in SESSDEF resource table [1085](#)
 - in TERMDEF resource table [1173](#)
 - in TERMNL resource table [1179](#)
 - in TYPTMDEF resource table [1239](#)
- USERAUTH field
 - in IPCONDEF resource table [681](#)
 - in IPCONN resource table [687](#)
- USERCORRDATA field
 - in TASKASSC resource table [1113](#)
- USERDATA field
 - in FEPICONN resource table [593](#)
 - in FEPINODE resource table [595](#)

- USERDATA field (*continued*)
 - in FEPIPOOL resource table [597](#)
 - in FEPITRGT resource table [603](#)
- USERDATA1 field
 - in ATOMDEF resource table [39](#)
 - in BUNDEF resource table [65](#)
 - in CONNDEF resource table [157](#)
 - in DB2CDEF resource table [295](#)
 - in DB2EDEF resource table [307](#)
 - in DB2TDEF resource table [319](#)
 - in DOCDEF resource table [331](#)
 - in EJCODEF resource table [365](#)
 - in EJDJDEF resource table [381](#)
 - in ENQMDEF resource table [427](#)
 - in FENODDEF resource table [589](#)
 - in FEPOODEF resource table [605](#)
 - in FEPRODEF resource table [609](#)
 - in FETRGEDEF resource table [613](#)
 - in FILEDEF resource table [617](#)
 - in FSEGDEF resource table [633](#)
 - in IPCONDEF resource table [681](#)
 - in JRNLEDEF resource table [701](#)
 - in JRNMEDEF resource table [709](#)
 - in JVMSVDEF resource table [723](#)
 - in LIBDEF resource table [727](#)
 - in LSRDEF resource table [769](#)
 - in MAPDEF resource table [781](#)
 - in MQCONDEF resource table [883](#)
 - in MQMONDEF resource table [897](#)
 - in PARTDEF resource table [945](#)
 - in PIPEDEF resource table [955](#)
 - in PROCDEF resource table [981](#)
 - in PROFDEF resource table [987](#)
 - in PROGDEF resource table [995](#)
 - in PRTNDEF resource table [1009](#)
 - in RQMDEF resource table [1053](#)
 - in SESSDEF resource table [1085](#)
 - in TCPDEF resource table [1145](#)
 - in TDQDEF resource table [1163](#)
 - in TERMDEF resource table [1173](#)
 - in TRANDEF resource table [1191](#)
 - in TRNCLDEF resource table [1205](#)
 - in TSMDEF resource table [1217](#)
 - in TYPTMDEF resource table [1239](#)
 - in URIMPDEF resource table [1261](#)
 - in WEBSVDEF resource table [1277](#)
- USERDATA2 field
 - in ATOMDEF resource table [39](#)
 - in BUNDEF resource table [65](#)
 - in CONNDEF resource table [157](#)
 - in DB2CDEF resource table [295](#)
 - in DB2EDEF resource table [307](#)
 - in DB2TDEF resource table [319](#)
 - in DOCDEF resource table [331](#)
 - in EJCODEF resource table [365](#)
 - in EJDJDEF resource table [381](#)
 - in ENQMDEF resource table [427](#)
 - in FENODDEF resource table [589](#)
 - in FEPOODEF resource table [605](#)
 - in FEPRODEF resource table [609](#)
 - in FETRGEDEF resource table [613](#)
 - in FILEDEF resource table [617](#)
 - in FSEGDEF resource table [633](#)
 - in IPCONDEF resource table [681](#)

USERDATA2 field (*continued*)

- in JRNLDEF resource table [701](#)
- in JRNMDEF resource table [709](#)
- in JVMSVDEF resource table [723](#)
- in LIBDEF resource table [727](#)
- in LSRDEF resource table [769](#)
- in MAPDEF resource table [781](#)
- in MQCONDEF resource table [883](#)
- in MQMONDEF resource table [897](#)
- in PARTDEF resource table [945](#)
- in PIPEDEF resource table [955](#)
- in PROCDEF resource table [981](#)
- in PROFDEF resource table [987](#)
- in PROGDEF resource table [995](#)
- in PRTNDEF resource table [1009](#)
- in RQMDEF resource table [1053](#)
- in SESSDEF resource table [1085](#)
- in TCPDEF resource table [1145](#)
- in TDQDEF resource table [1163](#)
- in TERMDEF resource table [1173](#)
- in TRANDEF resource table [1191](#)
- in TRNCLDEF resource table [1205](#)
- in TSMDEF resource table [1217](#)
- in TYPTMDEF resource table [1239](#)
- in URIMPDEF resource table [1261](#)
- in WEBSVDEF resource table [1277](#)

USERDATA3 field

- in ATOMDEF resource table [39](#)
- in BUNDEF resource table [65](#)
- in CONNDEF resource table [157](#)
- in DB2CDEF resource table [295](#)
- in DB2EDEF resource table [307](#)
- in DB2TDEF resource table [319](#)
- in DOCDEF resource table [331](#)
- in EJCODEF resource table [365](#)
- in EJDJDEF resource table [381](#)
- in ENQMDEF resource table [427](#)
- in FENODDEF resource table [589](#)
- in FEPODEF resource table [605](#)
- in FEPRODEF resource table [609](#)
- in FETRGDEF resource table [613](#)
- in FILEDEF resource table [617](#)
- in FSEGDEF resource table [633](#)
- in IPCONDEF resource table [681](#)
- in JRNLDEF resource table [701](#)
- in JRNMDEF resource table [709](#)
- in JVMSVDEF resource table [723](#)
- in LIBDEF resource table [727](#)
- in LSRDEF resource table [769](#)
- in MAPDEF resource table [781](#)
- in MQCONDEF resource table [883](#)
- in MQMONDEF resource table [897](#)
- in PARTDEF resource table [945](#)
- in PIPEDEF resource table [955](#)
- in PROCDEF resource table [981](#)
- in PROFDEF resource table [987](#)
- in PROGDEF resource table [995](#)
- in PRTNDEF resource table [1009](#)
- in RQMDEF resource table [1053](#)
- in SESSDEF resource table [1085](#)
- in TCPDEF resource table [1145](#)
- in TDQDEF resource table [1163](#)
- in TERMDEF resource table [1173](#)
- in TRANDEF resource table [1191](#)

USERDATA3 field (*continued*)

- in TRNCLDEF resource table [1205](#)
- in TSMDEF resource table [1217](#)
- in TYPTMDEF resource table [1239](#)
- in URIMPDEF resource table [1261](#)
- in WEBSVDEF resource table [1277](#)

USERID field

- in BRFACIL resource table [63](#)
- in HTASK resource table [655](#)
- in MQMON resource table [893](#)
- in MQMONDEF resource table [897](#)
- in REQID resource table [1033](#)
- in SESSDEF resource table [1085](#)
- in STATDEF resource table [1093](#)
- in TASK resource table [1123](#)
- in TASKASSC resource table [1113](#)
- in TASKRMI resource table [1121](#)
- in TDQDEF resource table [1163](#)
- in TERMDEF resource table [1173](#)
- in TERMNL resource table [1179](#)
- in UOW resource table [1253](#)
- in URIMAP resource table [1257](#)
- in URIMPDEF resource table [1261](#)
- in WLMATAFF resource table [1283](#)
- in WLMAWDEF resource table [1299](#)
- in WLMDEF resource table [1305](#)

USERIWRITE field

- in LSRPBUF resource table [777](#)
- in MLSPBUF resource table [845](#)

USERNAME field

- in TERMNL resource table [1179](#)

USERSTATUS field

- in CICSRCN resource table [89](#)
- in CMAS resource table [131](#)

USERTAG field

- in EVNTBIND resource table [567](#)
- in RULE resource table [1079](#)

USERTOKEN field

- in ASYNCREQ resource table [33](#)

USRP24HWM field

- in MLOCTRAN resource table [837](#)

USRP31HWM field

- in MLOCTRAN resource table [837](#)

USRPS24HWM field

- in HTASK resource table [655](#)
- in TASK resource table [1123](#)

USRPS31HWM field

- in HTASK resource table [655](#)
- in TASK resource table [1123](#)

USTG24CNT field

- in HTASK resource table [655](#)
- in MLOCTRAN resource table [837](#)
- in TASK resource table [1123](#)

USTG24HWM field

- in HTASK resource table [655](#)
- in MLOCTRAN resource table [837](#)
- in TASK resource table [1123](#)

USTG24OCC field

- in HTASK resource table [655](#)
- in MLOCTRAN resource table [837](#)
- in TASK resource table [1123](#)

USTG31CNT field

- in HTASK resource table [655](#)
- in MLOCTRAN resource table [837](#)

USTG31CNT field (*continued*)
 in TASK resource table [1123](#)
 USTG31HWM field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 USTG31OCC field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)

V

VALCICS400 field
 in ATTR resource table [49](#)
 in METAPARM resource table [821](#)
 in OBJACT resource table [929](#)
 VALCICSAIX field
 in ATTR resource table [49](#)
 in METAPARM resource table [821](#)
 in OBJACT resource table [929](#)
 VALCICES2 field
 in ATTR resource table [49](#)
 in METAPARM resource table [821](#)
 in OBJACT resource table [929](#)
 VALCICES3 field
 in ATTR resource table [49](#)
 in METAPARM resource table [821](#)
 in OBJACT resource table [929](#)
 VALCICESA field
 in ATTR resource table [49](#)
 in METAPARM resource table [821](#)
 in OBJACT resource table [929](#)
 VALCICSOS2 field
 in ATTR resource table [49](#)
 in METAPARM resource table [821](#)
 in OBJACT resource table [929](#)
 VALCICSRV1 field
 in ATTR resource table [49](#)
 in OBJACT resource table [929](#)
 VALCICSRV2 field
 in ATTR resource table [49](#)
 in METAPARM resource table [821](#)
 in OBJACT resource table [929](#)
 VALCICSVSE field
 in ATTR resource table [49](#)
 in METAPARM resource table [821](#)
 in OBJACT resource table [929](#)
 VALCICSWNT field
 in ATTR resource table [49](#)
 in METAPARM resource table [821](#)
 in OBJACT resource table [929](#)
 VALCOUNT field
 in ATTR resource table [49](#)
 VALIDATION field
 in TYPTMDEF resource table [1239](#)
 in WEBSVDEF resource table [1277](#)
 VALIDATIONST field
 in TERMNL resource table [1179](#)
 in WEBSERV resource table [1273](#)
 in XMLTRANS resource table [1321](#)
 VALIDEXT field
 in ATTR resource table [49](#)
 in METADESC resource table [817](#)

VALIDITY field
 in CRESDSNM resource table [195](#)
 in DSNAME resource table [345](#)
 VALSETAVAIL field
 in ATTR resource table [49](#)
 VALUE field
 in METANAME resource table [819](#)
 in METAPARM resource table [821](#)
 in PARMAVA resource table [943](#)
 in RULE resource table [1079](#)
 in SYSPARM resource table [1107](#)
 VALUELEN field
 in SYSPARM resource table [1107](#)
 VALUENAME field
 in METAPARM resource table [821](#)
 in PARMAVA resource table [943](#)
 VARIABLENAME field
 in EVCSDATA resource table [555](#)
 in EVCSINFO resource table [557](#)
 VER field
 in ACTION resource table [17](#)
 in APPLCTN resource table [23](#)
 in APPLDEF resource table [27](#)
 in APSPEC resource table [31](#)
 in ASYNCREQ resource table [33](#)
 in ATMINGRP resource table [37](#)
 in ATOMDEF resource table [39](#)
 in ATTR resource table [49](#)
 in ATTRAVAL resource table [47](#)
 in BATCHREP resource table [53](#)
 in BINCONRS resource table [57](#)
 in BINCONSC resource table [59](#)
 in BINSTERR resource table [61](#)
 in BUNDDDEF resource table [65](#)
 in BUNINGRP resource table [75](#)
 in CICSplex resource table [87](#)
 in CMAS resource table [131](#)
 in CMASLIST resource table [125](#)
 in CMASPLEX resource table [129](#)
 in CMDMPAPS resource table [137](#)
 in CMDMSAPS resource table [139](#)
 in CMTCMDEF resource table [147](#)
 in CMTCMLNK resource table [151](#)
 in CMTPMLNK resource table [153](#)
 in CONINGRP resource table [155](#)
 in CONNDEF resource table [157](#)
 in CPLEXDEF resource table [169](#)
 in CPLXCMAS resource table [173](#)
 in CRESAIMD resource table [177](#)
 in CRESATOM resource table [179](#)
 in CRESBUND resource table [181](#)
 in CRESCONN resource table [183](#)
 in CRESDB2C resource table [185](#)
 in CRESDB2E resource table [187](#)
 in CRESDB2P resource table [189](#)
 in CRESDB2T resource table [191](#)
 in CRESDOCT resource table [193](#)
 in CRESDSNM resource table [195](#)
 in CRESENQM resource table [197](#)
 in CRESEPAD resource table [199](#)
 in CRESEPAS resource table [201](#)
 in CRESEVBD resource table [203](#)
 in CRESEVCS resource table [205](#)
 in CRESFECO resource table [207](#)

VER field (continued)

in CRESFEND resource table [209](#)
in CRESFEPO resource table [211](#)
in CRESFETR resource table [213](#)
in CRESFILE resource table [215](#)
in CRESGLUE resource table [217](#)
in CRESIPCN resource table [219](#)
in CRESJRNL resource table [221](#)
in CRESJRNM resource table [223](#)
in CRESJVMS resource table [225](#)
in CRESLIBR resource table [227](#)
in CRESMODE resource table [229](#)
in CRESMQMN resource table [231](#)
in CRESPART resource table [233](#)
in CRESPIPE resource table [235](#)
in CRESPRGM resource table [237](#)
in CRESPROF resource table [239](#)
in CRESPTY resource table [241](#)
in CRESRQMD resource table [243](#)
in CRESSDMP resource table [245](#)
in CRESTCPS resource table [247](#)
in CRESTDMP resource table [249](#)
in CRESTDQ resource table [251](#)
in CRESTERM resource table [253](#)
in CRESTRAN resource table [255](#)
in CRESTRUE resource table [257](#)
in CRESTSMD resource table [259](#)
in CRESURIM resource table [261](#)
in CRESWEBS resource table [263](#)
in CRESXMLT resource table [265](#)
in CSDGROUP resource table [267](#)
in CSDINGRP resource table [269](#)
in CSDINLST resource table [271](#)
in CSDLIST resource table [273](#)
in CSGLCGCG resource table [275](#)
in CSGLCGCS resource table [277](#)
in CSYSDEF resource table [281](#)
in CSYSGRP resource table [287](#)
in D2CINGRP resource table [289](#)
in D2EINGRP resource table [291](#)
in D2TINGRP resource table [293](#)
in DB2CDEF resource table [295](#)
in DB2EDEF resource table [307](#)
in DB2TDEF resource table [319](#)
in DOCDEF resource table [331](#)
in DOCINGRP resource table [335](#)
in DTRINGRP resource table [355](#)
in EACTNTFN resource table [357](#)
in ECSYSCHG resource table [359](#)
in EJ2CINGRP resource table [361](#)
in EJCODEF resource table [365](#)
in EJDINGRP resource table [375](#)
in EJDJDEF resource table [381](#)
in ELSIGNAL resource table [385](#)
in EMASJOIN resource table [387](#)
in EMASICK resource table [389](#)
in EMASSTOP resource table [393](#)
in EMASSTRT resource table [395](#)
in EMASWELL resource table [397](#)
in EMCICS resource table [401](#)
in EMCONN resource table [403](#)
in EMDXB resource table [405](#)
in EMFTLE resource table [407](#)
in EMGLBL resource table [409](#)

VER field (continued)

in EMJRNJL resource table [411](#)
in EMPROG resource table [413](#)
in EMSTATUS resource table [415](#)
in EMTDQS resource table [419](#)
in EMTERM resource table [421](#)
in EMTRAN resource table [423](#)
in ENQINGRP resource table [425](#)
in ENQMDEF resource table [427](#)
in EPLEXCHG resource table [441](#)
in ERESSTAT resource table [443](#)
in ERMCAIMD resource table [445](#)
in ERMCAIOM resource table [447](#)
in ERMCBUND resource table [449](#)
in ERMCCONN resource table [451](#)
in ERMCDDB2C resource table [453](#)
in ERMCDDB2E resource table [455](#)
in ERMCDDB2P resource table [457](#)
in ERMCDDB2T resource table [459](#)
in ERMCDOCT resource table [461](#)
in ERMCDNSM resource table [463](#)
in ERMCCENQM resource table [465](#)
in ERMCEVBD resource table [467](#)
in ERMCEVCS resource table [469](#)
in ERMCFECO resource table [471](#)
in ERMCFEND resource table [473](#)
in ERMCFEPO resource table [475](#)
in ERMCFETR resource table [477](#)
in ERMCFILE resource table [479](#)
in ERMCGLUE resource table [481](#)
in ERMCI PCN resource table [483](#)
in ERMJCJRNJL resource table [485](#)
in ERMJCJRNJM resource table [487](#)
in ERMJCJVMS resource table [489](#)
in ERMCLIBR resource table [491](#)
in ERMCMODE resource table [493](#)
in ERMCCOSGB resource table [495](#)
in ERMCCOSGS resource table [497](#)
in ERMCPART resource table [499](#)
in ERMCPPIPE resource table [501](#)
in ERMCPPRGM resource table [503](#)
in ERMCPROF resource table [505](#)
in ERMCPRTY resource table [507](#)
in ERMCRQMD resource table [509](#)
in ERMCS DMP resource table [511](#)
in ERMCTCPS resource table [513](#)
in ERMCTDMP resource table [515](#)
in ERMCTDQ resource table [517](#)
in ERMCTERM resource table [519](#)
in ERMCTRAN resource table [521](#)
in ERMCTRUE resource table [523](#)
in ERMCTSMD resource table [525](#)
in ERMTCURIM resource table [527](#)
in ERM CWEB S resource table [529](#)
in ERM CXMLT resource table [531](#)
in ERM MCONN resource table [533](#)
in ERM MFILE resource table [535](#)
in ERM MJRNJL resource table [537](#)
in ERM MP RGM resource table [539](#)
in ERM MTDQ resource table [541](#)
in ERM MTERM resource table [543](#)

VER field (*continued*)

in ERMTRAN resource table [545](#)
 in ESGRPCHG resource table [547](#)
 in EVALDEF resource table [549](#)
 in EVENT resource table [563](#)
 in EVENTDTL resource table [561](#)
 in FEEDBACK resource table [585](#)
 in FENODDEF resource table [589](#)
 in FEPODEF resource table [605](#)
 in FEPRODEF resource table [609](#)
 in FETRGDEF resource table [613](#)
 in FILEDEF resource table [617](#)
 in FILINGRP resource table [625](#)
 in FNOINGRP resource table [627](#)
 in FPOINGRP resource table [629](#)
 in FPRINGRP resource table [631](#)
 in FSEGDEF resource table [633](#)
 in FSGINGRP resource table [649](#)
 in FTRINGRP resource table [651](#)
 in IPCINGRP resource table [679](#)
 in IPCONDEF resource table [681](#)
 in JMSINGRP resource table [695](#)
 in JRMINGRP resource table [697](#)
 in JRNINGRP resource table [699](#)
 in JRNLDEF resource table [701](#)
 in JRNMDEF resource table [709](#)
 in JVMSVDEF resource table [723](#)
 in LIBDEF resource table [727](#)
 in LIBINGRP resource table [735](#)
 in LNKSMSG resource table [739](#)
 in LNKSMSG resource table [741](#)
 in LNKSRSRG resource table [743](#)
 in LNKSRSRG resource table [745](#)
 in LNKSWSRG resource table [747](#)
 in LNKSWSRG resource table [749](#)
 in LSRDEF resource table [769](#)
 in LSRINGRP resource table [775](#)
 in MAPDEF resource table [781](#)
 in MAPINGRP resource table [785](#)
 in MAS resource table [787](#)
 in MASQRYER resource table [795](#)
 in MASSTAT resource table [797](#)
 in METADESC resource table [817](#)
 in METANAME resource table [819](#)
 in METAPARM resource table [821](#)
 in MGMTPART resource table [825](#)
 in MONDEF resource table [857](#)
 in MONGROUP resource table [861](#)
 in MONINGRP resource table [863](#)
 in MONINSPC resource table [865](#)
 in MONSPEC resource table [873](#)
 in MQCINGRP resource table [877](#)
 in MQCONDEF resource table [883](#)
 in MQMINGRP resource table [891](#)
 in MQMONDEF resource table [897](#)
 in OBJACT resource table [929](#)
 in OBJECT resource table [931](#)
 in PARINGRP resource table [941](#)
 in PARMAVA resource table [943](#)
 in PARTDEF resource table [945](#)
 in PERIODEF resource table [951](#)
 in PGMINGRP resource table [953](#)

VER field (*continued*)

in PIPEDEF resource table [955](#)
 in PIPINGRP resource table [963](#)
 in PLATDEF resource table [965](#)
 in PLATFORM resource table [970](#)
 in PRCINGRP resource table [977](#)
 in PRNINGRP resource table [979](#)
 in PROCDEF resource table [981](#)
 in PROFDEF resource table [987](#)
 in PROGDEF resource table [995](#)
 in PROINGRP resource table [1007](#)
 in PRTNDEF resource table [1009](#)
 in RASGNDEF resource table [1013](#)
 in RASINDSC resource table [1017](#)
 in RASPROC resource table [1019](#)
 in RDSCPROC resource table [1021](#)
 in RESDESC resource table [1035](#)
 in RESGROUP resource table [1043](#)
 in RESINDSC resource table [1047](#)
 in RESINGRP resource table [1049](#)
 in RQMDEF resource table [1053](#)
 in RQMINGRP resource table [1057](#)
 in RTADEF resource table [1063](#)
 in RTAGROUP resource table [1067](#)
 in RTAINAPS resource table [1069](#)
 in RTAINGRP resource table [1071](#)
 in RTAINSPC resource table [1073](#)
 in RTASPEC resource table [1075](#)
 in SESINGRP resource table [1083](#)
 in SESSDEF resource table [1085](#)
 in STAINGRP resource table [1091](#)
 in STATDEF resource table [1093](#)
 in SYSLINK resource table [1103](#)
 in SYSRES resource table [1109](#)
 in TCLINGRP resource table [1143](#)
 in TCPDEF resource table [1145](#)
 in TCPINGRP resource table [1151](#)
 in TDQDEF resource table [1163](#)
 in TDQINGRP resource table [1171](#)
 in TERMDEF resource table [1173](#)
 in TRANDEF resource table [1191](#)
 in TRANGRP resource table [1201](#)
 in TRMINGRP resource table [1203](#)
 in TRNCLDEF resource table [1205](#)
 in TRNINGRP resource table [1209](#)
 in TSMDEF resource table [1217](#)
 in TSMINGRP resource table [1221](#)
 in TYPINGRP resource table [1237](#)
 in TYPTMDEF resource table [1239](#)
 in URIINGRP resource table [1255](#)
 in URIMPDEF resource table [1261](#)

VER field (*continued*)
 in WEBINGRP resource table [1271](#)
 in WEBSVDEF resource table [1277](#)
 in WLMAROUT resource table [1281](#)
 in WLMATAFF resource table [1283](#)
 in WLMATARG resource table [1285](#)
 in WLMATGRP resource table [1289](#)
 in WLMATRAN resource table [1293](#)
 in WLMAWAOR resource table [1295](#)
 in WLMAWDEF resource table [1299](#)
 in WLMAWORK resource table [1301](#)
 in WLMAWTOR resource table [1303](#)
 in WLMDEF resource table [1305](#)
 in WLMGROUP resource table [1307](#)
 in WLMINGRP resource table [1309](#)
 in WLMINSPC resource table [1311](#)
 in WLMSPEC resource table [1313](#)
 VERTICALFORM field
 in TYPTMDEF resource table [1239](#)
 VFORMST field
 in TERMNL resource table [1179](#)
 VHSDATA field
 in EVALDEF resource table [549](#)
 in EVENTDTL resource table [561](#)
 VHSDATAL field
 in EVALDEF resource table [549](#)
 VHSENTRY field
 in EVENT resource table [563](#)
 in RTADEF resource table [1063](#)
 in STATDEF resource table [1093](#)
 VHSEXIT field
 in EVENT resource table [563](#)
 in RTADEF resource table [1063](#)
 in STATDEF resource table [1093](#)
 VIEW field
 in ACTION resource table [17](#)
 in EVALDEF resource table [549](#)
 in EVENT resource table [563](#)
 in EVENTDTL resource table [561](#)
 VIEWMOD field
 in ATTR resource table [49](#)
 in OBJECT resource table [931](#)
 VLSDATA field
 in EVALDEF resource table [549](#)
 in EVENTDTL resource table [561](#)
 VLSDATAL field
 in EVALDEF resource table [549](#)
 VLSENTRY field
 in EVENT resource table [563](#)
 in RTADEF resource table [1063](#)

VLSENTRY field (*continued*)
 in STATDEF resource table [1093](#)
 VLSEXIT field
 in EVENT resource table [563](#)
 in RTADEF resource table [1063](#)
 in STATDEF resource table [1093](#)
 VOLCNT field
 in JRNLDEF resource table [701](#)
 VOLUME field
 in VOLUME resource table [1269](#)
 VOLUME resource table [1269](#)
 VSAMTYPE field
 in CMDT resource table [141](#)
 in LOCFILE resource table [757](#)
 in MCMDT resource table [807](#)
 in MLOCFILE resource table [833](#)
 VSECNT field
 in CPLEXDEF resource table [169](#)
 in CPLXCMAS resource table [173](#)
 VTAMACB field
 in CMAS resource table [131](#)
 in EMSTATUS resource table [415](#)
 VTMACBDOPE field
 in CICSRRGN resource table [89](#)
 in MCICSRRGN resource table [803](#)
 VTMRLMAX field
 in CICSRRGN resource table [89](#)
 in MCICSRRGN resource table [803](#)
 VTMRLPOST field
 in CICSRRGN resource table [89](#)
 in MCICSRRGN resource table [803](#)
 VTMSOSCNT field
 in CICSRRGN resource table [89](#)
 in MCICSRRGN resource table [803](#)
 VTMSTATUS field
 in CICSRRGN resource table [89](#)
 in MCICSRRGN resource table [803](#)

W

WAFFCNT field
 in WLMAWORK resource table [1301](#)
 WAIT field
 in DB2SS resource table [317](#)
 in TDQDEF resource table [1163](#)
 in TRANDEF resource table [1191](#)
 WAITACTION field
 in TDQDEF resource table [1163](#)
 WAITCAUSE field
 in UOW resource table [1253](#)
 WAITCNT field
 in MLOCTRAN resource table [837](#)
 WAITCONVNUM field
 in FEPICONN resource table [593](#)
 in FEPIPOOL resource table [597](#)
 in MFEPICON resource table [823](#)
 WAITSTATE field
 in UOW resource table [1253](#)
 WAITTIME field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 in TASKRMI resource table [1121](#)
 WAITTIMEDD field

WAITTIMEDD field (*continued*)
 in TRANDEF resource table [1191](#)
 WAITTIMEHH field
 in TRANDEF resource table [1191](#)
 WAITTIMEMM field
 in TRANDEF resource table [1191](#)
 WBCHRIN field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 WBCHROUT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 WBISSFCT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 WBJSNRPL field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 WBJSNRQL field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 WBRCVCT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 WBREPWCT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 WBSENDCT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 WBSFCRCT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 WBSFTOCT field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 WBSREQBL field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 WBSRSPBL field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 WBTOTCT field
 in HTASK resource table [655](#)
 in MLOCTRAN resource table [837](#)
 in TASK resource table [1123](#)
 WDFCNT field
 in WLMWORK resource table [1301](#)
 WEBDEFRG field
 in RESDESC resource table [1035](#)
 WEBDEFRS field
 in RESDESC resource table [1035](#)
 WEBDEFTS field
 in RESDESC resource table [1035](#)
 WEBGROUP field
 in WEBINGRP resource table [1271](#)
 WEBINGRP resource table [1271](#)
 WEBNAME field
 in WEBINGRP resource table [1271](#)

WEBSERV resource table [1273](#)
 WEBSERVICE field
 in URIMAP resource table [1257](#)
 in URIMPDEF resource table [1261](#)
 WEBSVDEF resource table [1277](#)
 WEBUSECOUNT field
 in WEBSERV resource table [1273](#)
 WEBVER field
 in WEBINGRP resource table [1271](#)
 WELLTYPE field
 in EMASWELL resource table [397](#)
 WLM_SPEC field
 in EMASJOIN resource table [387](#)
 in EMASSTOP resource table [393](#)
 in EMASSTRT resource table [395](#)
 WLMAROUT resource table [1281](#)
 WLMATAFF resource table [1283](#)
 WLMATARG resource table [1285](#)
 WLMATGRP resource table [1289](#)
 WLMATRAN resource table [1293](#)
 WLMAWAOR resource table [1295](#)
 WLMAWDEF resource table [1299](#)
 WLMAWORK resource table [1301](#)
 WLMAWTOR resource table [1303](#)
 WLMDEF resource table [1305](#)
 WLMDTE field
 in ECSYSCHG resource table [359](#)
 WLMGROUP resource table [1307](#)
 WLMHLTH field
 in WLMATARG resource table [1285](#)
 in WLMAWAOR resource table [1295](#)
 WLMINGRP resource table [1309](#)
 WLMINSPC resource table [1311](#)
 WLMOPTEN field
 in CSYSDEF resource table [281](#)
 in MAS resource table [787](#)
 in WLMATARG resource table [1285](#)
 WLMOWNER field
 in METAPARM resource table [821](#)
 WLMQMODE field
 in CSYSDEF resource table [281](#)
 in MAS resource table [787](#)
 in WLMATARG resource table [1285](#)
 in WLMAWAOR resource table [1295](#)
 WLMRPTRCNAME field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 WLMSPEC field
 in EMSTATUS resource table [415](#)
 WLMSPEC resource table [1313](#)
 WLMSRVCNAME field
 in HTASK resource table [655](#)
 in TASK resource table [1123](#)
 WLMSTATUS field
 in CSYSDEF resource table [281](#)
 in MAS resource table [787](#)
 WLMTHRSH field
 in CSYSDEF resource table [281](#)
 in MAS resource table [787](#)
 in WLMATARG resource table [1285](#)
 in WLMAWAOR resource table [1295](#)
 WLMTRACE field
 in CMAS resource table [131](#)
 in MAS resource table [787](#)

- WLPAPPL field
 - in WLPSEVR resource table [1317](#)
- WLPCLASS field
 - in WLPSEVR resource table [1317](#)
- WLPSEVR resource table [1317](#)
- WLPSEVR field
 - in WLPSEVR resource table [1317](#)
- WORKLOAD field
 - in METAPARM resource table [821](#)
 - in WLMAROUT resource table [1281](#)
 - in WLMATAFF resource table [1283](#)
 - in WLMATGRP resource table [1289](#)
 - in WLMATRAN resource table [1293](#)
 - in WLMAWAOR resource table [1295](#)
 - in WLMAWDEF resource table [1299](#)
 - in WLMAWORK resource table [1301](#)
 - in WLMAWTOR resource table [1303](#)
- WORKREQ resource table [1319](#)
- WORKTYPE field
 - in WORKREQ resource table [1319](#)
- WRITES field
 - in MTDQGBL resource table [907](#)
 - in STREAMNM resource table [1097](#)
 - in TDQGBL resource table [1169](#)
- WRKLCNT field
 - in WLMATARG resource table [1285](#)
- WRKLOWNER field
 - in WLMAROUT resource table [1281](#)
 - in WLMATAFF resource table [1283](#)
 - in WLMATGRP resource table [1289](#)
 - in WLMATRAN resource table [1293](#)
 - in WLMAWAOR resource table [1295](#)
 - in WLMAWDEF resource table [1299](#)
 - in WLMAWORK resource table [1301](#)
 - in WLMAWTOR resource table [1303](#)
- WRKSTATIONSU field
 - in TYPTMDEF resource table [1239](#)
- WRTFRECVR field
 - in MTSQGBL resource table [913](#)
 - in TSQGBL resource table [1227](#)
- WRTGTCISZ field
 - in MTSQGBL resource table [913](#)
 - in TSQGBL resource table [1227](#)
- WSBIND field
 - in WEBSERV resource table [1273](#)
 - in WEBSVDEF resource table [1277](#)
- WSDIR field
 - in PIPEDEF resource table [955](#)
 - in PIPELINE resource table [959](#)
- WSDLFILE field
 - in WEBSERV resource table [1273](#)
 - in WEBSVDEF resource table [1277](#)
- WSSETUP field
 - in TERMDEF resource table [1173](#)
- WSTRCCURCNT field
 - in CMDT resource table [141](#)
 - in LOCFIL resource table [757](#)
 - in MCMDT resource table [807](#)
 - in MLOCFIL resource table [833](#)
- WSTRCNT field
 - in CMDT resource table [141](#)
 - in LOCFIL resource table [757](#)
 - in MCMDT resource table [807](#)
 - in MLOCFIL resource table [833](#)

- WTGPCNT field
 - in WLMAWORK resource table [1301](#)
- WTRNCNT field
 - in WLMAWORK resource table [1301](#)

X

- XCFGROUP field
 - in CICSGRN resource table [89](#)
 - in CMAS resource table [131](#)
- XCURR field
 - in DB2ENTRY resource table [311](#)
- XERRCNT field
 - in MTERMNL resource table [909](#)
 - in TERMNL resource table [1179](#)
- XHWM field
 - in DB2ENTRY resource table [311](#)
- XID field
 - in UOWLINK resource table [1251](#)
- XLNACTON field
 - in CONNDEF resource table [157](#)
 - in IPCONDEF resource table [681](#)
- XLNSTATUS field
 - in CONNECT resource table [164](#)
- XMGATMXT field
 - in CICSGRN resource table [89](#)
- XMGLAMXT field
 - in CICSGRN resource table [89](#)
- XMGLSMXT field
 - in CICSGRN resource table [89](#)
- XMGLTAT field
 - in CICSGRN resource table [89](#)
- XMLSCHEMA field
 - in XMLTRANS resource table [1321](#)
- XMLTRANS resource table [1321](#)
- XMLTRANSNAME field
 - in ATOMSERV resource table [45](#)
- XOPDIRECTST field
 - in PIPELINE resource table [959](#)
 - in WEBSERV resource table [1273](#)
- XOPSUPPORTST field
 - in PIPELINE resource table [959](#)
 - in WEBSERV resource table [1273](#)
- XPREFIX field
 - in TSMDEF resource table [1217](#)
- XPSYSTIME field
 - in EMSTATUS resource table [415](#)
- XREMOTEPFX field
 - in TSMDEF resource table [1217](#)
- XRFSIGNOFF field
 - in TYPTMDEF resource table [1239](#)
- XRFSTATUS field
 - in CICSGRN resource table [89](#)
- XSDBIND field
 - in XMLTRANS resource table [1321](#)
- XTOTAL field
 - in DB2ENTRY resource table [311](#)
- XTPNAME field
 - in PARTDEF resource table [945](#)
 - in TRANDEF resource table [1191](#)
- XTRANID field
 - in TRANDEF resource table [1191](#)
- XXXCNT field
 - in CPLEXDEF resource table [169](#)

XXXCNT field (*continued*)
 in CPLXCMAS resource table [173](#)
XZIQALLCPRG field
 in CONNECT resource table [164](#)
 in MCONNECT resource table [811](#)
XZIQPRGCNT field
 in CONNECT resource table [164](#)
 in MCONNECT resource table [811](#)
XZIQREJS field
 in CONNECT resource table [164](#)
 in MCONNECT resource table [811](#)

Y

YYYCNT field
 in CPLEXDEF resource table [169](#)
 in CPLXCMAS resource table [173](#)

Z

ZCPTRACING field
 in CONNECT resource table [164](#)
 in TERMNL resource table [1179](#)
ZONE field
 in PERIODEF resource table [951](#)
ZONEADJ field
 in PERIODEF resource table [951](#)
ZONEOFFS field
 in CMAS resource table [131](#)
ZZZCNT field
 in CPLEXDEF resource table [169](#)
 in CPLXCMAS resource table [173](#)

