









<b>Enhancements to non-SQL interfaces</b>	<b>SQL enhancements</b>
<b>Unicode support - UTF-16 and UTF-8</b>	<b>Unicode support - UTF-16 and UTF-8</b>
<b>Binary character data type</b>	<b>Binary character data type</b>
<b>CRTLF PAGESIZE parameter</b>	<b>CREATE INDEX PAGESIZE keyword</b>
<b>Larger decimal support</b>	<b>Larger decimal support</b>
<b>SSD enablement for physical &amp; logical files</b>	<b>SSD enablement for tables and Indexes</b>
	<b>XML, National Character, and ROWID data types</b>
	<b>Identity column attribute</b>
	<b>Hidden and Automatic Timestamp column attributes</b>
	<b>Field Procedure column attribute</b>
	<b>Sequence object</b>
	<b>Column-level and Instead-Of triggers</b>
	<b>Merge statement</b>
	<b>OLAP and Super Group expressions</b>
	<b>Create Table from Select and Insert from Select</b>
	<b>SQL functional indexes</b>
	<b>XML Publishing and Decomposition functions</b>
	<b>IBM OmniFind Text Search Server</b>
	<b>SQL Query Engine (SQE)</b>
	<b>SQE Result Set Caching</b>
	<b>SQE Autonomic Indexes</b>
	<b>SQE Self-Learning Query Optimization &amp; Adaptive Query Processing</b>
	<b>SQE Encoded Vector Index fast path for aggregate processing</b>
	<b>SQE In-memory Database Enablement</b>
	<b>IBM i Navigator Plan Cache Tool</b>










# Approaches & Options

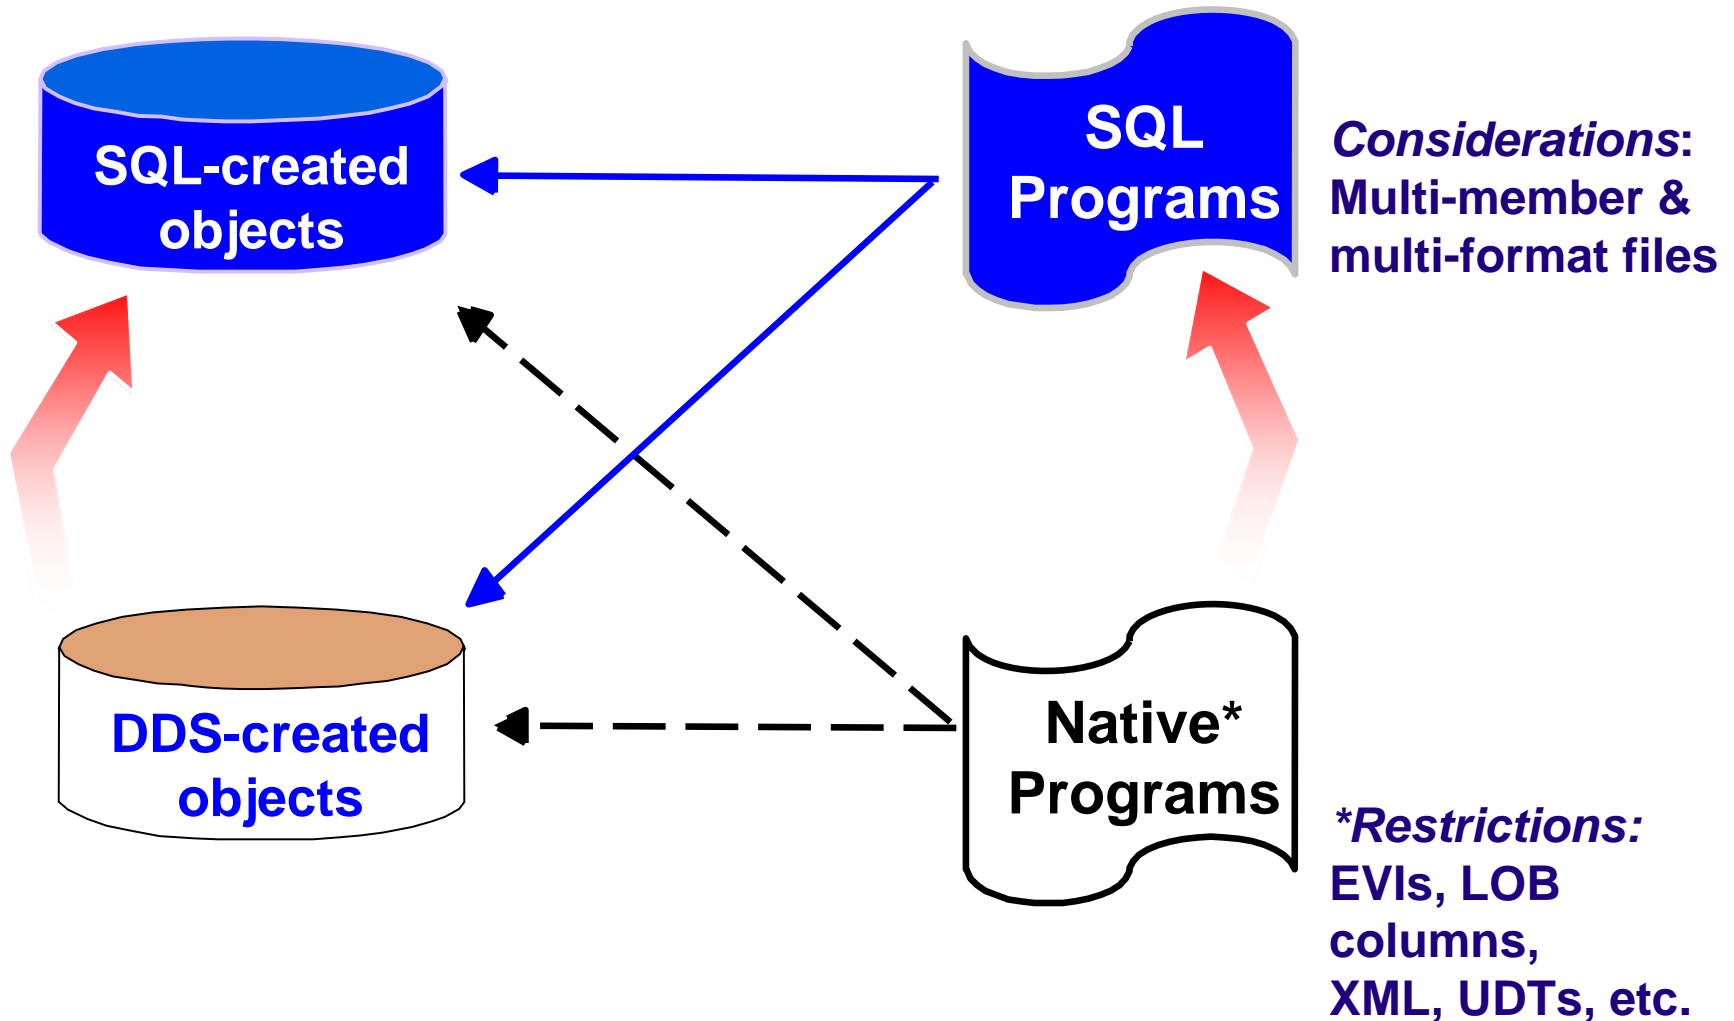





# Modernizing Definitions & Objects

- Modeling
- Terminology
- Moving from DDS to SQL DDL
- SQL object management
- Embedding business logic into database definitions




# Modernizing Definitions & Objects

## Data modeling

- Database normalization
  - Define a separate table for each related set of values
  - Define the primary key (surrogate or natural)
  - Eliminate redundant data
  - Design for Fifth normal form (5NF), performance & storage may drop back to 3NF
  - Establish RI constraints
  
- Consider Master Data Management
  - Services created to retrieve data – what if multiple copies exist?

Enrollment ID	Student ID	Student Name	Course ID	Course Name
200400	3456	Ed Moore	M-1932	Discrete Mathematics
200401	9393	Chuck Sellers	M-3459	Differential Equations
200402	2303	Lisa Gibbs	A-1003	Intro to Anthropology
200403	3456	Ed Moore	A-1003	Intro to Anthropology

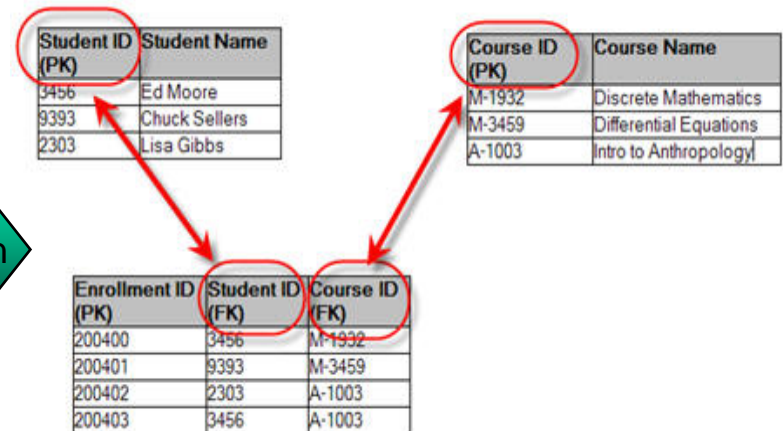




# Modernizing Definitions & Objects

## Data Modeling - IBM InfoSphere Data Architect



- Enterprise data modeling and management
  - Compare & synchronize
  - Forward & reverse engineering
  - Logical file support – Fixpack 003
  - Model analyzer for enterprise standard conformance
- Database development – SQL Stored Procedures and Function
- Trial Download: <http://ibm.com/software/data/optim/data-architect/>

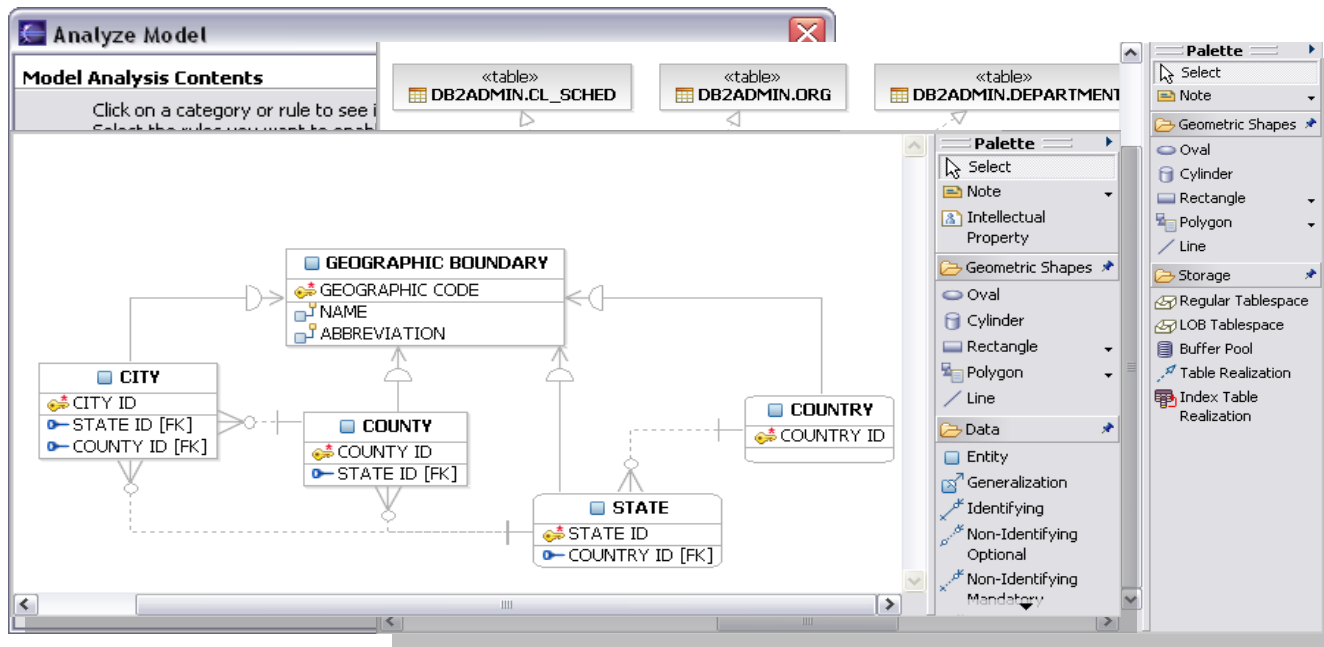



# Modernizing Database Objects

## Terminology

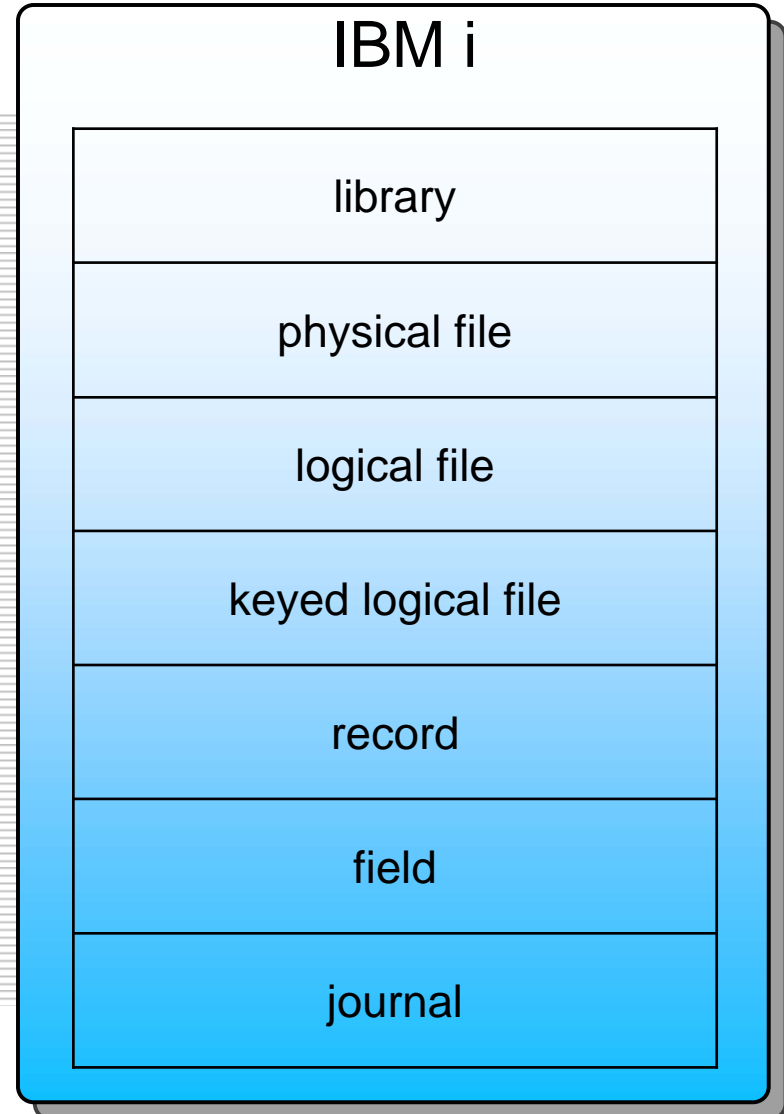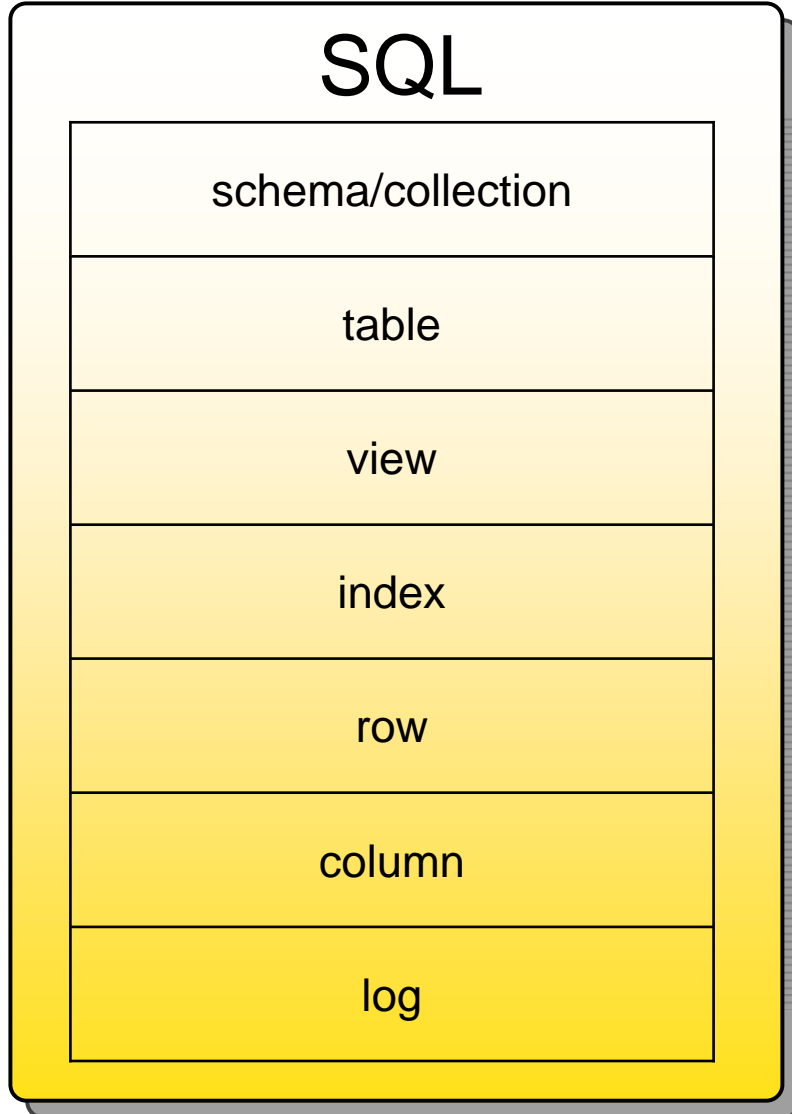





## Modernizing Objects: CREATE INDEX vs CRTLF (Keyed)

```

CREATE INDEX EMP_LASTNAME_DEPT
ON EMP_MAST(WORKDEPT, LASTNAME)
RCDFMT EMPLOYEEER1
ADD COLUMNS
    EMPNO, FIRSTNME, MIDINIT

CREATE ENCODED VECTOR INDEX RegionIX
ON SALES(REGION)

```

```

CRTLF FILE(EMPLOYEEER1) SRCFILE(QDDSSRC)
    SRCMBR(EMPLOYEEER1)

--Source Data
A      R EMPLOYEEER1  PFILE(EMPLOYEE)
A      WORKDEPT
A      LASTNAME
A      EMPNO
A      FIRSTNME
A      MIDINIT
A      K WORKDEPT
A      K LASTNAME

```

Encoded Vector Index (EVI) structure

Expressions can be used in the definition of the key columns

Sparse Indexes with WHERE clause (ie, Select/Omit)

EVI "Instant" Aggregate support

Larger default logical page size

Only Binary Radix Tree structure support – no EVIs

Limited support for key derivations and expressions

Key attributes –FCFO, FIFO, LIFO,

Smaller default logical page size



## Modernizing Objects: CREATE VIEW vs CRTLF (non-keyed)

### CREATE VIEW

```
EMPLOYEE_BONUSES_BY_DEPARTMENT
_WITHIN_STATE
```

AS

```
SELECT EA.STATE, DM.DEPTNAME,
       SUM(EM.BONUS)
```

```
FROM EMAST EM
```

```
JOIN EADDR EA USING (EM_PK)
```

```
JOIN DMAST DM ON WRKDPT = DPTNO
```

```
GROUP BY EA.STATE, DM.DEPTNAME
```

```
CRTLF FILE(EMPLOYEEJ1) SRCFILE(QDDSSRC)
      SRCMBR(EMPLOYEEJ1)
```

--Source Data

```
A  R EMPLOYEEJA JFILE(EMAST EADDR +
A                               DMAST)
```

```
A  J                               JOIN(1 2)
```

```
A                               JFLD(EM_PK EM_PK)
```

```
A  J                               JOIN(1 3)
```

```
A                               JFLD(WRKDPT DPTNO)
```

```
A  STATE
```

```
A  DEPTNAME
```

```
A  BONUS
```

Full access to advanced query capabilities of SQL

Can be used as logical files to enhance native functionality

No support for keying/ordering

Limited Join support

No support for Grouping, Case, Subqueries, User-Defined functions, ...


Multiple members & formats



# Modernizing Database Definitions & Objects

## DDS to SQL Conversion Tool

- System i Navigator Generate SQL Task (QSQGNDDL API)
  - Useful in converting object definitions from DDS to SQL
  - Supports physical & logical files
    - Not all DDS features can be converted, tool will convert as much as possible and generate warnings for unconvertible options (e.g., EDTCDE)
    - Logical files converted to SQL Views
    - SQL Field Reference File support not used
  - Can convert a single object or a group of objects
  - Output can be edited & saved directly into source file members

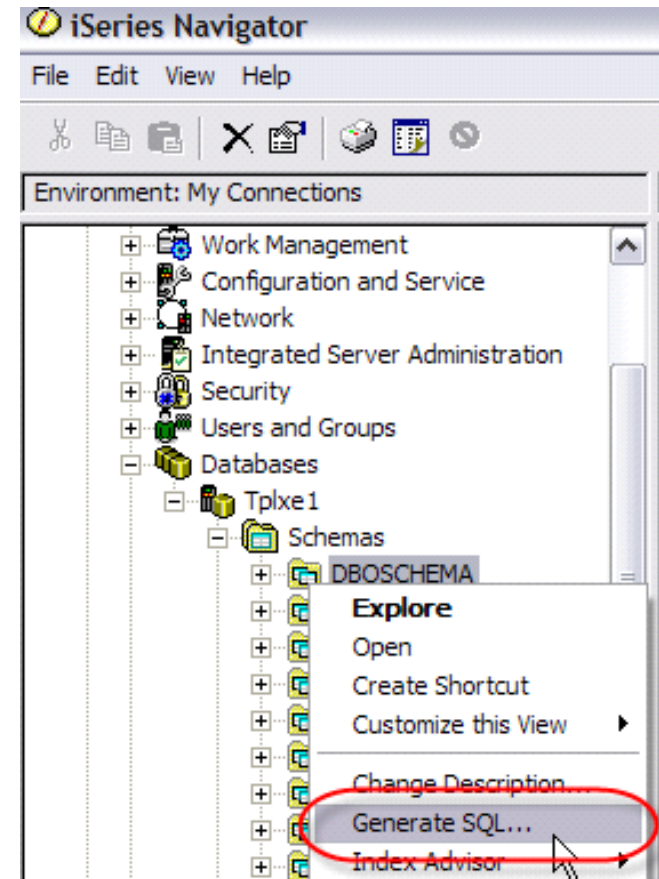







# Modernizing Database Definitions - Transparently

- Converting DDS PF to SQL DDL Table results in format identifiers being changed
  - HLL programs accessing the SQL Table will receive a “level check” exception message.
    - Only solutions prior to V5R4
      - recompile the program or
      - ignore the exception
      - (not recommended)

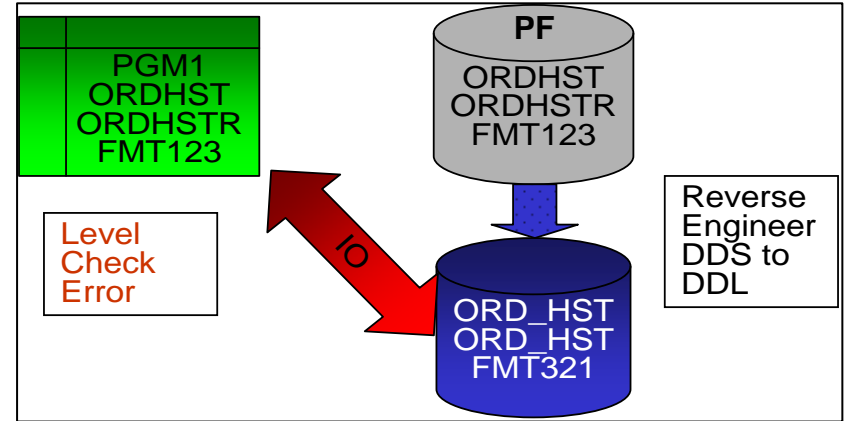


- A surrogate file preserves the original DDS PF format
  - Allows new columns to be added to SQL DDL Table
  - FORMAT keyword used to share surrogate format
    - Prevents level check IDs for programs accessing original PF or LFs sharing format
- “Best” method for avoiding format id changes!

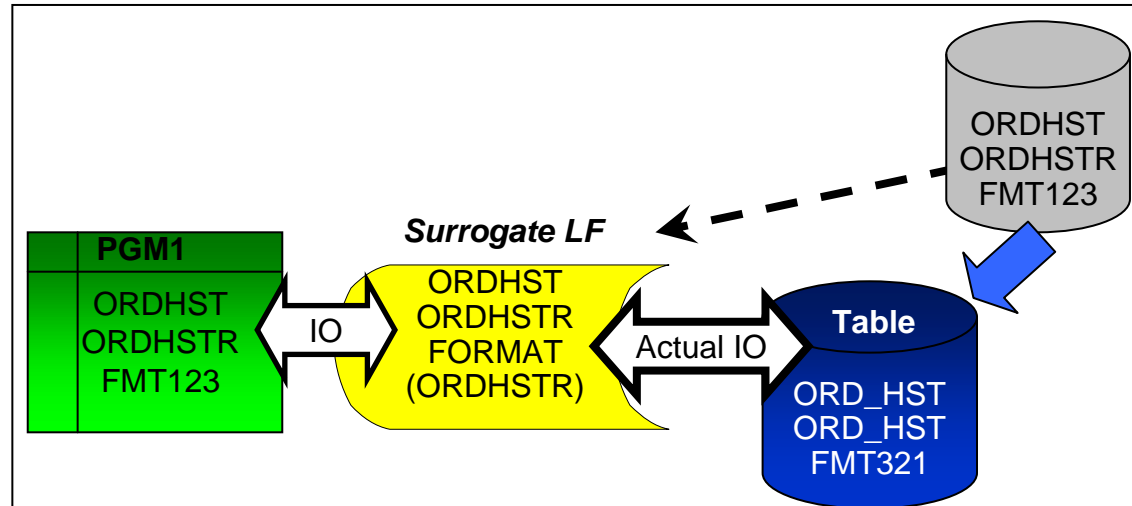



# Modernizing Database Definitions – Transparently

- Logical files also need to be re-engineered to reference the SQL table
  - For each logical file which shared the physical file format (FMT123):
    - PFILE modified to point at SQL table (FMT321)
    - FORMAT keyword specifies surrogate LF (FMT123)
  - Some LFs don't require re-engineering
    - DDS LF with unique format name
    - DDS Join Logical Files have unique format IDs

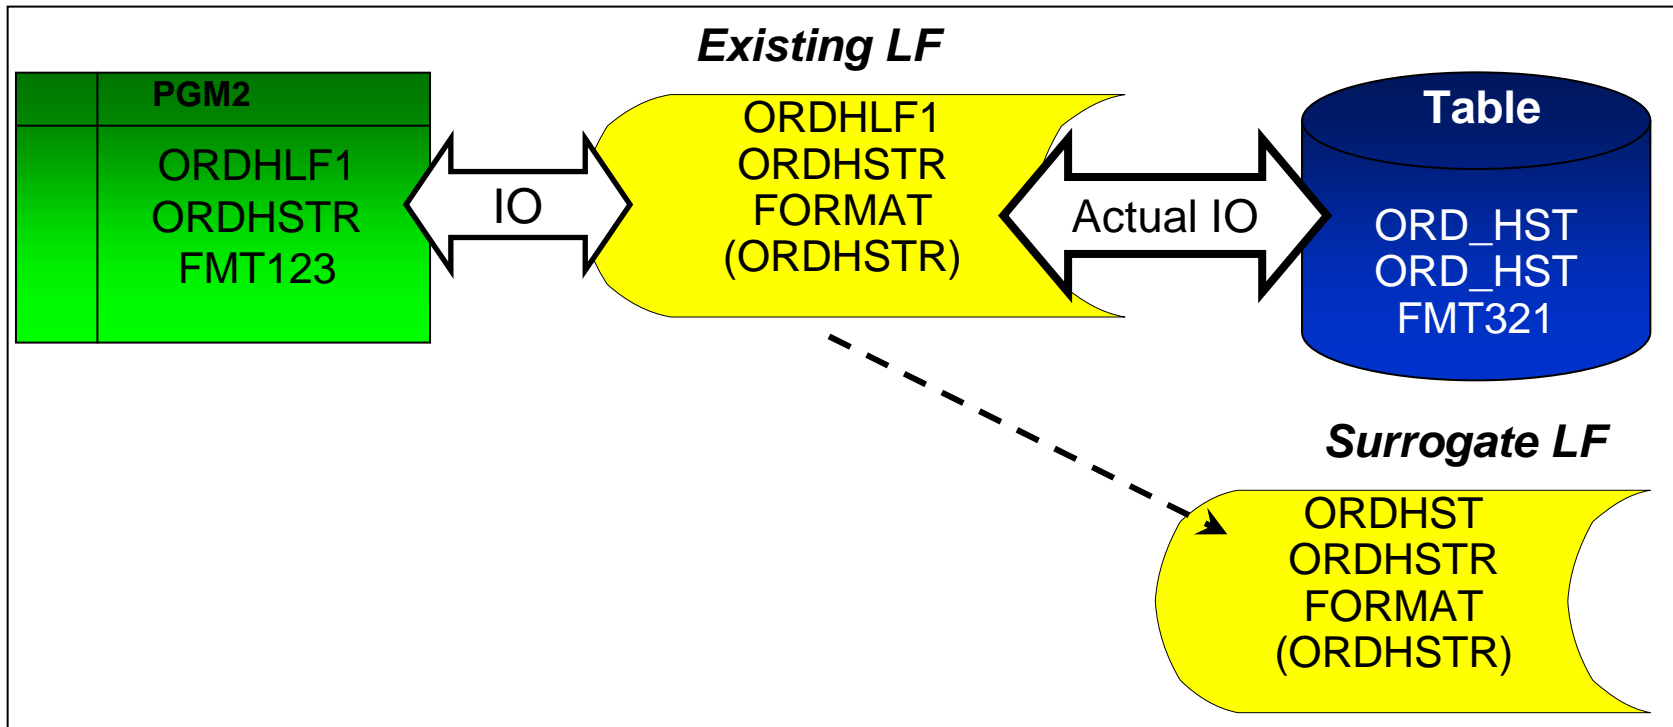



## Modernizing Database Definitions - Transparently

1. Convert PF to SQL Table (with new name)
2. Create SQL indexes to replace any implicitly created keyed access paths that exist for DDS files (use “Show Indexes”)
3. Create “Surrogate” LF with same name as original PF name
4. Modify existing LFs to reference SQL table



# Transparent SQL Migration - Example

## Existing PF – INVENTORY

```

A R INVMTR
A  ITEM    15A
A  ORDER   10A
A  SUPPLY  15A
A  QTY     5P
A  QTYDUE  5P

```

## Existing LF - INVLF

```

A R INVMTR PFILE( INVENTORY )
A K ITEM
A K ORDER

```

## Converted SQL Table:

```

CREATE TABLE sql_invent(
  item    CHAR(15),
  order   CHAR(10),
  supply  CHAR(15),
  qty     DECIMAL(5,0),
  qtydue  DECIMAL(5,0))

```

## Surrogate LF – INVENTORY

```

A R INVMTR PFILE( SQL_INVENT )
A  ITEM    15A
A  ORDER   10A
A  SUPPLY  15A
A  QTY     5P
A  QTYDUE  5P




```

## Existing LF - INVLF

```

A R INVMTR PFILE( SQL_INVENT )
          FORMAT( INVENTORY )
A K ITEM
A K ORDER

```

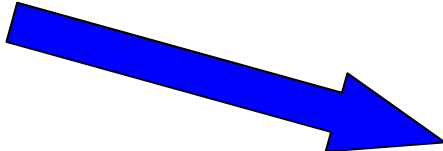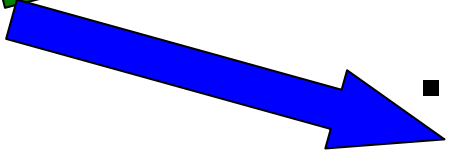



# Transparent SQL Migration - Tooling

- **XCase for i** tooling that automates and manages this migration process ([www.xcaseforsystemi.com](http://www.xcaseforsystemi.com))
  - Free Diagnostic Modernization download
  - Data modeling tool also available

The screenshot shows the Database Modernization Workbench interface. The main window displays a table with columns: PF Library, PF File, Status, FLI, Target Library, Target Name, Target SQL Name, Action, N, and E. The table lists several PF files being migrated, such as ALGKLASP, ALGPAR, ALGPAT, ALGPAV, ALGPBD, ALGPBG, and ALGPCD, all in a 'Surrogated' status. Below the table, the 'Execution Log' tab is active, showing the following text:

```
Source member CMMDATASQL.SOURCEFILE.ALGKLA101 removed
Table CMMDATASQL.ALGKLA101 was dropped

CREATE TABLE ALGKLASP_SQL_TABLE
(
  KLASCODE CHAR(5) NOT NULL DEFAULT ' ',
  ...
)
```

At the bottom of the interface, there are sections for 'Default Target Library' (set to MEURSQL), 'Target File Parameters' (Library: <Default>, System Name: ALGKLA101, SQL Name: ALGKLASP\_SQL\_TABLE, Surrogate Library: <As Sql>), and 'DDS References' (radio buttons for Original Objects and Target Objects, with Target Objects selected).



# Modernizing Database Definitions & Objects

## SQL Object management

- SQL Source Management best practices:
  - Just like DDS SQL source can be stored in source physical file members just and referenced with the RUNSQLSTM CL command instead of CRTPF/CRTLF
    - If change management tools are not IBM i specific, store SQL scripts in IFS or PC
    - If SQL source misplaced, Generate SQL can be used to retrieve the SQL source from System Catalogs (SYSIBM & QSYS2)
    - Navigator Run SQL Scripts in 6.1 can store and retrieve SQL from source members

- SQL Table definitions can use Field Reference File

**CREATE TABLE customer AS**

**(SELECT id cust\_id, lname cust\_lastname, fname cust\_firstname,  
city cust\_city FROM RefFile)**

**WITH NO DATA**

*f* May need to adjust process for moving from development to production

- Best practice is to re-execute SQL creation script
- Save/Restore process for SQL databases documented at:

[ibm.com/developerworks/E/library/](http://ibm.com/developerworks/E/library/)

[techarticle/0305milligan/0305milligan.html](http://techarticle/0305milligan/0305milligan.html)



# Modernizing Database Definitions & Objects

## SQL Object Management

- SQL Column & Object names have maximum lengths of 128, but many IBM i utilities, commands and interfaces only support a 10-character length. How does that work?!?
  - System automatically generates a short 10 character name
    - First 5 chars with unique 5 digit number  
CUSTOMER\_MASTER >> CUSTO00001
  
- Might be different each time a specific table is created, depending on creation order and what other objects share the same 5 character prefix
  
- Use IBM i SQL syntax to specify your own short name
  - RENAME TABLE (tables & views) & RENAME INDEX
  - FOR COLUMN clause for columns
  - SPECIFIC clause for procedures, functions



# Modernizing Database Definitions & Objects

## SQL Object Management

- Short & Long Name Co-existence Example
  - Specify the short name at creation:

```
CREATE TABLE dbtest/cusmst  
(customer_name FOR COLUMN cusnam CHAR(20),  
customer_city FOR COLUMN cuscty CHAR(40))
```

- Specify a long name for existing short-name:

```
RENAME TABLE dbtest/cusmst TO customer_master  
FOR SYSTEM NAME cusmst
```

- If long name specified on SQL Table definition, can also add/control the short name after table created:

```
RENAME TABLE dbtest/customer_master TO SYSTEM NAME cusmst
```





# Modernizing Database Definitions & Objects

## SQL Object Management

- RPG requires system name and record format name to be different
  - SQL defaults record format name to the system name
  - RCDFMT keyword can be used to override default behavior
- **CREATE TABLE** dbtest/customer\_master
- (customer\_name FOR COLUMN cusnam CHAR(20),
- customer\_city FOR COLUMN cuscty CHAR(40))
- **RCDFMT** cmfmt



# Modernizing Definitions & Objects

## SQL & Non-relational data

- User-Defined Table Functions
  - Allows non-relational & legacy data to be virtualized as an SQL table

```
SELECT * FROM TABLE(myudtf('Part XYZ'))
```

- Both SQL & External Table Functions supported
  - External UDTFs can be easily written to access multi-format files, S/36 files, and stream files
  - Table functions need to be invoked from SQL-based interfaces or SQL view
  - External UDTF Examples: <http://ibm.com/systems/i/Db2/db2code.html>
- LOBs
  - Allows you to keep non-relational data along with all the other business data



# Modernizing Definitions & Objects

## *Moving Business Logic into Db2 - Automatic Key Generation*

- Identity Column Attribute

- Attribute that can be added to any “whole” numeric columns
- Not guaranteed to be unique - primary key or unique index must be defined
- Only available for SQL tables, BUT identity column value generated for non-SQL interfaces (eg, RPG)

```
CREATE TABLE emp( empno INTEGER GENERATED ALWAYS AS IDENTITY  
                    (START WITH 10 , INCREMENT BY 10),  
                    name CHAR(30), dept# CHAR(4))
```

```
INSERT INTO employee(name,dept) VALUES('MIKE','503A') or...
```

- **INSERT INTO employee VALUES(DEFAULT,'MIKE', '503A')**

- Sequence Object

- Separate object that can be shared across multiple tables
- Generated value to be part of non-numeric keys

```
CREATE SEQUENCE order_seq START WITH 10 INCREMENT BY 10
```

```
INSERT INTO orders(ordnum,custnum)
```

- **VALUES( NEXT VALUE FOR order\_seq, 123 )**

## Modernizing Definitions & Objects

### *Moving Business Logic into Db2 - Triggers*

- Triggers allow you initiate business policies & processes whenever new data comes in or existing data is changed
  - Db2 responsible for always invoking the trigger program
  - Execution is independent of the user interface
  - Can be used to transform data before it gets into Db2
- Db2 for i Trigger Support
  - Before & After: Insert, Update, & Delete events (up to 300 triggers)
  - SQL & External(ADDPFTRG) Triggers
    - Column-level, Statement-level, and Instead Of triggers only available with SQL Triggers

```
CREATE TRIGGER audit_salary  
  AFTER UPDATE ON employee(salary)  
  REFERENCING NEW AS n  
  REFERENCING OLD AS o  
  FOR EACH ROW  
  WHEN (n.salary - o.salary >= 5000)  
    INSERT INTO audit  
      VALUES(n.empno, n.deptno, n.salary,current timestamp)
```



# Modernizing Data Access

- Programming Interfaces
- Native I/O to SQL Comparison

# Modernizing Data Access – Programming Interfaces

## Static SQL

Embedded Static  
  
SQL Procedures,  
Functions, Triggers

## Dynamic SQL

Embedded Dynamic  
  
SQL Procedures, Functions,  
Triggers  
  
JDBC, SQLJ  
  
ADO.NET, OLE DB  
  
CLI, ODBC  
  
PHP ibm\_Db2  
  
RUNSQLSTM

## Extended Dynamic SQL

QSQPRCED  
  
Toolbox JDBC driver  
  
IBM i Access ODBC & OLE DB

***\*\*Db2 SQL Development Kit only required if embedded SQL (& STRSQL)  
is going to be used***



# Modernizing Data Access

## Native I/O to SQL Example

...

```
C/EXEC SQL
C+ DECLARE sql_jn CURSOR FOR SELECT
C+  t.year,t.month,i.orderdt,c.country,c.cust
C+  p.part,s.supplier,i.quantity,i.revenue
C+ FROM item_fact i
C+ INNER JOIN part_dim p ON (i.partid =p.partid)
C+ INNER JOIN time_dim t ON (i.orderdt=t.datekey)
C+ INNER JOIN cust_dim c ON (i.custid=c.custid)
C+ INNER JOIN supp_dim s ON (i.suppdt=s.suppdt)
C+ WHERE year=2008 AND month=6
C/END-EXEC
```

```
C/EXEC SQL
C+ OPEN sql_jn
C/END-EXEC
```

```
C/EXEC SQL
C+ FETCH NEXT FROM sql_jn FOR :RowsReq ROWS
C+ INTO :result_set
C/END-EXEC
C      If      SQLCOD = 0  and
C              SQLER5 = 100 and
C              SQLER3 > 0
C      Eval    RowsRd = SQLER3
```

...

```
C  SearchKey  KList
C
C              Kfld          SearchYear
C              SearchMonth
...
C  Times      Occur  Result_Set
C  SearchKey  Setll   TIME_DIML1
C              If      %FOUND
C              DOU     RowsReq = Rows Rd
C              READ   TIME_DIML1
C              If      %EOF
C              Leave
C              Endif
C  DATEKEY    Setll   ITEMFACTL1
C              If      %FOUND
C              DOU     RowsReq = RowsRd
C  DATEKEY    READE   ITEMFACTL1
C              If      %EOF
C              Leave
C              Endif
C  PARTKEY    CHAIN   PART_DIML1
C              If      Not %FOUND
C              Iter
C              Endif
C  CUSTKEY    CHAIN   CUST_DIML1
C              If      Not %FOUND
C              Iter
C              Endif
C  SUPPKEY    CHAIN   SUPP_DIML1
C              If      Not %FOUND
C              Iter
C              Endif ...
```



# Modernizing Data Access

## Native I/O to SQL Example - Joined LFs & Views

```

...
C/EXEC SQL
C+ DECLARE sql_jn CURSOR FOR
C+   SELECT * FROM JoinView
C+   WHERE year=2008 AND month=6
C/END-EXEC

```

```

C/EXEC SQL
C+ OPEN sql_jn
C/END-EXEC

```

```

C/EXEC SQL
C+ FETCH NEXT FROM sql_jn FOR
C+   :RowsReq ROWS INTO :result_set
C/END-EXEC

```

```

C       If      SQLCOD = 0 and
C               SQLER5 = 100 and
C               SQLER3 > 0
C       Eval      RowsRd = SQLER3

```

```

..
C   SearchKey      KList
C                   Kfld          SearchYear
C                   Kfld          SearchMonth
...
C   SearchKey      SETLL          NTVJOIN002
C                   If            %FOUND
C                   DO            RowsReq Times
C   Times          Occur          Result_Set
C                   READ          NTVJOIN002
C                   If            %EOF
C                   Leave
C                   Endif
C                   Eval          RowsRd = RowsRd + 1
C                   ENDDO
C                   Endif


```





# Modernizing Data Access

## Native I/O to SQL Example - Performance Comparison

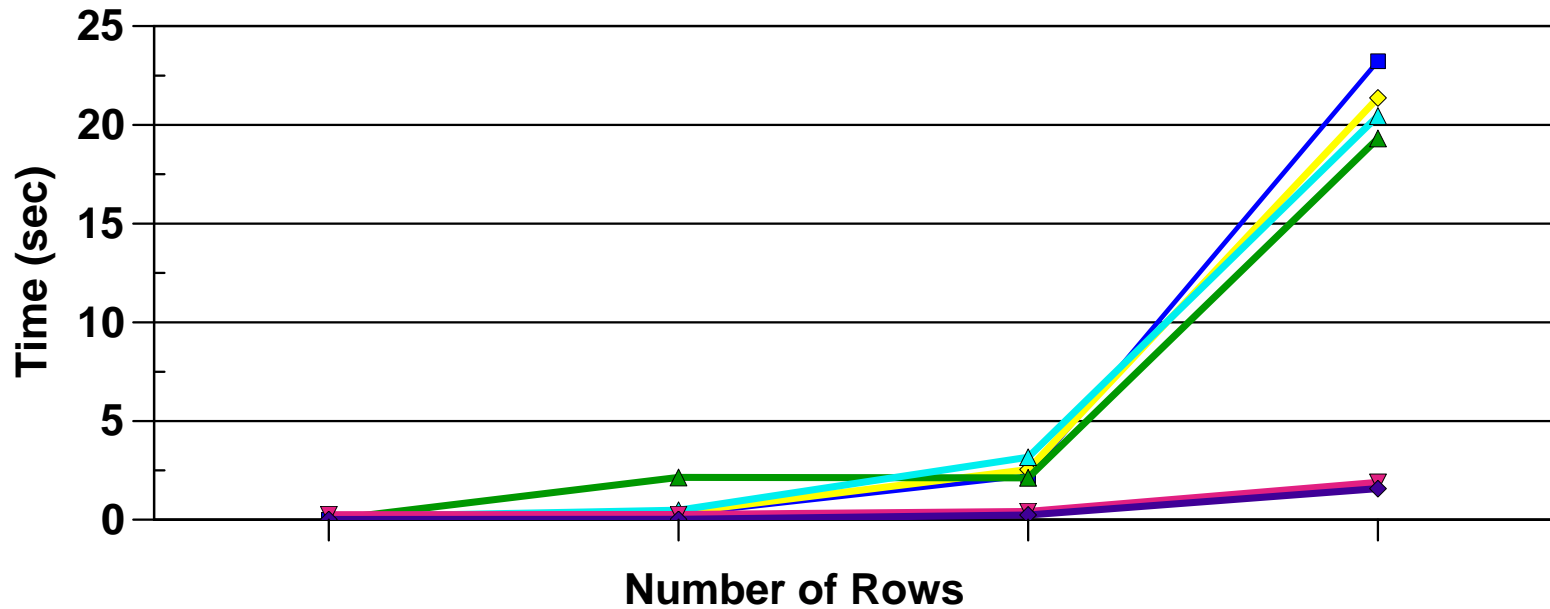

Note: Tests run on Model 720 w/1600 CPW & 2 GB Memory - your performance results may vary


	1	100	1000	10000
■ Native File Join	0.002512	0.260248	2.219504	23.228176
◆ Native JoinLF	0.002304	0.362128	2.544608	21.366480
▲ Native JoinLF w	0.002400	2.144288	2.125032	19.311464
▲ SQL - No IOA	0.145160	0.489136	3.166704	20.452984
▼ SQL IOA	0.251168	0.267208	0.417800	1.898800
◆ SQL SQE IOA	0.013536	0.019320	0.250160	1.576536



# Modernizing Data Access

## SQL and Scalability

- The issue is throughput not response time
  - As growth occurs, programs with Record Level Access (RLA) have a harder time scaling on IBM POWER Systems
  - Throwing hardware at the problem no longer an option
  - Application changes will be inevitable

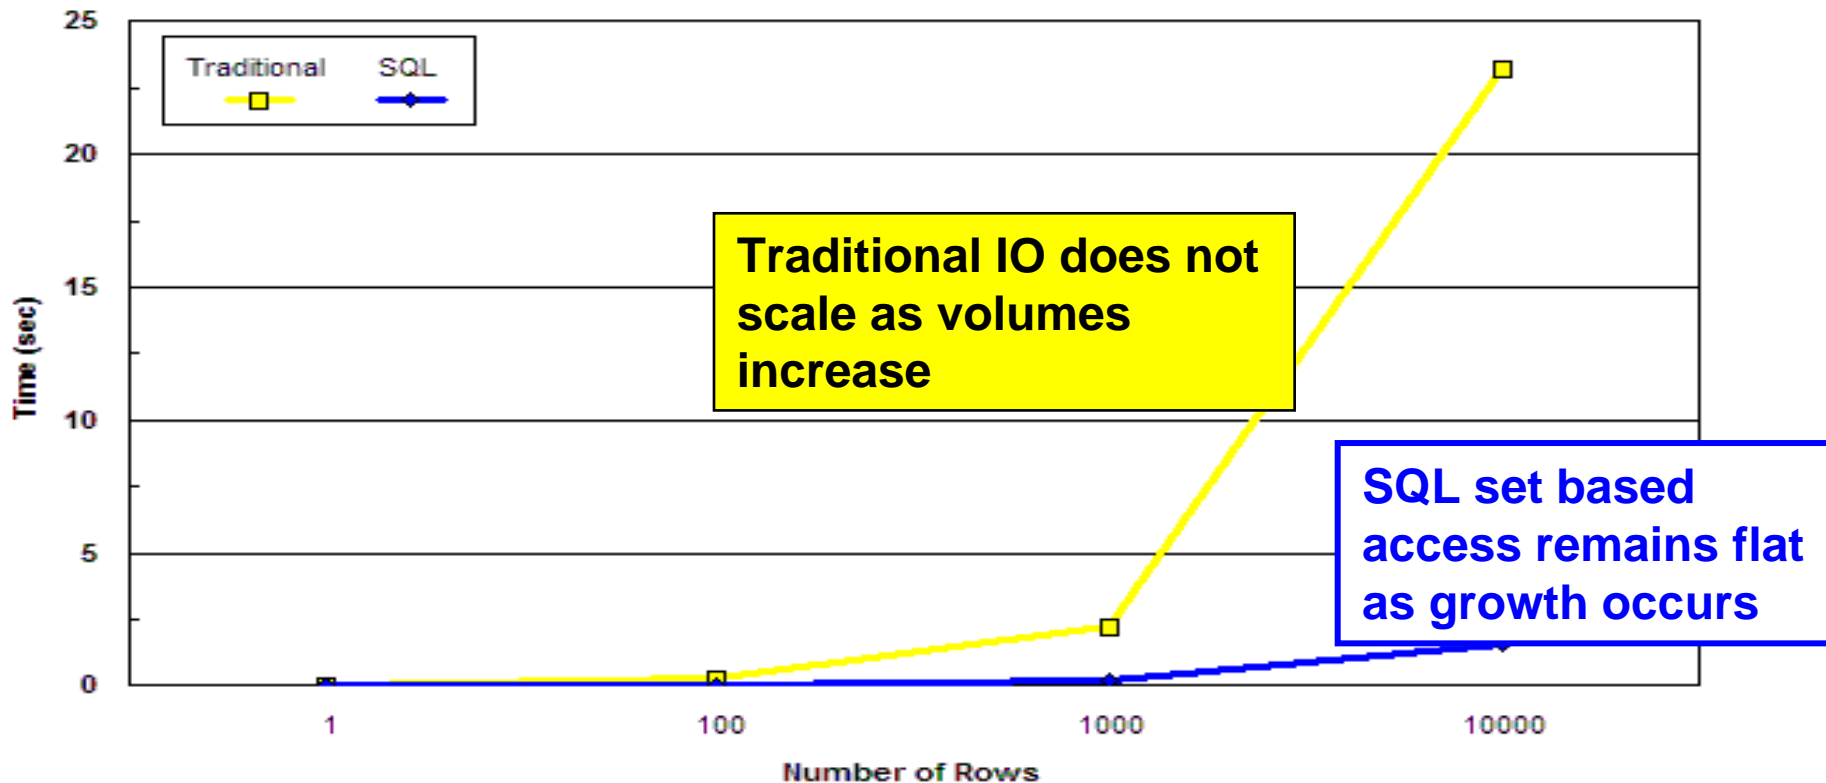



# Modernizing Data Access

## *Native to SQL Considerations*

- ORDER BY clause is the **only way** to guarantee the sequencing of results when using SQL - no clause, means ordering by chance
  
- SQL Precompilers do not always support all the latest features in the high-level language, still missing from RPG SQL Precompiler:
  - Support for qualified names with more than one level of qualification
  
- Consider impact of SQL isolation level & journaling on native applications
  
- Critical Performance Success Factors
  - Sound Indexing & Statistics Strategy  
[ibm.com/partnerworld/wps/servlet/ContentHandler/servers/enable/site/bi/strategy/index.html](http://ibm.com/partnerworld/wps/servlet/ContentHandler/servers/enable/site/bi/strategy/index.html)
  - Maximize Open Data Path (ODP) Reuse
    - Prepare Once, Execute Many
    - Connection Pooling
    - Keep Connections & Jobs active as long as possible
    - Reference:  
[ibm.com/partnerworld/wps/servlet/ContentHandler/servers/enable/site/education/ibp/4fa6/](http://ibm.com/partnerworld/wps/servlet/ContentHandler/servers/enable/site/education/ibp/4fa6/)
  - Use Blocked Fetches & Inserts
  - Attend SQL Performance Workshop – [ibm.com/systems/i/Db2/db2performance.html](http://ibm.com/systems/i/Db2/db2performance.html)



## Next Steps

### 1) Identify First Project

- Write a new function/program component using SQL
  
- Rewrite an existing component using SQL (eg, reporting)
  - OPNQRYF to SQL
  - Query/400 to Db2 Web Query
  
- Port SQL-based program to DB2 for i
  - Porting guides & conversion tools at:
  - <http://ibm.com/partnerworld/i/db2porting>



## Next Steps

### 2) Get Education

- *IBM i Database Modernization Workshop*
  - <http://ibm.com/systems/i/support/itc/educ/lbdb2mod.html>
  
- *Modernizing iSeries Application Data Access Redbooks document*  
[www.redbooks.ibm.com/abstracts/sg246393.html?Open](http://www.redbooks.ibm.com/abstracts/sg246393.html?Open)
- *Case Study: Modernizing a DB2 for iSeries Application white paper*  
[ibm.com/partnerworld/wps/servlet/ContentHandler/servers/enable/site/education/wp/9e5a/index.html](http://ibm.com/partnerworld/wps/servlet/ContentHandler/servers/enable/site/education/wp/9e5a/index.html)
  
- DB2 for i SQL Performance Workshop
  - [ibm.com/systems/i/db2/db2performance.html](http://ibm.com/systems/i/db2/db2performance.html)
  - [ibm.com/partnerworld/wps/training/i5os/courses](http://ibm.com/partnerworld/wps/training/i5os/courses)
- Indexing & Stats Strategy White Paper  
[ibm.com/partnerworld/wps/servlet/ContentHandler/servers/enable/site/bi/strategy/index.html](http://ibm.com/partnerworld/wps/servlet/ContentHandler/servers/enable/site/bi/strategy/index.html)
- Database modernization roadmaps
  - **Modernizing DB2 definitions and usage**  
[https://www.ibm.com/partnerworld/wps/servlet/ContentHandler/SOX\\_TwGV47Qq9ppycFAT](https://www.ibm.com/partnerworld/wps/servlet/ContentHandler/SOX_TwGV47Qq9ppycFAT)
  - **Modernizing data access with SQL**  
[https://www.ibm.com/partnerworld/wps/servlet/ContentHandler/SOX\\_JUGV47Q9cz7ycFAT](https://www.ibm.com/partnerworld/wps/servlet/ContentHandler/SOX_JUGV47Q9cz7ycFAT)
  - **Optimizing SQL performance**  
[https://www.ibm.com/partnerworld/wps/servlet/ContentHandler/SOX\\_G7FV47QIUAIycFAT](https://www.ibm.com/partnerworld/wps/servlet/ContentHandler/SOX_G7FV47QIUAIycFAT)



## Conclusion

- DDS and Native Record-Level Access are
  - not sustainable
- Must migrate both Native to SQL, and your Mind to SQL
- There is no reason not to keep your business data in DB2 for i

## Additional Information

- DB2 for i Websites
  - Homepage: [ibm.com/systems/i/db2](http://ibm.com/systems/i/db2)
  - developerWorks Zone: [ibm.com/developerworks/db2/products/db2i5OS](http://ibm.com/developerworks/db2/products/db2i5OS)
- Newsgroups
  - DeveloperWorks: <https://www.ibm.com/developerworks/forums/forum.jspa?forumID=292>
  - System i Network DB2 Forum - <http://forums.systeminetwork.com/isnetforums/>
- Education Resources - Classroom & Online
  - [http://ibm.com/systems/i/db2/db2educ\\_m.html](http://ibm.com/systems/i/db2/db2educ_m.html)
  - <http://ibm.com/partnerworld/wps/training/i5os/courses>
- DB2 for i Publications
  - Online Manuals: <http://ibm.com/systems/i/db2/books.html>
  - White Papers: [ibm.com/partnerworld/wps/whitepaper/i5os](http://ibm.com/partnerworld/wps/whitepaper/i5os)
  - Porting Help: <http://ibm.com/partnerworld/i/db2porting>
  - DB2 for i5/OS Redbooks (<http://ibm.com/systemi/db2/relredbooks.html>)
    - Stored Procedures, Triggers, & User-Defined Functions on DB2 for iSeries (SG24-6503)
    - DB2 for AS/400 Object Relational Support (SG24-5409)
    - Advanced Functions & Administration on DB2 for iSeries (SG24-4249)
    - Getting Started with DB2 Web Query for System i (SG24-7214)
  - SQL for DB2 by Conte & Cooper
    - <http://www.amazon.com/SQL-James-Cooper-Paul-Conte/dp/1583041230/>

## DB2 Modernization Assistance

### DB2 for i Modernization Workshop

<http://ibm.com/systems/i/support/itc/educ/lldb2mod.html>



 **Need help?**

### IBM DB2 for i Consulting and Services

- ✓ Database modernization
- ✓ DB2 Web Query
- ✓ Database design, features and functions
- ✓ DB2 SQL performance analysis and tuning
- ✓ Data warehousing and Business Intelligence
- ✓ DB2 for i education and training

Contact: Mike Cain [mcaain@us.ibm.com](mailto:mcaain@us.ibm.com)  
IBM Systems and Technology Group  
Rochester, MN USA